


Test Equipment

Four-in-One Multi-Tester

Model 9004 4 Instrument Test Station

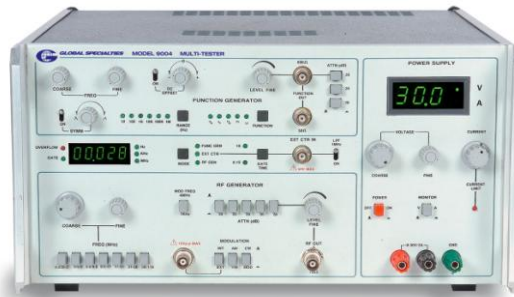

Features:

- Unique combination of RF Generator, Function Generator, Frequency Counter & Power Supply
- Independent yet simple operation
- Excellent educational tool & service gear for the Engineer
- Logic Switch Operation is fast & easy
- 100 KHz to 110 MHz RF Generator
- 100 MHz, High Sensitivity Counter with 5 Digit Display
- 1 Hz to 1 MHz Function Generator
- Variable 32 V, 2A DC Power Supply with Adjustable Voltage and Current Limit
- Digital Readout for Voltage and Current
- 3-year Warranty

The 9004 combines some most needed Test Equipment in a very special way. It effectively gives you a 1 Hz to 110 MHz generator & a 60W Power Supply to power your test circuits. The professional will find it covers a broad spectrum of his test needs & the schools will see plenty of experiments with it. A very wide variety of experiments in Analog, Digital & RF can be performed with just this unit.

The unit is great for service or Test bench & also simple enough for a school lab. The touch of a button can select the 5 digit counter to accurately measure the Function Generator frequency, the RF Generator Freq or an External i/p signal. All functions are kept completely independent for FULL Functionality & there is no clutter of switches & knobs.

The RF Generator covers a frequency range all the way up to the commercial FM band. It also has fixed internal AM & FM modulation and also the facility of External modulation.

The Function Generator features Unipolar Square/Pulse outputs to directly interface to digital circuits, in addition to the standard Sine, Triangle, and Square. There are 2 Outputs-50 Ohm & 600 Ohm to match audio impedances.



- The Model 9004 is great for service or Test bench & also for school labs.
- The touch of a button can select the 5 digit counter to accurately measure the Function Generator frequency, the RF Generator Freq or an External i/p signal.

Test Equipment

Four-in-One Multi-Tester

Specifications

Model	9004
RF SIGNAL GENERATOR	
CM Signal	100 MHz to 110 MHz in 7 ranges & continuously variable over the whole range with a coarse and fine control
Modulation Frequency	a) Internal Modulation 30% b) External Modulation: Freq. Range 50Hz to 4kHz bandwidth ± 3 dB
Output Amplitude	200mV p-p at 75ohms
Attenuation	2 x 20 dB step and continuously variable 20 dB (approx.)
FM Signal	30 MHz to 110 MHz
Modulation Frequency	Selectable 400 Hz/1kHz
Frequency Modulation	a) Internal 30kHz (approx.) b) External Modulation: Freq. Range 50Hz to 4kHz bandwidth ± 3 dB
FREQUENCY COUNTER	
Readout	5 digit, 0.3 LED Display
Frequency Range	10Hz to 100MHz
Range Selection	Hz/KHz/MHz selection is automatic depending on mode selected
Source Selection	Internal AM/FM/Internal Function/External Frequency/Logic Selected
Annunciation	GATE, OVERFLOW, Hz, KHz, MHz, INT, AM/FM, FUNCTION, EXT FREQUENCY
Gate Period	0.1 sec & 1 sec by LED indication for ext. counter mode
Sensitivity	50mV
Dynamic Range	50mV to 1V rms
FUNCTION GENERATOR	
Frequency	1 Hz to 1 MHz
Waveform	Sine, Square, Triangular, +pulse, -pulse, Ramp
Amplitude	30V p-p at 600 ohms & 50 ohms terminal (open circuit)
Attenuation	2 x 20 dB step & 20dB continuously variable
Output Impedance	600 ohms, 50 ohms
DC Offset	0 to ± 15 V max. (open circuit)
Sinewave Distortion	(Pulse Duty) <3%
Cycle	10% to 90% variable
Symmetry on/off	In off mode 50% duty cycle
POWER SUPPLY	
Reg. DC Power Supply	0 to 32V/2 Amp independent ON/OFF switchable
Display	3 digit, 0.5 LED Display for voltage or current switchable
Voltage	Coarse & Fine control
Current	0 to 2 Amp
Load Regulation	0.1%
Ripple	<5 mV
Current Limit	Desired current setting
Current Limit LED	Indicates when current limit is reached
GENERAL	
Power	115V/230V AC switchable $\pm 10\%$, 47-65Hz, 125VA (max)
Dimensions	360 (W) x 190 (H) x 375 D mm
Weight	27lbs. approx.
ACCESSORIES	1. BNC to BNC Cable 2. BNC to Alligator Clip 3. Instruction Manual

Technical data subject to change without notice.



Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкуренеспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)
Email: org@lifeelectronics.ru