

### **General Description**

The MAX6605 precision, low-power, analog output temperature sensor is available in a 5-pin SC70 package. The device has a +2.7V to +5.5V supply voltage range and 10µA supply current over the -55°C to +125°C temperature range. For the -40°C to +105°C temperature range, the supply voltage can go as low as +2.4V. Accuracy is  $\pm 0.75^{\circ}$ C at T<sub>A</sub> =  $+25^{\circ}$ C and  $\pm 3^{\circ}$ C from  $0^{\circ}$ C to +70°C.

The MAX6605 output voltage is dependent on its die temperature and has a slope of 11.9mV/°C and an offset of 744mV at 0°C. The output typically shows only +0.4°C of nonlinearity over the -20°C to +85°C temperature range.

### **Applications**

Cellular Phones **Battery Packs GPS** Equipment Digital Cameras

#### Features


- ♦ Low Current Consumption (10µA max)
- ♦ Small SC70 Package
- **♦** Accurate (±0.75°C at T<sub>A</sub> = +25°C)
- ♦ Optimized to Drive Large Capacitive Loads

# **Ordering Information**


PART	TEMP RANGE	PIN-PACKAGE
MAX6605MXK-T	-55°C to +125°C	5 SC70-5
MAX6605MXK+T	-55°C to +125°C	5 SC70-5
MAX6605MXK/V+T	-40°C to +85°C	5 SC70-5

- +Denotes a lead(Pb)-free/RoHS-compliant package.
- T = Tape and reel.
- N denotes an automotive qualified part.

# Pin Configuration



# **Typical Application Circuit**

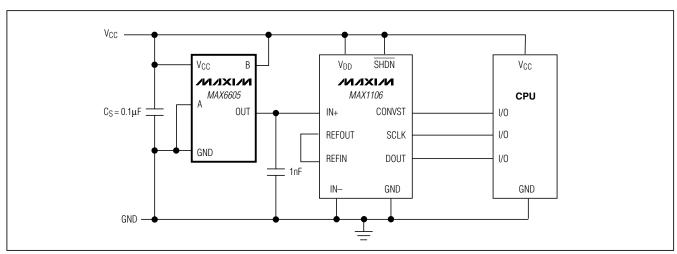

NIXIN

Maxim Integrated Products 1

#### **ABSOLUTE MAXIMUM RATINGS**

V <sub>CC</sub> to GND0.3V to +6V	Continuous Power Dissipation ( $T_A = +70^{\circ}C$ )
OUT, A, B to GND0.3V to (V <sub>CC</sub> + 0.3V)	5-Pin SC70 (derate 3.1mW/°C above +70°C)245mW
ESD Protection (Human Body Model)> 2000V	Operating Temperature Range55°C to +125°C
Current into Any Pin10mA	Junction Temperature+150°C
Output Short-Circuit DurationContinuous	Storage Temperature Range65°C to +150°C
	Lead Temperature (soldering, 10s)+300°C

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

#### **ELECTRICAL CHARACTERISTICS**

 $(V_{CC} = +2.7 \text{V to } +5.5 \text{V}, C_L = 1 \text{nF}, T_A = -55 ^{\circ}\text{C} \text{ to } +125 ^{\circ}\text{C}, \text{ unless otherwise noted.})$  (Note 1)


PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
Temperature Error V <sub>OUT</sub> = 0.744 + (0.0119 × T°C) + (1.604 × 10 <sup>-6</sup> × T <sup>2</sup> )V (Note 2)		V <sub>CC</sub> = +3.3V	T <sub>A</sub> = +25°C		±0.75		
			$T_A = -0^{\circ}C \text{ to } +70^{\circ}C$	-3.0		+3.0	°C
			$T_A = -20^{\circ}C \text{ to } +85^{\circ}C$	-3.8		+3.8	
			$T_A = -40^{\circ}C \text{ to } +100^{\circ}C$	-5.0		+5.0	
			$T_A = -55^{\circ}C \text{ to } +125^{\circ}C$	-5.8		+5.8	
Supply Voltage	Vcc	T <sub>A</sub> = -55°C to +125°C		2.7		5.5	V
		$T_A = -40$ °C to $+105$ °C		2.4		5.5	
Supply Current	IQ	No load			4.5	10	μΑ
Output Voltage	Vout	$T_A = 0$ °C			744		mV
Nonlinearity		$T_A = -20^{\circ}C \text{ to } +85^{\circ}C$			0.4		°C
Sensor Gain (Average Slope)		$T_A = -40^{\circ}C \text{ to } +100^{\circ}C$		11.1	11.9	12.7	mV/°C
Capacitive Load		Required for stability		1			nF
Land Danidation		$T_A = -20^{\circ}C \text{ to } +125^{\circ}C, I_{OUT} = -20\mu\text{A to } +20\mu\text{A}$				20	m°C/uA
Load Regulation		$T_A = -55^{\circ}C$ , $I_{OUT} = -10$	μΑ to +10μΑ			20	m°C/μA

**Note 1:** All parameters are measured at  $T_A = +25$ °C. Specifications over temperature range are guaranteed by design.

**Note 2:** Error (expressed in °C) is defined as the difference between the calculated and measured values of output voltage. Guaranteed by design to 5 sigma.

**Typical Operating Characteristics** 

 $(V_{CC} = +3.3V, C_S = 0.1\mu F, C_L = 1nF, unless otherwise noted.)$ 

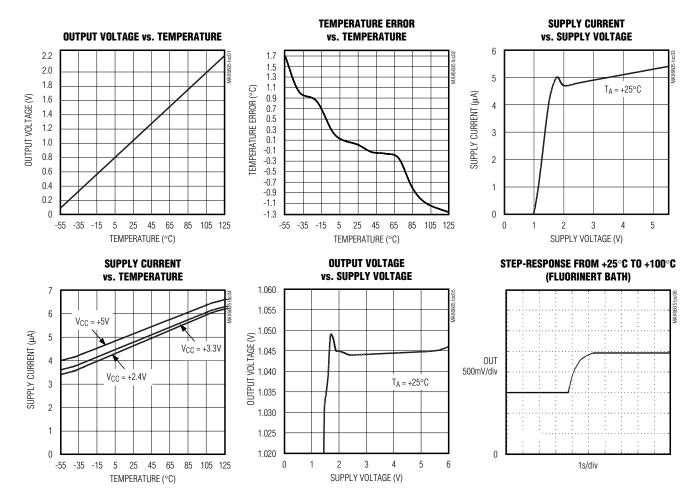

#### **Pin Description**

PIN	NAME	FUNCTION
1	Vcc	Supply Input. Decouple with a 0.1µF capacitor to GND.
2	А	Must be connected to GND.
3	OUT	Temperature Sensor Output, C <sub>L</sub> ≥ 1nF
4	В	Must be connected to V <sub>CC</sub> .
5	GND	Ground

### **Detailed Description**

The MAX6605 analog output temperature sensor's output voltage is a linear function of its die temperature. The slope of the output voltage is 11.9mV/°C, and there is a 744mV offset at 0°C to allow measurement of negative temperatures. The MAX6605 has three terminals: VCC, GND, and OUT. The maximum supply current is 10 $\mu$ A, and the supply voltage range is from +2.4V to +5.5V for the -40°C to +105°C temperature range and +2.7V to +5.5V for the -55°C to +125°C temperature range. The temperature error is <1°C at TA = +25°C, <3.8°C from TA = -20°C to +85°C, and <5.8°C from TA = -55°C to +125°C.

#### **Nonlinearity**

The benefit of silicon analog temperature sensors over thermistors is linearity over extended temperatures. The nonlinearity of the MAX6605 is typically 0.4°C over the -20°C to +85°C temperature range.

#### **Transfer Function**

The temperature-to-voltage transfer function has an approximately linear positive slope and can be described by the equation:

$$V_{OUT} = 744 \text{mV} + (T \times 11.9 \text{mV/}^{\circ}\text{C})$$

where T is the MAX6605's die temperature in °C.

Therefore:

$$T(^{\circ}C) = (V_{OUT} - 744 \text{mV}) / 11.9 \text{mV}/^{\circ}C$$

To account for the small amount of curvature in the transfer function, use the equation below to obtain a more accurate temperature reading:

$$V_{OUT} = 0.744V + 0.0119V/^{\circ}C \times T(^{\circ}C) + 1.604 \times 10^{-6} V/^{\circ}C^{2} \times (T(^{\circ}C))^{2}$$

### **Applications Information**

#### Sensing Circuit Board and Ambient Temperatures

Temperature sensor ICs like the MAX6605 that sense their own die temperatures must be mounted on, or close to, the object whose temperature they are intended to measure. Because there is a good thermal path between the SC70 package's metal leads and the IC die, the MAX6605 can accurately measure the temperature of the circuit board to which it is soldered. If the sensor is intended to measure the temperature of a heatgenerating component on the circuit board, it should be mounted as close as possible to that component and should share supply and ground traces (if they are not noisy) with that component where possible. This will maximize the heat transfer from the component to the sensor.

The thermal path between the plastic package and the die is not as good as the path through the leads, so the MAX6605, like all temperature sensors in plastic packages, is less sensitive to the temperature of the surrounding air than it is to the temperature of its leads. It can be successfully used to sense ambient temperature if the circuit board is designed to track the ambient temperature.

As with any IC, the wiring and circuits must be kept insulated and dry to avoid leakage and corrosion, especially if the part will be operated at cold temperatures where condensation can occur.

The thermal resistance junction to ambient  $(\theta_{JA})$  is the parameter used to calculate the rise of a device junction temperature  $(T_J)$  due to its power dissipation. For the MAX6605, use the following equation to calculate the rise in die temperature:

$$T_J = T_A + \theta_{JA} ((V_{CC} \times I_Q) + (V_{CC} - V_{OUT}) I_{OUT})$$

The MAX6605 is a very-low-power temperature sensor and is intended to drive very light loads. As a result, the temperature rise due to power dissipation on the die is insignificant under normal conditions. For example, assume that the MAX6605 is operating from a +3V supply at +21.6°C (VOUT = 1V) and is driving a 100k $\Omega$  load (IOUT = 10 $\mu$ A). In the 5-pin SC70 package, the die temperature will increase above the ambient by:

$$T_J - T_A = \theta_{JA} ((V_{CC} \times I_Q) + (V_{CC} - V_{OUT}) I_{OUT}) = 324^{\circ}C/W \times ((3V \times 10\mu A) + (3V - 1V) \times 10\mu A) = 0.0162^{\circ}C$$

Therefore, the error caused by power dissipation will be negligible.

\_\_ /N/XI/M

**Capacitive Loads** 

The MAX6605 can drive unlimited load capacitance. For stable operation load capacitance should be  $\geq 1$ nF.

\_Chip Information

**TRANSISTOR COUNT: 573** 

### Package Information

For the latest package outline information and land patterns, go to **www.maxim-ic.com/packages**. Note that a "+", "#", or "-" in the package code indicates RoHS status only. Package drawings may show a different suffix character, but the drawing pertains to the package regardless of RoHS status.

PACKAGE TYPE	PACKAGE CODE	DOCUMENT NO.
5 SC70	X5-1	<u>21-0076</u>

# **Revision History**

REVISION NUMBER	REVISION DATE	DESCRIPTION	PAGES CHANGED
0	10/00	Initial release	_
1	8/04	_	_
2	11/08	Corrected the parameter unit for VOUT in the Transfer Function section.	4
3	12/09	Added lead-free and automotive-qualified parts to the Ordering Information table.	1

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.



OOO «ЛайфЭлектроникс" "LifeElectronics" LLC

ИНН 7805602321 КПП 780501001 P/C 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 3010181090000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

#### Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный) Email: org@lifeelectronics.ru