

Descriptions

The S1117 series of positive adjustable and fixed regulators are designed to provide 1A with high efficiency. All internal circuitry is designed to operate down to 1.3V input to output differential. On-chip trimming adjusts reference voltage to 2%.


Features

- Adjustable or fixed output
- Output current of 1A
- Low dropout, 1.3V maximum at 1A output current
- Thermal shutdown protection

Ordering Information

Type NO.	Marking	Package Code
S1117AQ/S1117xxQ	S1117□□Q / S1117□□□Q	SOT-223
□□: Voltage Code (Aj : 1.25V, 15:1.5V, 18: 1.8V, 25:2.5V, 33:3.3V, 50:5.0V)		
□□□: Voltage Code (285:2.85V)		

Outline Dimensions (Unit : mm)

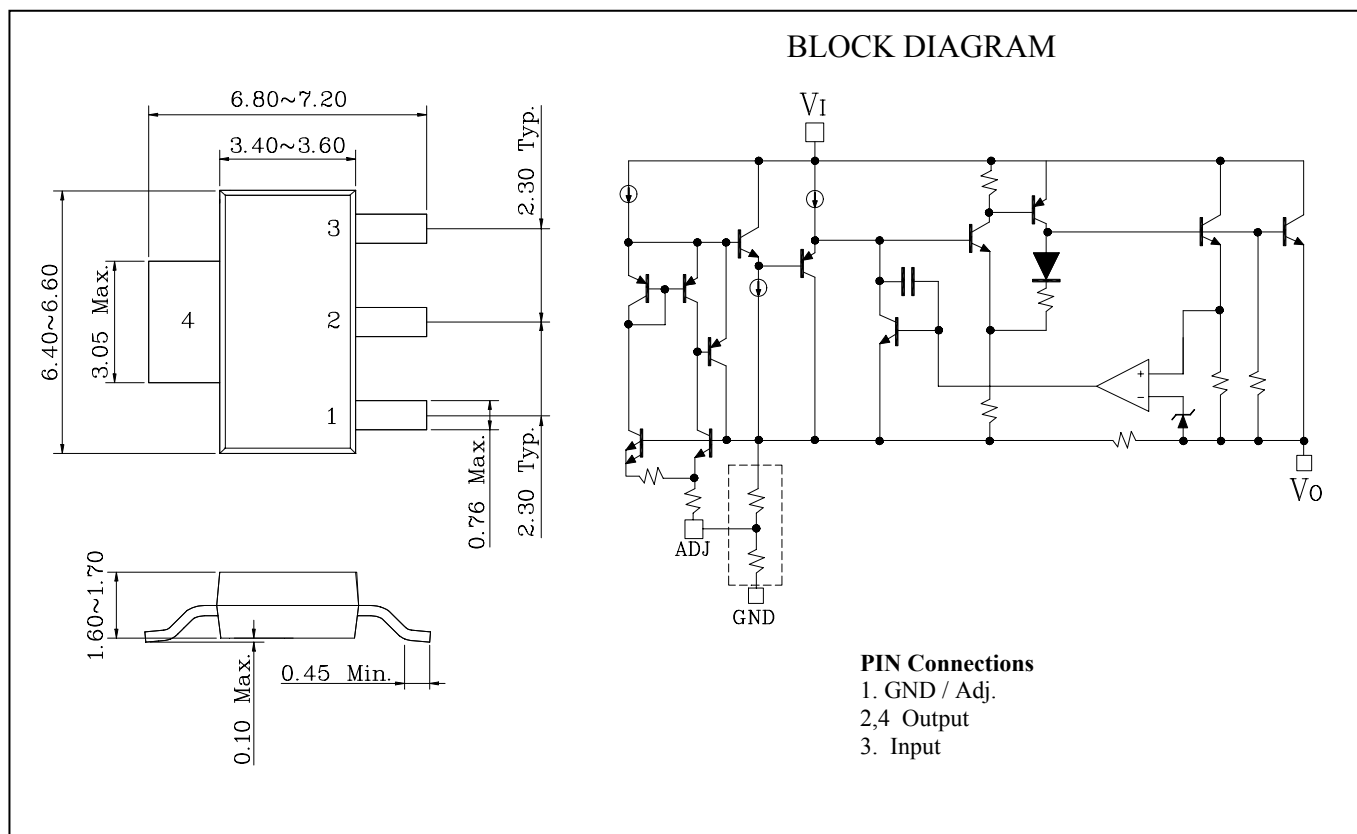

Absolute Maximum Ratings

[Ta=25°C]

Characteristic	Symbol	Rating	Unit
Input voltage	V_I	16	V
Power Dissipation	$P_{D1}(\text{Note1})$	2.8	W
	$P_{D2}(\text{Note2})$	0.8	
Junction Temperature	T_J	150	°C
Operating temperature range	T_{opr}	0 ~ +125	°C
Storage temperature range	T_{stg}	-55 ~ +150	°C

Note 1 : Mounted on a glass epoxy circuit board of 25.4 × 25.4mm. (at 1oz copper area)

Note 2 : No Heat sink

Recommended operating conditions

Characteristic	Symbol	Min.	Max.	Unit
Input voltage	V_I	$V_O+1.5V$	V_O+7V	V
Output current	I_O	1	1000	mA

Device Selection Guide

Device	Output Voltage
S1117AQ	Adjustable
S1117-15Q	1.50V
S1117-18Q	1.80V
S1117-25Q	2.50V
S1117-285Q	2.85V
S1117-33Q	3.30V
S1117-50Q	5.00V

Note 3 : Other fixed versions are available $V_O=1.5V \sim 5V$

Electrical Characteristics

(Electrical Characteristics at $0^{\circ}\text{C} \leq T_a \leq 125^{\circ}\text{C}$ and $V_I = (V_O + 1.5\text{V})$, $I_O = 10\text{mA}$, $C_O = 10\mu\text{F}$, unless otherwise specified.)

Characteristic	Symbol	Device	Test Condition		Min	Typ	Max	Unit
Output voltage	V_O	S1117A		*	1.23	1.25	1.28	V
			$V_I = (V_O + 1.5\text{V})$ to 7V $I_O = 0$ to 1000mA		1.20		1.30	
		S1117-15		*	1.47	1.50	1.53	
			$V_I = (V_O + 1.5\text{V})$ to 7V $I_O = 0$ to 1000mA		1.44		1.56	
		S1117-18		*	1.76	1.80	1.84	
			$V_I = (V_O + 1.5\text{V})$ to 7V $I_O = 0$ to 1000mA		1.73		1.87	
		S1117-25		*	2.45	2.50	2.55	
			$V_I = (V_O + 1.5\text{V})$ to 7V $I_O = 0$ to 1000mA		2.40		2.60	
		S1117-285		*	2.79	2.85	2.91	
			$V_I = (V_O + 1.5\text{V})$ to 7V $I_O = 0$ to 1000mA		2.74		2.96	
		S1117-33		*	3.23	3.30	3.37	
			$V_I = (V_O + 1.5\text{V})$ to 7V $I_O = 0$ to 1000mA		3.17		3.43	
		S1117-50		*	4.90	5.00	5.10	
			$V_I = (V_O + 1.5\text{V})$ to 7V $I_O = 0$ to 1000mA		4.80		5.20	
Line regulation (Note4)	$ \Delta V_{O(\Delta V_I)} $	All	$1.5\text{V} \leq V_I - V_O \leq 7\text{V}$ $I_O = 10\text{mA}$	*	-	5	10	mV
Load regulation (Note4)	$ \Delta V_{O(\Delta I_L)} $	All	$1.5\text{V} \leq V_I - V_O \leq 7\text{V}$ $I_O = 10\text{mA} \sim 1000\text{mA}$	*	-	10	30	mV
Quiescent current	I_{QC}	All	$I_O = 0$		-	7	13	mA
Minimum load current	$I_{L(\text{MIN})}$	S1117A	$V_{\text{Adj}} = 0\text{V}$			3	7	mA
Adjust pin current	I_{ADJ}	S1117A	$V_I = (V_O + 1.5\text{V})$ to 7V $I_O = 100\text{mA}$			55	90	μA
Adjust pin current change	$ \Delta I_{\text{ADJ}} $	S1117A	$1.5\text{V} \leq V_I - V_O \leq 7\text{V}$ $I_O = 10\text{mA} \sim 1000\text{mA}$			1	5	μA
Dropout voltage	V_{DROP}	All	$I_O = 1000\text{mA}$	*	-	1.2	1.3	V
Ripple rejection ratio	RR	All	$I_O = 1000\text{mA}$ $V_{\text{Ripple}} = 1\text{V}_{\text{P-P}}$, $f = 120\text{Hz}$	*	60	72	-	dB
Current limit	I_{LIMIT}	All	$I_O \geq 1000\text{mA}$	*	1.1			A

[*] $T_a = 25^{\circ}\text{C}$

Note 4: Low duty pulse testing with Kelvin connections required.

■ Typical Applications


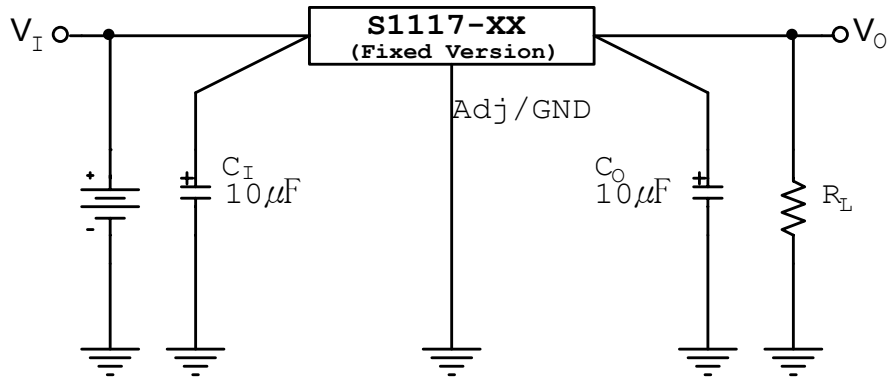


Fig. 1 Fixed Voltage Regulator

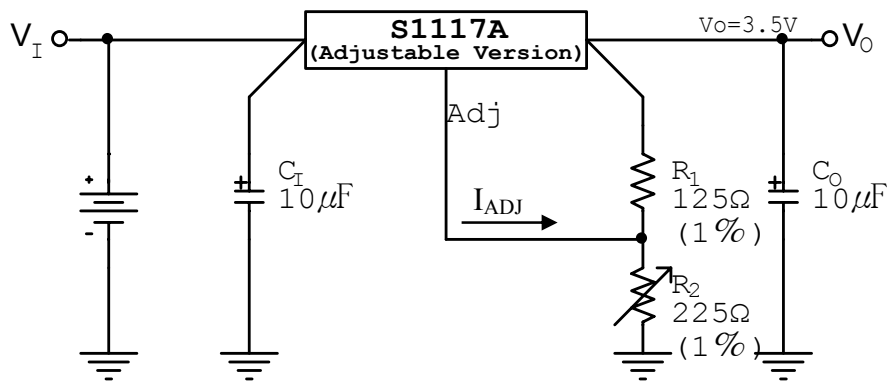

$$V_O = V_{\text{ADJ}} \times \left(1 + \frac{R_2}{R_1}\right) + I_{\text{ADJ}} \times R_2$$

Fig. 2 Adjustable Voltage Regulator

Notes 5:

- 1) C_I needed if device is far from filter capacitors
- 2) C_O minimum value required for stability

Electrical Characteristic Curves

Fig.3 V_{DROP} vs I_O

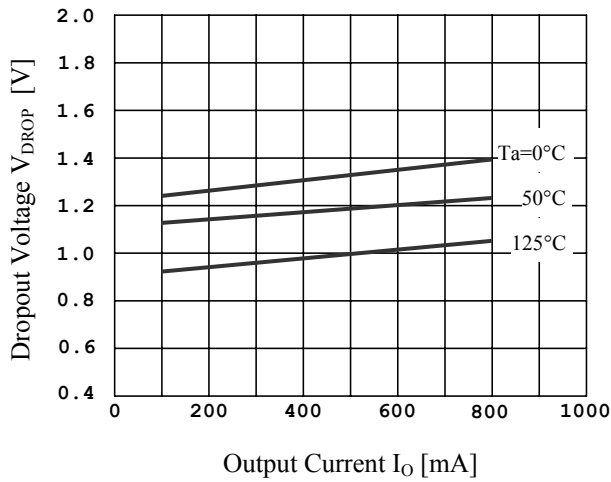


Fig.4 V_O vs T_a

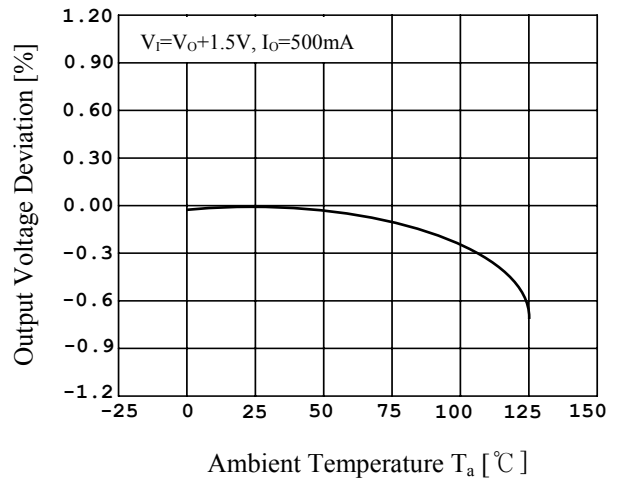


Fig.5 $I_{L(\text{MIN})}$ vs $V_I - V_O$

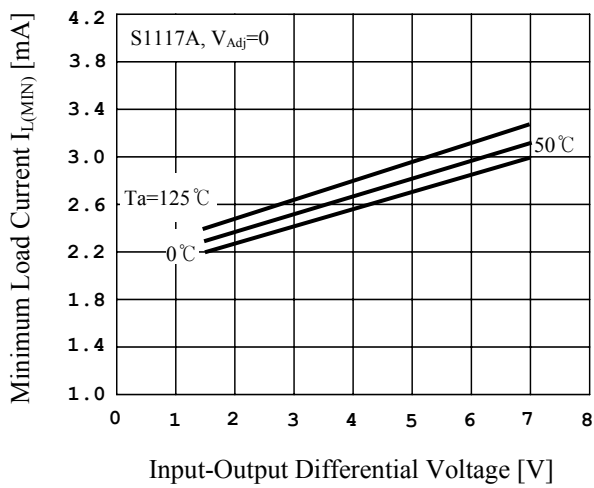


Fig.6 I_{Adj} vs T_a


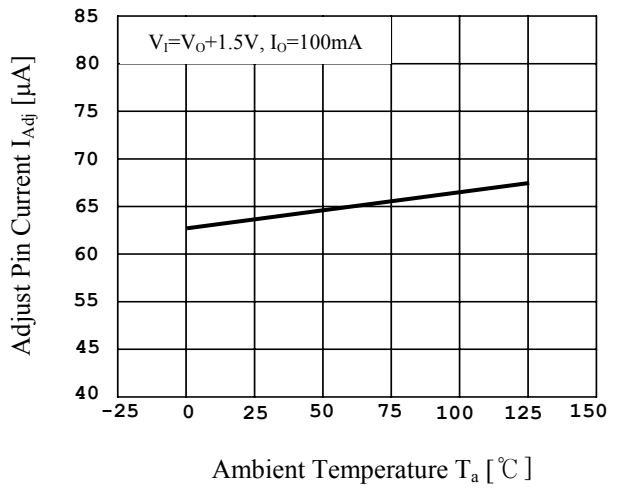


Fig.7 P_D vs T_a

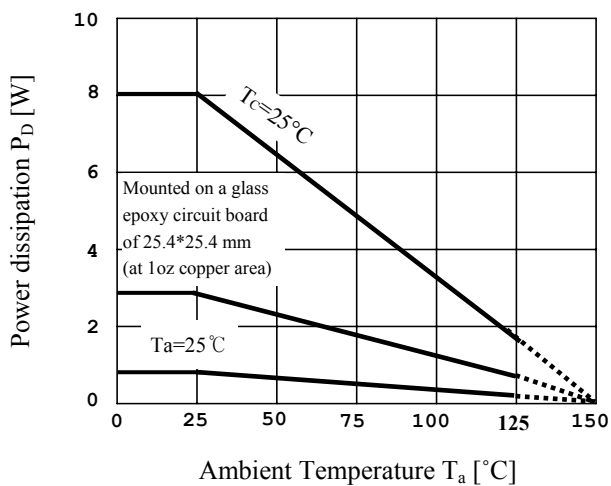

The AUK Corp. products are intended for the use as components in general electronic equipment (Office and communication equipment, measuring equipment, home appliance, etc.).

Please make sure that you consult with us before you use these AUK Corp. products in equipments which require high quality and / or reliability, and in equipments which could have major impact to the welfare of human life(atomic energy control, airplane, spaceship, transportation, combustion control, all types of safety device, etc.). AUK Corp. cannot accept liability to any damage which may occur in case these AUK Corp. products were used in the mentioned equipments without prior consultation with AUK Corp..

Specifications mentioned in this publication are subject to change without notice.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru