



Grove - Flame Sensor

Release date : 9/20/2015

Version : 1.0

Wiki: http://wiki.seeedstudio.com/Grove-Flame_Sensor/

Bazaar: <https://www.seeedstudio.com/Grove-Flame-Sensor-p-1450.html>

Document Revision History

Revision	Date	Author	Description
1.0	Sep 21, 2015	Victor.He	Create file

Contents

Document Revision History.....	2
1. Introduction	2
2. Feature	3
3. Specification.....	4
4. Usage.....	5
5. Reference	7
6. Resource.....	8
7. Support.....	9

Disclaimer

For physical injuries and possessions loss caused by those reasons which are not related to product quality, such as operating without following manual guide, natural disasters or force majeure, we take no responsibility for that.


Under the supervision of Seeed Technology Inc., this manual has been compiled and published which covered the latest product description and specification. The content of this manual is subject to change without notice.

Copyright

The design of this product (including software) and its accessories is under tutelage of laws. Any action to violate relevant right of our product will be penalized through law. Please consciously observe relevant local laws in the use of this product.

1. Introduction

The Grove - Flame Sensor can be used to detect fire source or other light sources of the wavelength in the range of 760nm - 1100 nm. It is based on the YG1006 sensor which is a high speed and high sensitive NPN silicon phototransistor. Due to its black epoxy, the sensor is sensitive to infrared radiation. In firefighting robot game, the sensor plays a very important role, it can be used as a robot eyes to find the fire source.

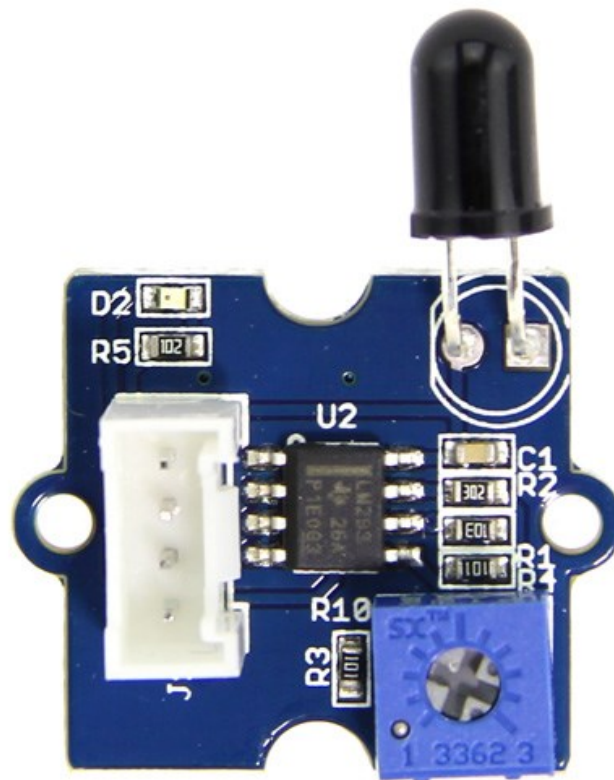

2. Feature

- Grove Interface
- High Photo Sensitivity
- Fast Response Time
- Easy to use
- Sensitivity can adjustable

3. Specification

Item	Min	Typical	Max	Unit
Voltage	4.75	5.0	5.30	VDC
Current	/	20	/	mA
Range of Spectral Bandwidth	760	940	1100	nm
Detection range	0	~	1	m
Response Time	15			μS
Operating Temperature	-25	~	85	°C

4. Usage

The module is mainly used to detect the infrared light. It outputs digital signal 0 and 1 through a Comparator output. The output value will be 0 when infrared light is detected. And the sensitivity is adjustable by the precision potentiometer.

Let's use it to control. When the output value is 0, the led will light up.

1. Connect the module to the D3 of [Grove - Base Shield](#) using the 4-pin grove cable.
2. Plug the Grove - Base Shield into Arduino.
3. Connect Arduino to PC by using a USB cable.
4. Copy and paste code below to a new Arduino sketch. Please click [here](#) if you do not know how to upload.

```
/*
*****/

#define SENSOR 3 //connect SENSOR to digital pin3
#define LED 2//connect Grove - LED to pin2

void setup()
{
  pinsInit();
}
void loop()
{
  if(isFlameDetected())
    turnOnLED();
  else turnOffLED();
}
/*
*****/
void pinsInit()
{
  pinMode (FLAME_SENSOR, INPUT);
  pinMode (LED,OUTPUT);
  digitalWrite (LED,LOW);
}
void turnOnLED()
{
  digitalWrite (LED,HIGH);
}
void turnOffLED()
{

```




```
digitalWrite(LED, LOW);  
}  
boolean isFlameDetected()  
{  
    if(digitalRead(FLAME_SENSOR))  
        return false;  
    else return true;  
}
```

5. The LED will light up when there is infrared light. Please use it to design your products.

5. Reference

The sensor can detect the light source whose wavelength is in the range of 760nm - 1100 nm. The below picture shows the spectral sensitivity.

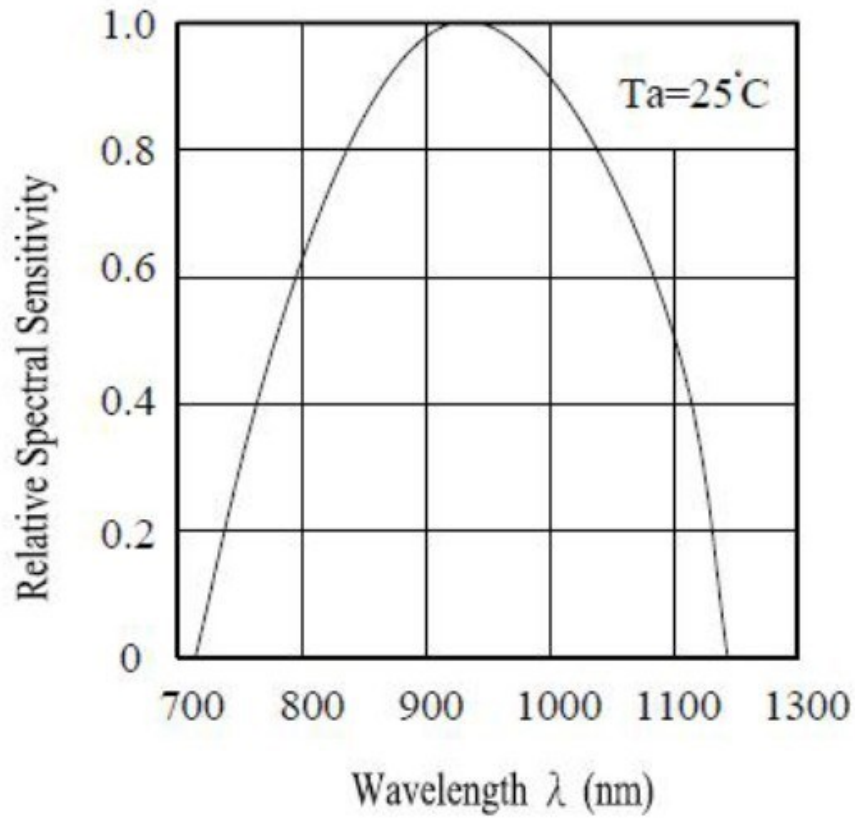

6. Resource

[Grove - Flame Sensor Eagle File](#)

[Github repository for Grove Flame Sensor Library \(new\)](#)

[LM293D datasheet](#)

7. Support

If you have questions or other better design ideas, you can go to our [forum](#) to discuss.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкуренеспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru