

# GP Series Sealed Ultraminiature Pushbutton Switches




A  
Pushbutton

## Features/Benefits

- Ultraminiature design saves space
- Process compatible, withstands most soldering and washing processes
- Thru-hole and surface mount models available
- Sealed construction—internal o-ring and epoxy base
- RoHS compliant

## Typical Applications

- Telecommunications and network equipment
- Computers and peripheral products
- Instrumentation
- Medical Applications



## Specifications

CONTACT RATING: 0.4 VA max. @ 20 V AC or DC max.

MECHANICAL & ELECTRICAL LIFE: 40,000 make-and-break cycles at full load.

CONTACT RESISTANCE: Below 50 mΩ typ. initial @ 2-4 V DC, 100 mA.

INSULATION RESISTANCE: 10<sup>9</sup>Ω min.

DIELECTRIC STRENGTH: 500 Vrms min. @ sea level.

OPERATING TEMPERATURE: -40°C to 85°C.

SOLDERABILITY: Per MIL-STD-202F method 208D, or EIA RS-186E method 9 (1 hour steam aging).

DEGREE OF PROTECTION: IP57; Protection against harmful dust deposit, full-scale voltage protection, temporary immersion.

PACKAGING: Surface mount switches standard in anti-static tape and reel packaging per EIA 481-3, see page A-80 for drawings and reel information. Thru-Hole parts are shipped in trays.

All models are RoHS compliant and compliant.

## Materials

HOUSING & BASE: Glass filled nylon 4/6, flame retardant, heat stabilized (UL 94V-0).

ACTUATOR: Glass filled nylon 4/6, flame retardant (UL 94V-0) with standard internal o-ring seal.

SWITCH SUPPORT: Brass, tin plated.

MOVABLE CONTACT: Copper alloy, with gold plate over nickel plate.

STATIONARY CONTACTS Copper alloy, with gold plate over nickel plate.

TERMINALS: Copper alloy, with gold flash over nickel plate.

TERMINAL SEAL: Epoxy/Urethane. All terminals insert molded.

**NOTE:** Any models supplied with B contact material are RoHS compliant and compatible.

**NOTE:** Materials listed above are general specifications. Specifications available for specific and custom switches, consult Customer Service Center.



**CAUTION:** PC mounting layouts and pads as shown are designed to be compatible with the latest equipment and reflow techniques. Care should be taken in the design and location of PC lands to suit individual needs. Orientation relative to reflow direction may significantly impact solder joint integrity.

## How To Order

Complete part numbers for GP Series Sealed Ultraminiature Pushbutton Switches are shown on pages A-78 thru A-80.

| PART NUMBER     | SWITCH FUNCTION |        | SCHEMATIC              |
|-----------------|-----------------|--------|------------------------|
|                 | POS. 1          | POS. 2 |                        |
| <b>GP11MCBE</b> | OFF             | MOM.   | <br>1 3                |
| Conn. Terms.    | OPEN            | 1-3    |                        |
| <b>GP12MCBE</b> | ON              | MOM.   | <br>NC 1 2 (COMM) 3 NO |
| Conn. Terms     | 2-1             | 2-3    |                        |


MOM. = Momentary



## PC MOUNTING



GP11—omit center hole.



Dimensions are shown: Inches (mm)  
Specifications and dimensions subject to change



# GP Series


## Sealed Ultraminiature Pushbutton Switches

A


Pushbutton



**GP11MABE**  
SPST

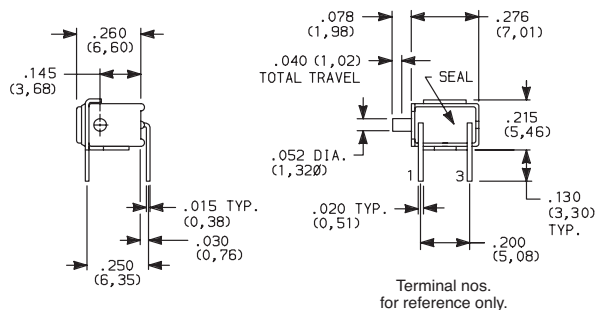

PC MOUNTING



GP11- omit hole 2.


GP12 Model

| PART NUMBER     | SWITCH FUNCTION |        | SCHEMATIC |
|-----------------|-----------------|--------|-----------|
|                 | POS.1           | POS. 2 |           |
| <b>GP11MABE</b> | OFF             | MOM.   |           |
| Conn. Terms.    | OPEN            | 1-3    |           |
| <b>GP12MABE</b> | ON              | MOM.   |           |
| Conn. Terms.    | 2-1             | 2-3    |           |


MOM. = Momentary



**GP11MSABE**  
SPST

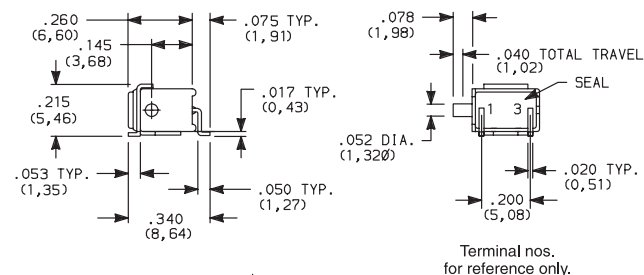

PC MOUNTING

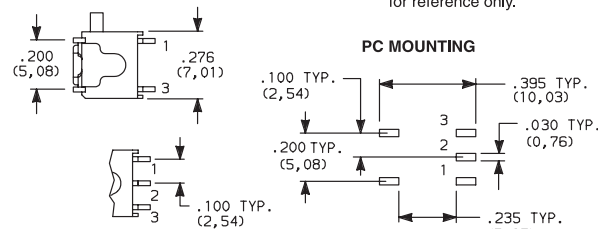

GP12 Model


GP11- omit pad 2.

| PART NUMBER      | SWITCH FUNCTION |        | SCHEMATIC |
|------------------|-----------------|--------|-----------|
|                  | POS.1           | POS. 2 |           |
| <b>GP11MSABE</b> | OFF             | MOM.   |           |
| Conn. Terms      | OPEN            | 1-3    |           |
| <b>GP12MSABE</b> | ON              | MOM.   |           |
| Conn. Terms      | 2-1             | 2-3    |           |


MOM. = Momentary



**GP11MSA1BE**  
SPST

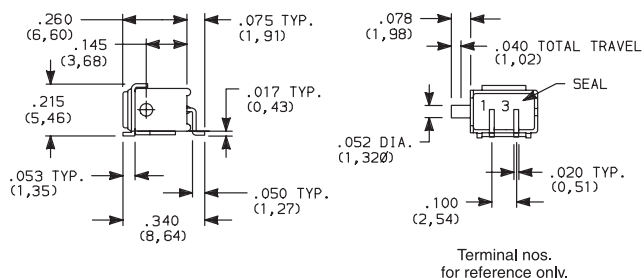

PC MOUNTING

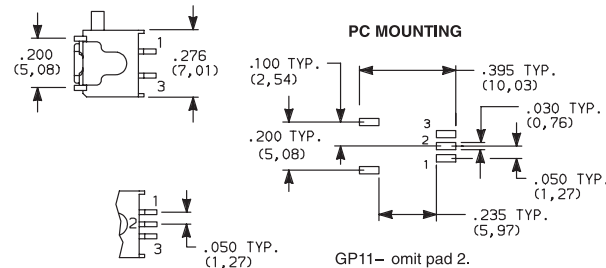

GP12 Model

GP11- omit pad 2.

| PART NUMBER       | SWITCH FUNCTION |        | SCHEMATIC |
|-------------------|-----------------|--------|-----------|
|                   | POS.1           | POS. 2 |           |
| <b>GP11MSA1BE</b> | OFF             | MOM.   |           |
| Conn. Terms.      | OPEN            | 1-3    |           |
| <b>GP12MSA1BE</b> | ON              | MOM.   |           |
| Conn. Terms       | 2-1             | 2-3    |           |

MOM. = Momentary



Third Angle  
Projection

# GP Series Sealed Ultraminiature Pushbutton Switches




A

Pushbutton


| PART NUMBER      | SWITCH FUNCTION |        | SCHEMATIC |
|------------------|-----------------|--------|-----------|
|                  | POS. 1          | POS. 2 |           |
| <b>GP12MSCBE</b> | ON              | MOM.   |           |
| Conn. Terms      | 2-1             | 2-3    |           |

MOM. = Momentary

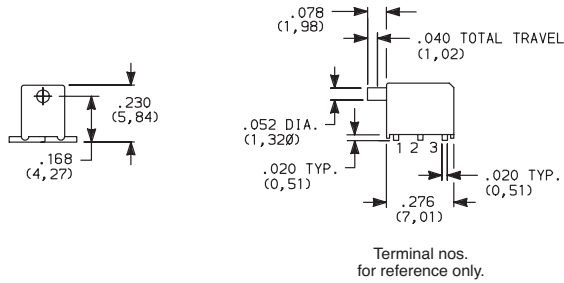


**GP12MSCBE**  
SPDT

## PC MOUNTING

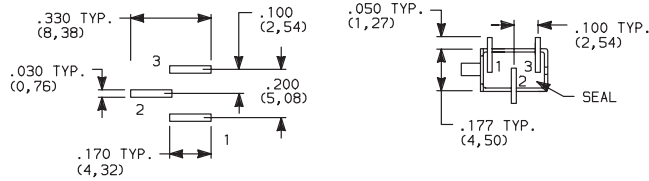



**NOTE:** Recommended for infrequent use applications only  
For increased switch mounting strength, order, SV1 termination style with support bracket (see below).

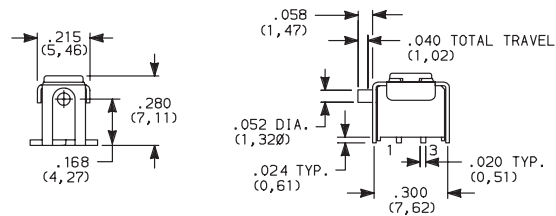

**GP11MSV1BE**  
SPST

| PART NUMBER       | SWITCH FUNCTION |        | SCHEMATIC |
|-------------------|-----------------|--------|-----------|
|                   | POS. 1          | POS. 2 |           |
| <b>GP11MSV1BE</b> | OFF             | MOM.   |           |
| Conn. Terms.      | OPEN            | 1-3    |           |
| <b>GP12MSV1BE</b> | ON              | MOM.   |           |
| Conn. Terms.      | 2-1             | 2-3    |           |

MOM. = Momentary

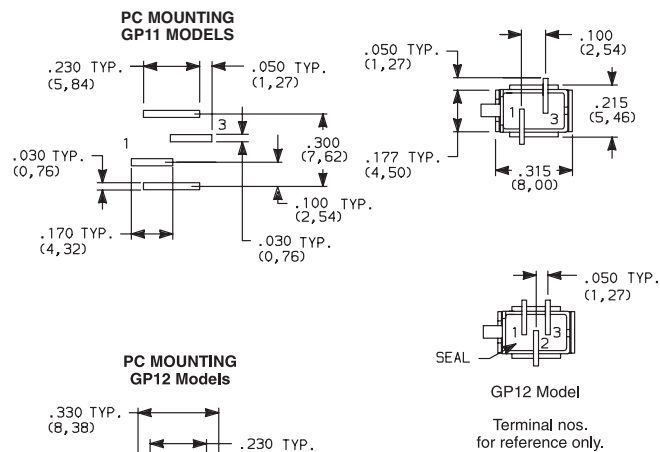

Dimensions are shown: Inches (mm)  
Specifications and dimensions subject to change

**C&K**




# GP Series Sealed Ultraminiature Pushbutton Switches

## TAPE & REEL


For part numbers GP11MSV1BE, GP12MSV1BE

| REEL INFORMATION  |               |
|-------------------|---------------|
| OUTSIDE DIAMETER  | 13.00 (330,0) |
| PILOT HOLE        | .512 (13,0)   |
| QUANTITY PER REEL | 600           |

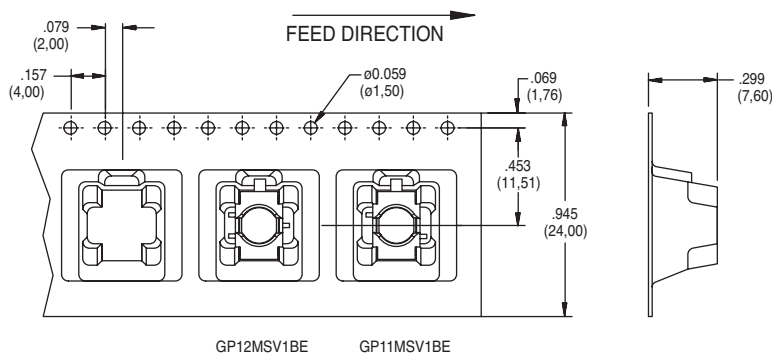


For part numbers GPXXSA1BE, GPXXMSABE

| REEL INFORMATION  |               |
|-------------------|---------------|
| OUTSIDE DIAMETER  | 13.00 (330,0) |
| PILOT HOLE        | .512 (13,0)   |
| QUANTITY PER REEL | 600           |

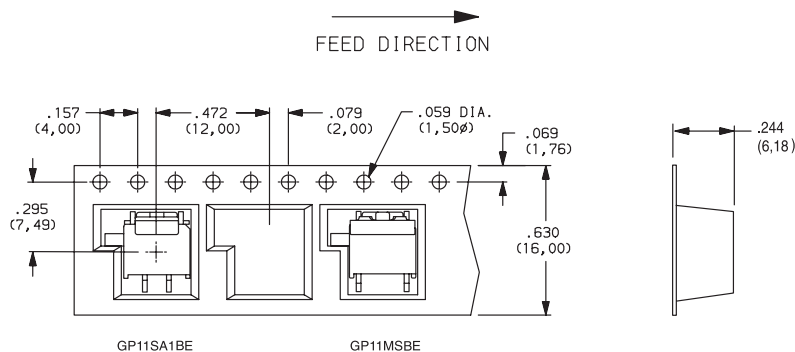

For part numbers GP12MSCBE

| REEL INFORMATION  |               |
|-------------------|---------------|
| OUTSIDE DIAMETER  | 13.00 (330,0) |
| PILOT HOLE        | .512 (13,0)   |
| QUANTITY PER REEL | 600           |

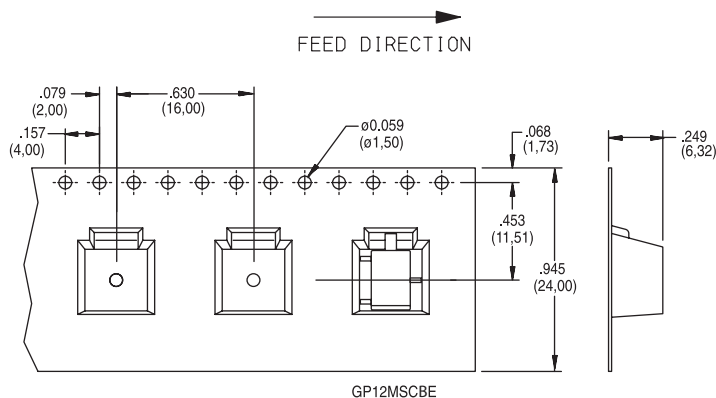

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)