



# SPECIFICATION

Item no.:

T60404-N4646-X410

K-No.: 24616

## 50 A Current Sensor

For the electronic measurement of currents:  
 DC, AC, pulsed, mixed ..., with a galvanic  
 Isolation between the primary circuit  
 (high power) and the secondary circuit  
 (electronic circuit)

Date: 28.01.2008

Customer: Standard type

Customers Part no.:

Page 1 of 2

**Description**

- Closed loop (compensation)
- Current Sensor with magnetic field probe
- Printed circuit board mounting
- Casing and materials UL-listed

**Characteristics**

- Excellent accuracy
- Very low offset current
- Very low temperature dependency and offset current drift
- Very low hysteresis of offset current
- Low response time
- Wide frequency bandwidth
- Compact design
- Reduced offset ripple

**Applications**

- Mainly used for stationary operation in industrial applications:
- AC variable speed drives and servo motor drives
  - Static converters for DC motor drives
  - Battery supplied applications
  - Switched Mode Power Supplies (SMPS)
  - Power Supplies for welding applications
  - Uninterruptable Power Supplies (UPS)

**Electrical data – Ratings<sup>1)</sup>**

I <sub>PN</sub>	Primary nominal r.m.s. current	50	A
R <sub>M</sub>	Measuring resistance V <sub>C</sub> =± 12V	10 ... 200	Ω
	V <sub>C</sub> =± 15V	22 ... 400	Ω
I <sub>SN</sub>	Secondary nominal r.m.s. current	50	mA
K <sub>N</sub>	Turns ratio	1...3 : 1000	

**Accuracy – Dynamic performance data<sup>1)</sup>**

		min.	typ.	max.	Unit
I <sub>P,max</sub>	Max. measuring range @ V <sub>C</sub> = ±12V, R <sub>M</sub> = 10 Ω (t <sub>max</sub> = 10sec) @ V <sub>C</sub> = ±15V, R <sub>M</sub> = 22 Ω (t <sub>max</sub> = 10sec)	±112			A
X	Accuracy @ I <sub>PN</sub> , T <sub>A</sub> = 25°C	0.1	0.5		%
ε <sub>L</sub>	Linearity		0.1		%
I <sub>0</sub>	Offset current @ I <sub>P</sub> =0, T <sub>A</sub> = 25°C	0.02	0.1		mA
t <sub>r</sub>	Response time	500			ns
Δt (I <sub>P,max</sub> )	Delay time at di/dt = 100 A/μs	200			ns
f	Frequency bandwidth	DC...200			kHz

**General data<sup>1)</sup>**

		min.	typ.	max.	Unit
T <sub>A</sub>	Ambient operating temperature	-40	+85		°C
T <sub>s</sub>	Ambient storage temperature	-40	+90		°C
m	Mass		13.5		g
V <sub>C</sub>	Supply voltage	±11.4	±12 or ±15	±15.75	V
I <sub>C</sub>	Current consumption		18,5		mA
	Constructed and manufactured and tested in accordance with EN 61800-5-1 (Pin 1 - 6 to Pin 7 – 9) Reinforced insulation, Insulation material group 1, Pollution degree 2				
S <sub>clear</sub>	clearance (component without solder pad)	10.2			mm
S <sub>creep</sub>	creepage (component without solder pad)	10.2			mm
V <sub>sys</sub>	System voltage overvoltage category 3	RMS	600		V
V <sub>work</sub>	Working voltage (table 7 acc. to EN61800-5-1)	RMS	1020		V
U <sub>PD</sub>	Rated discharge voltage	peak value	1400		V

Date	Name	Issue	Amendment
28.01.08	Le	81	Date changed. Insignificant

Hrsg.: KB-E editor	Bearb: SA designer	KB-E: Le check	KB-PM: KRe. check	freig.: Heu. released
-----------------------	-----------------------	-------------------	----------------------	--------------------------

K-No.: 24616

**50 A Current Sensor**

For the electronic measurement of currents:  
 DC, AC, pulsed, mixed ..., with a galvanic  
 Isolation between the primary circuit  
 (high power) and the secondary circuit  
 (electronic circuit)

Date: 28.01.2008


Customer: Standard type

Customers Part no.:

Page 2 of 2

**Mechanical outline (mm):**


General tolerances DIN ISO 2768-c

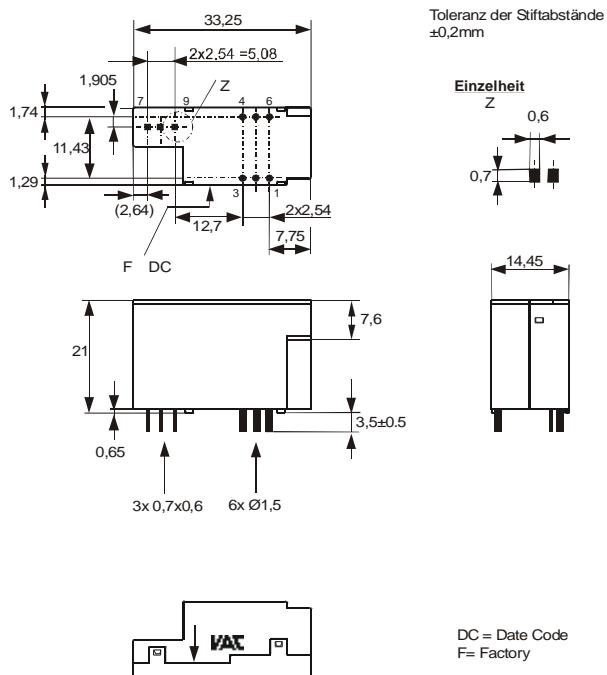


**Connections:**  
 1...6: Ø 1,5 mm  
 7...9: 0,6x0,7 mm

**Marking:**

**VAC**  
 4646X410  
 F DC



DC = Date Code  
 F = Factory

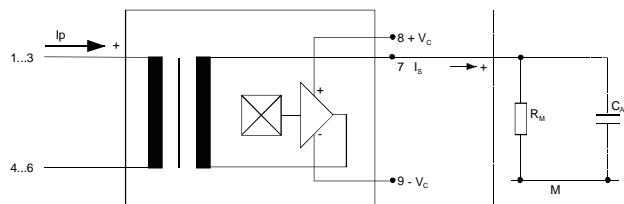**Schematic diagram****Possibilities of wiring for  $V_C = \pm 15V$  (@  $T_A = 85^\circ C$ ,  $R_M = 22 \Omega$ )**

primary windings <b>N<sub>P</sub></b>	primary current RMS <b>I<sub>P</sub> [A]</b>	maximal primary current RMS <b>I<sub>P,max</sub> [A]</b>	output current RMS <b>I<sub>S</sub> (I<sub>P</sub>) [mA]</b>	turns ratio <b>K<sub>N</sub></b>	primary resistance RMS <b>R<sub>P</sub> [mW]</b>	wiring
1	50	128	50	1:1000	0,12	
2	20	64	40	2:1000	0,54	
3	15	43	45	3:1000	1,1	

Temperature of the primary conductor should not exceed 100°C.

Additional information is obtainable on request.

This specification is no declaration of warranty acc. BGB §443 dar.

Hrsg.: KB-E  
editorBearb: SA  
designerKB-E: Le  
checkKB-PM: KRe.  
checkfreig.: Heu.  
released



## Additional Information

Item No.: T60404-N4646-X410

K-No.: 24616

### 50 A Current Sensor

For electronic current measurement:  
DC, AC, pulsed, mixed ..., with a galvanic  
isolation between primary circuit  
(high power) and secondary circuit

Date: 28.01.2008

Customer:

Customers Part No.:

Page 1 of 3

### Electrical Data (investigate by a type checking)

		min.	typ.	max.	Unit
$V_{Ctot}$	Maximum supply voltage (without function) $\pm 15.75 \dots \pm 18$ V: for 1s per hour			$\pm 18$	V
$R_S$	Secondary coil resistance @ $T_A=85^\circ\text{C}$			88	$\Omega$
$R_p$	Primary coil resistance per turn @ $T_A=25^\circ\text{C}$			0.36	$\text{m}\Omega$
$X_{Ti}$	Temperature drift of X @ $T_A = -40 \dots +85^\circ\text{C}$			0.1	%
$I_{0ges}$	Offset current (including $I_0$ , $I_{0t}$ , $I_{0T}$ )			0.15	mA
$I_{0t}$	Long term drift Offset current $I_0$		0.05		mA
$I_{0T}$	Offset current temperature drift $I_0$ @ $T_A = -40 \dots +85^\circ\text{C}$		0.05		mA
$I_{0H}$	Hysteresis current @ $I_P=0$ (caused by primary current $3 \times I_{PN}$ )	0.04	0.1		mA
$\Delta I_0/\Delta V_C$	Supply voltage rejection ratio		0.01		mA/V
$i_{loss}$	Offset ripple* (with 1 MHz- filter first order)		0.15		mA
$i_{loss}$	Offset ripple* (with 100 kHz- filter first order)	0.03	0.05		mA
$i_{loss}$	Offset ripple* (with 20 kHz- filter first order)	0.007	0.01		mA
$C_k$	Maximum possible coupling capacity (primary – secondary)	4			pF

Mechanical Stress according to M3209/3

Settings: 10 – 2000 Hz, 1 min/Decade, 2 hours

An exceptionally high rate of on/off – switching of the supply voltage  
accelerates the aging process of the sensor.

### Inspection (Measurement after temperature balance of the samples at room temperature)

$K_N(N_1/N_2)$	(V)	M3011/6	Transformation ratio ( $I_P=3*10\text{A}$ , 40-80 Hz)	1...3 : 1000 $\pm 0.5$ %
$I_0$	(V)	M3226	Offset current	< 0.1 mA
$V_{P,eff}$	(V)	M3014	Test voltage, rms, 1s Pin 1 - 6 to Pin 7 - 9	2.5 kV
$V_e$	(AQL 1/S4)		Partial discharge voltage acc. M3024 (RMS) with $V_{vor}$ (RMS)	1500 V 1875 V

### Type Testing (Pin 1 - 6 to Pin 7 – 9)

Designed according standard EN 61800 with insulation material group 1

$V_W$	HV transient test according (to M3064) (1,2 $\mu\text{s}$ / 50 $\mu\text{s}$ -wave form)	8	kV
$V_d$	Testing voltage acc. M3014 (RMS)	(5 s)	5 kV
$V_e$	Partial discharge voltage acc. M3024 (RMS) with $V_{vor}$ (RMS)	1500 V 1875 V	V

Datum	Name	Index	Änderung
28.01.08	Le	81	Page 3: write error in $X_{ges}$ ( $I_{PN}$ ). changed. Insignificant

Hrsg.: KB-E editor	Bearb: SA designer		KB-E: Le check	KB-PM: KRe. check	freig.: Heu. released
-----------------------	-----------------------	--	-------------------	----------------------	--------------------------

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Zu widerhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patenterteilung oder GM-Eintragung vorbehalten

Copying of this document, disclosing it to third parties or using the contents there for any purposes without express written authorization by use illegally forbidden.  
Any offenders are liable to pay all relevant damages.

K-No.: 24616

**50 A Current Sensor**

For electronic current measurement:  
DC, AC, pulsed, mixed ..., with a galvanic  
isolation between primary circuit  
(high power) and secondary circuit

Date: 28.01.2008


Customer:

Customers Part No.:


Page 2 of 3

ME

A=km  
1=St  
2=kg  
3=g  
4=l  
5=m  
3=m<sup>2</sup>  
7=m<sup>3</sup>  
3=mm  
9:Paar

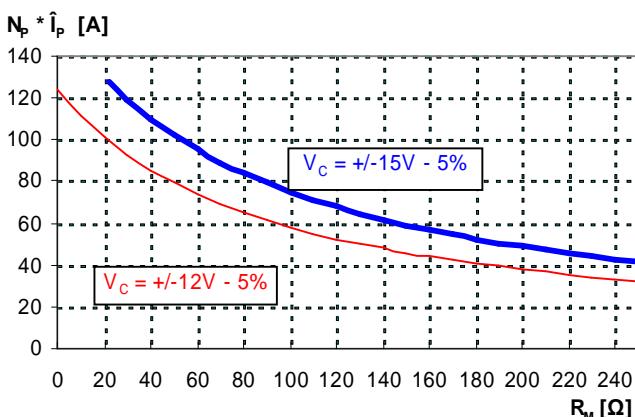**Limit curve of measurable current  $\hat{I}_P(R_M)$** @ ambient temperature  $T_A \leq 85^\circ\text{C}$ **Maximum measuring range ( $\mu\text{s-range}$ )**

Output current behaviour of a 3kA current pulse  
@  $V_C = \pm 15\text{V}$  und  $R_M = 25\Omega$

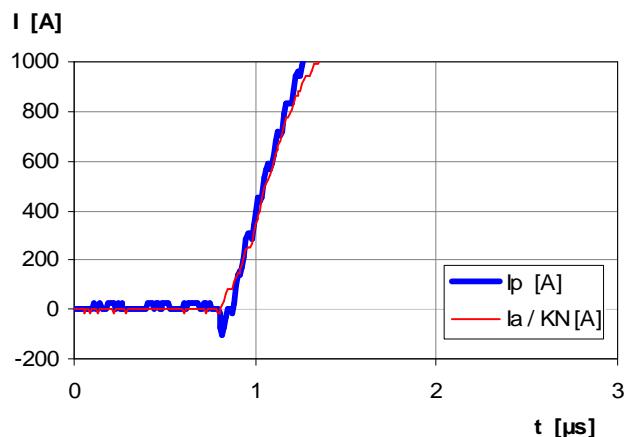

Fast increasing currents (higher than the specified  $I_{p,\max}$ ), e.g. in case of a short circuit, can be transmitted because the currents are transformed directly.

**Offsetripple reduction**

The offset ripple can be reduced by an external low pass. Simplest solution is a passive low pass filter of 1st order with

$$f_g = \frac{1}{2p \cdot R_M \cdot C_a}$$

In this case the response time is enlarged.

It is calculated from:

$$t'_r \leq t_r + 2,5R_M C_a$$

**Applicable documents**

Current direction: A positive output current appears at point  $I_S$ , by primary current in direction of the arrow.  
Constructed and manufactured and tested in accordance with EN 61800.

Housing and bobbin material UL-listed: Flammability class 94V-0.

Hrsg.: KB-E  
editor

Bearb: SA  
designer

KB-E: Le  
check

KB-PM: KRe.  
check

freig.:  
released

K-No.: 24616

**50 A Current Sensor**

For electronic current measurement:  
 DC, AC, pulsed, mixed ..., with a galvanic  
 isolation between primary circuit  
 (high power) and secondary circuit

Date: 28.01.2008

Customer:

Customers Part No.:

Page 3 of 3

ME

A=km

1=St

2=kg

3=g

4=l

5=m

6=m<sup>2</sup>7=m<sup>3</sup>

8=mm

9:Paar

$I_{0H}$ : Zero variation of  $I_o$  after overloading with a DC of tenfold the rated value ( $R_M = R_{MN}$ )

$I_{0t}$ : Long term drift of  $I_o$  after 100 temperature cycles in the range -40 bis 85 °C.

$t_r$ : Response time (describe the dynamic performance for the specified measurement range), measured as delay time at  $I_p = 0,9 \cdot I_{Pmax}$  between a rectangular current and the output current.

$\Delta t (I_{Pmax})$ : Delay time (describe the dynamic performance for the rapid current pulse rate e.g short circuit current) measured between  $I_{Pmax}$  and the output current  $i_a$  with a primary current rise of  $di_1/dt = 100 \text{ A}/\mu\text{s}$ .

$X_{ges}(I_{PN})$ : The sum of all possible errors over the temperature range by measuring a current  $I_{PN}$ :

$$X_{ges} = 100 \cdot \left| \frac{I_S(I_{PN})}{K_N \cdot I_{PN}} - 1 \right| \%$$

$X$ : Permissible measurement error in the final inspection at RT, defined by

$$X = 100 \cdot \left| \frac{I_{SB}}{I_{SN}} - 1 \right| \%$$

where  $I_{SB}$  is the output DC value of an input DC current of the same magnitude as the (positive) rated current ( $I_o = 0$ )

$X_{Ti}$ : Temperature drift of the rated value orientated output term.  $I_{SN}$  (cf. Notes on  $F_i$ ) in a specified temperature range, obtained by:

$$X_{Ti} = 100 \cdot \left| \frac{I_{SB}(T_{A2}) - I_{SB}(T_{A1})}{I_{SN}} \right| \%$$

$\varepsilon_L$ : Linearity fault defined by  $e_L = 100 \cdot \left| \frac{I_p}{I_{PN}} - \frac{I_{Sx}}{I_{SN}} \right| \%$

Where  $I_p$  is any input DC and  $I_{Sx}$  the corresponding output term.  $I_{SN}$ : see notes of  $F_i$  ( $I_o = 0$ ).

This "Additional information" is no declaration of warranty according BGB §443.

Hrsg.: KB-E  
editorBearb: SA  
designerKB-E: Le  
checkKB-PM: KRe.  
checkfreig.:  
released

ООО "ЛайфЭлектроникс"

"LifeElectronics" LLC

ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибуторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибуторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помочь разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)  
Email: org@lifeelectronics.ru