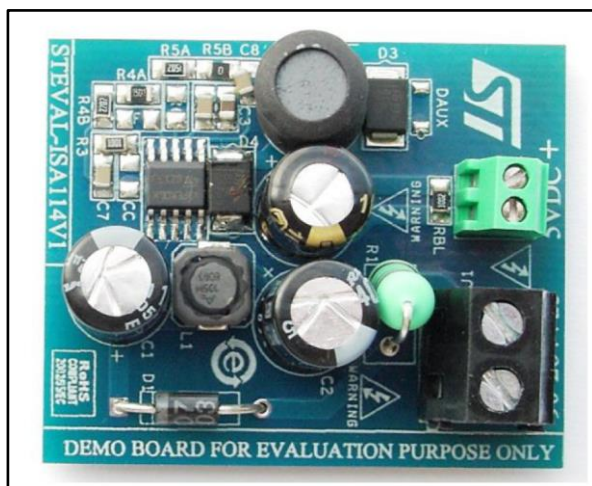


5 V, 160 mA non-isolated buck converter using VIPer™ Plus - VIPER06XS

Data brief



Description

The STEVAL-ISA114V1 evaluation board describes a 5 V- 0.15 A power supply set in buck topology with the VIPer06XS, a new off-line high voltage converter by STMicroelectronics, specifically developed for non-isolated SMPS.

The features of the device include an 800 V avalanche rugged power section, PWM operation at 30 kHz with frequency jittering for lower EMI, limiting current with adjustable set point, on-board soft-start, safe auto-restart after a fault condition and low standby power consumption.

The available protection includes a thermal shutdown with hysteresis, delayed overload protection and open loop failure protection. All protection is auto-restart mode.

Features

- Universal input mains range:
 - input voltage: 90 - 264 V_{AC}
 - frequency: 45 - 65 Hz
- Single-output voltage:
 - 5 V @ 0.16 A continuous operation
- Fully protected against faults (overload, feedback disconnection and overheating)
- EMI: according to EN55022-Class-B
- RoHS compliant

1 Adapter features

The electrical specifications are given in [Table 1: "Electrical specifications"](#), the schematic in [Figure 1: "Circuit schematic"](#), and the bill of material in [Table 2: "Bill of material"](#).

Table 1: Electrical specifications


Parameter	Symbol	Value
Input voltage range	V_{IN}	[80 V _{AC} ; 265 V _{AC}]
Output voltage	V_{OUT}	5 V
Max. output current	I_{OUT}	0.16 A
Precision of output regulation	ΔV_{OUT_LF}	± 5%
High frequency output voltage ripple	ΔV_{OUT_HF}	50 mV
Max. ambient operating temperature	T_{AMB}	60 °C

Table 2: Bill of material

Name	Value	Description	Footprint	Manufacturer
C1	2.2 µF, 400 V	Electrolytic capacitor		Saxon
C2	2.2 µF, 400 V	Electrolytic capacitor		Saxon
C3	2.2 µF, 25 V	Ceramic capacitor	SMD: 0805	Murata
CFB	Not mounted	Ceramic capacitor	SMD: 0805	
Cf	100 nF, 50 V	Ceramic capacitor	SMD: 0805	Murata
Cc	Not mounted	Ceramic capacitor	SMD: 0805	
C7	22 nF, 25 V	Ceramic capacitor	SMD: 0805	Murata
C8	100 nF, 50 V	Ceramic capacitor	SMD: 0805	Murata
C9	100 µF, 25 V	Electrolytic capacitor		Rubycon, ZL series
D1	1N4007	High voltage rectifier	DO-41	Fairchild
D3	STTH1L06	High voltage ultra fast rectifier	SMB (SOD87)	ST
D4	STTH1L06	High voltage ultra fast rectifier	SMB (SOD87)	ST
Daux	Not mounted	Small signal diode		
IC	VIPER06XS	High voltage converter	SSO-10	ST
L1	1 mH	Input filter inductor	SMD	Epcos
L2	RFB0810-681	0.68 mH power inductor		Coilcraft
R1	22 ohm	1 W resistor		Panasonic
R3	1 kohm, 1%	1/4 W resistor	SMD: 0805	Panasonic
R4a	1.5 kohm, 1%	1/4 W resistor	SMD: 0805	Panasonic
R4b	22 kohm	1/4 W resistor	SMD: 0805	
R5a	15 kohm	1/4 W resistor	SMD: 0805	
R5b	0 ohm, 1%	1/4 W resistor	SMD: 0805	Panasonic

Name	Value	Description	Footprint	Manufacturer
R6	Not mounted	1/4 W resistor	SMD: 0805	
Rbl	10 kohm, 1%	1/4 W resistor	SMD: 0805	Panasonic

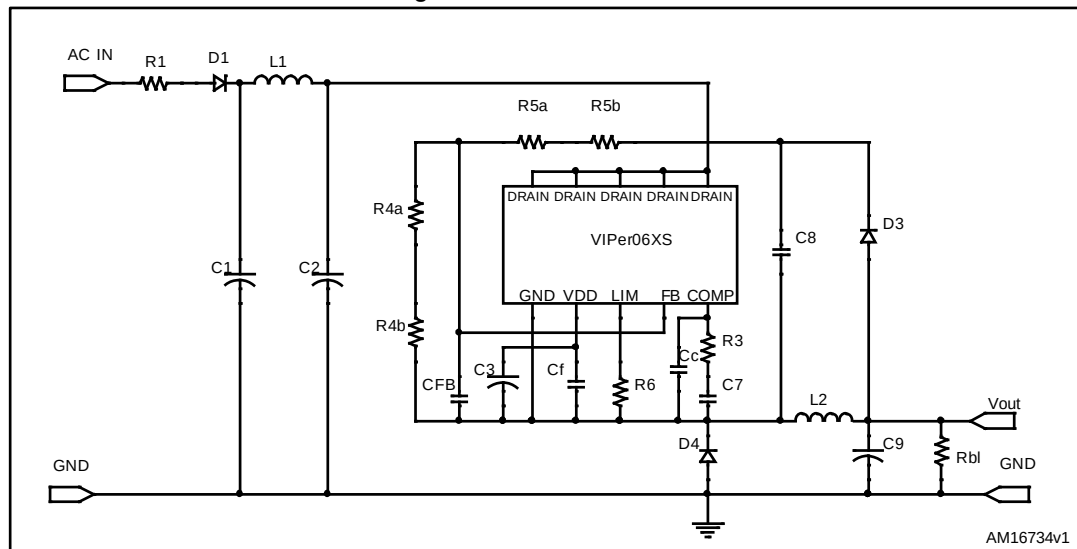Figure 1: Circuit schematic



Layout

Figure 2: Layout (top)

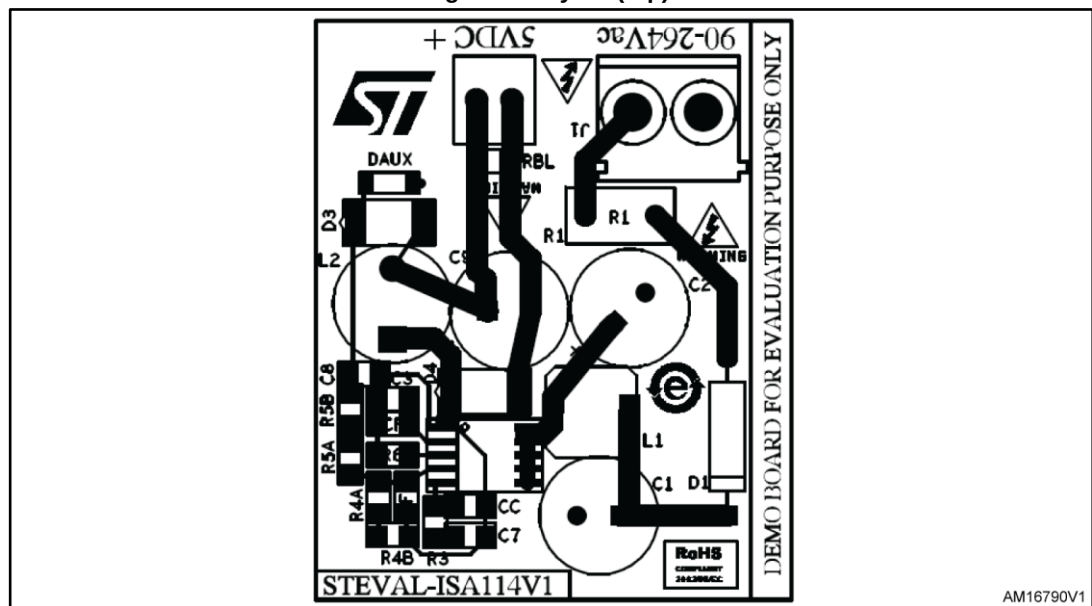


Figure 3: Layout (bottom)

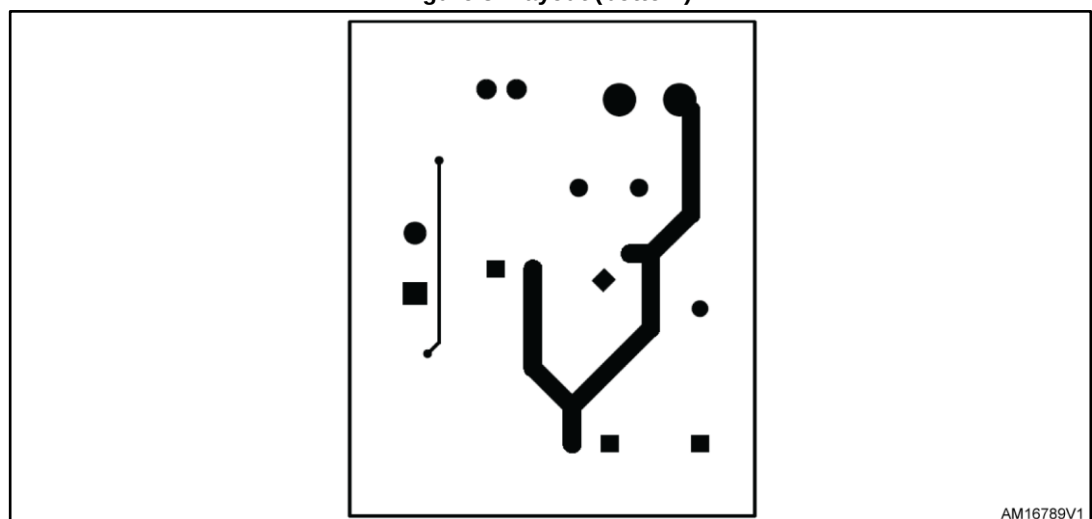


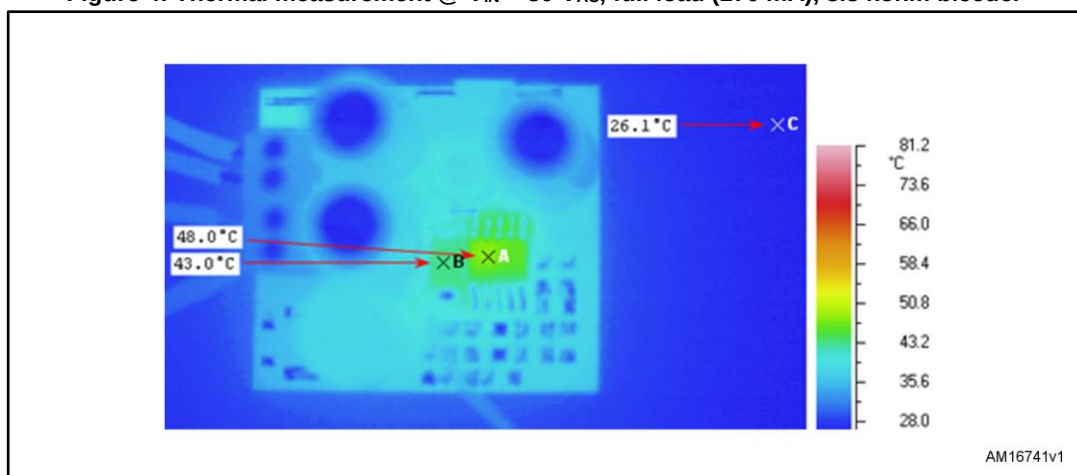
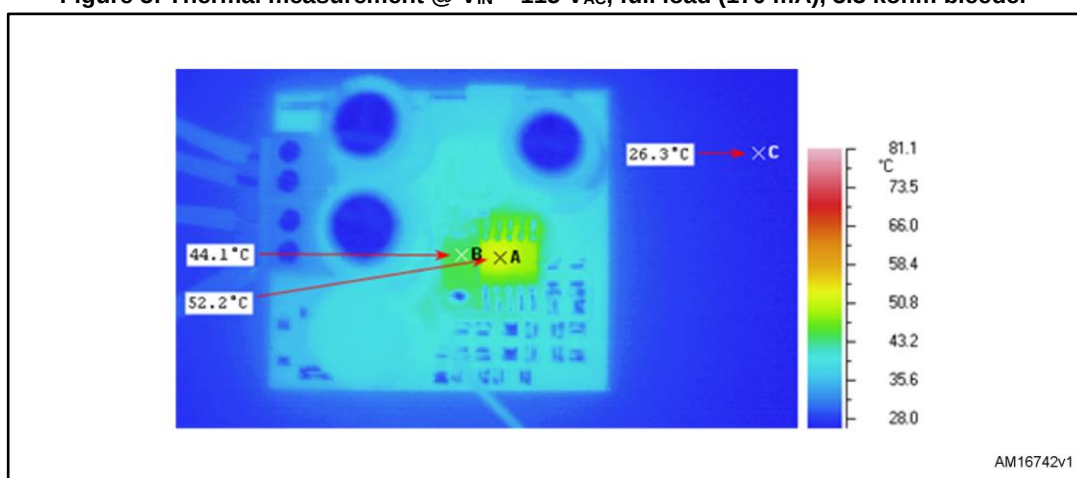
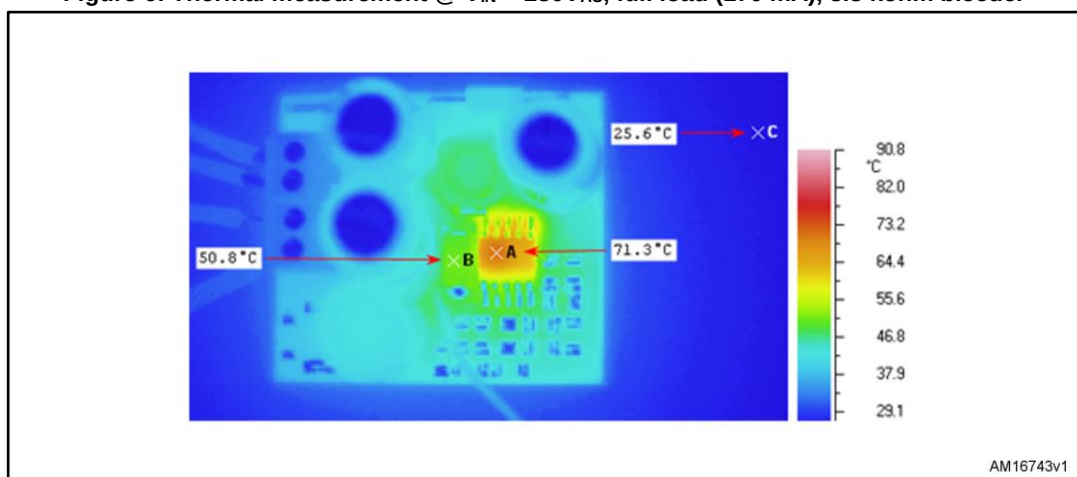
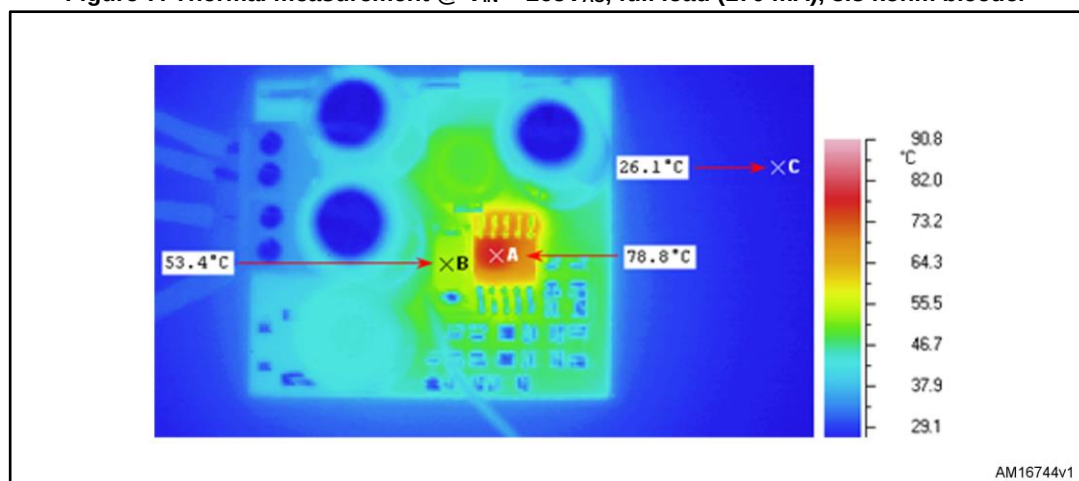
Figure 4: Thermal measurement @ $V_{IN} = 80\text{ V}_{AC}$, full load (170 mA), 3.3 kohm bleederFigure 5: Thermal measurement @ $V_{IN} = 115\text{ V}_{AC}$, full load (170 mA), 3.3 kohm bleederFigure 6: Thermal measurement @ $V_{IN} = 230\text{ V}_{AC}$, full load (170 mA), 3.3 kohm bleeder

Figure 7: Thermal measurement @ $V_{IN} = 265V_{AC}$, full load (170 mA), 3.3 kohm bleeder

3 Revision history

Table 3: Document revision history

Date	Version	Changes
24-Jul-2013	1	Initial release.
06-Sep-2016	2	Updated board photo on the cover page.

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2016 STMicroelectronics – All rights reserved

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru