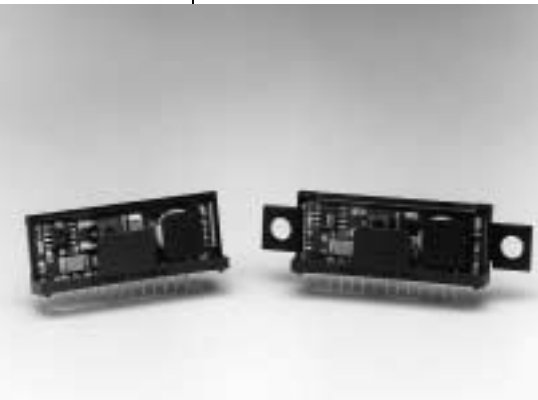
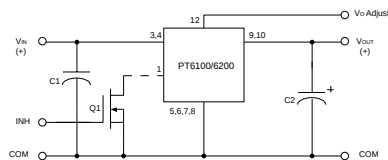


PT6200 Series**SLTS063****2 AMP HIGH-PERFORMANCE ADJUSTABLE
ISR WITH ON/OFF CONTROL**

- 90% Efficiency
- Adjustable Output Voltage
- Internal Short Circuit Protection
- Over-Temperature Protection
- On/Off Control (Ground Off)
- Small SIP Footprint
0.36" x 1.64" x 0.60"(H)

The PT6200 Series is a line of High-Performance 2 Amp, 12-Pin SIP (Single In-line Package) Integrated Switching Regulators (ISRs) designed

to meet the on-board power conversion needs of battery powered or other equipment requiring high efficiency and small size. This high performance ISR family offers a unique combination of features combining 90% typical efficiency with open-collector on/off control and adjustable output voltage. Quiescent current in the shutdown mode is less than 100µA.

Standard Application

C_1 = Optional ceramic (1µF)
 Q_1 = NFET
 C_2 = Required 100µF electrolytic

Pin-Out Information

Pin No.	Function	Pin No.	Function
1	Inhibit	7	GND
2	N/C	8	GND
3	V_{in}	9	V_{out}
4	V_{in}	10	V_{out}
5	GND	11	N/C
6	GND	12	$V_{out Adj}$

Ordering Information

PT6202□ = +5 Volts

PT6203□ = +3.3 Volts

PT6204□ = +12 Volts

(For dimensions, see page 65.)

PT Series Suffix (PT1234X)

Case/Pin Configuration	Heat Tab Configuration	None	Side
Vertical Through-Hole	N	R	
Horizontal Through-Hole	A	G	
Horizontal Surface Mount	C	B	

(See Thermal Application Notes on page 44 for heat tab application data.)

Specifications

Characteristics ($T_A = 25^\circ\text{C}$ unless note d)	Symbols	Conditions	PT6200 SERIES			
			Min	Typ	Max	Units
Output Current	I_o	Over V_{in} range	0.1**	—	2.0	Amps
Current Limit	I_{cl}	$V_{in} = V_o + 5V$	—	3.5	4.5	Amps
Short Circuit Current	I_{sc}	$V_{in} = V_o + 5V$	—	5.0	—	Apk
Input Voltage Range	V_{in}	$0.1 \leq I_o \leq 2.0$ Amp $V_o = 3.3V$ $V_o = 5V$ $V_o = 12V$	7 7.25 14.5	— — —	26 30 30	VDC VDC VDC
Static Voltage Tolerance	V_o	Over V_{in} Range, $I_o = 2.0$ Amp $T_A = -40^\circ\text{C}$ to shutdown	—	± 1.0	± 2.0	% V_o
Line Regulation	Reg_{line}	Over V_{in} range	—	± 0.25	± 0.5	% V_o
Load Regulation	Reg_{load}	$0.1 \leq I_o \leq 2.0$ Amp	—	± 0.25	± 0.5	% V_o
Ripple/Noise	V_n	$V_{in} = V_o + 5V$, $I_o = 2.0$ Amp	—	± 2	—	% V_o
Transient Response with $C_o = 100\mu\text{F}$	t_{tr} V_{os}	50% load change V_o over/undershoot	— —	100 3.0	200 5.0	µSec % V_o
Efficiency	η	$V_{in} = 8V$, $I_o = 0.5$ Amp, $V_o = 3.3V$ $V_{in} = 8V$, $I_o = 0.5$ Amp, $V_o = 5V$ $V_{in} = 15V$, $I_o = 0.5$ Amp, $V_o = 12V$	— — —	85 90 93	— — —	% % %
Switching Frequency	f_o	Over V_{in} and I_o ranges, $V_o = 3.3V$ $V_o = 5V$ $V_o = 12V$	400 500 500	500 650 650	600 800 800	KHz KHz KHz
Shutdown Current	I_{sc}	$V_{in} = 15V$	—	100	—	µAmp
Quiescent Current	I_{nl}	$I_o = 0A$, $V_{in} = 10V$	—	10	—	mAmp
Output Voltage Adjustment Range	V_o	Below V_o Above V_o	See Application Notes on page 40.			
Operating Temperature	T_A	Free Air Convection, 3.3V (40-60LFM) 5V Over V_{in} and I_o ranges 12V	-40 -40 -40	— — —	+85* +60* *	C
Thermal Resistance	θ_{JA}	Free Air Convection (40-60LFM) $V_o = 3.3V$ $V_o = 5V$ $V_o = 12V$	— — —	25 30 35	— — —	C/W
Storage Temperature	T_s	—	-40	—	+125	C
Mechanical Shock	Per Mil-STD-883D, Method 2002.3 Condition A, 1 msec, Half Sine, mounted to a fixture		—	—	500	G's
Mechanical Vibration	Per Mil-STD-883D, Method 2007.2 Condition A, 20-2000 Hz		—	—	15	G's
Weight	—	—	—	8.5	—	grams
Relative Humidity	—	Non-condensing	0	—	95	%

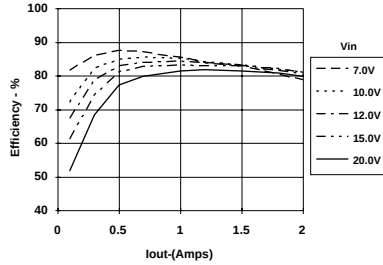
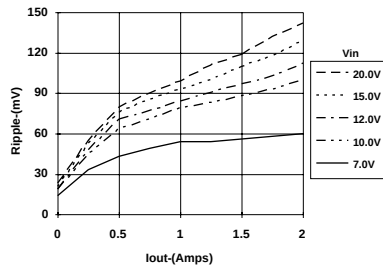
*See Thermal Derating chart.

** ISR will operate down to no load with reduced specifications.

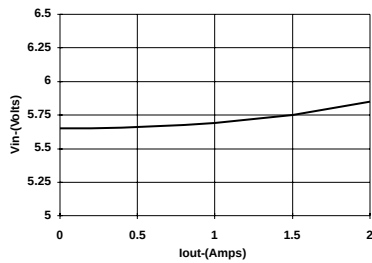
Note: The PT6200 Series requires a 100µF electrolytic or tantalum output capacitor for proper operation in all applications.

CHARACTERISTIC DATA**PT6203, 3.3 VDC**

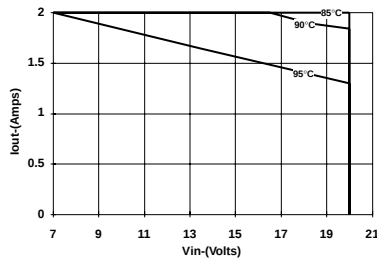
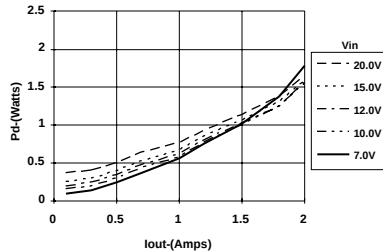
(See Note 1)

Efficiency vs Output Current**Ripple vs Output Current****Minimum Input Voltage**

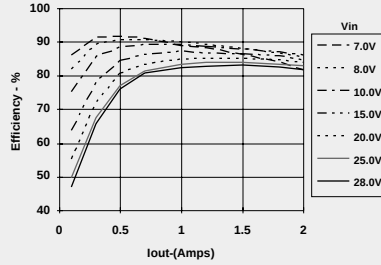
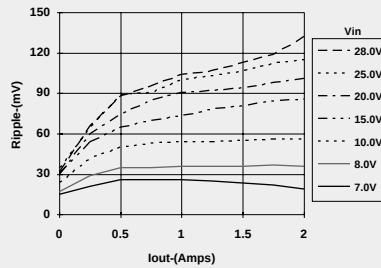
(See Note 2)

**Thermal Derating (T_a)**

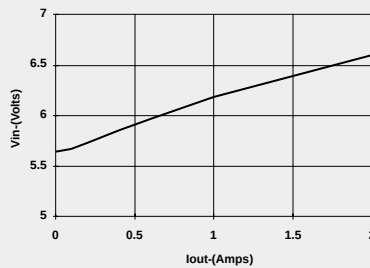
(See Note 3)

**Power Dissipation vs Output Current****PT6202, 5.0 VDC**

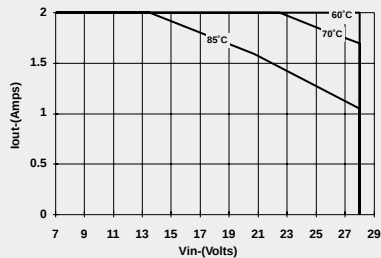
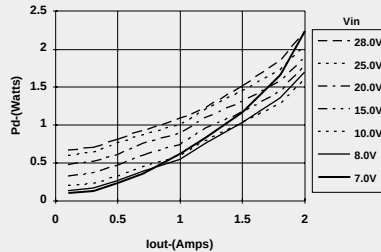
(See Note 1)

Efficiency vs Output Current**Ripple vs Output Current****Minimum Input Voltage**

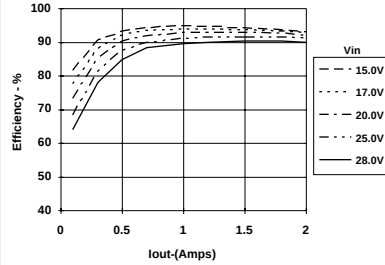
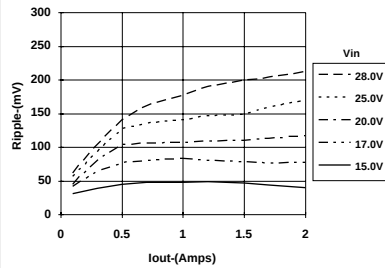
(See Note 2)

**Thermal Derating (T_a)**

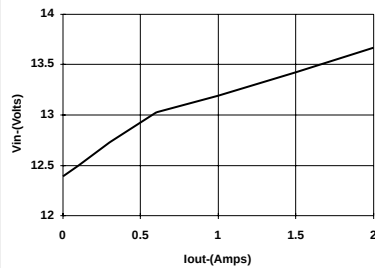
(See Note 3)

**Power Dissipation vs Output Current****PT6204, 12.0 VDC**

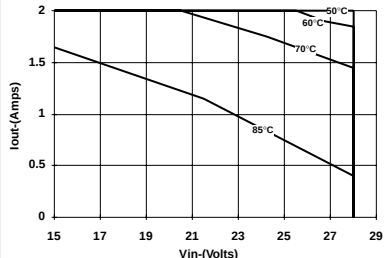
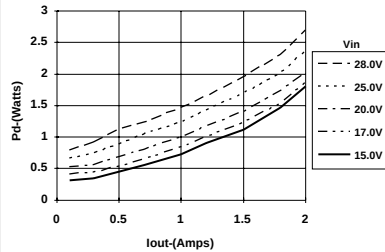
(See Note 1)

Efficiency vs Output Current**Ripple vs Output Current****Minimum Input Voltage**

(See Note 2)

**Thermal Derating (T_a)**

(See Note 3)

**Power Dissipation vs Output Current****Note 1:** All data listed in the above graphs, except for derating data, has been developed from actual products tested at 25°C. This data is considered typical data for the ISR.**Note 2:** Minimum V_{in} data is typical and is not guaranteed. The data corresponds to a 2% output voltage drop.**Note 3:** Thermal derating graphs are developed in free air convection cooling of 40-60 LFM with no optional heat tab. (See Thermal Application Notes).

PACKAGING INFORMATION

Orderable Device	Status ⁽¹⁾	Package Type	Package Drawing	Pins	Package Qty	Eco Plan ⁽²⁾	Lead/Ball Finish	MSL Peak Temp ⁽³⁾
PT6202A	NRND	SIP MOD ULE	EBA	12	12	Pb-Free (RoHS)	Call TI	N / A for Pkg Type
PT6202B	NRND	SIP MOD ULE	EBK	12	12	Pb-Free (RoHS)	Call TI	Level-1-215C-UNLIM
PT6202C	NRND	SIP MOD ULE	EBC	12	12	Pb-Free (RoHS)	Call TI	Level-1-215C-UNLIM
PT6202G	NRND	SIP MOD ULE	EBG	12	12	Pb-Free (RoHS)	Call TI	N / A for Pkg Type
PT6202J	OBSOLETE	SIP MOD ULE	EBJ	12		TBD	Call TI	Call TI
PT6202N	NRND	SIP MOD ULE	EBD	12	12	Pb-Free (RoHS)	Call TI	N / A for Pkg Type
PT6202R	NRND	SIP MOD ULE	EBE	12	12	Pb-Free (RoHS)	Call TI	N / A for Pkg Type
PT6202S	OBSOLETE	SIP MOD ULE	EBF	12		TBD	Call TI	Call TI
PT6203A	NRND	SIP MOD ULE	EBA	12	12	Pb-Free (RoHS)	Call TI	N / A for Pkg Type
PT6203C	NRND	SIP MOD ULE	EBC	12	12	Pb-Free (RoHS)	Call TI	Level-1-215C-UNLIM
PT6203H	OBSOLETE	SIP MOD ULE	EBH	12		TBD	Call TI	Call TI
PT6203N	NRND	SIP MOD ULE	EBD	12	12	Pb-Free (RoHS)	Call TI	N / A for Pkg Type
PT6204A	NRND	SIP MOD ULE	EBA	12	12	Pb-Free (RoHS)	Call TI	N / A for Pkg Type
PT6204G	NRND	SIP MOD ULE	EBG	12	12	Pb-Free (RoHS)	Call TI	N / A for Pkg Type
PT6204H	OBSOLETE	SIP MOD ULE	EBH	12		TBD	Call TI	Call TI
PT6204J	OBSOLETE	SIP MOD ULE	EBJ	12		TBD	Call TI	Call TI
PT6204N	NRND	SIP MOD ULE	EBD	12	12	Pb-Free (RoHS)	Call TI	N / A for Pkg Type
PT6204R	NRND	SIP MOD ULE	EBE	12	12	Pb-Free (RoHS)	Call TI	N / A for Pkg Type
PT6204S	OBSOLETE	SIP MOD ULE	EBF	12		TBD	Call TI	Call TI

⁽¹⁾ The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

⁽²⁾ Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

TBD: The Pb-Free/Green conversion plan has not been defined.

Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered

at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

Pb-Free (RoHS Exempt): This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

⁽³⁾ MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products

Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DLP® Products	www.dlp.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
RF/IF and ZigBee® Solutions	www.ti.com/lprf

Applications

Audio	www.ti.com/audio
Automotive	www.ti.com/automotive
Broadband	www.ti.com/broadband
Digital Control	www.ti.com/digitalcontrol
Medical	www.ti.com/medical
Military	www.ti.com/military
Optical Networking	www.ti.com/opticalnetwork
Security	www.ti.com/security
Telephony	www.ti.com/telephony
Video & Imaging	www.ti.com/video
Wireless	www.ti.com/wireless

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2009, Texas Instruments Incorporated

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru