




NPN Silicon Digital Transistor

- Switching circuit, inverter, interface circuit, driver circuit
- Built in bias resistor ($R_1=2.2\text{ k}\Omega$, $R_2=47\text{ k}\Omega$)
- BCR108S: Two internally isolated transistors with good matching in one multichip package
- BCR108S: For orientation in reel see package information below
- Pb-free (RoHS compliant) package¹⁾
- Qualified according AEC Q101

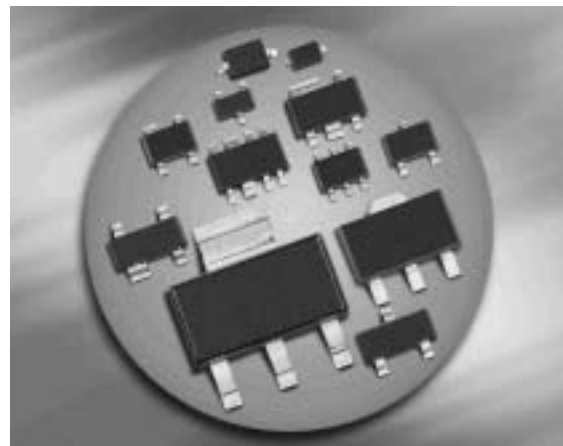

BCR108/F
BCR108T/W

BCR108S



Type	Marking	Pin Configuration						Package
BCR108	WHs	1=B	2=E	3=C	-	-	-	SOT23
BCR108F	WHs	1=B	2=E	3=C	-	-	-	TSFP-3
BCR108S	WHs	1=E1	2=B1	3=C2	4=E2	5=B2	6=C1	SOT363
BCR108W	WHs	1=B	2=E	3=C	-	-	-	SOT323

¹⁾Pb-containing package may be available upon special request

Maximum Ratings

Parameter	Symbol	Value	Unit
Collector-emitter voltage	V_{CEO}	50	V
Collector-base voltage	V_{CBO}	50	
Input forward voltage	$V_{i(fwd)}$	20	
Input reverse voltage	$V_{i(rev)}$	5	
Collector current	I_C	100	mA
Total power dissipation- BCR108, $T_S \leq 102^\circ\text{C}$ BCR108F, $T_S \leq 128^\circ\text{C}$ BCR108S, $T_S \leq 115^\circ\text{C}$ BCR108W, $T_S \leq 124^\circ\text{C}$	P_{tot}	200 250 250 250	mW
Junction temperature	T_j	150	
Storage temperature	T_{stg}	-65 ... 150	

Thermal Resistance

Parameter	Symbol	Value	Unit
Junction - soldering point ¹⁾	R_{thJS}		K/W
BCR108		≤ 240	
BCR108F		≤ 90	
BCR108S		≤ 140	
BCR108W		≤ 105	

¹⁾For calculation of R_{thJA} please refer to Application Note Thermal Resistance

Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified


Parameter	Symbol	Values			Unit
		min.	typ.	max.	
DC Characteristics					
Collector-emitter breakdown voltage $I_C = 100\ \mu\text{A}$, $I_B = 0$	$V_{(\text{BR})\text{CEO}}$	50	-	-	V
Collector-base breakdown voltage $I_C = 10\ \mu\text{A}$, $I_E = 0$	$V_{(\text{BR})\text{CBO}}$	50	-	-	
Collector-base cutoff current $V_{\text{CB}} = 40\ \text{V}$, $I_E = 0$	I_{CBO}	-	-	100	nA
Emitter-base cutoff current $V_{\text{EB}} = 5\ \text{V}$, $I_C = 0$	I_{EBO}	-	-	164	μA
DC current gain ¹⁾ $I_C = 5\ \text{mA}$, $V_{\text{CE}} = 5\ \text{V}$	h_{FE}	70	-	-	-
Collector-emitter saturation voltage ¹⁾ $I_C = 10\ \text{mA}$, $I_B = 0.5\ \text{mA}$	V_{CEsat}	-	-	0.3	V
Input off voltage $I_C = 100\ \mu\text{A}$, $V_{\text{CE}} = 5\ \text{V}$	$V_{\text{i(off)}}$	0.4	-	0.8	
Input on voltage $I_C = 2\ \text{mA}$, $V_{\text{CE}} = 0.3\ \text{V}$	$V_{\text{i(on)}}$	0.5	-	1.1	
Input resistor	R_1	1.5	2.2	2.9	k Ω
Resistor ratio	R_1/R_2	0.042	0.047	0.052	-
AC Characteristics					
Transition frequency $I_C = 10\ \text{mA}$, $V_{\text{CE}} = 5\ \text{V}$, $f = 1\ \text{MHz}$	f_{T}	-	170	-	MHz
Collector-base capacitance $V_{\text{CB}} = 10\ \text{V}$, $f = 1\ \text{MHz}$	C_{cb}	-	2	-	pF

¹⁾Pulse test: $t < 300\ \mu\text{s}$; $D < 2\%$

DC current gain $h_{FE} = f(I_C)$

$V_{CE} = 5V$ (common emitter configuration)


$T_A = \text{Parameter}$

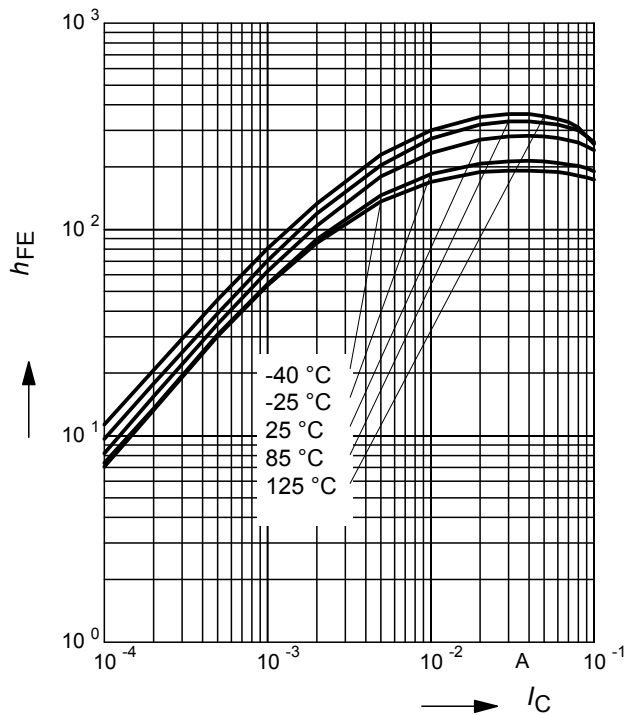

Collector-emitter saturation voltage

$V_{CEsat} = f(I_C)$, $I_C/I_B = 20$


$T_A = \text{Parameter}$

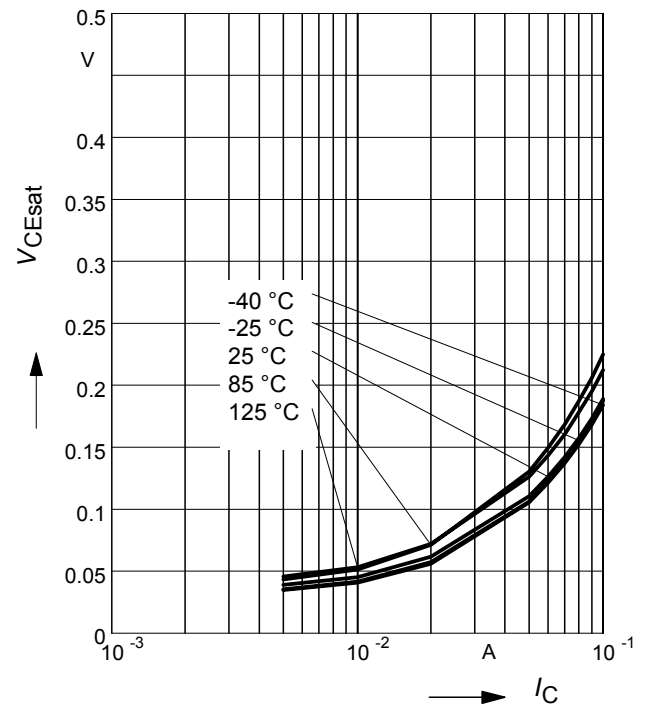

Input on Voltage $V_{i(on)} = f(I_C)$

$V_{CE} = 0.3V$ (common emitter configuration)


$T_A = \text{Parameter}$

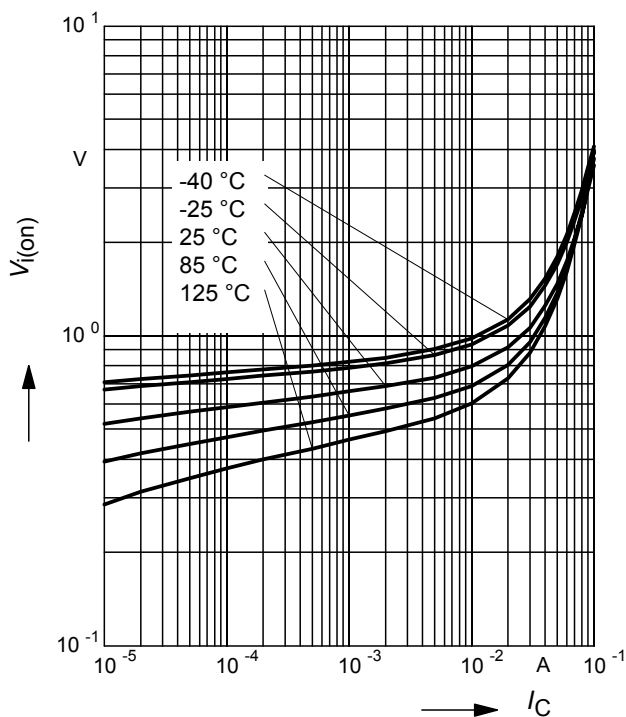

Input off voltage $V_{i(off)} = f(I_C)$


$V_{CE} = 5V$ (common emitter configuration)

$T_A = \text{Parameter}$

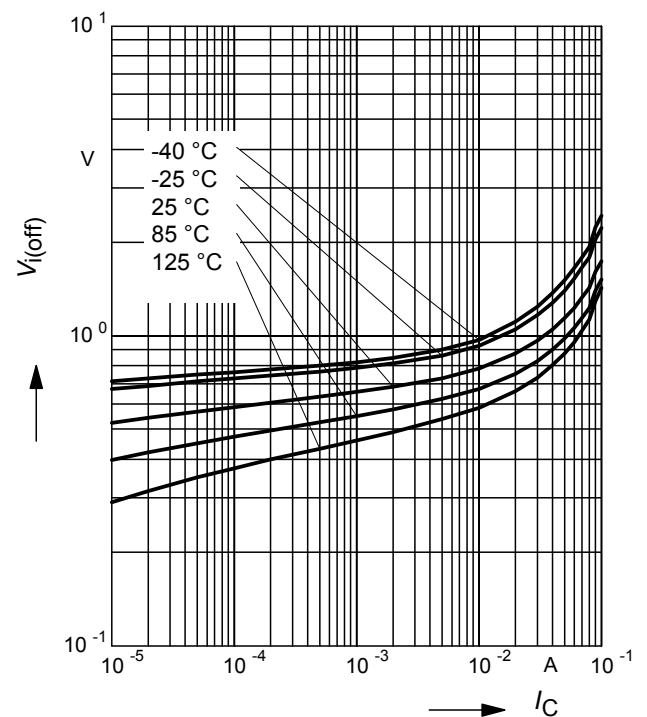


Total power dissipation $P_{\text{tot}} = f(T_S)$

BCR108

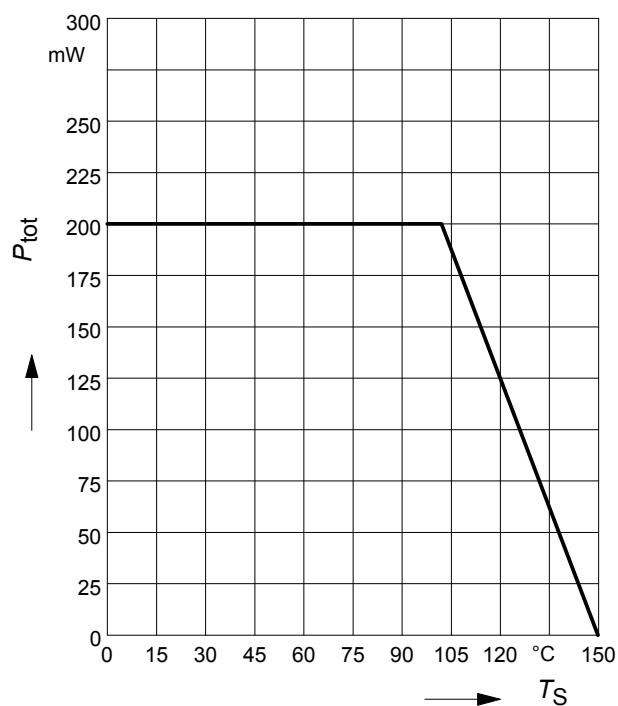


Total power dissipation $P_{\text{tot}} = f(T_S)$

BCR108F

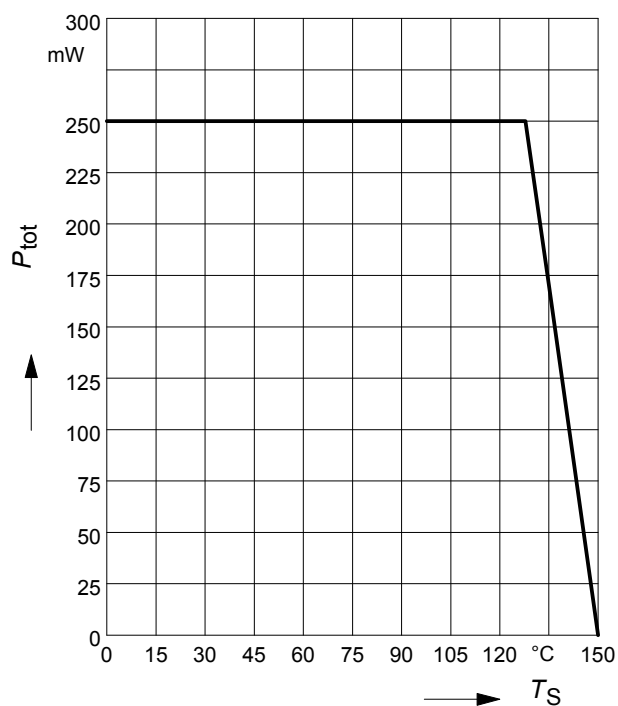


Total power dissipation $P_{\text{tot}} = f(T_S)$

BCR108S

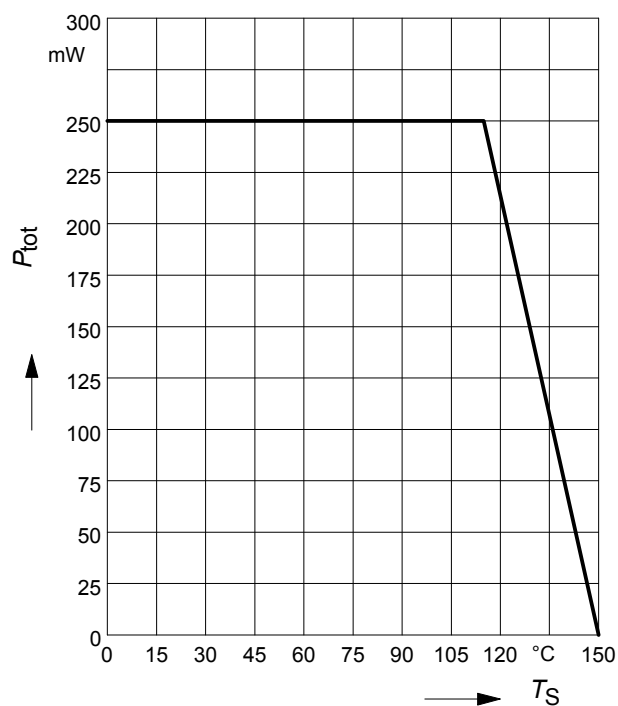


Total power dissipation $P_{\text{tot}} = f(T_S)$

BCR108W

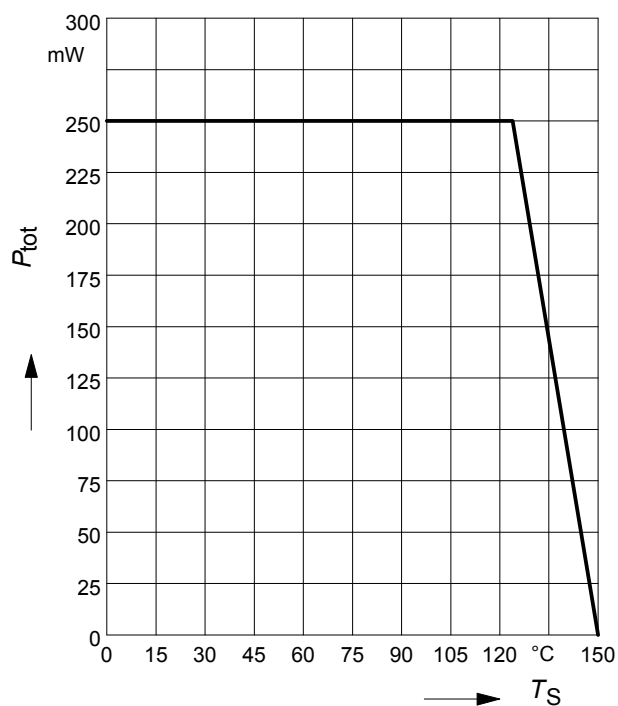

Permissible Pulse Load $R_{thJS} = f(t_p)$


BCR108

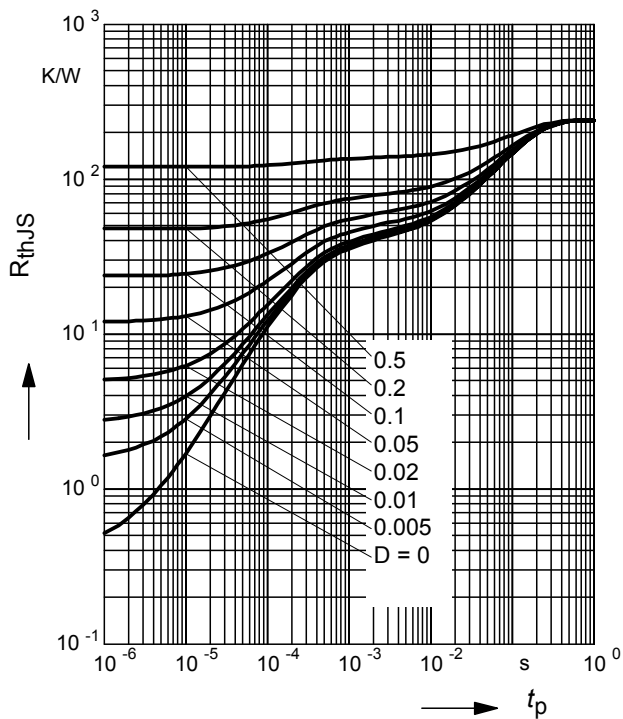

Permissible Pulse Load


$$P_{totmax}/P_{totDC} = f(t_p)$$

BCR108

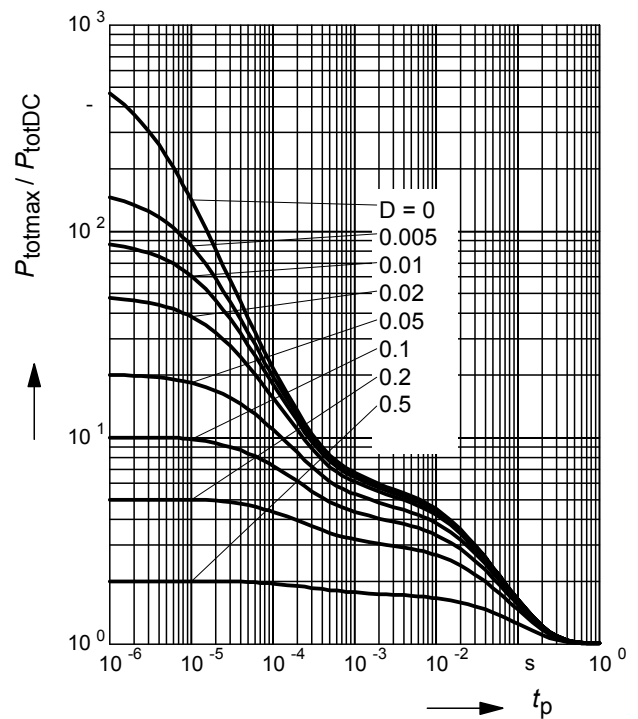

Permissible Puls Load $R_{thJS} = f(t_p)$


BCR108F

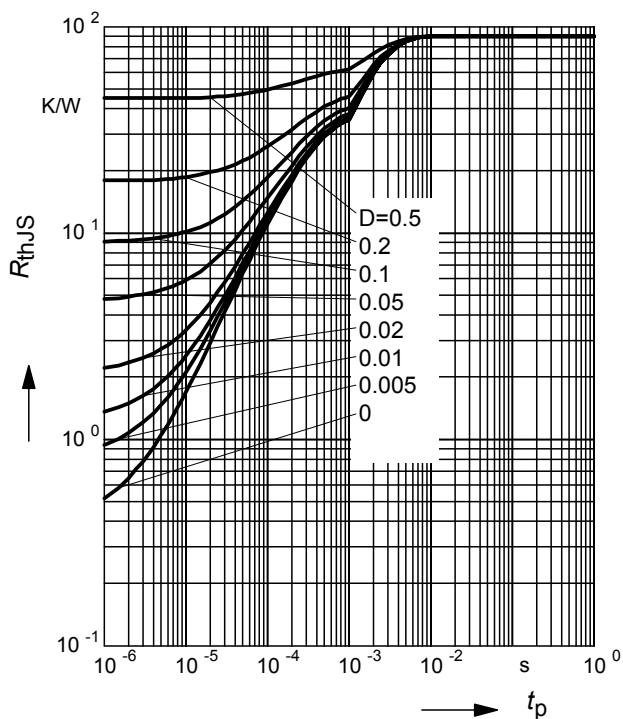

Permissible Pulse Load


$$P_{totmax}/P_{totDC} = f(t_p)$$

BCR108F

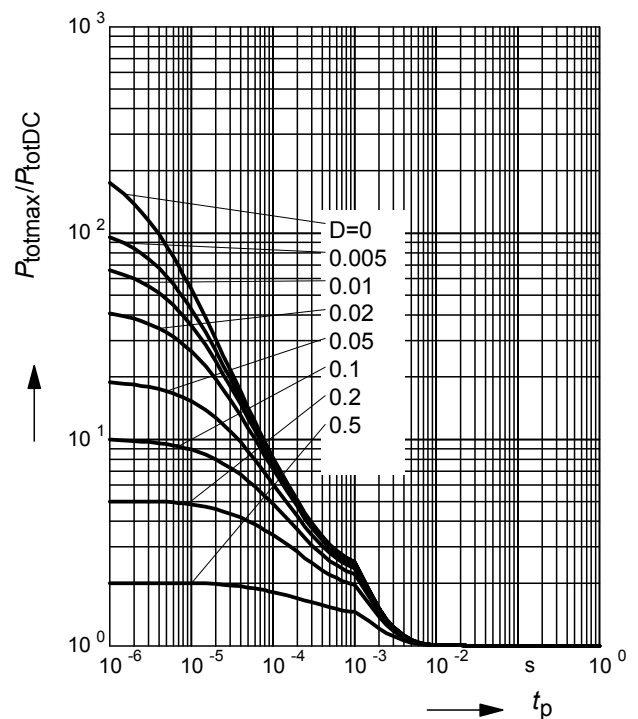

Permissible Puls Load $R_{thJS} = f(t_p)$


BCR108S

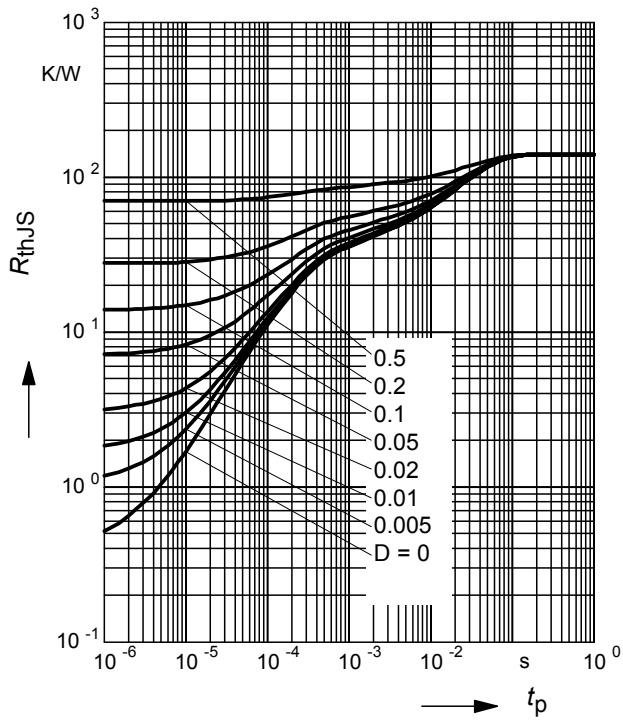

Permissible Pulse Load


$$P_{totmax}/P_{totDC} = f(t_p)$$

BCR108S

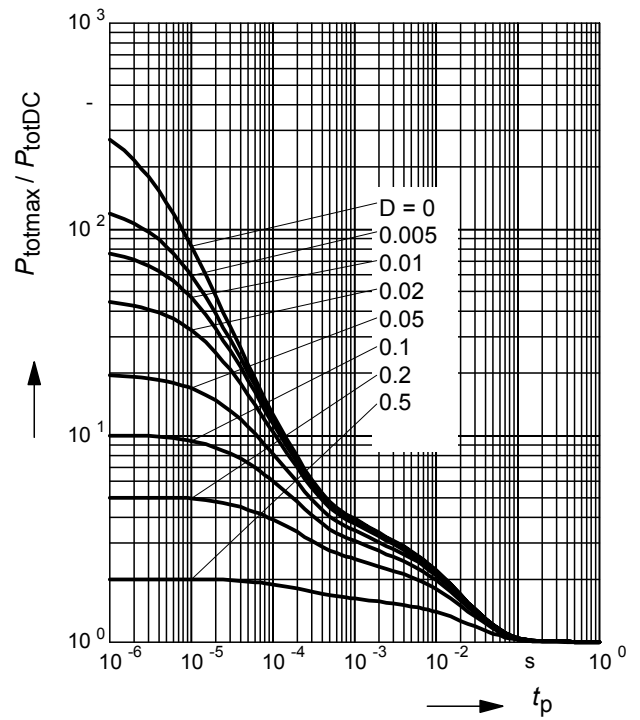

Permissible Puls Load $R_{thJS} = f(t_p)$


BCR108W

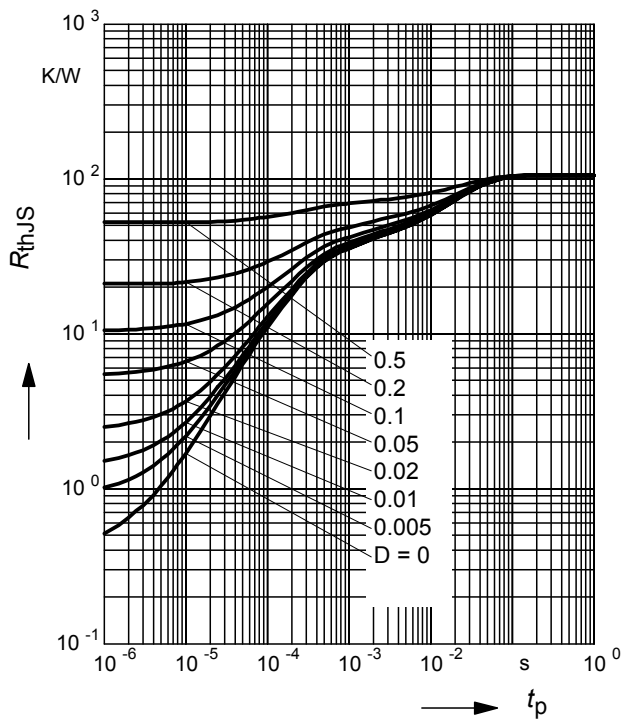


Permissible Pulse Load

$$P_{totmax}/P_{totDC} = f(t_p)$$

BCR108W

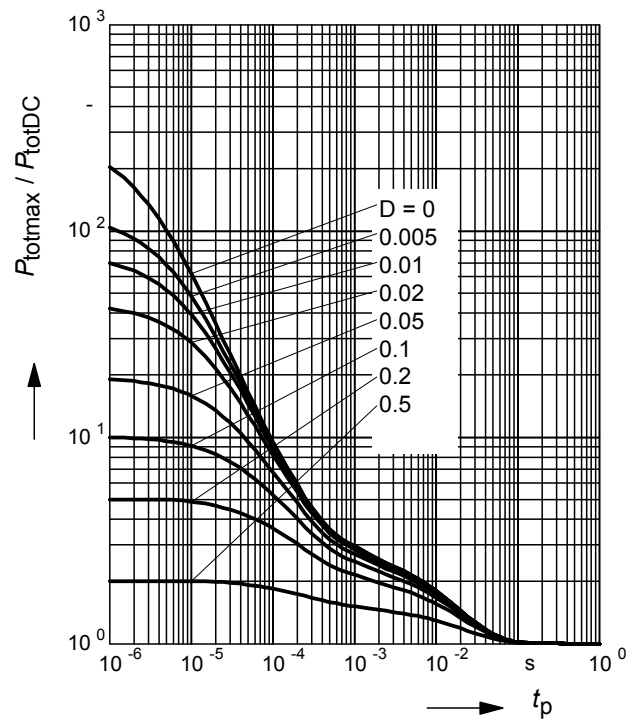


Package Outline

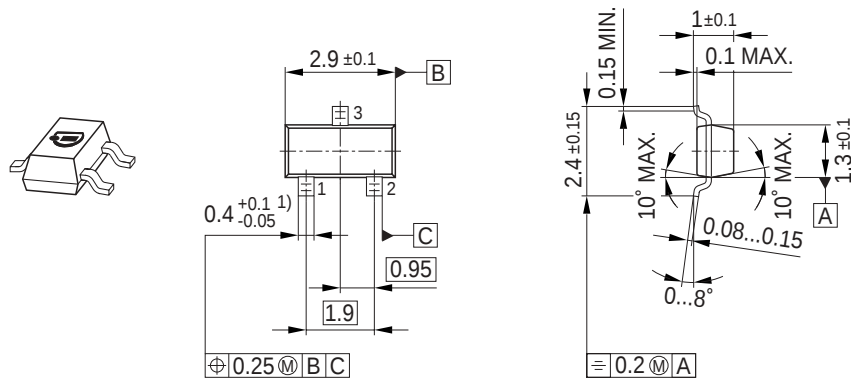


1) Lead width can be 0.6 max. in dambar area

Foot Print




Marking Layout (Example)

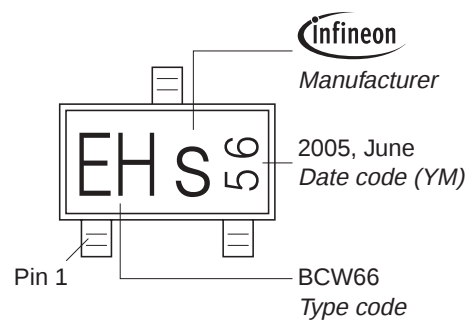


Standard Packing


Reel ø180 mm = 3.000 Pieces/Reel
Reel ø330 mm = 10.000 Pieces/Reel

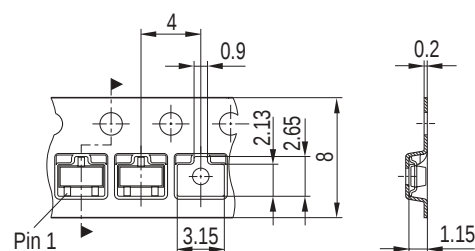


Package Outline

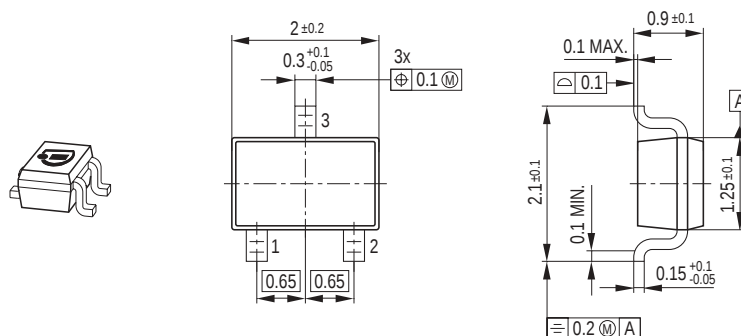

Foot Print




Marking Layout (Example)

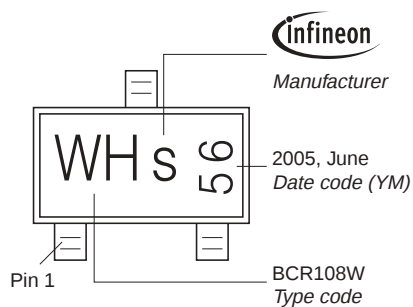


Standard Packing


Reel $\varnothing 180 \text{ mm}$ = 3.000 Pieces/Reel
 Reel $\varnothing 330 \text{ mm}$ = 10.000 Pieces/Reel

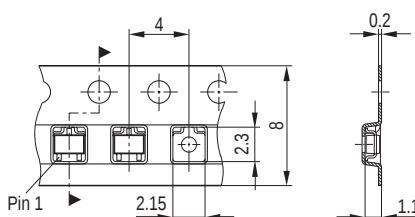

Package Outline

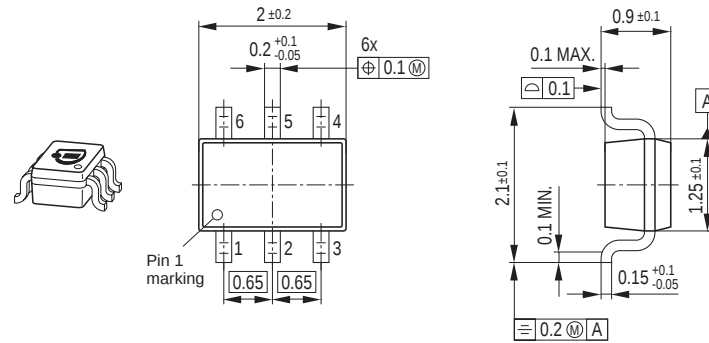


Foot Print



Marking Layout (Example)


Small variations in positioning of
Date code, Type code and Manufacture are possible.

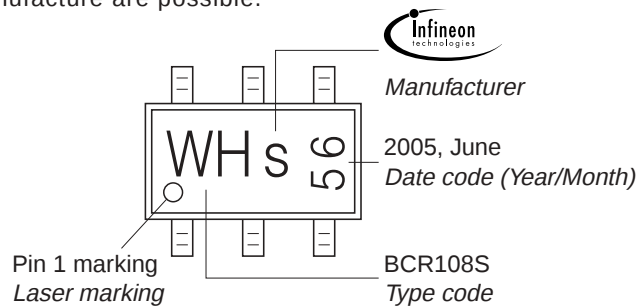

Standard Packing

Reel $\varnothing 180$ mm = 3.000 Pieces/Reel
Reel $\varnothing 330$ mm = 10.000 Pieces/Reel

For symmetric types no defined Pin 1 orientation in reel.

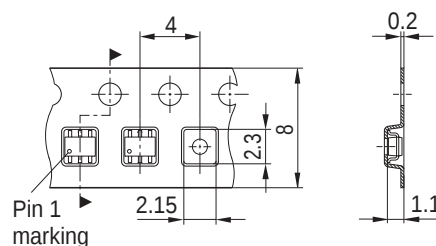

The technical drawing shows two views of the M8x10mm connector:

- Front View (Left):** Shows the top profile of the connector. Dimensions include a total width of 1.2 ± 0.05 , a central slot width of 0.2 ± 0.05 , a pin diameter of 3, and mounting hole positions at 0.2 ± 0.05 , 0.4 ± 0.05 , and 0.4 ± 0.05 from the edges.
- Side View (Right):** Shows the side profile of the connector. Dimensions include a total height of 1.2 ± 0.05 , a base thickness of 0.2 ± 0.05 , a top flange width of 0.55 ± 0.04 , a bottom flange width of 0.15 ± 0.05 , and a maximum taper angle of 10° MAX. . A reference dimension of 0.8 ± 0.05 is also shown.

Technical drawing of a mechanical part. The drawing shows a top view and a side view. The top view is a rectangle with a width of 0.4 and a height of 0.45. The side view is a rectangle with a width of 0.4 and a height of 1.05. The drawing is labeled with dimensions: 0.4, 0.45, 1.05, and 0.4.

Pin 1

BCR847BF

Type code

Manufacturer

Technical drawing of a mechanical part showing a top view and a side view. The top view includes dimensions: 4, 0.3, 1.2, 1.5, 8, 1.35, and Pin 1. The side view includes dimensions: 0.2 and 0.7.

Edition 2006-02-01

Published by

Infineon Technologies AG

81726 München, Germany

© Infineon Technologies AG 2007.

All Rights Reserved.

Attention please!

The information given in this dokument shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenheitsgarantie"). With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

Information

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office (www.infineon.com).

Warnings

Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies Office.

Infineon Technologies Components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system.

Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru