

# A3A

## Lighted Pushbutton Switch

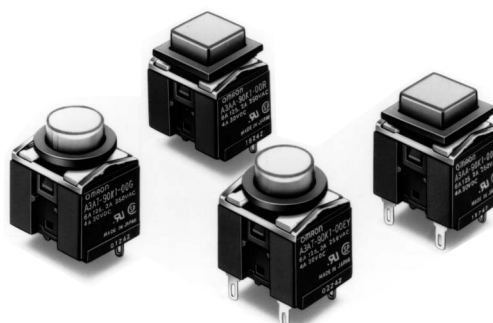
### Compact High-capacity Push-button Switch

- Ideal for use as a high breaking capacity Power Switch.
- Switches from micro load (minimum applicable load: 5 VDC 1mA) to high capacity load.

RoHS Compliant




Refer to Safety Precautions for All Pushbutton Switches and Safety Precautions on page 8.





### List of Models

#### ● Non-lighted Push-button Switches

| Appearance                                                                                  | Model             |
|---------------------------------------------------------------------------------------------|-------------------|
| Square<br> | A3AA-9□<br>□1-00□ |
| Round<br> | A3AT-9□<br>□1-00□ |

#### ● Lighted Push-button Switches

| Illumination             | Appearance                                                                                  | Model              |
|--------------------------|---------------------------------------------------------------------------------------------|--------------------|
| LED surface illumination | Square<br> | A3AA-9□<br>□1-00E□ |
|                          | Round<br> | A3AT-9□<br>□1-00E□ |

### Model Number Structure

#### ■ Model Number Legend (Ordering as a Set).....

The model numbers used to order sets of Units are illustrated below. One set comprises the Pushbutton (LED lamp built-in) and Switch. For information on combinations, refer to Ordering Information.

A 3 A (1) A - 9 (2) 0 (3) K 1 - 00E (4) R (5)

#### (1) Shape of Pushbutton

| Symbol | Shape  |
|--------|--------|
| A      | Square |
| T      | Round  |

#### (2) Terminal

| Symbol | Type   |
|--------|--------|
| 0      | Solder |
| 1      | PCB    |

#### (3) Switch Specifications

| Symbol | Operation | Contact type |                                                         |
|--------|-----------|--------------|---------------------------------------------------------|
| A      | Momentary | SPDT         | ( 3 A at 125 VAC,<br>2 A at 30 VDC )                    |
| B      | Alternate |              |                                                         |
| K      | Momentary | SPST-NO      | ( 6 A at 125 VAC,<br>2 A at 250 VAC,<br>4 A at 30 VDC ) |
| L      | Alternate |              |                                                         |

#### (4) Illumination

| Symbol | Operation            |
|--------|----------------------|
| 00     | Non-lighted          |
| 00E    | Surface illumination |

#### (5) Color

##### 1. Pushbutton (Non-lighted Models)

| Symbol | Color      |
|--------|------------|
| L      | Light gray |
| R      | Red*       |
| Y      | Yellow*    |
| G      | Green*     |
| A      | Blue       |
| B      | Black      |
| D      | Dark gray  |
| H      | Gray       |

##### 2. LED (Surface Illumination Models)

| Symbol | Color  |
|--------|--------|
| R      | Red    |
| Y      | Yellow |
| G      | Green  |

\* Common to both lighted and non-lighted models.



■ Specifications: Refer to page 3.

■ Accessories: Refer to page 2.

■ Dimensions: Refer to page 5.



## List of Models

## SPST-NO

| Appearance                                                                                       | Terminal | Operation | Illumination             | Model          | Color symbol for pushbutton                                                                                                                                                                 | Minimum packing unit |
|--------------------------------------------------------------------------------------------------|----------|-----------|--------------------------|----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|
| Square/A3AA<br> | Solder   | Momentary | Non-lighted              | A3AA-90K1-00□  | (Non-lighted)<br>R (red)<br>Y (yellow)<br>G (green)<br>L (light gray)<br>A (blue)<br>B (black)<br>D (dark gray)<br>H (gray)<br>(Surface illumination)<br>R (red)<br>Y (yellow)<br>G (green) | 100                  |
|                                                                                                  |          |           | LED surface illumination | A3AA-90K1-00E□ |                                                                                                                                                                                             |                      |
|                                                                                                  |          | Alternate | Non-lighted              | A3AA-90L1-00□  |                                                                                                                                                                                             |                      |
|                                                                                                  |          |           | LED surface illumination | A3AA-90L1-00E□ |                                                                                                                                                                                             |                      |
|                                                                                                  | PCB      | Momentary | Non-lighted              | A3AA-91K1-00□  |                                                                                                                                                                                             |                      |
|                                                                                                  |          |           | LED surface illumination | A3AA-91K1-00E□ |                                                                                                                                                                                             |                      |
|                                                                                                  |          | Alternate | Non-lighted              | A3AA-91L1-00□  |                                                                                                                                                                                             |                      |
|                                                                                                  |          |           | LED surface illumination | A3AA-91L1-00E□ |                                                                                                                                                                                             |                      |
| Round/A3AT<br>  | Solder   | Momentary | Non-lighted              | A3AT-90K1-00□  |                                                                                                                                                                                             |                      |
|                                                                                                  |          |           | LED surface illumination | A3AT-90K1-00E□ |                                                                                                                                                                                             |                      |
|                                                                                                  |          | Alternate | Non-lighted              | A3AT-90L1-00□  |                                                                                                                                                                                             |                      |
|                                                                                                  |          |           | LED surface illumination | A3AT-90L1-00E□ |                                                                                                                                                                                             |                      |
|                                                                                                  | PCB      | Momentary | Non-lighted              | A3AT-91K1-00□  |                                                                                                                                                                                             |                      |
|                                                                                                  |          |           | LED surface illumination | A3AT-91K1-00E□ |                                                                                                                                                                                             |                      |
|                                                                                                  |          | Alternate | Non-lighted              | A3AT-91L1-00□  |                                                                                                                                                                                             |                      |
|                                                                                                  |          |           | LED surface illumination | A3AT-91L1-00E□ |                                                                                                                                                                                             |                      |

Note: The above models each have a SPST-NO contact that can switch 6 A at 125 VAC, 2 A at 250 VAC, and 4 A at 30 VDC. When ordering any of the above models, replace □ of the model number with a code to indicate the pushbutton color of the model (i.e., replace □ with R, Y, G, L, A, B, D, H, and L). The pushbutton of an A3A does not illuminate if the color of the pushbutton is dark gray, gray, light gray, blue, or black.

## SPDT

| Appearance                                                                                         | Terminal | Operation | Illumination             | Model          | Color symbol for pushbutton                                                                                                                                                                 | Minimum packing unit |
|----------------------------------------------------------------------------------------------------|----------|-----------|--------------------------|----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|
| Square/A3AA<br> | Solder   | Momentary | Non-lighted              | A3AA-90A1-00□  | (Non-lighted)<br>R (red)<br>Y (yellow)<br>G (green)<br>L (light gray)<br>A (blue)<br>B (black)<br>D (dark gray)<br>H (gray)<br>(Surface illumination)<br>R (red)<br>Y (yellow)<br>G (green) | 100                  |
|                                                                                                    |          |           | LED surface illumination | A3AA-90A1-00E□ |                                                                                                                                                                                             |                      |
|                                                                                                    |          | Alternate | Non-lighted              | A3AA-90B1-00□  |                                                                                                                                                                                             |                      |
|                                                                                                    |          |           | LED surface illumination | A3AA-90B1-00E□ |                                                                                                                                                                                             |                      |
|                                                                                                    | PCB      | Momentary | Non-lighted              | A3AA-91A1-00□  |                                                                                                                                                                                             |                      |
|                                                                                                    |          |           | LED surface illumination | A3AA-91A1-00E□ |                                                                                                                                                                                             |                      |
|                                                                                                    |          | Alternate | Non-lighted              | A3AA-91B1-00□  |                                                                                                                                                                                             |                      |
|                                                                                                    |          |           | LED surface illumination | A3AA-91B1-00E□ |                                                                                                                                                                                             |                      |
| Round/A3AT<br>  | Solder   | Momentary | Non-lighted              | A3AT-90A1-00□  |                                                                                                                                                                                             |                      |
|                                                                                                    |          |           | LED surface illumination | A3AT-90A1-00E□ |                                                                                                                                                                                             |                      |
|                                                                                                    |          | Alternate | Non-lighted              | A3AT-90B1-00□  |                                                                                                                                                                                             |                      |
|                                                                                                    |          |           | LED surface illumination | A3AT-90B1-00E□ |                                                                                                                                                                                             |                      |
|                                                                                                    | PCB      | Momentary | Non-lighted              | A3AT-91A1-00□  |                                                                                                                                                                                             |                      |
|                                                                                                    |          |           | LED surface illumination | A3AT-91A1-00E□ |                                                                                                                                                                                             |                      |
|                                                                                                    |          | Alternate | Non-lighted              | A3AT-91B1-00□  |                                                                                                                                                                                             |                      |
|                                                                                                    |          |           | LED surface illumination | A3AT-91B1-00E□ |                                                                                                                                                                                             |                      |

## Accessories

Flange (Select according to panel color.)

| Name   | Shape           | Classification                       |            | Model   | Minimum packing unit |
|--------|-----------------|--------------------------------------|------------|---------|----------------------|
| Flange | Square<br>□12.7 | Flange alone                         | Black      | A3A-241 | 100                  |
|        | Round<br>φ12.7  |                                      | Light gray | A3A-242 |                      |
|        |                 |                                      | Black      | A3A-251 |                      |
|        | Light gray      |                                      | A3A-252    |         |                      |
|        |                 | Leaf spring                          |            | A3A-200 |                      |
|        | Square<br>□12.7 | Flange and leaf spring<br>(one each) | Black      | A3A-211 |                      |
|        | Round<br>φ12.7  |                                      | Light gray | A3A-212 |                      |
|        |                 |                                      | Black      | A3A-221 |                      |
|        |                 |                                      | Light gray | A3A-222 |                      |

Note: An A3A with solder terminals is provided with a round or square black flange and leaf spring. A round black flange is provided with each A3A having solder terminals and a round pushbutton. A square black flange is provided with each A3A having solder terminals and a square pushbutton.

## Specifications

### ■Approved Standards

|           |                |                |
|-----------|----------------|----------------|
| UL<br>CSA | • SPST-NO      | • SPDT         |
|           | 6 A at 125 VAC | 3 A at 125 VAC |
|           | 2 A at 250 VAC | 2 A at 30 VDC  |
|           | 4 A at 30 VDC  |                |

### ■Ratings

| Type         | Item<br>Contact form | AC resistive load                | DC resistive load |
|--------------|----------------------|----------------------------------|-------------------|
| General load | SPST-NO              | 6 A at 125 VAC<br>2 A at 250 VAC | 4 A at 30 VDC     |

Note: Minimum allowable load: 5 VDC 1 mA (Resistive)

The ratings given above are for testing under the following conditions:

(1) Ambient temperature: 20 ±2°C

(2) Ambient humidity: 65 ±5%

(3) Operating frequency: 20 times/minute

### LED

| Illumination          |                                          | Surface illumination |        |       |
|-----------------------|------------------------------------------|----------------------|--------|-------|
| Item                  |                                          | Red                  | Yellow | Green |
| Forward voltage $V_F$ | Standard value (V) *<br>( $I_F = 10$ mA) | 2.0                  | 2.1    | 2.1   |
|                       | Maximum value (V)                        | 3.0                  |        |       |
| Forward current $I_F$ | Maximum value (mA)                       | 20                   | 20     | 25    |
| Permissible loss PD   | Maximum value (mW)                       | 60                   | 60     | 75    |
| Reverse voltage $V_R$ | Maximum value (V)                        | 3                    |        |       |

Note: The above built-in LEDs do not have a resistor. Connect to each of the above built-in LEDs a resistor that satisfies the above conditions.

\* Refer to the  $V_F - I_F$  characteristic graphs on page 8.

### ■Operating Characteristics

|                        |          |             |
|------------------------|----------|-------------|
| Operating force        | OF max.  | 2.45 N      |
| Release force          | RF min.  | 0.15 N      |
| Total travel           | TT       | Approx. 2mm |
| Pretravel              | PT max.  | 1.5 mm      |
| Locktravel alternate * | LTA min. | 0.5 mm      |

\* Alternate operation models only.

### ■Characteristics

|                                 |                                    |                                                                                                |
|---------------------------------|------------------------------------|------------------------------------------------------------------------------------------------|
| Operating frequency             | Mechanical                         | Momentary action: 120 operations/minute max.<br>Alternate action: 60 operations/minute max. *1 |
|                                 | Electrical                         | 20 operations/minute max.                                                                      |
| Insulation resistance           |                                    | 100 MΩ min. (at 500 VDC)                                                                       |
| Contact resistance              |                                    | 100 mΩ max. (initial value)                                                                    |
| Dielectric strength             | Between terminals of same polarity | 600 VAC, 50/60 Hz for 1 min                                                                    |
|                                 | Between each terminal and ground   | 2,000 VAC, 50/60 Hz for 1 min                                                                  |
| Vibration resistance            | Malfunction                        | 10 to 55 Hz, 1.5-mm double amplitude *2                                                        |
| Shock resistance                | Destruction                        | 500 m/s <sup>2</sup>                                                                           |
|                                 | Malfunction                        | 150 m/s <sup>2</sup> *2                                                                        |
| Durability                      | Mechanical                         | Momentary action: 1,000,000 operations min.<br>Alternate action: 50,000 operations min. *1     |
|                                 | Electrical                         | 50,000 operations min.                                                                         |
| Weight                          |                                    | Approx. 3.2 g                                                                                  |
| Ambient operating temperature   |                                    | -10°C to +55°C (with no icing)                                                                 |
| Ambient operating humidity      |                                    | 35% to 85%                                                                                     |
| Ambient storage temperature     |                                    | -25°C to +65°C (with no icing)                                                                 |
| Degree of protection            |                                    | IP00                                                                                           |
| Electric shock protection class |                                    | Class II                                                                                       |
| PTI (proof tracking index)      |                                    | 175                                                                                            |
| Pollution degree                |                                    | 3 (IEC947-5-1)                                                                                 |

\*1. With alternate operation models, one operation cycle consists of set and reset operations.

\*2. Indicates malfunctions of less than 1 ms.

### ■Contact Form

| Contact name | Contact form | Contact type     |
|--------------|--------------|------------------|
| Double-break | SPST-NO      | NO ——— NO        |
| Double-throw | SPDT         | COM ——— NC<br>NO |

### Nomenclature

#### Model Structure

<Pushbutton>


1. Shape  
Square  
(A3AA)




Round  
(A3AT)



Diffusion sheet  
(milky white)



4. Color cap



Flange

5. Color

• Non-lighted Model


Red, yellow, light gray,

gray, dark gray,

green, blue, black

• Surface Illumination Model

Red, yellow, green



Leaf spring

<Switch>

3. Ratings

Standard load

6 A at 125 VAC

2 A at 250 VAC

4 A at 30 VDC


\* Minimum applicable load:

1 mA at 5 VDC (resistive load)

2. Terminals

• Solder terminal

• PCB terminal




Note 1. The above is for the A3AA.

2. An A3A with solder terminals is provided with a black flange and leaf spring, however an A3A with PCB terminals is not provided with them. If a black flange and leaf spring are required for an A3A with PCB terminals, order them from your OMRON representative. (Refer to page 2.)


Dimensions

(Unit: mm)


Non-lighted Model  
Square Pushbutton




SPST-NO



SPDT



Round Pushbutton

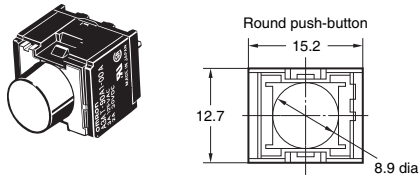


Two, t0.4 terminals


Three, t0.4 terminals

A  
3  
A

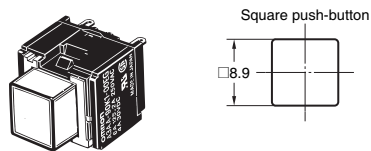
Surface Illumination Model  
Square Pushbutton




SPST-NO



SPDT



Round Pushbutton

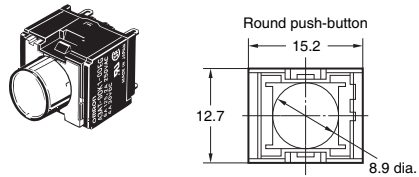

Two, t0.4 terminals



















Three, t0.4 terminals

Two, t0.3 LED terminals

Two, t0.3 LED terminals


Note: All units are in millimeters unless otherwise indicated.  
The illustrations below show switches with solder terminals, without a flange or leaf spring.  
Unless specified, there is a tolerance of  $\pm 0.4$ mm for dimensions.

■Terminals


| Contact | Solder terminal                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | PCB terminal                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SPST-NO | <div><div>Terminal Hole Dimensions</div><div><p>0.8 0.5 2</p></div></div> <div><div>Non-lighted Models</div><div><p>1 3.5 1.7</p></div><div>Switch terminal: t0.4</div></div> <div><div>Lighted Models</div><div><p>0.8 0.5 2</p></div><div><p>1 3.5 1.7 0.8 x 2</p></div><div>Switch terminal: t0.4<br/>Lamp terminal: t0.3</div></div> <div><div>LED terminal</div><div><p>10.16 4.48</p></div><div>Terminal for models with an illuminating push-button</div></div> | <div><div>Non-lighted Models</div><div><p>1 3.5 0.6 1.7</p></div><div>Switch terminal: t0.4</div></div> <div><div>Lighted Models</div><div><p>1 3.5 0.6 1.7</p></div><div>Switch terminal: t0.4<br/>Lamp terminal: t0.3</div></div> <div><div>Terminal Arrangement (BOTTOM VIEW)</div><div><p>10.16 4.48</p></div><div>Terminal for models with an illuminating push-button</div></div> <div><div>PCB Dimensions (BOTTOM VIEW)</div><div><p>10.16 4.48 (0.67) (1.87) (2.52) (2.52)</p></div><div>Holes for models with illuminating push-button</div><div>Four, 1 dia. holes</div></div> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|         | SPDT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | <div><div>Terminal Hole Dimensions</div><div><p>0.8 0.5 2</p></div></div> <div><div>Non-lighted Models</div><div><p>1 3.5 0.8 1.7</p></div><div>Switch terminal: t0.4</div></div> <div><div>Lighted Models</div><div><p>0.8 0.5 2</p></div><div><p>1 3.5 0.8 1.7</p></div><div>Switch terminal: t0.4<br/>Lamp terminal: t0.3</div></div> <div><div>LED terminal</div><div><p>5.7 1.95 10.16</p></div><div>Terminal for models with an illuminating push-button</div></div>                             | <div><div>Non-lighted Models</div><div><p>3.5 0.6 1.7</p></div><div>Switch terminal: t0.4</div></div> <div><div>Lighted Models</div><div><p>3.5 0.6 1.7</p></div><div>Switch terminal: t0.4<br/>LED terminal: t0.3</div></div> <div><div>Terminal Arrangement (BOTTOM VIEW)</div><div><p>5.7 1.95 10.16</p></div><div>LED terminal</div></div> <div><div>PCB Dimensions (BOTTOM VIEW)</div><div><p>5.7 1.95 10.16 (2.54)</p></div><div>Five, 1-dia. holes</div><div>Holes for models with illuminating push-button</div><div>NC C NO</div></div> |

Accessories Dimensions


Leaf Spring A3A-200



Flange (Square) A3A-24




Flange (Round) A3A-25

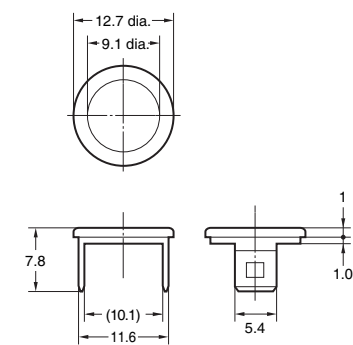


Note: Unless otherwise specified, a tolerance of ±0.4 mm applies to all dimensions.

Panel Cutouts

Square Pushbutton




Round Pushbutton



For Side-by-side Mounting

|                              | Square pushbutton | Round pushbutton |
|------------------------------|-------------------|------------------|
| Horizontal multiple mounting |                   |                  |
| Vertical multiple mounting   |                   |                  |

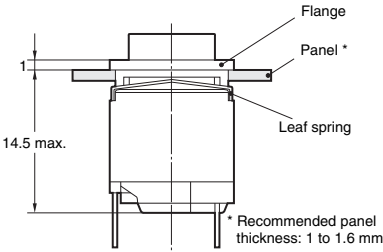Panel Mounting Dimensions



(The diagram shows the lighted SPST-NO model.)

## Precautions

● Refer to the “Push-button Switches Common Precautions” for correct use.

### Precautions for Correct Use

- Please do not perform wiring or touch the charged parts of terminals while power is supplied to the Switch. Doing so may result in electric shock.
- Make sure to keep a secure insulation distance after wiring to the Switch.

#### ● Mounting

- When opening a hole on a panel to mount an A3A to the panel, make sure that the hole has no burr.
- When mounting a flange to the switching mechanism of an A3A, make sure that the flange and the casing of the switching mechanism are engaged securely.

#### ● Wiring

- When soldering the terminals of an A3A, refer to the following.
  1. For manual soldering:  
Use a soldering iron with the terminals at a temperature of 350°C maximum within three seconds.
  2. Do not impose any external force on the terminals for one minute after the terminals are soldered.
- Do not pull the terminals of any A3A with a force exceeding 5.34 N, otherwise the joint part of the A3A may be damaged.
- When soldering the terminals of an A3A, apply non-corrosive rosin flux to the terminals.
- After soldering the terminals of an A3A, do not wash the A3A with any solvent.
- When mounting an A3A to a PCB and soldering the terminals of the A3A to the PCB, make sure that the flux will not rise above the surface of the PCB.

#### ● Operating Environment

- When using an A3A, make sure that dust, metal powder, or oil will not penetrate into the interior of the A3A.

#### ● LED

- The polarity of the LED is indicated on the back of the Switch. Wire the LED correctly according to the polarity.
- An A3A with a built-in LED does not have a limiting resistor. Connect a limiting resistor.
- The resistance can be calculated by using the following expression.

$$R = \frac{E - V_F}{I_F} (\Omega)$$

E : Applied voltage (V)  
 V<sub>F</sub> : LED forward voltage (V)  
 I<sub>F</sub> : LED forward current (A)

Note: Make sure that the limiting resistor connected to the built-in LED of an A3A satisfies the characteristics of the built-in LED. The mean forward current of the built-in LED must be 8 mA minimum.

#### ● Example

Conditions: Red LED with an I<sub>F</sub> of 10 mA at 24 V and a T<sub>a</sub> of 25°C.  
 From the red LED characteristic below, V<sub>F</sub> will be 2 V when I<sub>F</sub> is 10 mA.  
 Therefore, R = (24 V – 2 V)/0.01 A = 2,200 Ω.

Thus the recommended resistance is 2.2 kΩ at 0.5 W (2\* x I<sub>F</sub><sup>2</sup>R).

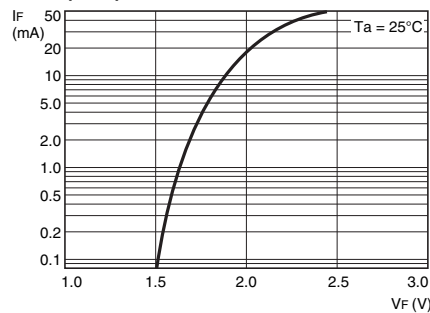
Note: A factor of 2 (marked with an asterisk) is applied because the permissible wattage of the resistor must be twice as large as the required wattage.

#### LED Characteristics


(V<sub>F</sub> – I<sub>F</sub> Characteristics)

T<sub>a</sub>: Ambient Temperature


(Red)



(Yellow)

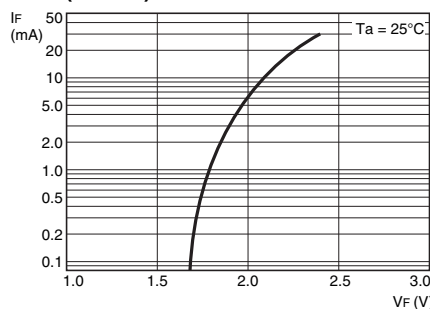

(Green)

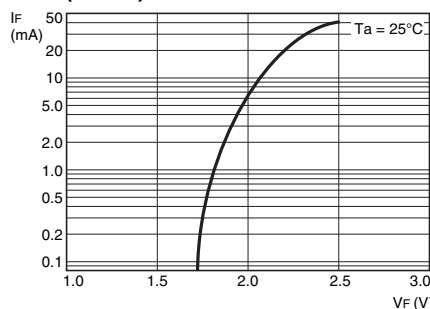

#### ● Pushbutton

- When exchanging the Pushbutton (except the ones for the mechanical indicator models) with a new one, pull out the Pushbutton from the Switch, holding the Pushbutton in the longitudinal direction. Do not remove the Pushbutton of the mechanical indicator model.

#### ● Engraving of Pushbutton


- Depth of engraving: 0.3 mm max. for illuminating pushbutton
- Since the Pushbutton is made of polycarbonate, use an alcohol-based paint when marking legend.

#### ● Pressing of Pushbutton






- Apply firm pressure to the Pushbutton when operating it. In doing so, however, do not apply a pressure greater than 11.8 N.

## ■ Installation

### ● Mounting and Replacing the Pushbutton

| 1. Mounting Direction for the Pushbutton and Switch                                                                                                                                                                                                                                                                                                                      | 2. Removing the Pushbutton (Non-lighted Models Only)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>Insert the catches of the Pushbutton into the grooves of the Switch and push down on the Pushbutton until it is fixed securely to the Switch.</li> <li>With lighted models, the LED is built into the Switch and cannot be replaced.</li> </ul>  | <ul style="list-style-type: none"> <li>To remove the Pushbutton, hold both the Pushbutton and the Switch on the longer sides and pull the Pushbutton away from the Switch.<br/>(If the catches on the Pushbutton are bent outwards, it may result in malfunction.)</li> <li>When replacing the Pushbutton, if the cap is held on the sides with catches, internal components (e.g., plate) may come loose. Be sure to hold the Pushbutton by the sides without catches (i.e., the longer sides of the Switch) when removing.</li> </ul>  |

### ● Mounting Switch on a Panel

| 1. Mount Leaf Spring                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 2. Mount Flange on Panel                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 3. Fit Flange with Switch                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 4. Removing Switch                                                                                                                                                                                                                                                                                                                                                                                                |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>Press the leaf spring into the fitted groove on the upper surface of the Switch. For an easier fitting, first fit one side of the leaf spring, then press the other side into the fitting groove.<br/>(It will be easier mounting the leaf spring of one side first, then mount the other side.)</li> </ul>  <p>Note: Be sure to fit the leaf spring exactly into the groove, and do not allow it to slip out of the groove.</p> | <ul style="list-style-type: none"> <li>Insert the flange from the front surface of the panel.</li> </ul>  <ul style="list-style-type: none"> <li>The flange has two opposing guides to facilitate its insertion into the panel cutout hole. Be sure the flange does not remain tilted with respect to the panel surface after being installed.</li> </ul>  <p>Note: The mounting direction of the flange determines the orientation of the Switch.</p> | <ul style="list-style-type: none"> <li>While holding the flange, insert the opposing supports into the gaps between the leaf spring and Switch on the longer sides of the housing, and fit the rectangular hole of the flange with the projections of the switch housing.</li> </ul>  <p>Note: Completely remove any burrs on the panel cutout surface; otherwise, the flange and Switch will not attach solidly.</p> | <ul style="list-style-type: none"> <li>Insert a small flat-bladed screwdriver or tweezers into the flange support exposed on the rear of the panel. Pry up on each side to pull out the Switch.</li> </ul>  <p>Note: Do not pry up the flange support more than necessary or the switch holding portions may be damaged.</p> |

- Application examples provided in this document are for reference only. In actual applications, confirm equipment functions and safety before using the product.
- Consult your OMRON representative before using the product under conditions which are not described in the manual or applying the product to nuclear control systems, railroad systems, aviation systems, vehicles, combustion systems, medical equipment, amusement machines, safety equipment, and other systems or equipment that may have a serious influence on lives and property if used improperly. Make sure that the ratings and performance characteristics of the product provide a margin of safety for the system or equipment, and be sure to provide the system or equipment with double safety mechanisms.

**Note: Do not use this document to operate the Unit.**

**OMRON Corporation**  
Electronic and Mechanical Components Company

**Contact:** [www.omron.com/ecb](http://www.omron.com/ecb)

**Cat. No. A025-E1-05**  
0812(0207)(O)

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)