


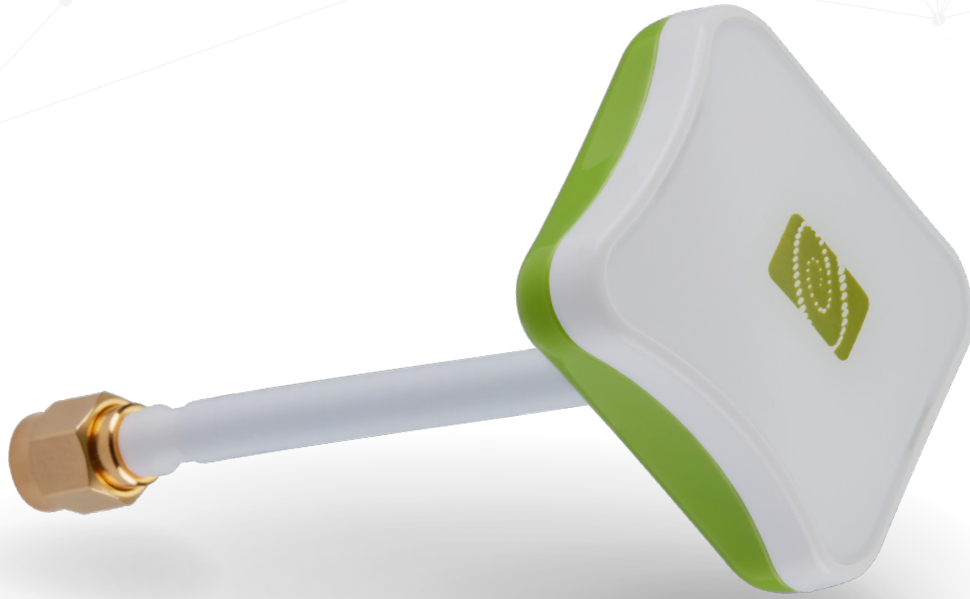

**Part No:**

**WCM.10.005QQ111**

**Description:**

Stratus 5-5.8GHz 3dBi  
SMA(M) Connector Mount Antenna  
with Semi-Rigid Flexiform 402 Cable

**Features:**

5150-5850 MHz Wi-Fi Antenna  
Designed for UAV / Drone Applications  
Connector Mount  
Right Hand Circularly Polarized  
IP67 Rating  
Dimensions: 30.7x34.9x17mm  
Cable: 50mm SS402 Coaxial Cable  
Connector: RP-SMA(M)



# Contents

|          |                                |           |
|----------|--------------------------------|-----------|
| <b>1</b> | <b>Introduction</b>            | <b>3</b>  |
|          |                                |           |
| <b>2</b> | <b>Specifications</b>          | <b>4</b>  |
|          |                                |           |
| <b>3</b> | <b>Antenna Characteristics</b> | <b>5</b>  |
| 3.1      | Return Loss                    | 5         |
| 3.2      | Efficiency                     | 5         |
| 3.3      | Average Gain                   | 6         |
| 3.4      | Peak Gain                      | 6         |
| <b>4</b> | <b>2D Radiation Pattern</b>    | <b>7</b>  |
| 4.1      | Antenna Test Set Up            | 7         |
| 4.2      | 2D Radiation Pattern           | 8         |
| 4.3      | 3D Radiation Pattern           | 9         |
| <b>5</b> | <b>Axial Ratio</b>             | <b>10</b> |
|          |                                |           |
| <b>6</b> | <b>Mechanical drawing</b>      | <b>11</b> |
|          |                                |           |
| <b>7</b> | <b>3D Model</b>                | <b>12</b> |
|          |                                |           |
| <b>8</b> | <b>Packaging</b>               | <b>13</b> |
|          |                                |           |

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein.

Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

Copyright © Taoglas Ltd.

# 1 Introduction



The Taoglas Stratus WCM.10 antenna is an external connector mount antenna designed for UAV / Drone applications operating from 5150-5850MHz. The Stratus comes in a compact size, at only 34.8 \* 30.7 \* 17 mm, enabling flexibility of integration. The high efficiency, of nearly 70%, provided by this antenna allows it to meet the high throughput demands of drone applications, especially high definition FPV video streams.

Right Hand Circular Polarization (RHCP) and an optimized omnidirectional radiation pattern helps ensure excellent performance regardless of device orientation. The antenna can be use as either Tx or Rx and includes a high quality, low loss, SS402 semi-rigid cable, frequently used for military and commercial aerospace applications. The cable can be bent to a fixed orientation for ease of installation on either the UAV or goggles and headsets

Cable length and connector types on this antenna are customizable. Taoglas can also customize and test antennas on your UAV in any one of our worldwide facilities subject to NRE or MOQ. Contact your regional Taoglas sales office for support.


## 2 Specifications

| Electrical *                      |                             |          |
|-----------------------------------|-----------------------------|----------|
| Frequency                         | 5150 MHz                    | 5850 MHz |
| Efficiency (%)                    | 71                          | 63       |
| Average Gain (dB)                 | -1.6                        | -2       |
| Peak Gain (dBi)                   | 3.8                         | 3.2      |
| Return Loss (dB)                  | <-10                        | <-15     |
| Polarization                      | RHCP                        | Linear   |
| Axial ratio at zenith             | <1                          | <7       |
| Impedance                         | 50Ω                         |          |
| Mechanical                        |                             |          |
| Cap Material                      | PMMA                        |          |
| Housing Material                  | ASA                         |          |
| Dimensions (mm)                   | 30.7 * 34.8 * 17            |          |
| Color                             | White & Green               |          |
| Connector                         | RP-SMA(M)ST                 |          |
| Cable                             | 50mm SS402                  |          |
| Weight                            | 17g                         |          |
| IP Rating                         | IP67                        |          |
| Environmental                     |                             |          |
| Operating and Storage Temperature | -40°C to +85°C              |          |
| Humidity                          | Non-condensing 65° C 95% RH |          |


\*Measurements taken in Free Space

## 3 Antenna Characteristics


### 3.1 Return Loss

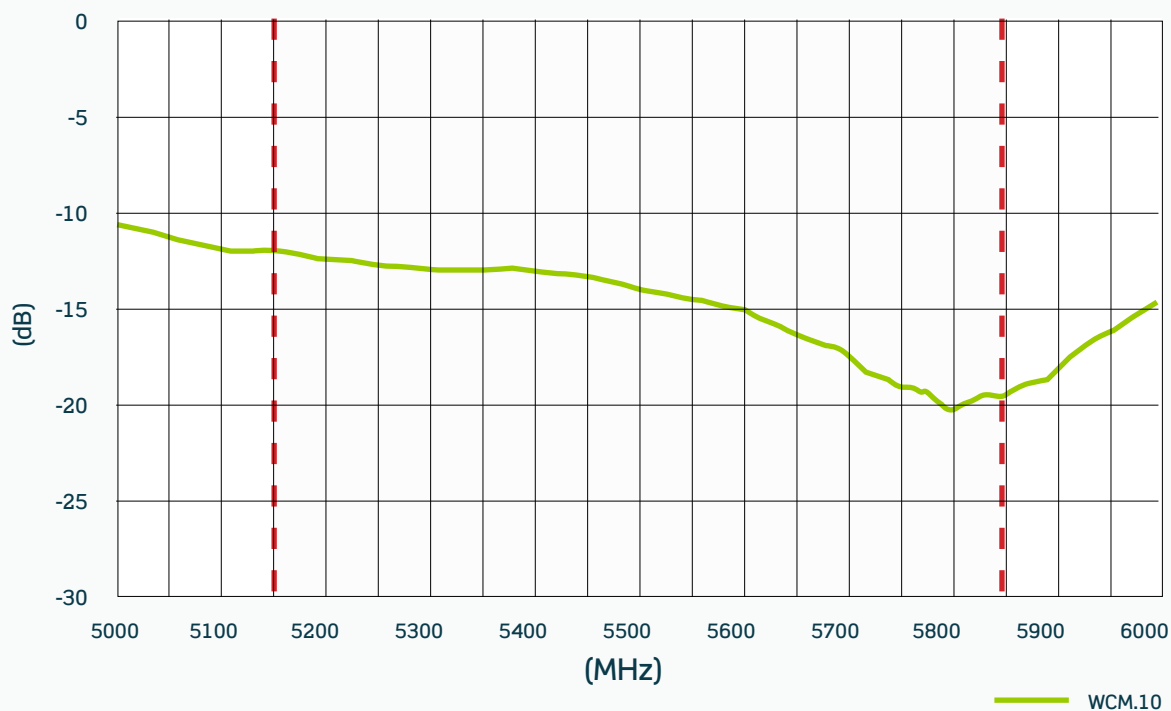


### 3.2 Efficiency

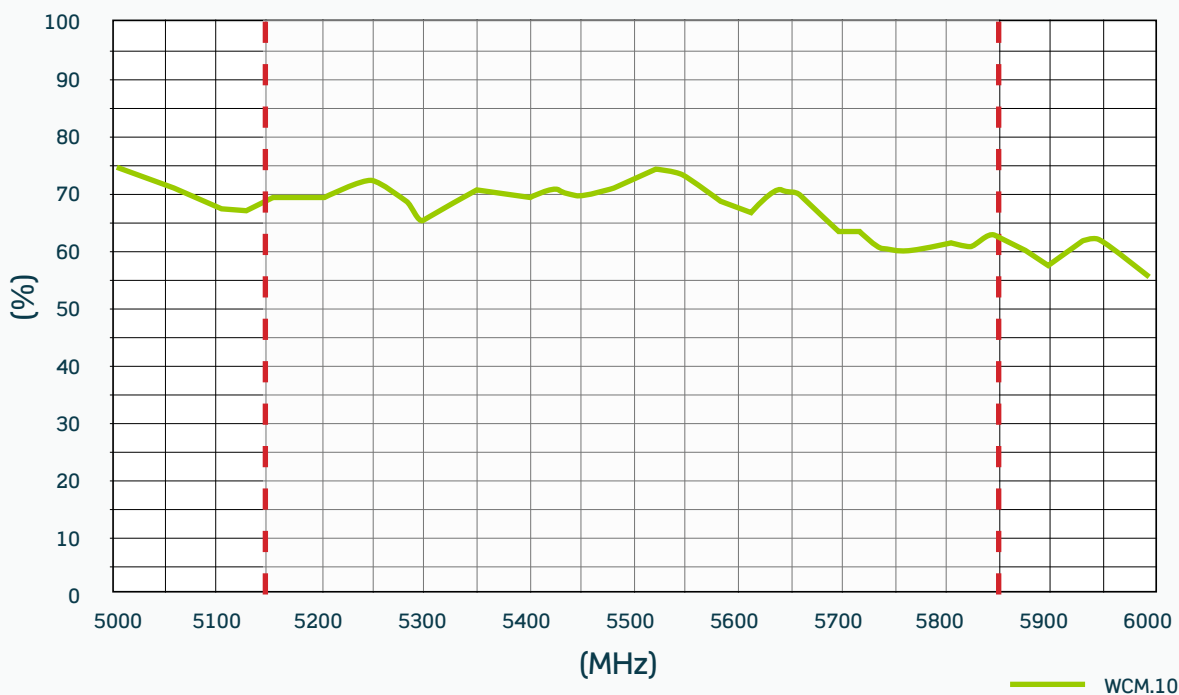

### 3.3 Average Gain

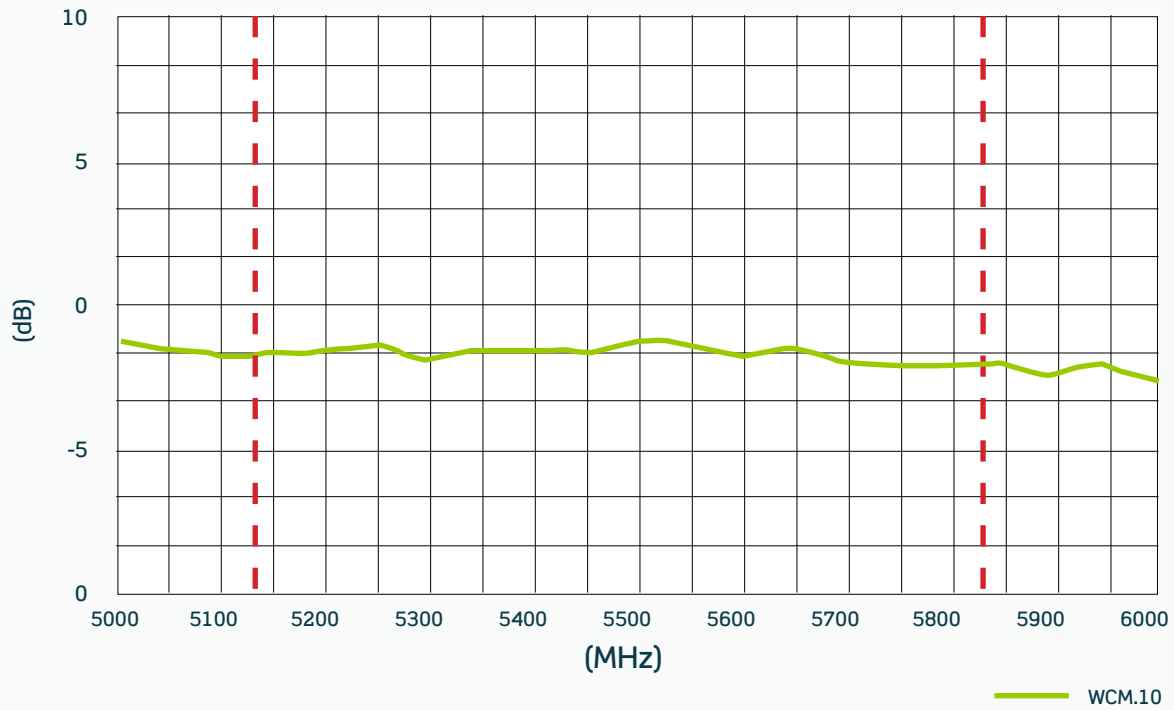


### 3.4 Peak Gain

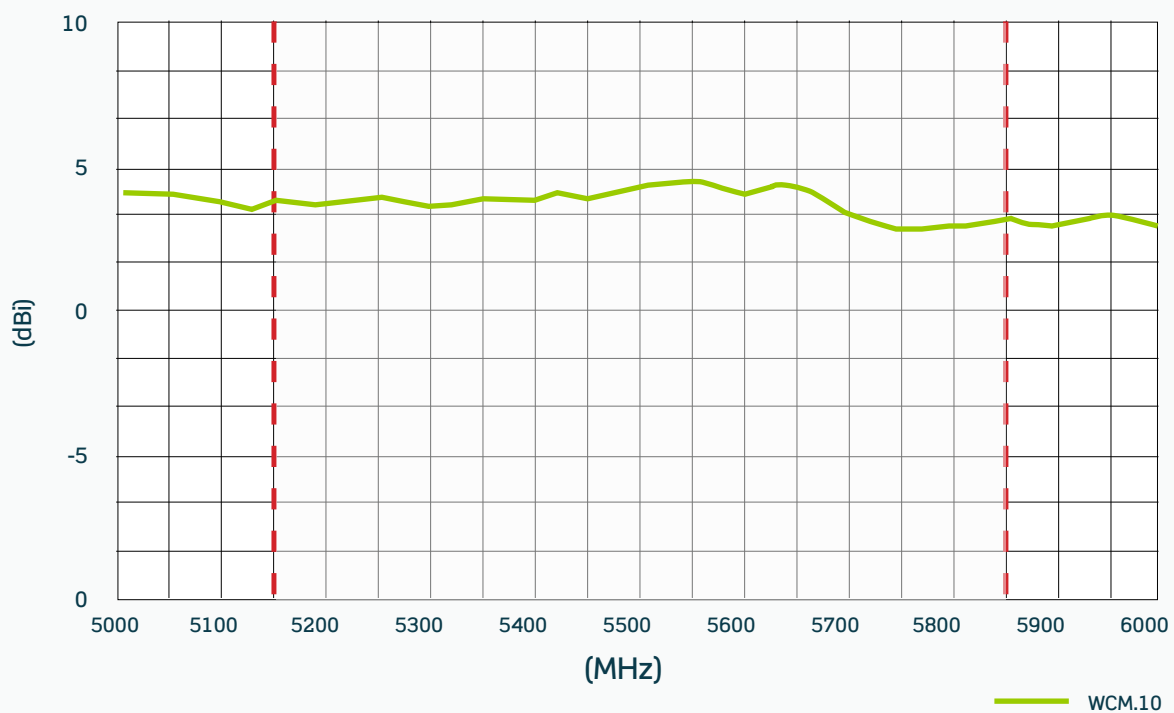


## 4 2D Radiation Pattern

### 4.1 Antenna Test Set Up

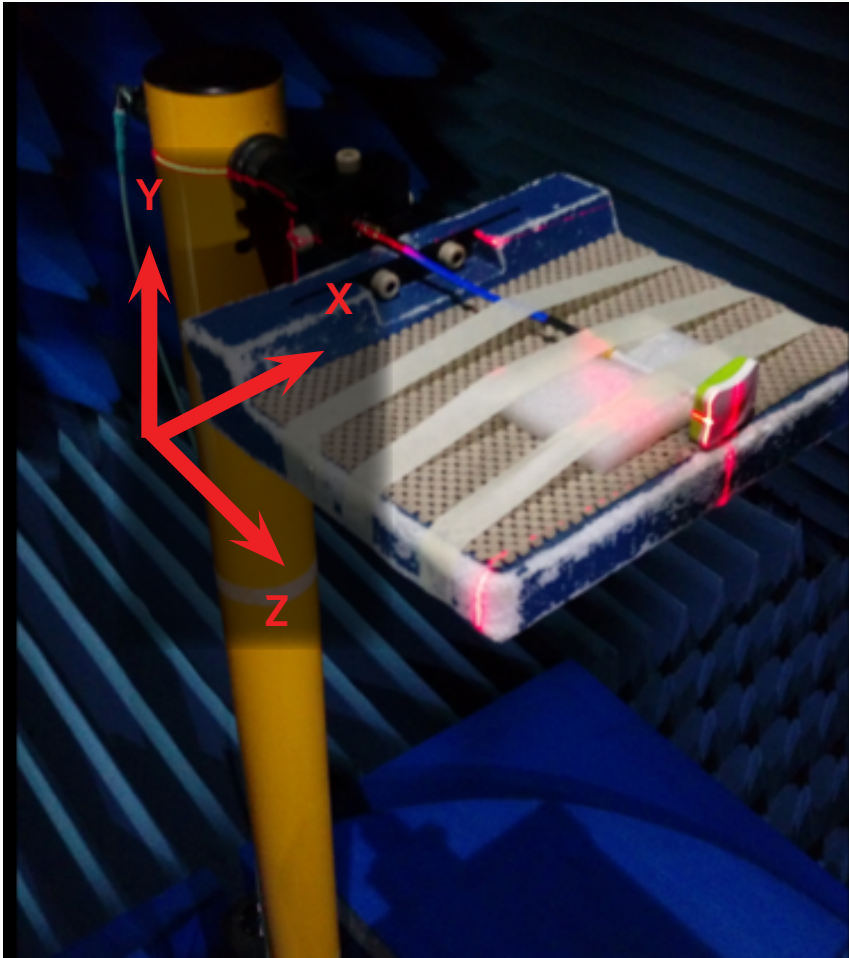


## 4.2 2D Radiation Pattern


XY Plane

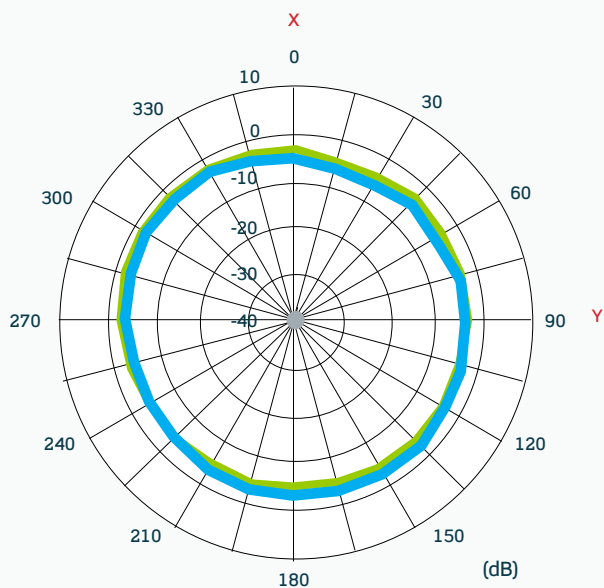

XZ Plane

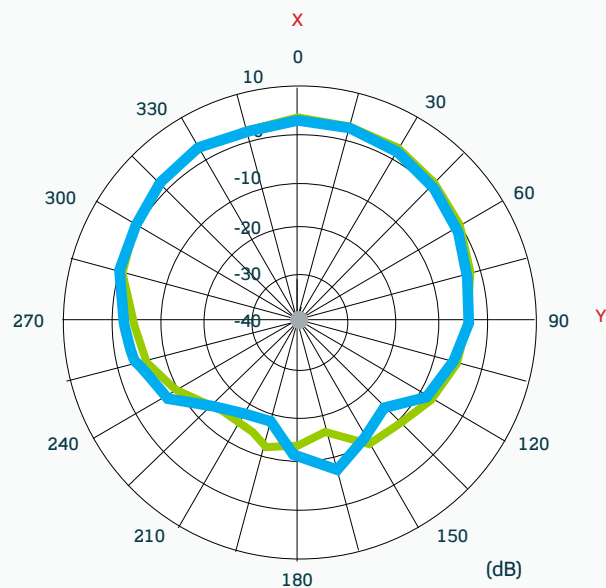

YZ Plane

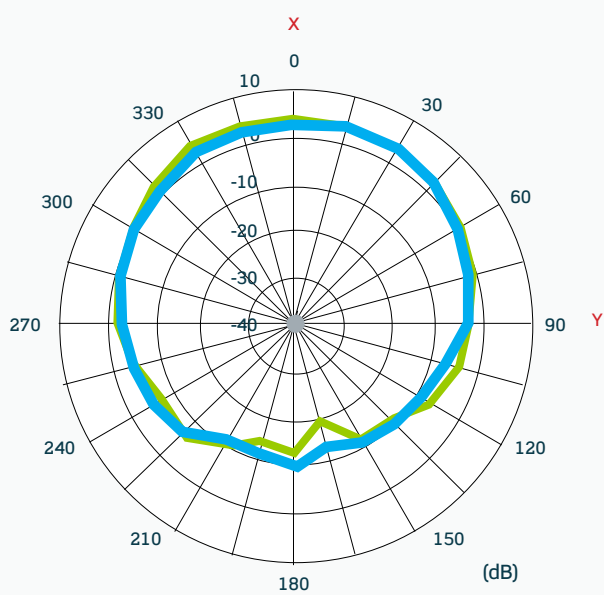


Key:


5150MHz  
5850MHz

### 4.3 3D Radiation Pattern



5150MHz

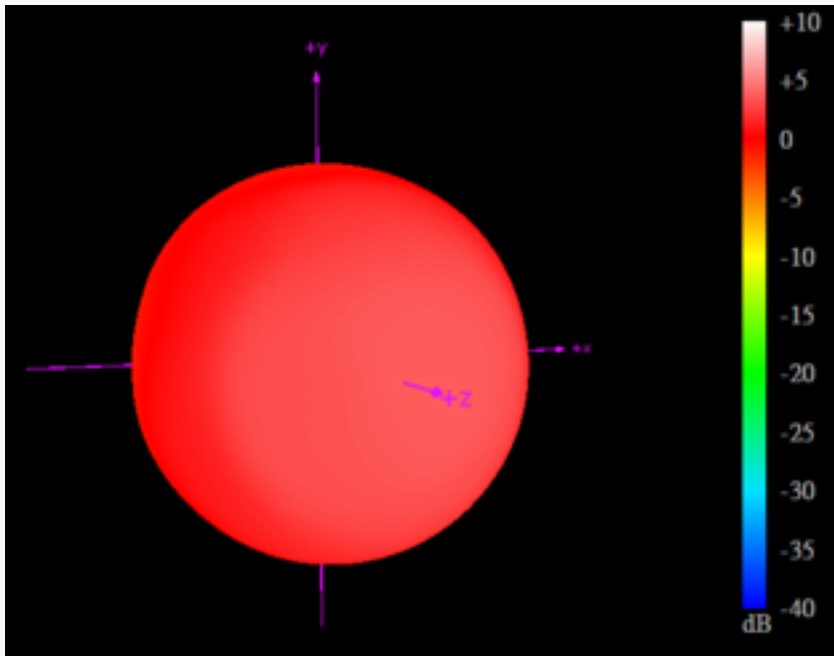


5850MHz

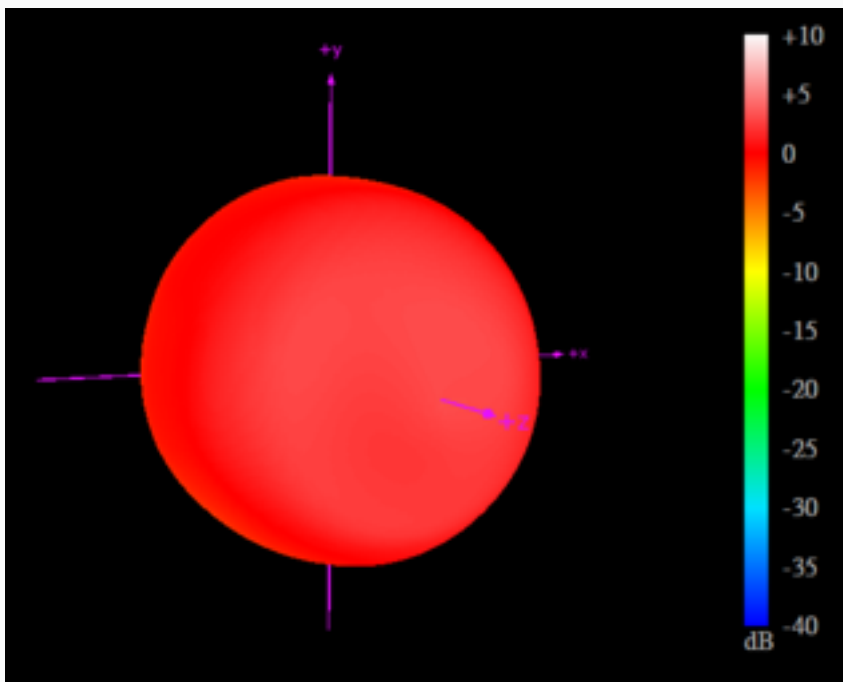


## 5 Axial Ratio

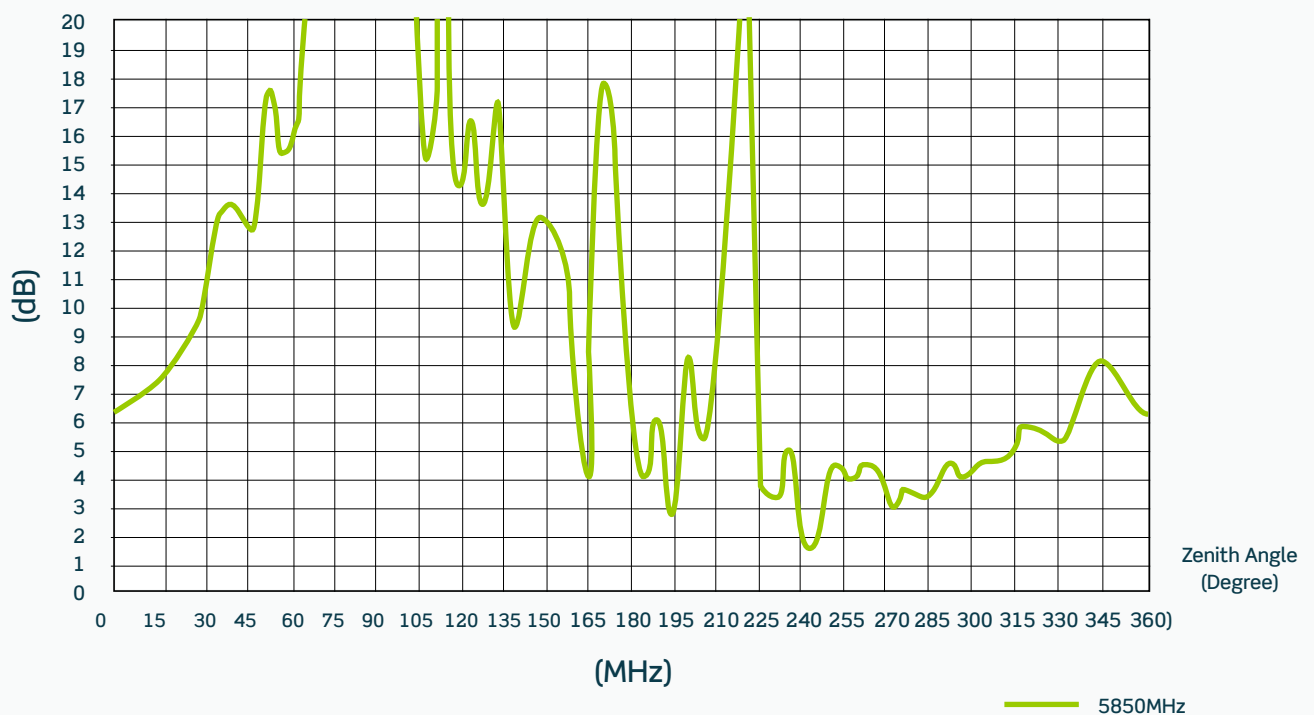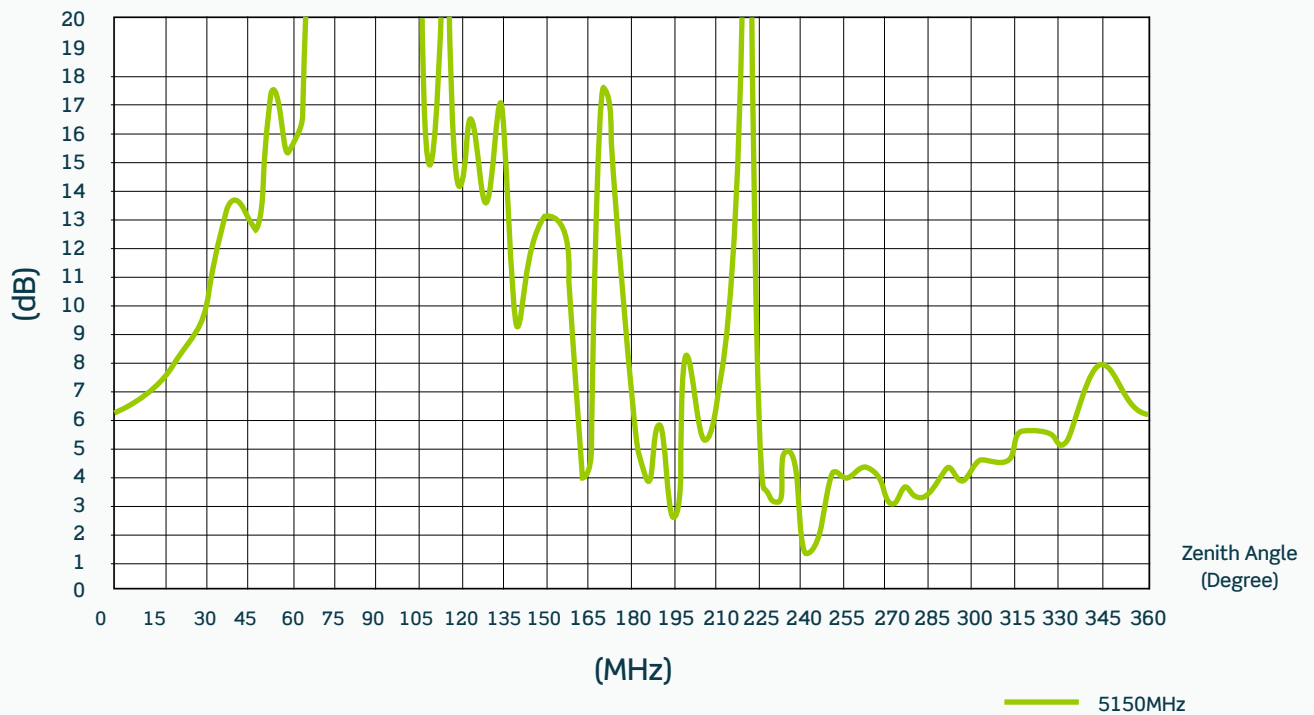


## 6 Mechanical Drawing (Unit: mm)

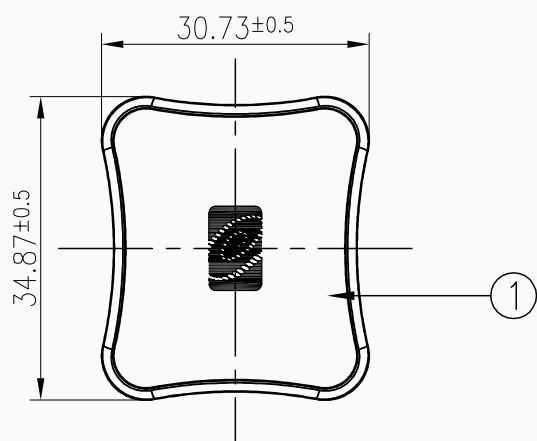


Front View

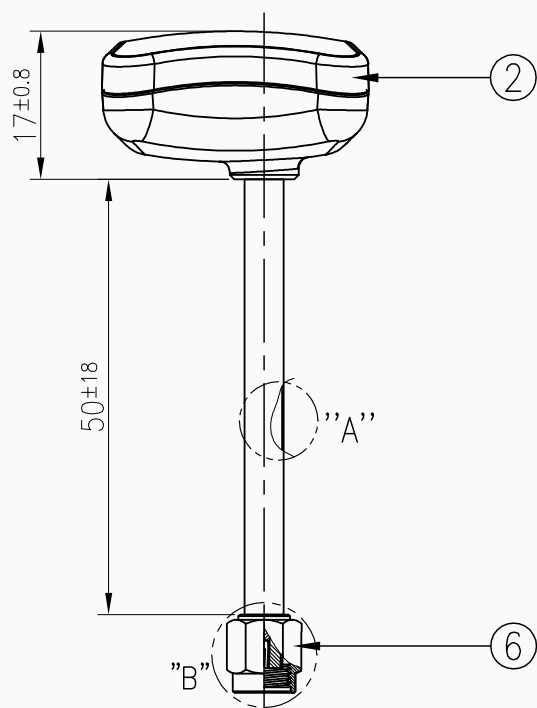

Side View

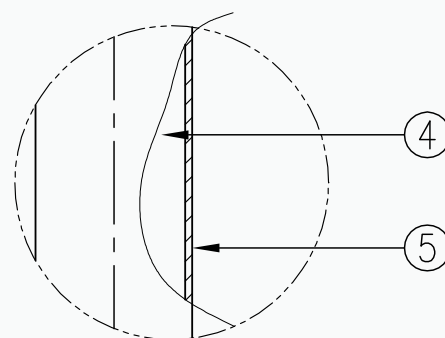


Detail A  
Scale:4:1



1/4-36UNS-2B

Detail B  
Scale:2:1

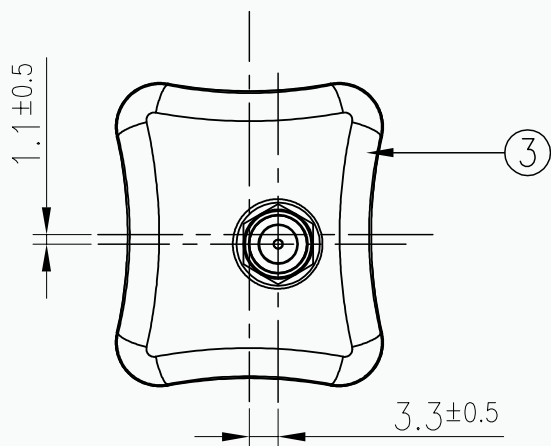


Back View

|   | Name                | Material | Finish                   | QTY |
|---|---------------------|----------|--------------------------|-----|
| 1 | Top Cap             | PMMA     | Transparent/Bottom White | 1   |
| 2 | Top Housing         | ASA      | White                    | 1   |
| 3 | Bottom Housing      | ASA      | Green                    | 1   |
| 4 | SS402 Coaxial Cable | FEP      | Blue                     | 1   |
| 5 | Heat Shrink Tube    | EVA      | White                    | 1   |
| 6 | RP-SMA(M)ST         | Brass    | Au Plated                | 1   |




## 8 Packaging

1 pcs WCM.10.005QQ111 per box  
Box Dimensions - 35\*40\*83mm  
Weight - 29.5g

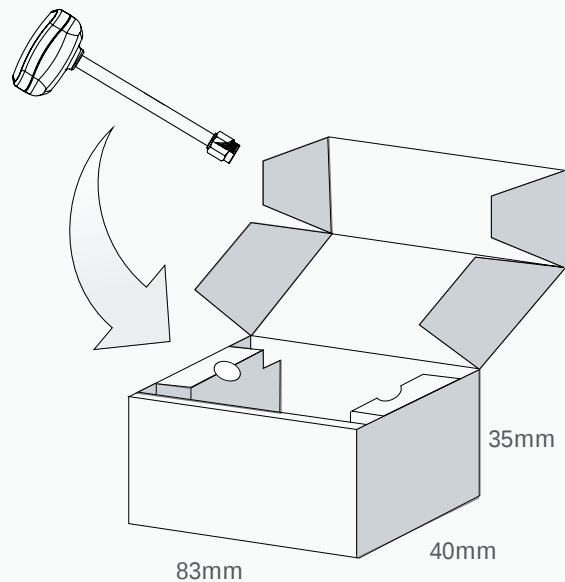

110 pcs WCM.10.005QQ111 per carton  
Carton Dimensions - 488\*193\*195mm  
Weight - 3.75kg

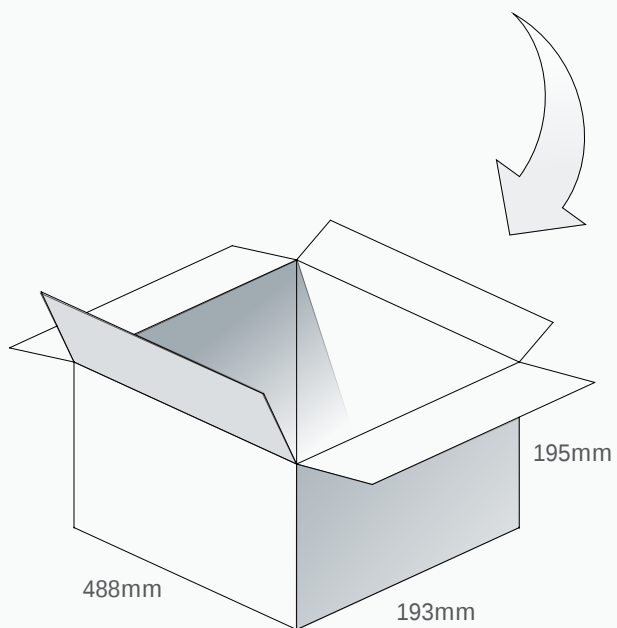



### **Wexford, Ireland - Group Headquarters**

Unit 5 Kilcannon Business Park  
Old Dublin Road  
Enniscorthy, Co. Wexford  
Y21 XW56, Ireland  
**+353 53 9169500**  
**emeasales@taoglas.com**

### **Dublin, Ireland**

DCU Alpha, Innovation Campus  
Old Finglas Road  
Glasnevin, Dublin 11, Ireland  
**emeasales@taoglas.com**

### **CA, United States**

8375 Camino Santa Fe, Suite A & B  
San Diego, CA 92121  
USA  
**+1 858 450 0888**  
**nasales@taoglas.com**

### **MN, United States**

530 N 3rd St., Suite B10  
Minneapolis, MN 55401-1256  
USA  
**+1 858 450 0888**  
**nasales@taoglas.com**

### **Germany**

Erika-Maan-Straße 25  
80636 München, Germany  
**+49 89 3803 7426**  
**emeasales@taoglas.com**

### **Taoyuan, Taiwan**

No.2-2, Ln. 66, ZhongShan 1<sup>st</sup> Rd.  
Bade City, Taoyuan City 33454  
Taiwan, ROC  
**+886 3 3681223**  
**asiasales@taoglas.com**

### **Tainan, Taiwan**

4F.-2, No.15, Guoji Road, Xinshi District,  
Tainan City 744, Taiwan, ROC  
**+886 3 3681223**  
**asiasales@taoglas.com**

### **Shenzhen, China**

Unit 509, Haiwang Star Building  
Dongbin Road & Haibin Road  
Nanshan District  
Shenzhen 518001  
China  
**+86 (755) 86538292**  
**cnsales@taoglas.com**

Ireland  
ISO 9001:2008  
Certified



Taiwan  
ISO 9001:2008  
Certified



Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)