



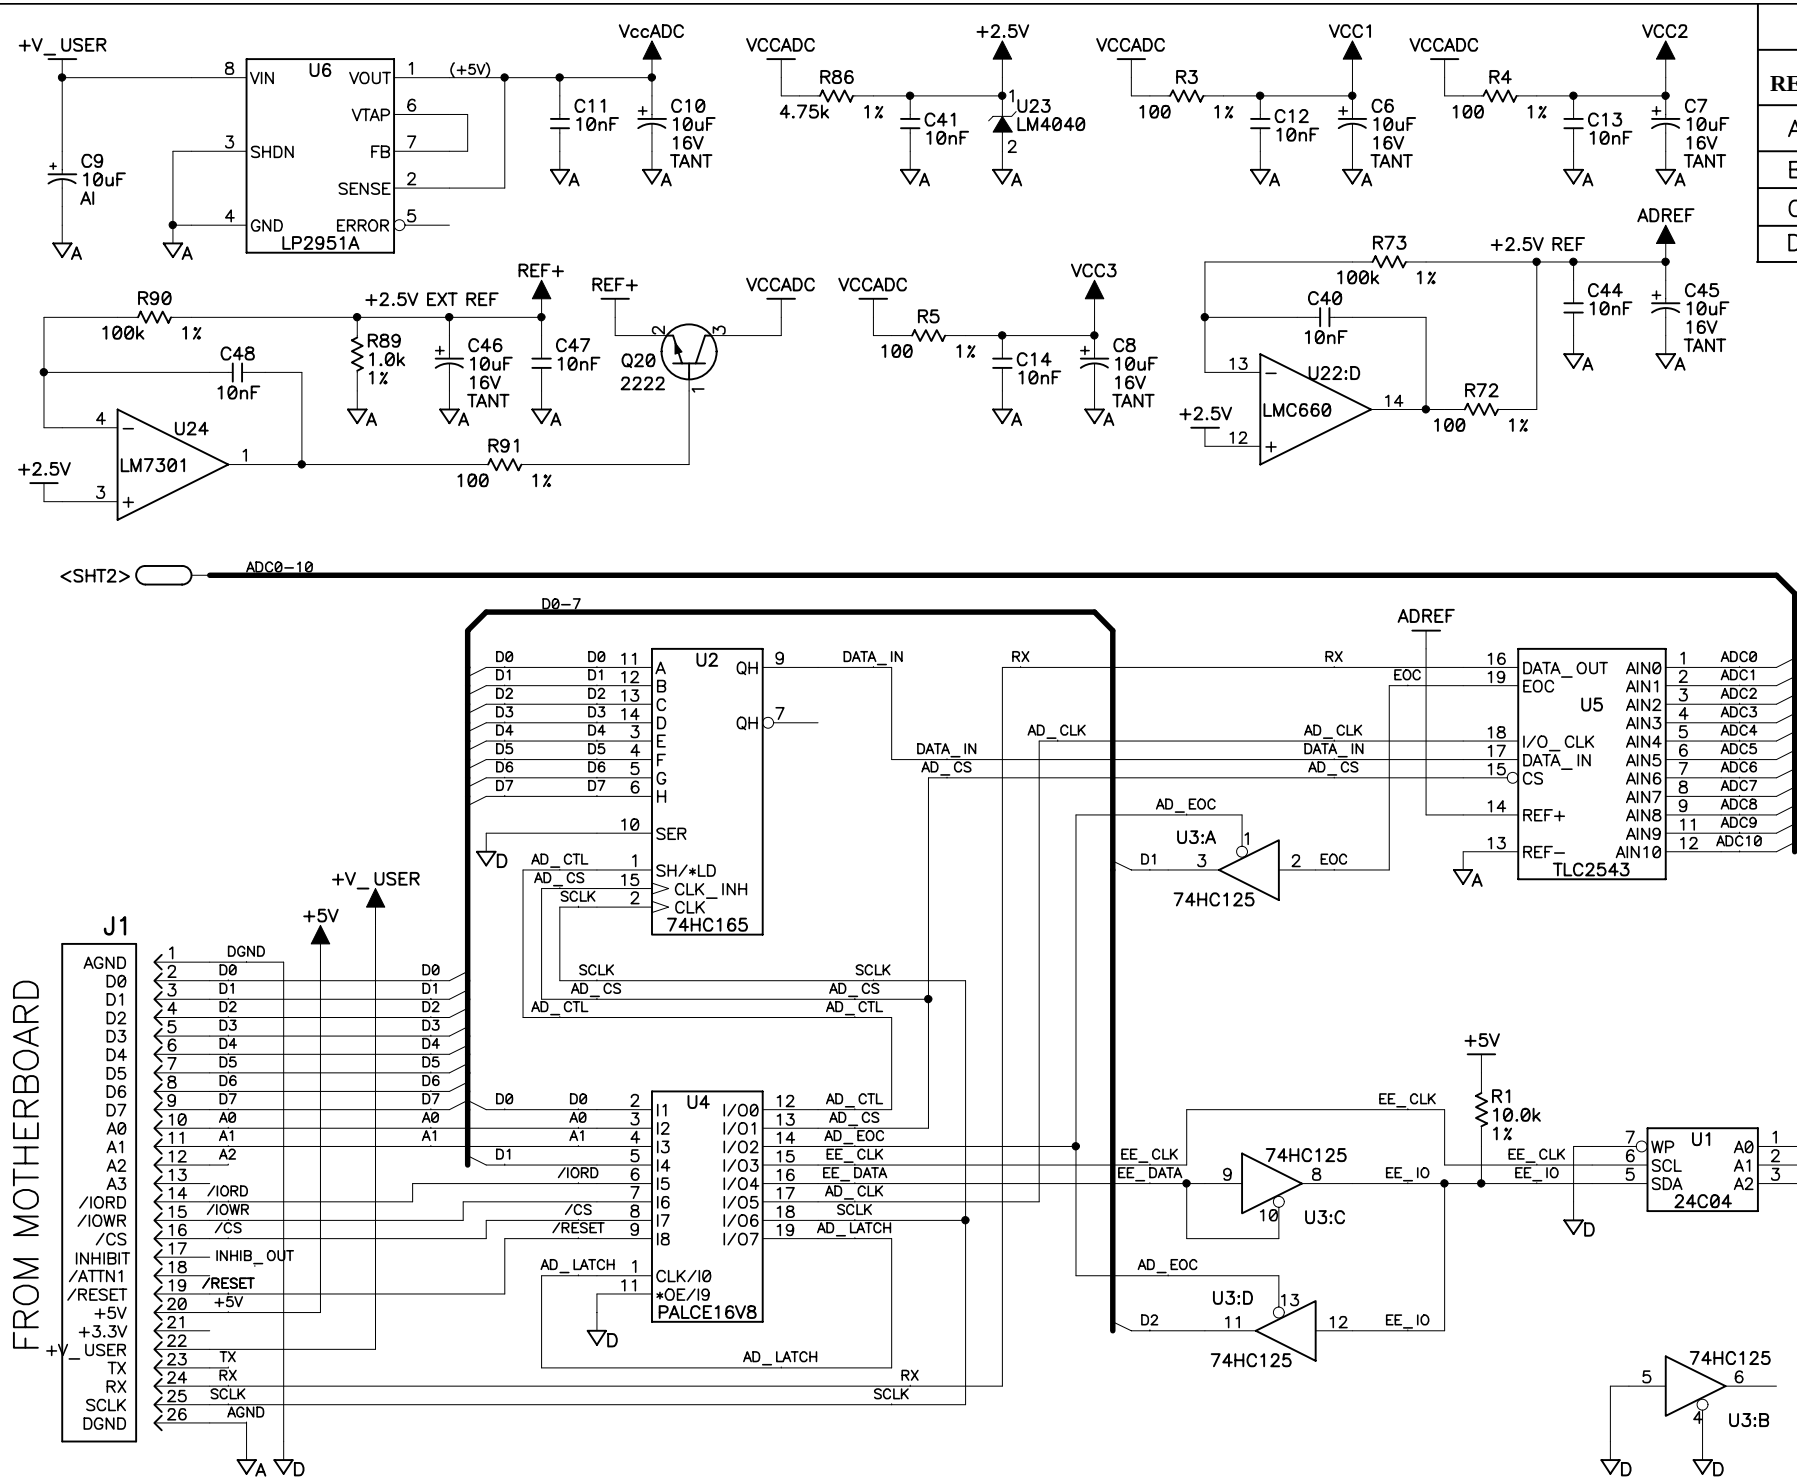

REVISION HISTORY			REVISION APPROVAL			
REV	ECO	DESCRIPTION	PROJECT ENGINEER	APPROVAL DATE	DOCUMENT CONTROL	APPROVAL DATE
A	----	PROTOTYPE RELEASE, TRACKS A/W @ REV-A	----	----	----	----
B	E11217	INITIAL RELEASE TRACK A/W @ REV-B	DM	20NOV00	KIS	11/20/01
C	E11453	CONNECTED /IOWR TO U4, UPDATED FOR SR9320	DM	20MAR01	KIS	3/20/01
D	E11564	CHANGED PE7 TO OUTPUT INHIBIT	DM	28JUN01	KIS	7/17/01

TABLE A

REF DES	DEVICE	DEVICE VOLTAGE INFORMATION									DEVICE: FILTER CAP REF DES(s)
		AGND	DGND	+5V	VCC1	VCC2	VCC3	ADREF	VCCADC	NC	
U1	24C04		4	8							C1
U2	74HC165		10	20						1,6,11,16	C2
U3	74HC125		7	14							C3
U4	PALCE16V8		10	20							C4
U5	TLC2543	10							20		C5, C44
U6	LP2951A										
U20	LMC660	11			4						C12
U21	LMC660	11				4					C13
U22	LMC660	11					4				C14
U23	LM4040										C41
U24	LM7301	2							5		C11

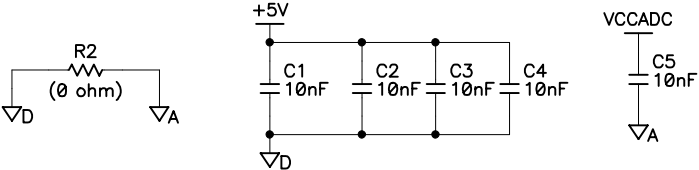


STUFFING TABLE

STUFFING TABLE			MODEL		
CIRCUIT		PART	SR9300	SR9310	SR9320
A/D INPUT CONDITIONING	GAIN RESISTOR	R32,39,40,47,48,55, R56,63,64,71,77	23.7k 1%	12.1k 1%	60.4k 1%
	BIAS RESISTOR	R34,37,42,45,50,53 R58,61,66,69,75	39.2k 1%	8.06k 1%	32.4k 1%
	EXCITATION SELECT OR 4—20mA SELECT	JP2,JP4,JP6,JP8 JP10,JP12,JP13 JP15,JP17,JP19 JP21	NOT INSTALLED	NOT INSTALLED	INSTALLED 2—3
	EXCITATION VOLTAGE SELECT	JP1,JP3,JP5,JP7 JP9,JP11,JP14, JP16,JP18,JP20 JP22	NOT INSTALLED	NOT INSTALLED	NOT INSTALLED

- NOTES: UNLESS OTHERWISE SPECIFIED;
- ALL RESISTOR VALUES ARE IN OHMS, 1/10W, 5%
 - ALL CAPACITORS ARE 50VDC OR HIGHER.
 - THE ORIGINATION SOURCE OF A VOLTAGE IS REPRESENTED BY (VCC), AND ALL REFERENCES TO THAT VOLTAGE ARE REPRESENTED BY (VCC).
 - OUTLINED CIRCUIT MAY NOT BE STUFFED DEPENDING ON MODEL, SEE STUFFING CHART FOR CLARIFICATION.
 - COMPONENT VALUES SHOWN WITH AN ASTERISK (*) FOLLOWING THE VALUE, MAY HAVE DIFFERENT VALUES, OR MAY NOT BE STUFFED DEPENDING ON MODEL. SEE STUFFING CHART FOR CLARIFICATION.

APPEND THE FOLLOWING DOCUMENTS WHEN CHANGING THIS DOCUMENT:		DRAWING CONTENT:		TITLE		Z-WORLD	
		DRAWN BY: (INITIAL RELEASE)					
		RAF	18JUN99	SCHEMATIC DIAGRAM SR9300 SERIES 12-BIT 11-CHANNEL A/D CONVERTER		2900 SPAFFORD ST. DAVIS, CA 95616 530 - 757 - 4616	
		REVISED BY:					
		DM	20JUN01				
		APPROVALS: INITIAL RELEASE		SIZE		DWG NO.	
		PROJECT ENGINEER:					
		Darren Musgrove	7/20/01	B		090-0086	
		ENGINEERING MANAGER:					
		R.Matthews	7/20/01	SCALE		NONE	
		SIGNATURES	DATE				
				RELEASE DATE		SHEET 1 OF 2	

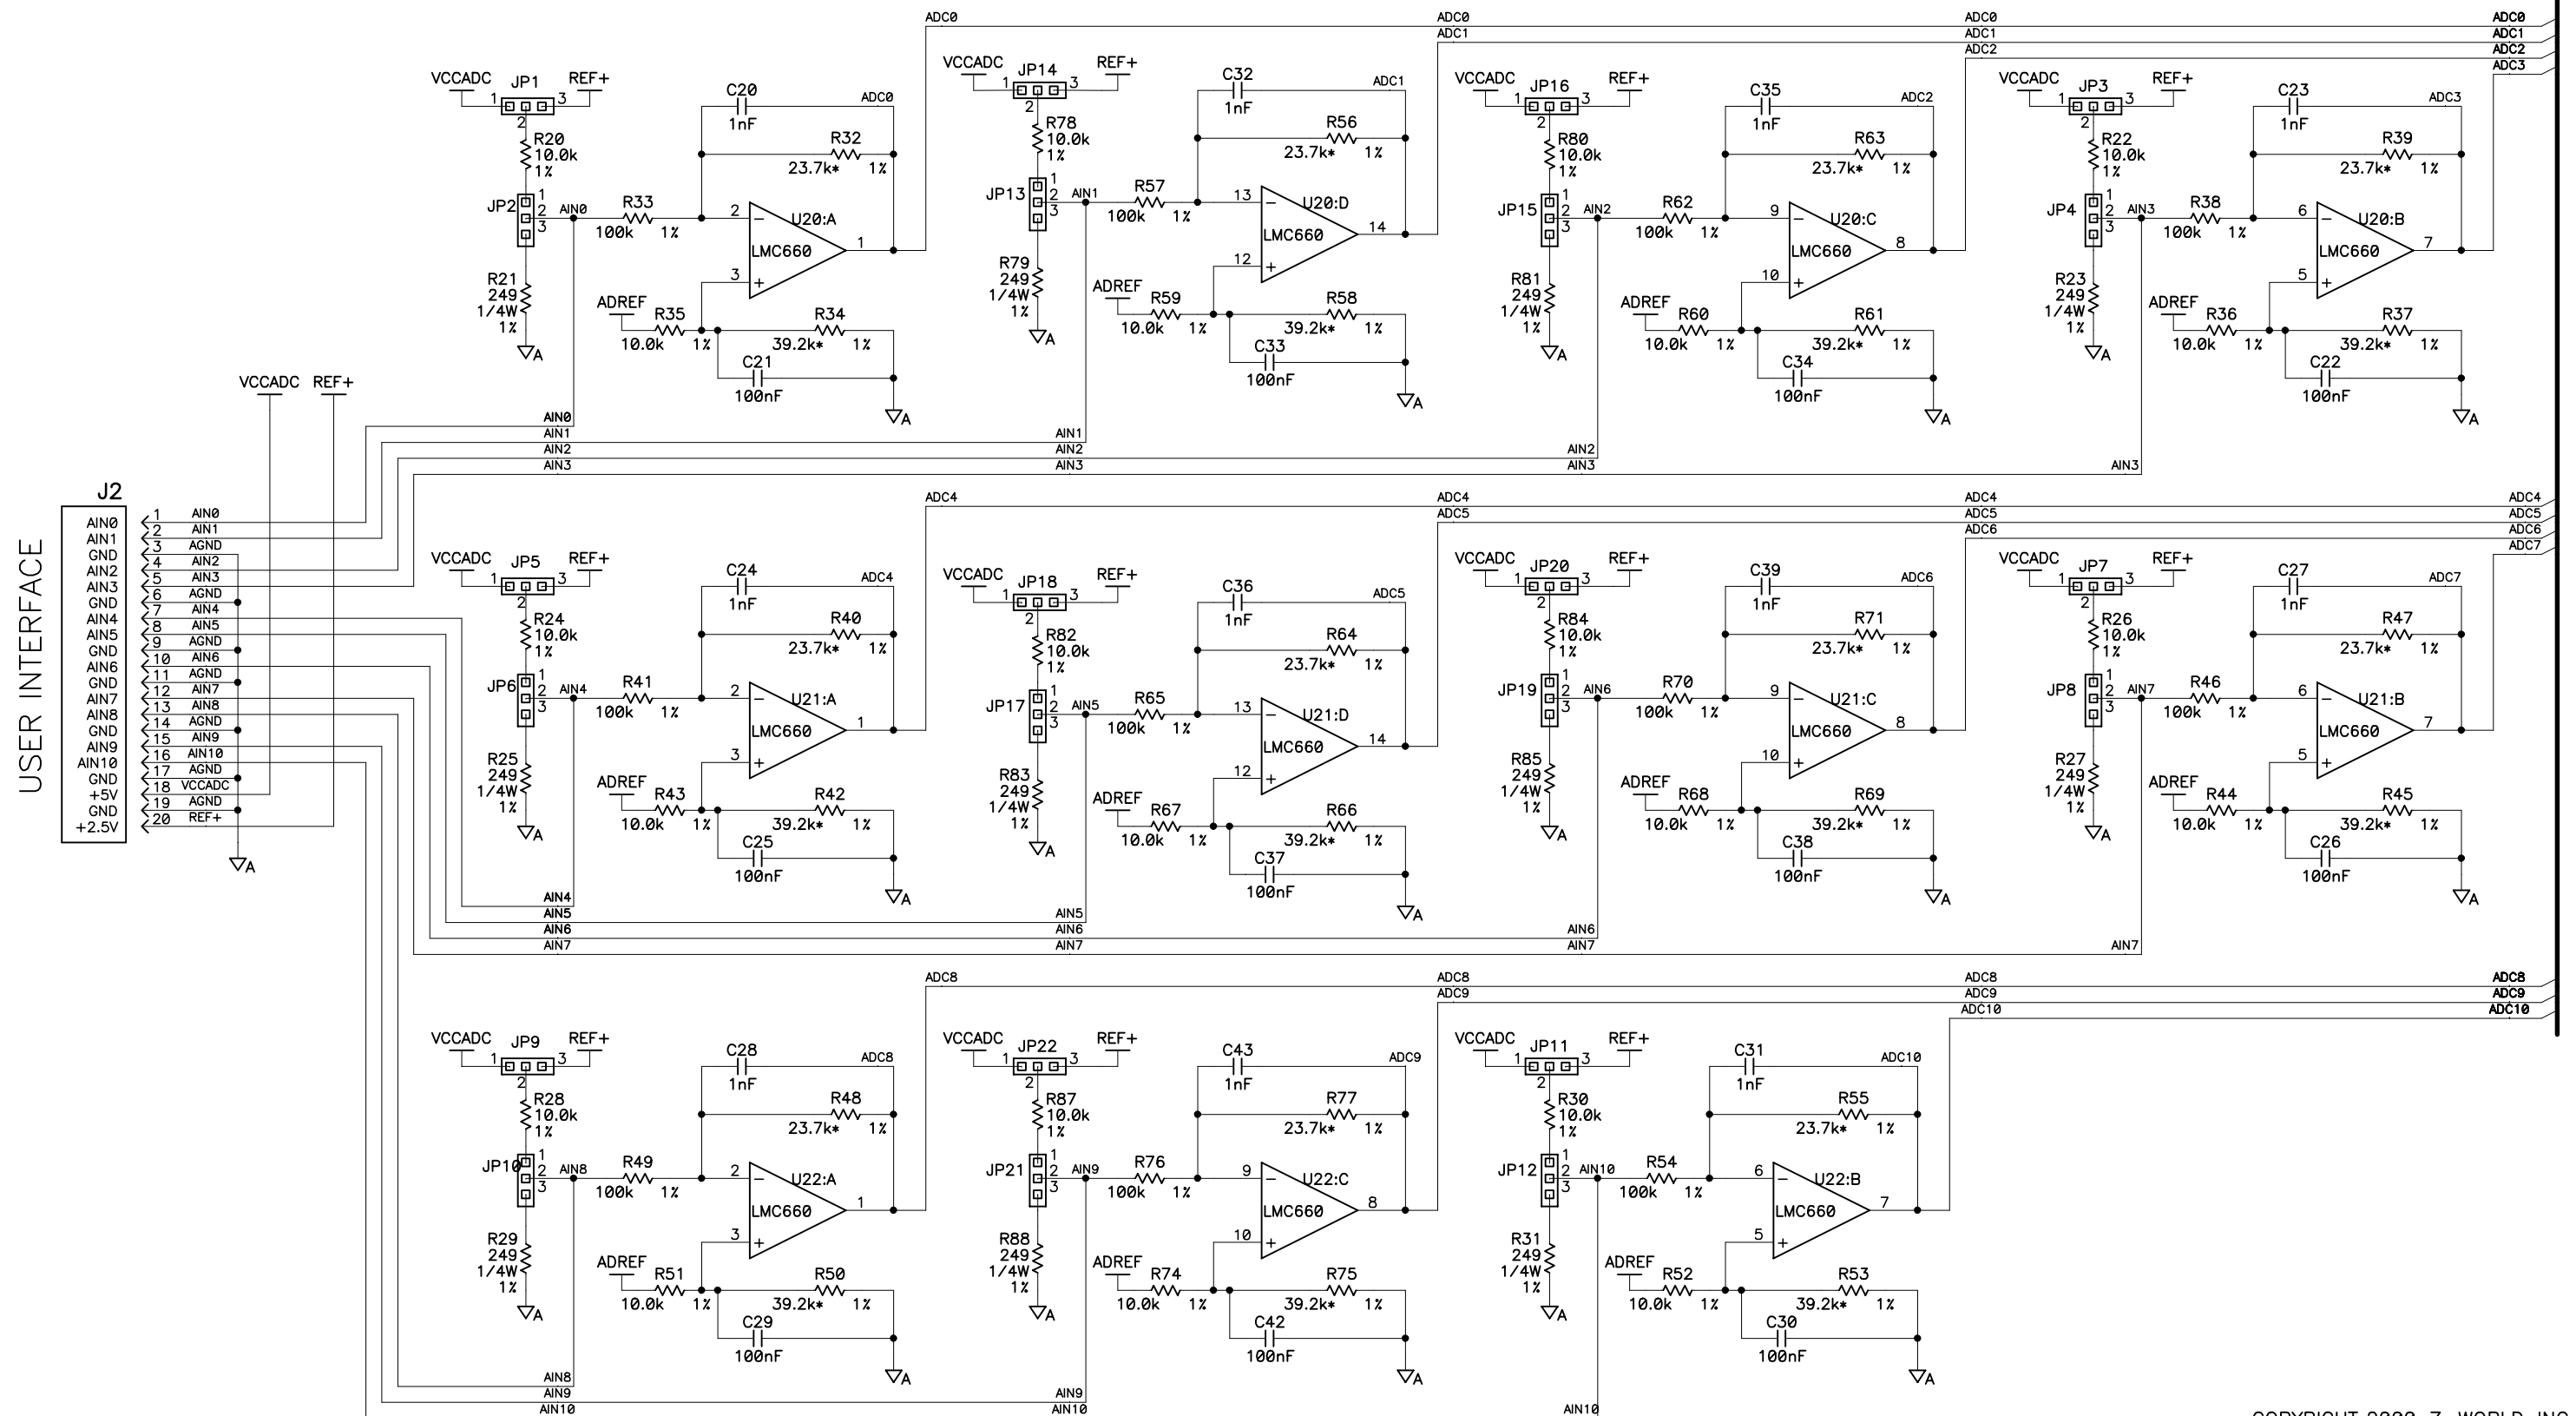

COPYRIGHT 2000, Z-WORLD, INC.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru