



# PXAC182002FC

## Thermally-Enhanced High Power RF LDMOS FET 180 W, 28 V, 1805 – 1880 MHz

### Description

The PXAC182002FC is a 180-watt LDMOS FET with an asymmetrical design intended for use in multi-standard cellular power amplifier applications in the 1805 to 1880 MHz frequency band. Features include dual-path design, input and output matching, high gain and thermally-enhanced package with earless flanges. Manufactured with Wolfspeed's advanced LDMOS process, this device provides excellent thermal performance and superior reliability.

PXAC182002FC  
Package H-37248-4

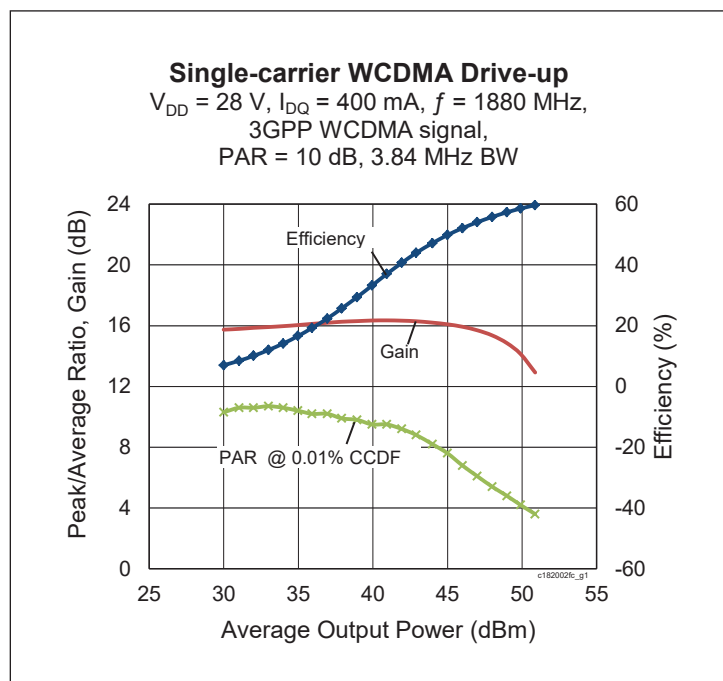

### Features

- Broadband internal input and output matching
- Asymmetrical Doherty design
  - Main: 70 W Typ ( $P_{1dB}$ )
  - Peak: 110 W Typ ( $P_{1dB}$ )
- Typical pulsed CW performance, 1880 MHz, 28 V, combined outputs
  - Output power at  $P_{3dB} = 194\text{ W}$
  - Efficiency = 64%
  - Gain = 14 dB
- Capable of handling 10:1 VSWR @ 28 V, 110 W (CW) output power
- Integrated ESD protection
- Human Body Model Class 1C (per ANSI/ESDA/ JEDEC/JS-001)
- Low thermal resistance
- Pb-free and RoHS compliant

### RF Characteristics

#### Single-carrier WCDMA Specifications (tested in Wolfspeed Doherty test fixture)

$V_{DD} = 28\text{ V}$ ,  $I_{DQ} = 400\text{ mA}$ ,  $V_{GSPEAK} = 1.1\text{ V}$ ,  $P_{OUT} = 28.2\text{ W avg}$ ,  $f = 1880\text{ MHz}$ , 3GPP signal, channel bandwidth = 3.84 MHz, peak/average = 10 dB @ 0.01% CCDF

Characteristic	Symbol	Min	Typ	Max	Unit
Gain	$G_{ps}$	15.5	16.5	—	dB
Drain Efficiency	$\eta_D$	48.5	51	—	%
Adjacent Channel Power Ratio	ACPR	—	-30	-26	dBc

All published data at  $T_{CASE} = 25^\circ\text{C}$  unless otherwise indicated

ESD: Electrostatic discharge sensitive device—observe handling precautions!

**DC Characteristics** (each side)

Characteristic	Conditions	Symbol	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	$V_{GS} = 0\text{ V}$ , $I_{DS} = 10\text{ mA}$	$V_{(BR)DSS}$	65	—	—	V
Drain Leakage Current	$V_{DS} = 28\text{ V}$ , $V_{GS} = 0\text{ V}$	$I_{DSS}$	—	—	0.1	$\mu\text{A}$
	$V_{DS} = 63\text{ V}$ , $V_{GS} = 0\text{ V}$	$I_{DSS}$	—	—	1.0	$\mu\text{A}$
On-State Resistance (main)	$V_{GS} = 10\text{ V}$ , $V_{DS} = 0.1\text{ V}$	$R_{DS(on)}$	—	0.18	—	$\Omega$
	(peak) $V_{GS} = 10\text{ V}$ , $V_{DS} = 0.1\text{ V}$	$R_{DS(on)}$	—	0.135	—	$\Omega$
Operating Gate Voltage (main)	$V_{DS} = 28\text{ V}$ , $I_{DQ} = 400\text{ mA}$	$V_{GS}$	2.55	2.65	2.75	V
	(peak) $V_{DS} = 28\text{ V}$ , $I_{DQ} = 0\text{ A}$	$V_{GS}$	0.9	1.2	1.3	V
Gate Leakage Current	$V_{GS} = 10\text{ V}$ , $V_{DS} = 0\text{ V}$	$I_{GSS}$	—	—	0.1	$\mu\text{A}$





**Maximum Ratings**

Parameter	Symbol	Value	Unit
Drain-Source Voltage	$V_{DSS}$	65	V
Gate-Source Voltage	$V_{GS}$	-6 to +10	V
Operating Voltage	$V_{DD}$	0 to +32	V
Junction Temperature	$T_J$	225	$^{\circ}\text{C}$
Storage Temperature Range	$T_{STG}$	-65 to +150	$^{\circ}\text{C}$
Thermal Resistance (main, $T_{CASE} = 70^{\circ}\text{C}$ , 28 W CW)	$R_{\theta JC}$	1.088	$^{\circ}\text{C}/\text{W}$
	(peak, $T_{CASE} = 70^{\circ}\text{C}$ , 100 W CW)	$R_{\theta JC}$	0.587

**Ordering Information**


Type and Version	Order Code	Package Description	Shipping
PXAC182002FC V1 R0	PXAC182002FC-V1-R0	H-37248-4, earless flange	Tape & Reel, 50 pcs
PXAC182002FC V1 R250	PXAC182002FC-V1-R250	H-37248-4, earless flange	Tape & Reel, 250 pcs

**Typical Performance** (data taken in a production test fixture)

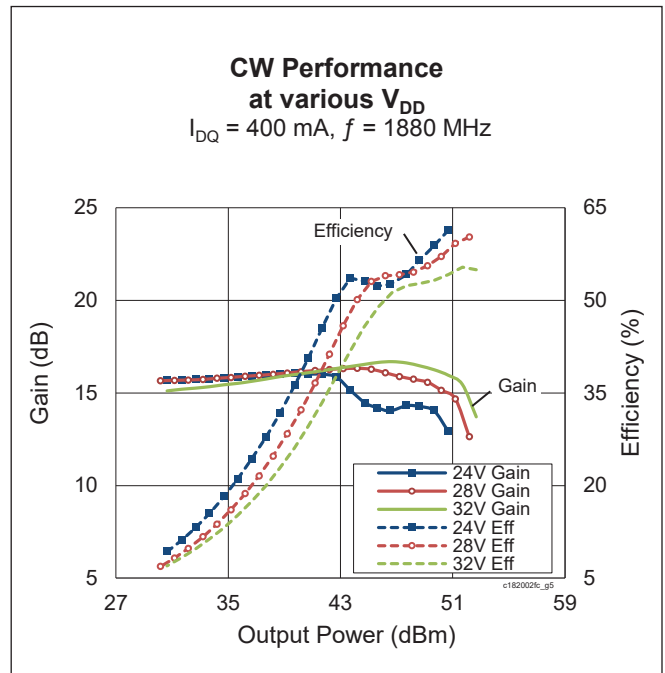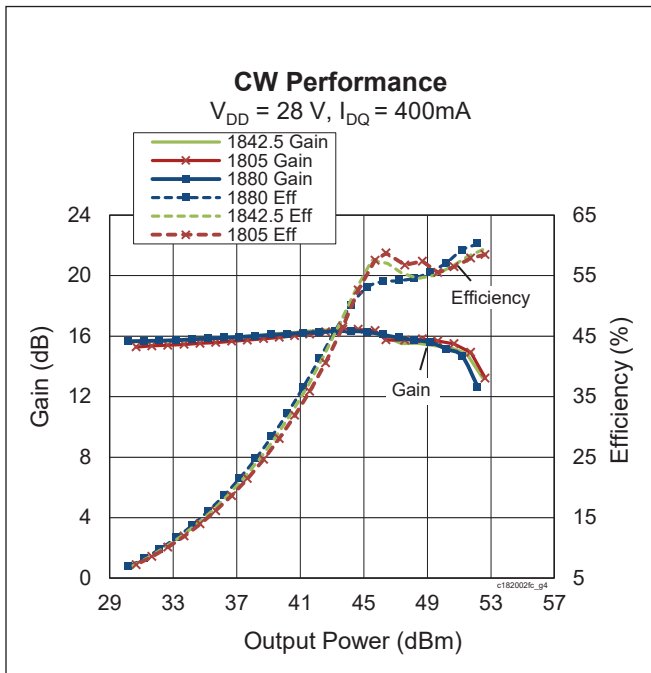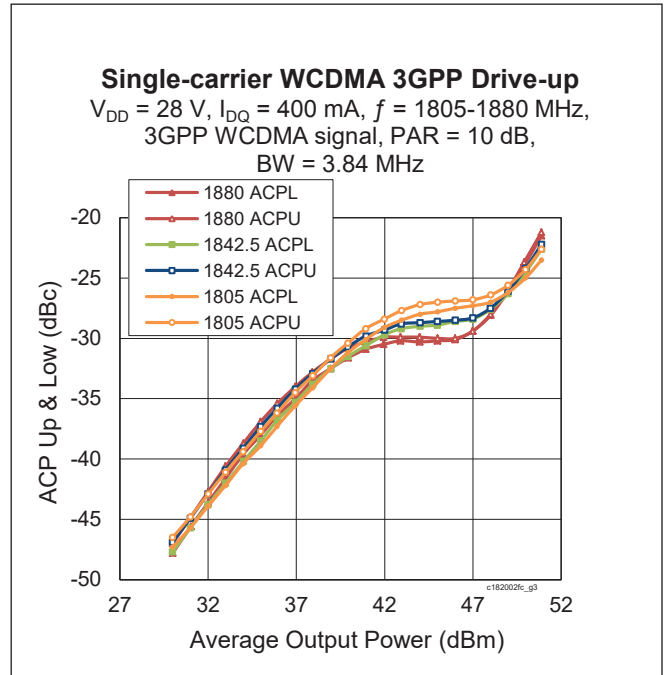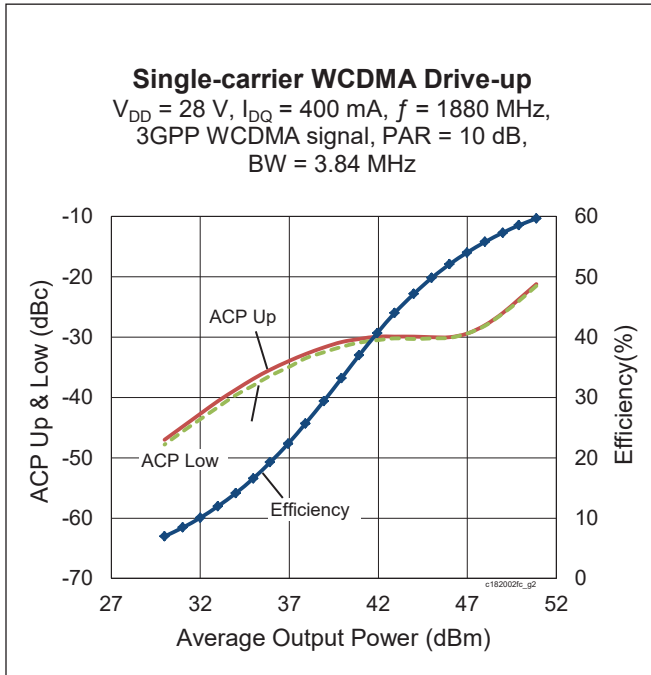



**Typical Performance** (cont.)

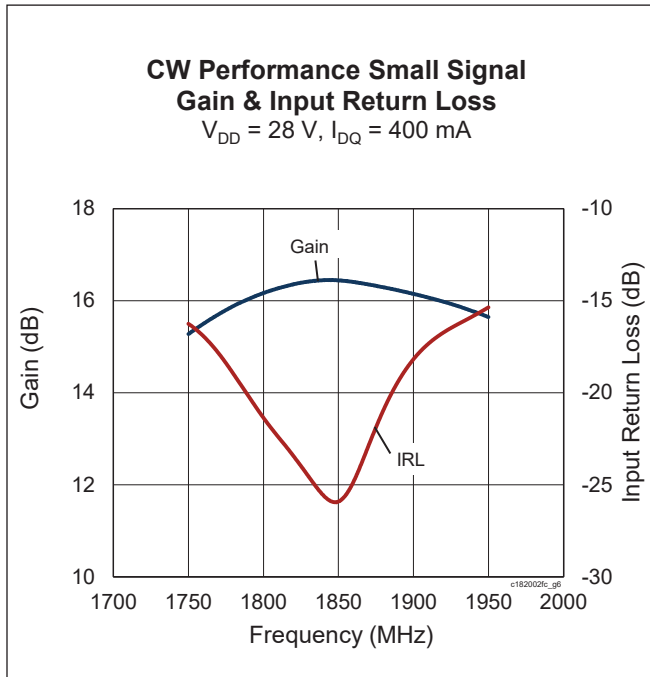

**Load Pull Performance**


**Main Side Load Pull Performance** – Pulsed CW signal: 160  $\mu\text{s}$ , 10% duty cycle, 28 V,  $I_{DQ} = 405\text{ mA}$

		<b>P<sub>1dB</sub></b>									
		<b>Max Output Power</b>					<b>Max Drain Efficiency</b>				
<b>Freq [MHz]</b>	<b>Z<sub>s</sub> [<math>\Omega</math>]</b>	<b>Z<sub>l</sub> [<math>\Omega</math>]</b>	<b>Gain [dB]</b>	<b>P<sub>OUT</sub> [dBm]</b>	<b>P<sub>OUT</sub> [W]</b>	<b><math>\eta_D</math> [%]</b>	<b>Z<sub>l</sub> [<math>\Omega</math>]</b>	<b>Gain [dB]</b>	<b>P<sub>OUT</sub> [dBm]</b>	<b>P<sub>OUT</sub> [W]</b>	<b><math>\eta_D</math> [%]</b>
1810	3.94 – j10.15	2.92 – j5.27	19.2	49.4	86	54.0	6.49 – j2.19	21.9	47.2	52	66.6
1840	5.13 – j10.93	2.93 – j4.16	19.5	49.3	85	57.6	5.82 – j2.44	21.7	47.5	56	66.3
1880	5.90 – j12.44	2.73 – j5.17	19.2	49.5	89	55.2	4.53 – j2.29	21.5	47.7	59	67.9

**Peak Side Load Pull Performance** – Pulsed CW signal: 160  $\mu\text{s}$ , 10% duty cycle, 28 V,  $I_{DQ} = 685\text{ mA}$

		<b>P<sub>1dB</sub></b>									
		<b>Max Output Power</b>					<b>Max Drain Efficiency</b>				
<b>Freq [MHz]</b>	<b>Z<sub>s</sub> [<math>\Omega</math>]</b>	<b>Z<sub>l</sub> [<math>\Omega</math>]</b>	<b>Gain [dB]</b>	<b>P<sub>OUT</sub> [dBm]</b>	<b>P<sub>OUT</sub> [W]</b>	<b><math>\eta_D</math> [%]</b>	<b>Z<sub>l</sub> [<math>\Omega</math>]</b>	<b>Gain [dB]</b>	<b>P<sub>OUT</sub> [dBm]</b>	<b>P<sub>OUT</sub> [W]</b>	<b><math>\eta_D</math> [%]</b>
1810	3.71 – j9.13	4.64 – j5.44	20.5	50.9	123	55.5	3.52 – j2.84	22.7	49.7	94	66.2
1840	4.76 – j8.65	4.66 – j5.68	20.6	50.7	117	54.5	3.39 – j3.01	23.2	49.2	84	64.1
1880	6.40 – j9.13	4.63 – j5.74	20.8	50.7	116	54.3	2.83 – j3.50	23.1	49.2	83	64.3

### Reference Circuit , 1805 – 1880 MHz

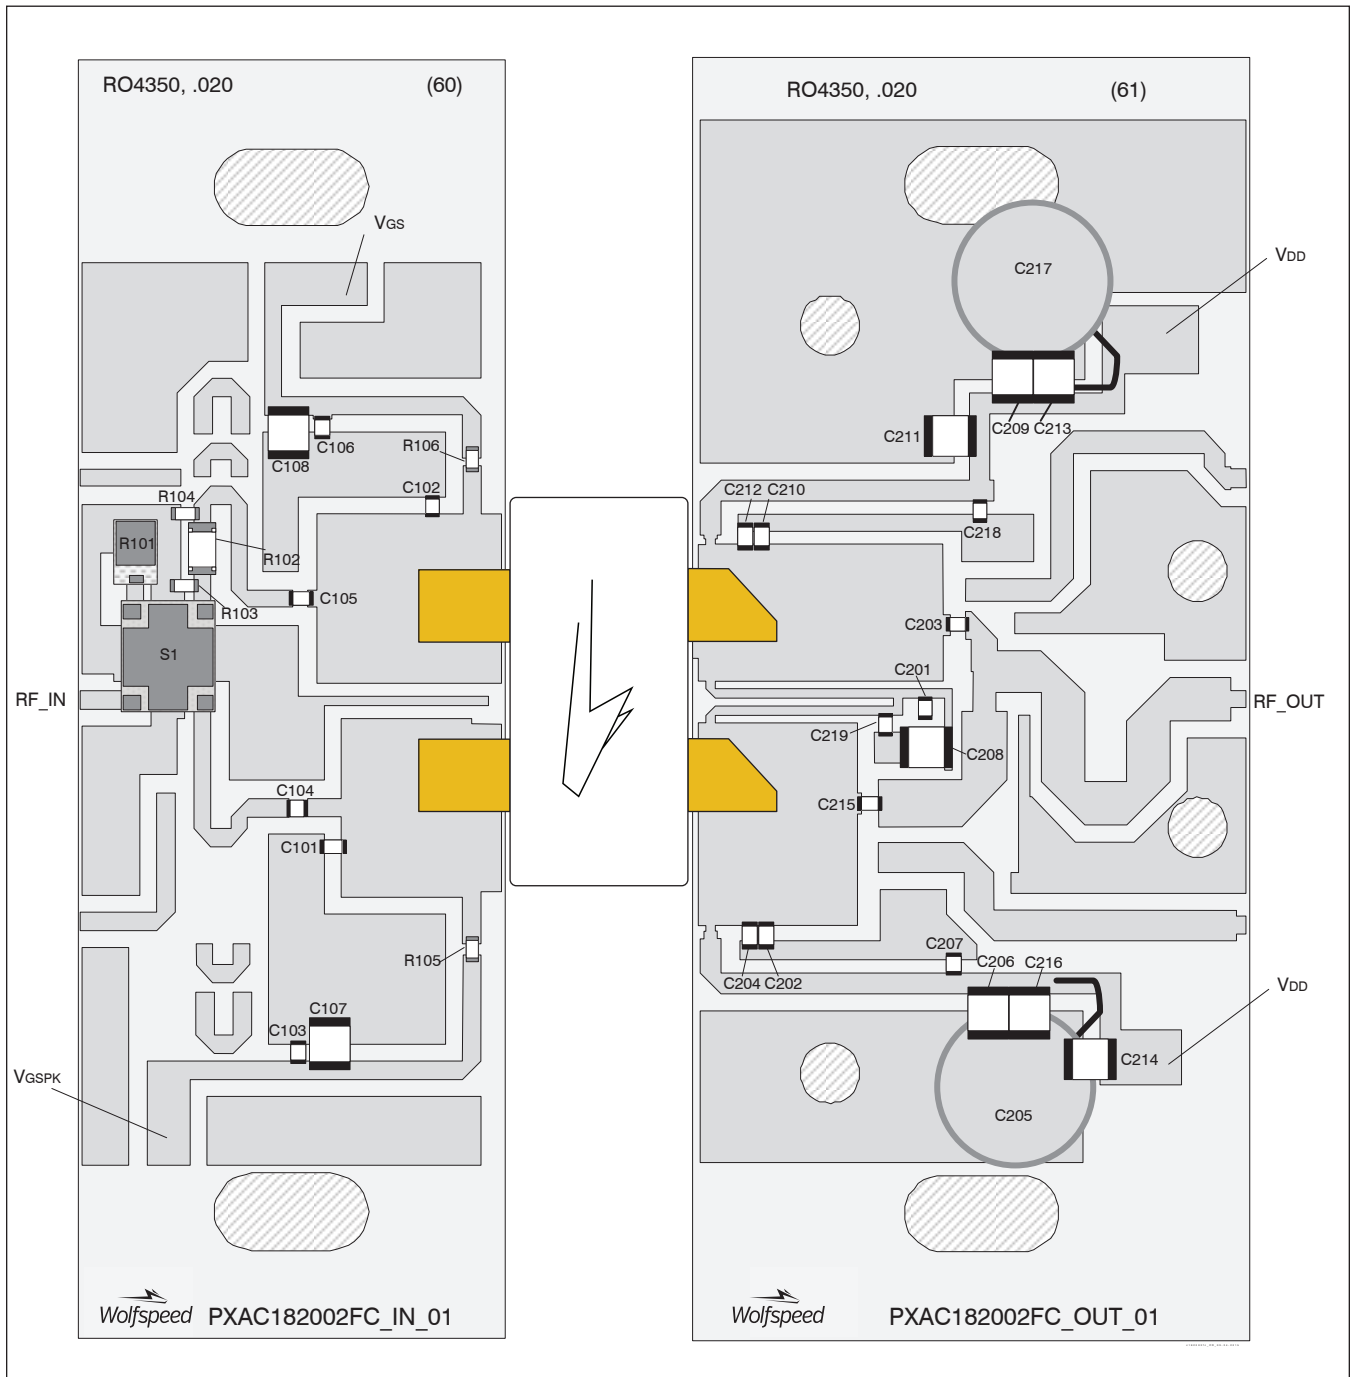

Reference circuit assembly diagram (not to scale)



**Reference Circuit** (cont.)


**Reference Circuit Assembly**

DUT	PXAC182002FC V1
Test Fixture Part No.	LTA/PXAC182002FC V1
PCB	Rogers 4350, 0.508 mm [0.020"] thick, 2 oz. copper, $\epsilon_r = 3.66$ , $f = 1805 - 1880$ MHz
Find Gerber files for this test fixture on the Wolfspeed Web site at <a href="http://www.wolfspeed.com/RF">www.wolfspeed.com/RF</a>	

**Components Information**

Component	Description	Manufacturer	P/N
<b>Input</b>			
C101	Capacitor, 1.2 pF	ATC	ATC600F1R2CW250T
C102	Capacitor, 0.5 pF	ATC	ATC600F0R5CW250T
C103, C104, C105, C106	Capacitor, 18 pF	ATC	ATC600F180JW250T
C107, C108	Capacitor, 10 $\mu$ F	Taiyo Yuden	UMK325C7106MM-T
R101	Resistor, 50 $\Omega$	Richardson	C8A50Z4A
R102	Resistor, 18 ohms	Panasonic Electronic Components	ERJ-8GEYJ180V
R103, R104	Resistor, 301 $\Omega$	Venkel	CR0603-16W-3010FT
R105, R106	Resistor, 10 $\Omega$	Panasonic Electronic Components	ERJ-3GEYJ100V
S1	Hybrid Coupler	Anaren	X3C19P1-03S
<b>Output</b>			
C201, C207, C215, C218, C219	Capacitor, 18 pF	ATC	ATC600F180JW250T
C202	Capacitor, 0.8 pF	ATC	ATC600F0R8AW250T
C203	Capacitor, 5.1 pF	ATC	ATC600F5R1AW250T
C204	Capacitor, 1.6 pF	ATC	ATC600F1R6AW250T
C205, C217	Capacitor, 220 $\mu$ F	Cornell Dubilier Electronics	SK221M050ST
C206, C208, C209, C211, C213, C214, C216	Capacitor, 10 $\mu$ F	Taiyo Yuden	UMK325C7106MM-T
C210	Capacitor, 0.5 pF	ATC	ATC600F0R5AW250T
C212	Capacitor, 1.6 pF	ATC	ATC600F1R6AW250T


**Pinout Diagram** (top view)

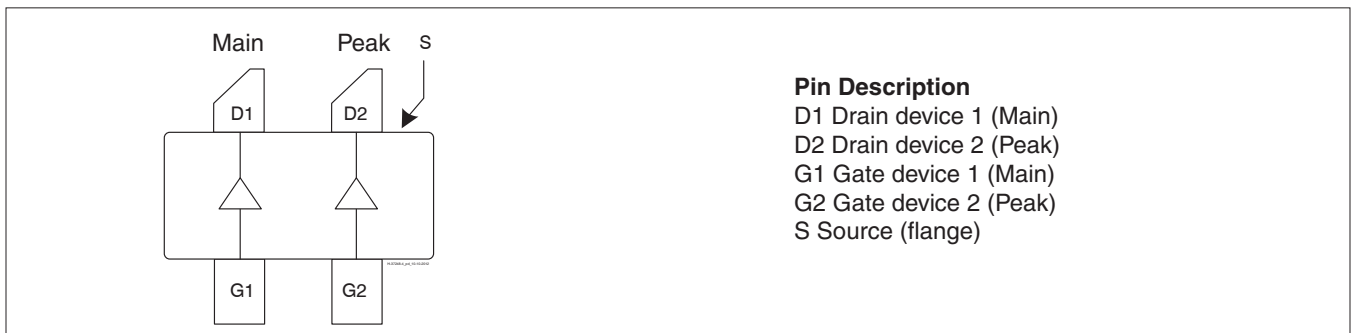

**Pin Description**  
 D1 Drain device 1 (Main)  
 D2 Drain device 2 (Peak)  
 G1 Gate device 1 (Main)  
 G2 Gate device 2 (Peak)  
 S Source (flange)

Lead connections for PXAC182002FC

Package Outline Specifications

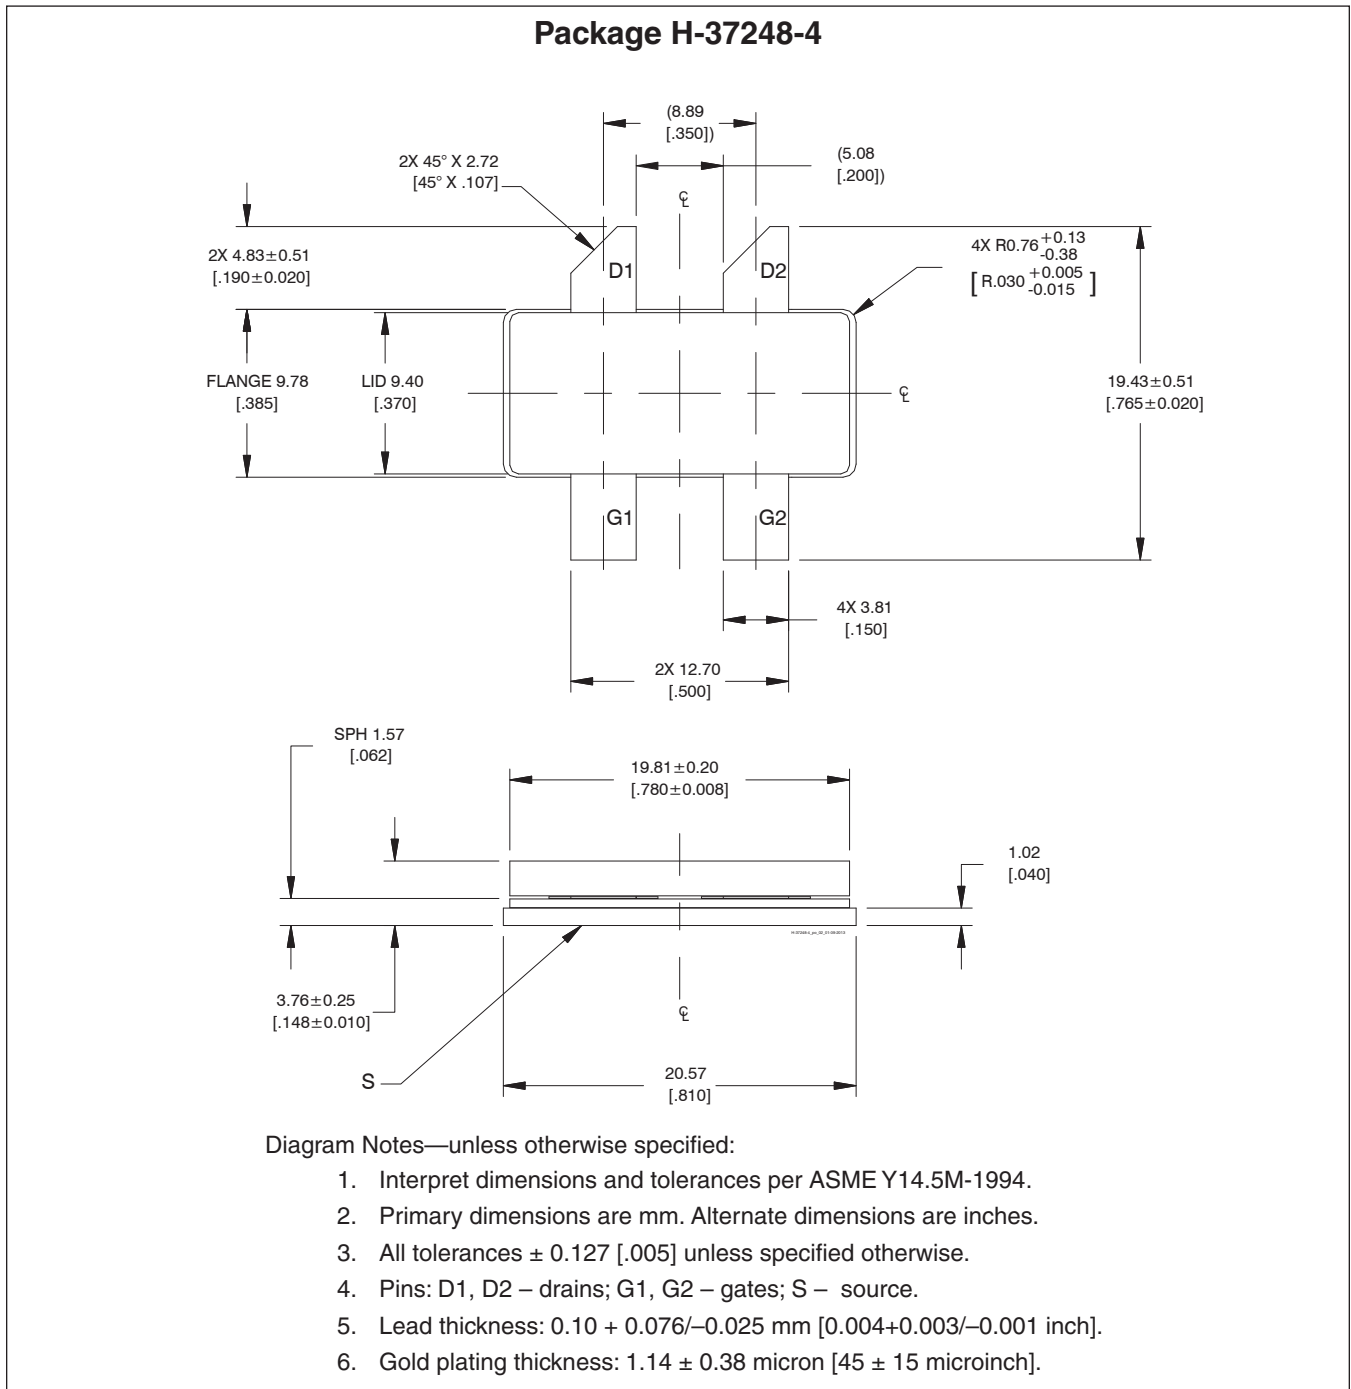

## Revision History

Revision	Date	Data Sheet Type	Page	Subjects (major changes since last revision)
01	2014-09-23	Advance	All	Data Sheet reflects advance specification for product development
02	2015-03-24	Production	All All	Data Sheet reflects released product specification Revised all data and includes updated final specs, typical performance graphs, loadpull, reference circuit, package outline
02.1	2015-05-20	Production	1	Updated single-carrier WCDMA test spec
02.2	2015-06-05	Production	1	Corrected I/O in description paragraph, removed $f_1$ from single-carrier WCDMA test spec condition
02.3	2016-06-17	Production	1, 2	Updated ESD rating and ordering information to include R0
03	2018-06-25	Production	All	Converted to Wolfspeed Data Sheet

For more information, please contact:

4600 Silicon Drive  
Durham, North Carolina, USA 27703  
[www.wolfspeed.com/RF](http://www.wolfspeed.com/RF)

Sales Contact  
[RFSales@wolfspeed.com](mailto:RFSales@wolfspeed.com)

RF Product Marketing Contact  
[RFMarketing@wolfspeed.com](mailto:RFMarketing@wolfspeed.com)  
919.407.7816

## Notes

---

### Disclaimer

Specifications are subject to change without notice. Cree, Inc. believes the information contained within this data sheet to be accurate and reliable. However, no responsibility is assumed by Cree for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Cree. Cree makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. "Typical" parameters are the average values expected by Cree in large quantities and are provided for information purposes only. These values can and do vary in different applications and actual performance can vary over time. All operating parameters should be validated by customer's technical experts for each application. Cree products are not designed, intended or authorized for use as components in applications intended for surgical implant into the body or to support or sustain life, in applications in which the failure of the Cree product could result in personal injury or death or in applications for planning, construction, maintenance or direct operation of a nuclear facility.



Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)