AVO100-36S3V3B-6L

100 Watts

Eighth-brick Converter

Total Power: 100 Watts
Input Voltage: 18 to 75 Vdc
# of Outputs: Single

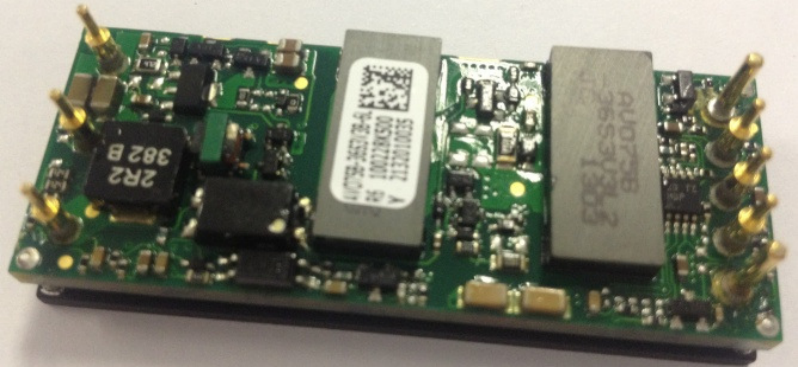

Special Features

- Delivering up to 30A output
- Ultra-high efficiency 92% typ. at full load
- Wide input range: 18V ~ 75V
- Excellent thermal performance
- No minimum load requirement
- Start-up and shut-down monotonically into any normal and pre-biased loads, internal pre-bias function circuit prevents back negative current drawn from external load
- RoHS 6 compliant
- Remote control function
- Remote output sense
- Trim function: 80% ~ 110%
- Input under voltage lockout
- Output over current protection
- Output over voltage protection
- Over temperature protection
- Industry standard eighth-brick pin-out outline
- Open frame
- Baseplate
- Pin length Option: 3.8mm

Safety

IEC/EN 60950-1
UL/TUV
GB4943
CE Marking
EN55022 Class A

Product Descriptions

The AVO100-36S3V3B-6L is a single output DC/DC converter with standard eighth-brick form factor and pin configuration. It delivers up to 30A output current with 3.3V output. Ultra-high 92% efficiency and excellent thermal performance makes it an ideal choice for use in computing and telecommunication applications and can operate over an ambient temperature range of -40 ^{O}C ~ +85 ^{O}C.

Applications

Telecom/ Datacom

ARTESYN™
EMBEDDED TECHNOLOGIES

Model Numbers

Standard	Output Voltage	Structure	Remote ON/OFF logic	RoHS Status
AVO100-36S3V3B-6L	3.3Vdc	Baseplate	Negative	R6

Ordering information

AVO100	-	36	S	3V3	P	B	-	6	L
①		②	③	④	⑤	⑥		⑦	⑧

①	Model series	AVO: high efficiency eighth brick series, 100: output power 100W
②	Input voltage	36: 18V ~ 75V input range, rated input voltage 36V
③	Output number	S: single output
④	Rated output voltage	3v3: 3.3V output
⑤	Remote ON/OFF logic	Default: negative logic; P: positive logic
⑥	Baseplate status	B: with baseplate; default: open frame
⑦	Pin length	6: 3.8mm
⑧	RoHS status	Y: RoHS, R5; L: RoHS, R6

Options

None

Electrical Specifications

Absolute Maximum Ratings

Stress in excess of those listed in the "Absolute Maximum Ratings" may cause permanent damage to the power supply. These are stress ratings only and functional operation of the unit is not implied at these or any other conditions above those given in the operational sections of this TRN. Exposure to any absolute maximum rated condition for extended periods may adversely affect the power supply's reliability.

Table 1. Absolute Maximum Ratings:

Parameter	Model	Symbol	Min	Typ	Max	Unit
Input Voltage						
Operating -Continuous	All	$V_{IN,DC}$	-	-	80	Vdc
Non-operating -100mS	All		-	-	100	Vdc
Maximum Output Power	All	$P_{O,max}$	-	-	100	W
Isolation Voltage[1]						
Input to outputs	Baseplate module		-	-	1500	Vdc
input to metal			-	-	1000	
output to metal			-	-	1000	
Ambient Operating Temperature	All	T_A	-40	-	+85	^{O}C
Storage Temperature	All	T_{STG}	-55	-	+125	^{O}C
Voltage at remote ON/OFF pin	All		-0.7	-	12	Vdc

Note 1 - 1mA for 60s, slew rate of 1500V/10s.

Input Specifications

Table 2. Input Specifications:

Parameter	Conditions	Symbol	Min	Typ	Max	Unit
Operating Input Voltage, DC	All	$V_{IN,DC}$	18	36	75	Vdc
Turn-on Voltage Threshold	$I_O = I_{O,max}$	$V_{IN,ON}$	16.6	17	18	Vdc
Turn-off Voltage Threshold	$I_O = I_{O,max}$	$V_{IN,OFF}$	15.2	16	16.6	Vdc
Lockout Voltage Hysteresis	$I_O = I_{O,max}$		1	-	3	V
Maximum Input Current ($I_O = I_{O,max}$)	$V_{IN,DC} = 18V_{DC}$	$I_{IN,max}$	-	-	7	A
No-load Input Current (V_O On, I_O = 0A)	$V_{IN,DC} = 18V_{DC}$	I_{IN,no_load}	-	0.1	-	A
Standby Input Current (V_O Off, I_O = 0A)	$V_{IN,DC} = 18V_{DC}$	I_{IN,no_load}	-	-	0.015	A
Inrush Current Transient Rating	All		-	-	1.5	A^2s
Input Reflected Ripple Current	Through 12µH inductor		-	15	-	mA
Recommended Input Fuse	Fast blow external fuse recommended		-	-	12	A
Input filter component values (C\L)	Internal values		-	2\2.2	-	µF\µH
Recommended external input capacitance	All		-	100	-	µF
Operating Efficiency	T_A=25 °C $I_O = I_{O,max}$ $I_O = 50\% I_{O,max}$	η	- -	91 92	- -	% %

Output Specifications

Table 3. Output Specifications:

Parameter		Condition	Symbol	Min	Typ	Max	Unit
Factory Set Voltage		$V_{IN,DC}$ = 36V_{DC} I_O=$I_{O,max}$	V_O	3.25	3.3	3.35	Vdc
Total Regulation		Inclusive of line, load temperature change, warm-up drift	V_O	3.2	3.3	3.4	Vdc
Output Voltage Line Regulation		All	%V_O	-	0.1	0.3	%
Output Voltage Load Regulation		All	%V_O	-	0.1	0.6	%
Output Voltage Temperature Regulation		All	%V_O	-	-	0.02	%/^{O}C
Output Voltage Trim Range		All	V_O	2.64	-	3.63	V
Output Ripple, pk-pk		Measure with a 1uF ceramic capacitor in parallel with a 10uF tantalum capacitor, 0 to 20MHz bandwidth	V_O	-	60	-	mV_{PK-PK}
Output Current		All	I_O	0	-	30	A
Output DC current-limit inception[1]		All	I_O	33	35	40	A
Vout pre-bias level		All		-	-	75	%Vo
V_O Load Capacitance[2]		All	C_O	220	-	10000	uF
V_O Dynamic Response	Peak Deviation	25% load change slew rate = 0.1A/us	±V_O T_s	- -	70 100	- -	mV uSec
	Settling Time	25% load change slew rate = 1A/us	±V_O T_s	- -	100 100	- -	mV uSec
Turn-on transient	Rise time	I_O = I_{max}	T_{rise}	-	-	50	mS
	Turn-on delay time	I_O = I_{max}	$T_{turn-on}$	-	-	30	mS
	Output voltage overshoot	I_O = 0	%V_O	-	-	5	%
Switching frequency		All	f_{SW}	300	310	320	KHz
Remote ON/OFF control (positive logic)	Off-state voltage	All		-0.7	-	1.2	V
	On-state voltage	All		3.5	-	12	V

Note 1 - Hiccup: auto-restart when over-current condition is removed.

Note 2 - High frequency and low ESR is recommended.

Output Specifications

Table 3. Output Specifications, con't:

Parameter		Condition	Symbol	Min	Typ	Max	Unit
Remote ON/OFF control (Negative logic)	Off-state voltage	All		3.5	-	12	V
	On-state voltage	All		-0.7	-	1.2	V
Output voltage remote sense range		All		-	-	0.165	V
Output over-voltage protection[3]		All	V_O	3.8	-	4.6	V
Output over-temperature protection[4]		All	T	-	110	125	^{O}C
MTBF		Telcordia SR-332 Method 1 Case3; 80% load, 300LFM, 40 ^{O}C T_A		-	1.5	-	10^6 h

Note 3 - Hiccup: auto-restart when over-voltage condition is removed.
Note 4 - Auto recovery.

AVO100-36S3V3B-6L Performance Curves

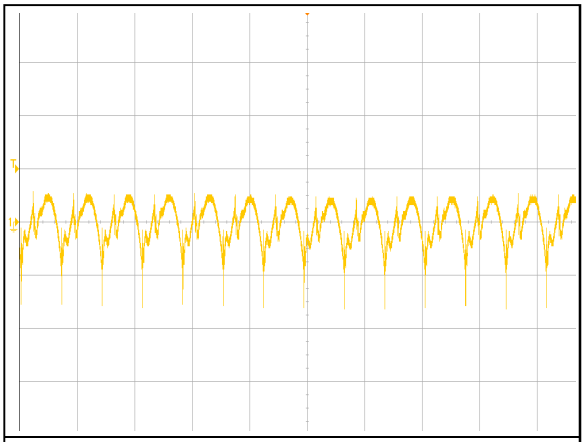

Figure 1: AVO100-36S3V3B-6L Ripple and Noise Measurement

Ch 1: Vo (5µs/div, 20mV/div)

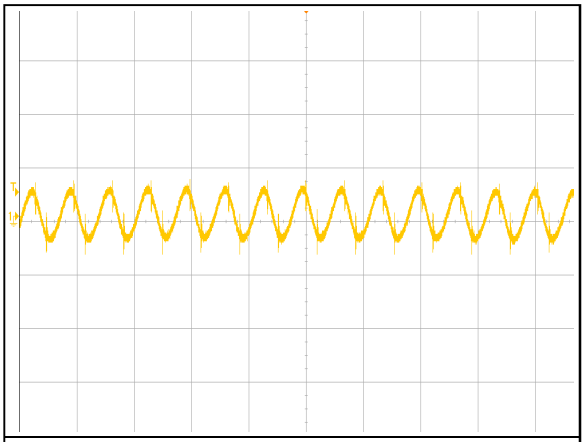

Figure 2: AVO100-36S3V3B-6L Input reflected ripple current

Ch 1: Vo (5µs/div , 10mA/div)

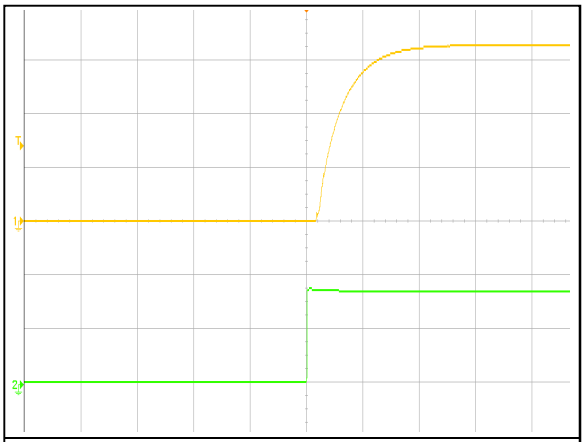

Figure 3: AVO100-36S3V3B-6L Output Voltage Startup Characteristic (50ms/div)

Ch 1: Vo (1V/div) Ch 2: Vin (20V/div)

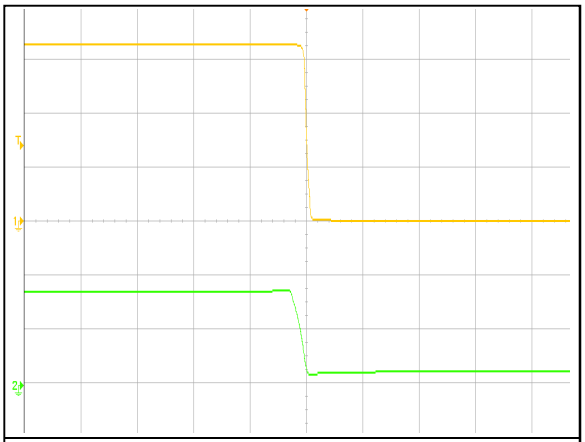

Figure 4: AVO100-36S3V3B-6L Turn Off Characteristic (2mS/div)

Ch 1: Vo (1V/div) Ch 2: Vin (20V/div)

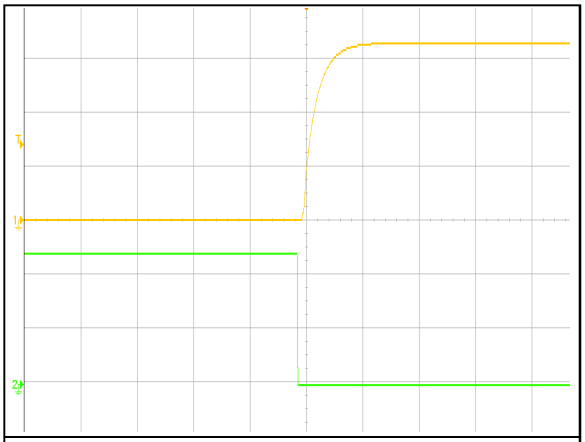

Figure 5: AVO100-36S3V3B-6L Remote ON Waveform (100mS/div)

Ch 1: Vo (1V/div) Ch 2: Remote ON (2V/div)

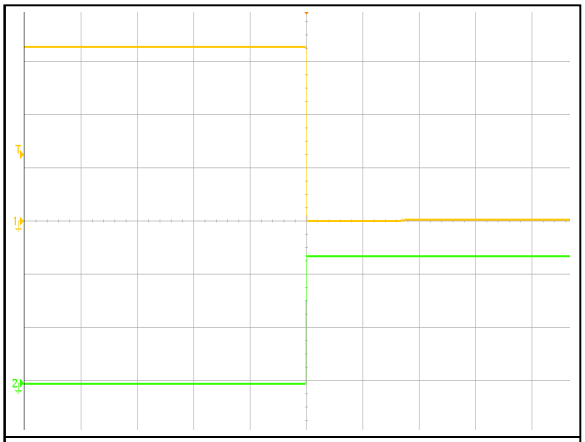

Figure 6: AVO100-36S3V3B-6L Remote OFF Waveform (50mS/div)

Ch 1: Vo (1V/div) CH2: Remote OFF (2V/div)

AVO100-36S3V3B-6L Performance Curves

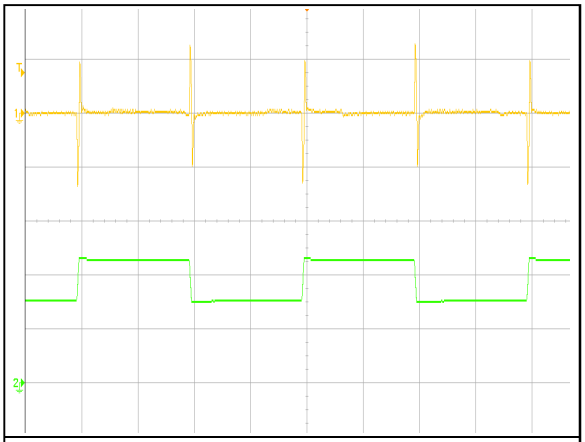

Figure 7: AVO100-36S3V3B-6L Transient Response (2mS/div)
50%~75%~50% load change, 0.1A/uS slew rate,
Ch 1: Vo (50mV/div) Ch 2: Io (10A/div)

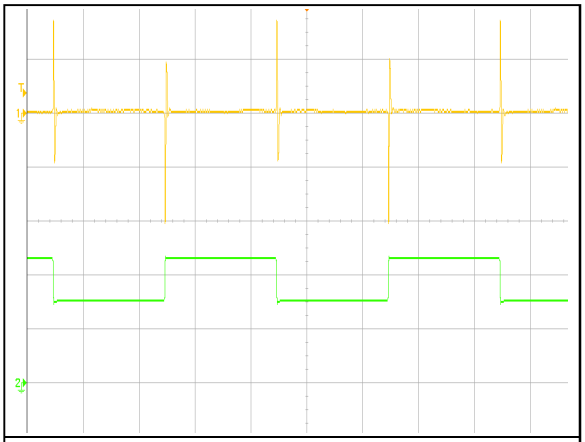

Figure 8: AVO100-36S3V3B-6L Transient Response (2mS/div)
50%~75%~50% load change, 1A/uS slew rate,
Ch 1: Vo (100mV/div) Ch 2: Io (10A/div)

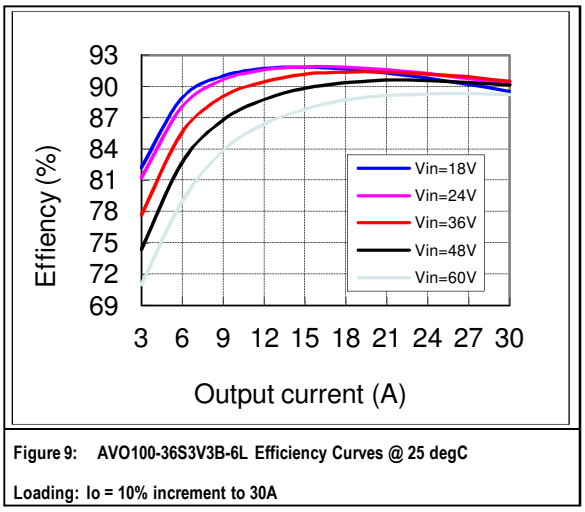

Figure 9: AVO100-36S3V3B-6L Efficiency Curves @ 25 degC

Loading: Io = 10% increment to 30A

Mechanical Specifications

Mechanical Outlines – Base plate Module

AVO100-36S3V3B-6L

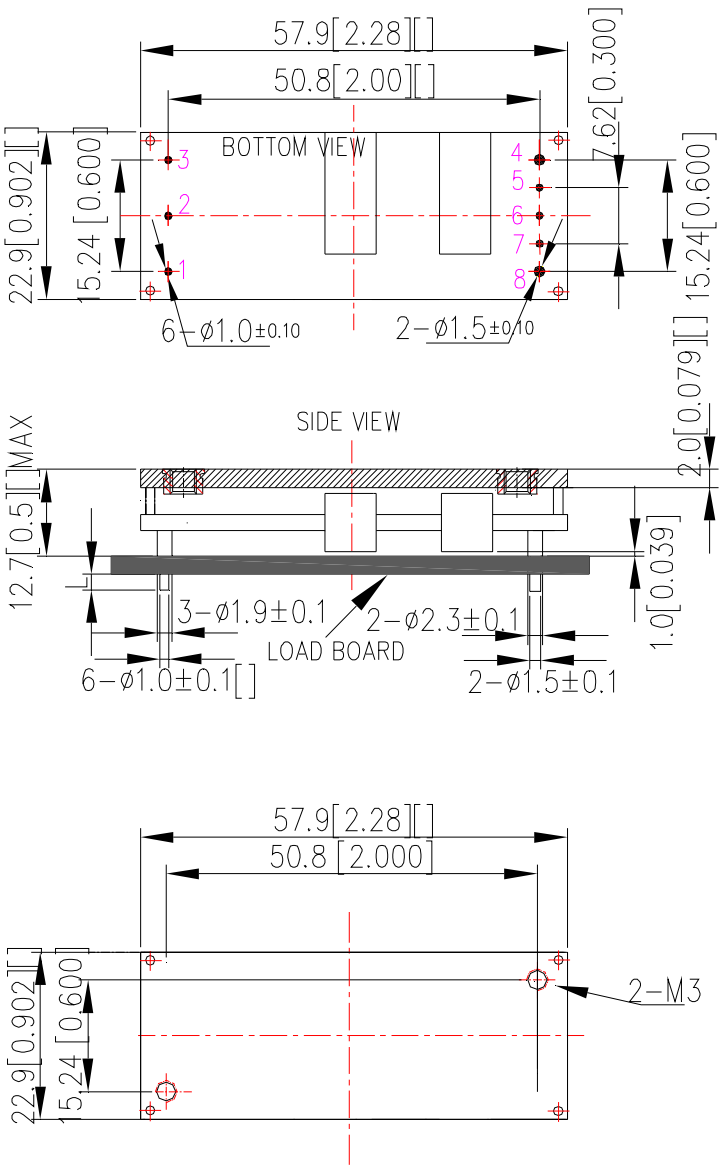

UNIT: mm[inch] BOTTOM VIEW: pin on upside

TOLERANCE: X.Xmm±0.5mm[X.X in.±0.02in.]
X.XXmm±0.25mm[X.XX in.±0.01in.]

Figure 10 Mechanical diagram

Pin Length Option

Device code suffix	L
-4	4.8mm±0.25mm
-6	3.8mm±0.25mm
-8	2.8mm±0.25mm
None	5.8mm±0.25mm

Pin Designations

Pin No	Name	Function
1	Vin+	Positive input voltage
2	Remote On/Off	Remote control
3	Vin-	Negative input voltage
4	Vo-	Negative output voltage
5	S-	Negative remote sense
6	Trim	Output voltage trim
7	S+	Positive remote sense
8	Vo+	Positive output voltage

Environmental Specifications

EMC Immunity

AVO100-36S3V3B-6L power supply is designed to meet the following EMC immunity specifications:

Table 4. Environmental Specifications:

Document	Description
EN55022, Class A Limits	Conducted and Radiated EMI Limits
IEC/EN 61000-4-2, Level 3	Immunity to Electrostatic Discharge. Enclosure Port
IEC/EN 61000-4-6, Level 2	Immunity to Continuous Conducted Interference. DC input port
IEC/EN 61000-4-4, Level3	Immunity to Electrical Fast Transient
IEC/EN 61000-4-5	Immunity to surges - 600V common mode and 600V differential mode for DC ports
EN61000-4-29	Immunity to Voltage Dips and short interruptions and voltage variations. DC input port

EMC Test Conditions

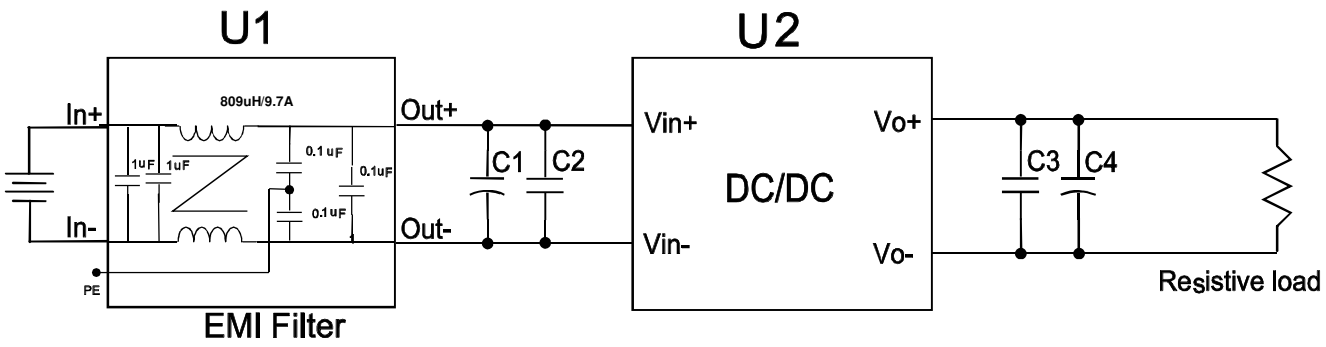

Figure 11 EMC test configuration

U1: Input EMC filter

U2: Module to test, AVO100-36S3V3B

C1 ~ C4: See Figure 18

Safety Certifications

The AVO100-36S3V3B-6L power supply is intended for inclusion in other equipment and the installer must ensure that it is in compliance with all the requirements of the end application. This product is only for inclusion by professional installers within other equipment and must not be operated as a stand alone product.

Table 5. Safety Certifications for AVO100-36S3V3B-6L power supply system

Document	File #	Description
UL/CSA 60950		US and Canada Requirements
EN60950		European Requirements
IEC60950		International Requirements
CE		CE Marking

Operating Temperature

The AVO100-36S3V3B-6L power supplies will start and operate within stated specifications at an ambient temperature from -40 ^{O}C to 85 ^{O}C under all load conditions. The storage temperature is -55 ^{O}C to 125 ^{O}C.

Thermal Considerations – Baseplate module

The converter is designed to operate in different thermal environments and sufficient cooling must be provided. Proper cooling can be verified by measuring the temperature at the test points as shown in figure 12. The temperature at this point should not exceed the max values in the table 6.

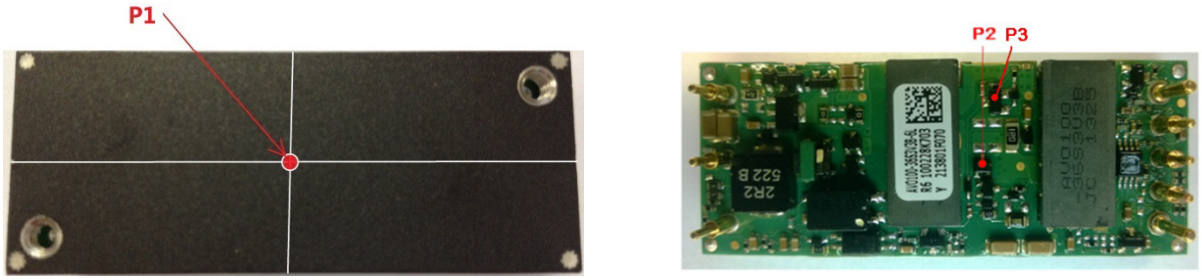

Figure 12 Temperature test point

Table 6 Temperature limit of the test points

Test Point	Temperature limit
P1	105° C
P2	120° C
P3	122° C

The converter can operate with a smaller heatsink and sufficient airflow. Figure 15 and Figure 16 shows the derating output current vs. ambient air temperature at different air velocity with a specified heatsink.

The typical test condition is shown in Figure 13 and Figure 14. Figure 17 shows the thermal image taken by a RF camera at a rated I/O condition.

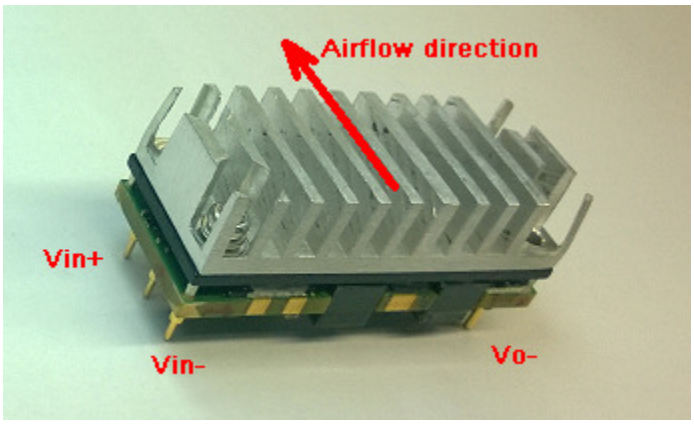

Figure 13 Typical test condition, heatsink size (L*W*H): 57.9mm*22.86*12.7mm

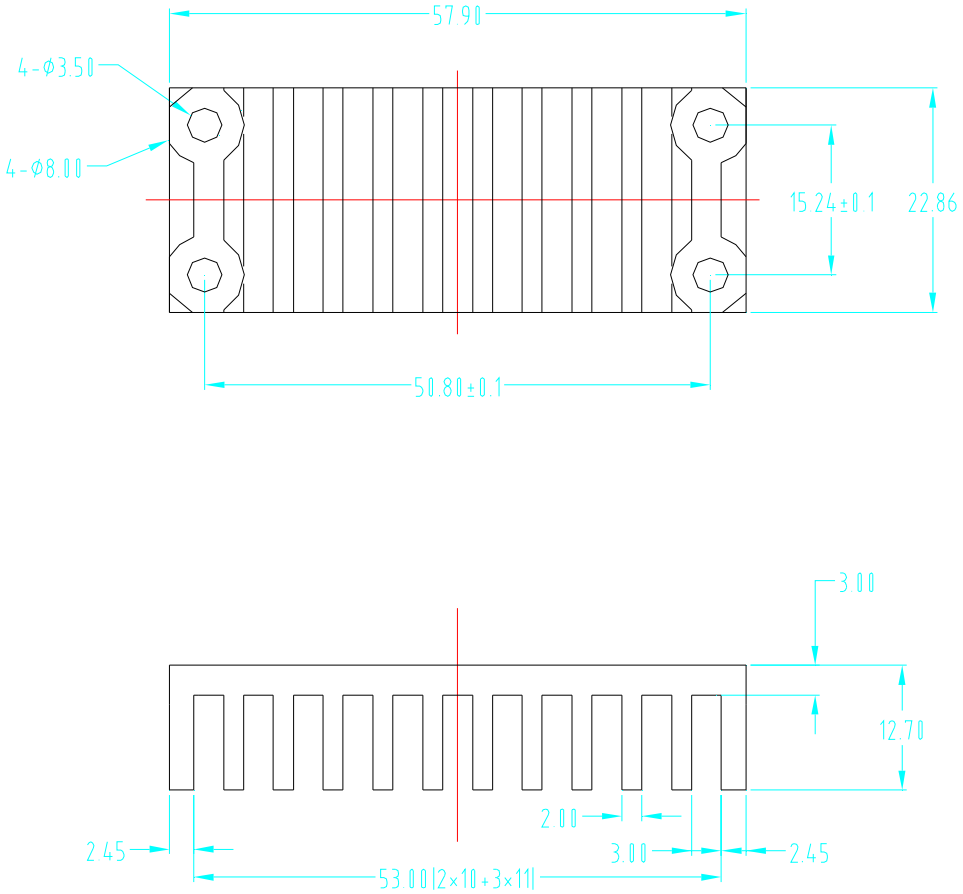

Figure 14 heatsink mechanical diargram

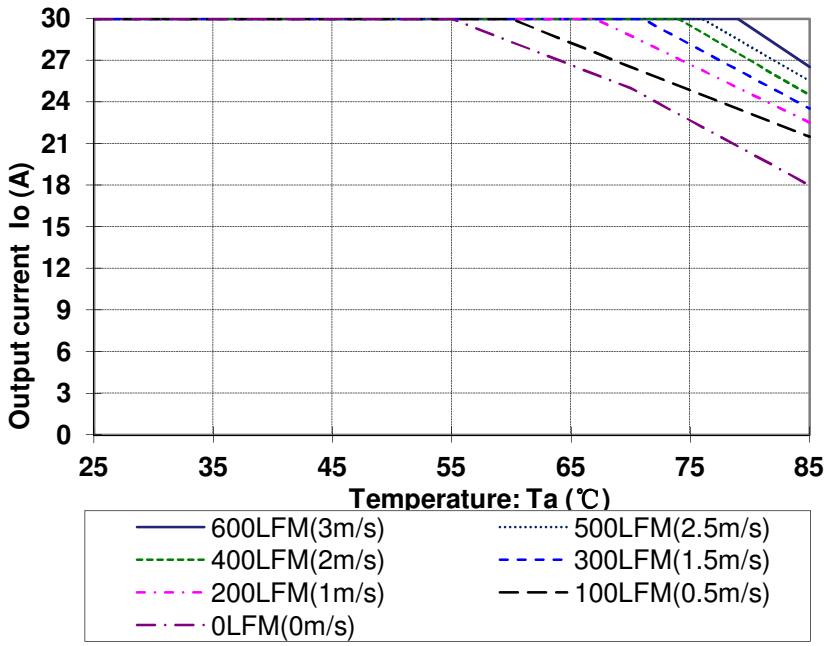

Figure 15 Output power derating, 24V_{in}, air flowing across the converter from pin 3 to pin1

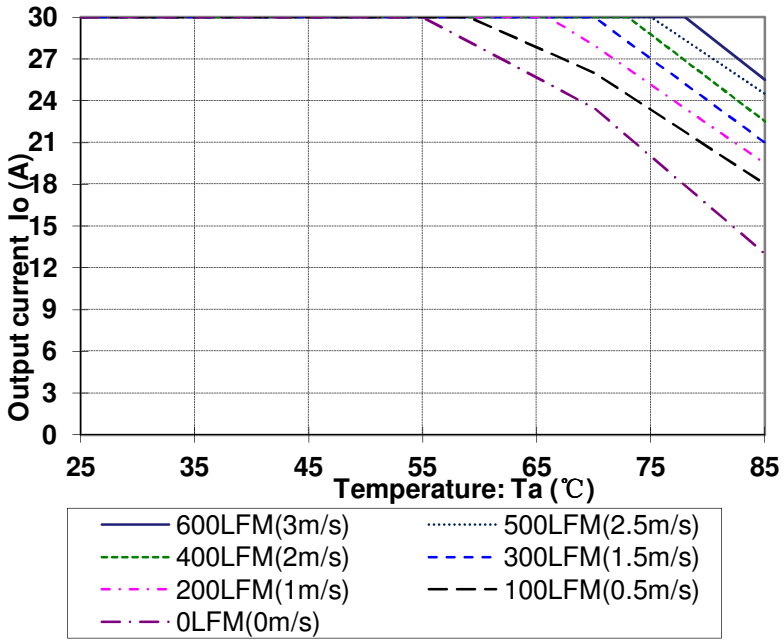

Figure 16 Output power derating, 48V_{in}， air flowing across the converter from pin 3 to pin 1

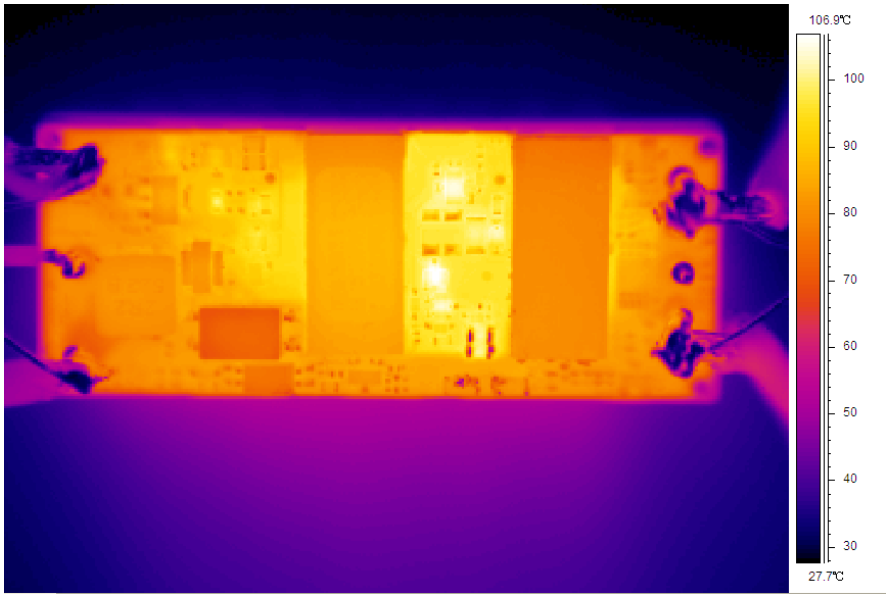

Figure 17 Thermal image, 36V_{in}, 3.3V_o, full load, room temperature, 100LFM (air flowing from pin 3 to pin 1)

Qualification Testing

Parameter	Unit (pcs)	Test condition
Halt test	4-5	$T_{a,min}$-10 ^{O}C to $T_{a,max}$+25 ^{O}C, 10 ^{O}C step, V_{in} = min to max, 0 ~ 100% load
Vibration	3	Frequency range: 5Hz ~ 20Hz, 20Hz ~ 200Hz, A.S.D: 1.0m^2/s^3, -3db/oct, axes of vibration: X/Y/Z. Time: 30min/axes
Mechanical Shock	3	30g, 6ms, 3axes, 6directions, 3time/direction
Thermal Shock	3	-40 ^{O}C to 100 ^{O}C, unit temperature 20cycles
Thermal Cycling	3	-40 ^{O}C to 85 ^{O}C, temperature change rate: 1^{O}C/min, cycles: 2cycles
Humidity	3	40 ^{O}C, 95%RH, 48h
Solder Ability	15	IPC J-STD-002C-2007

Application Notes

Typical Application

Below is the typical application of the AVO100-36S3V3B-6L power supply.

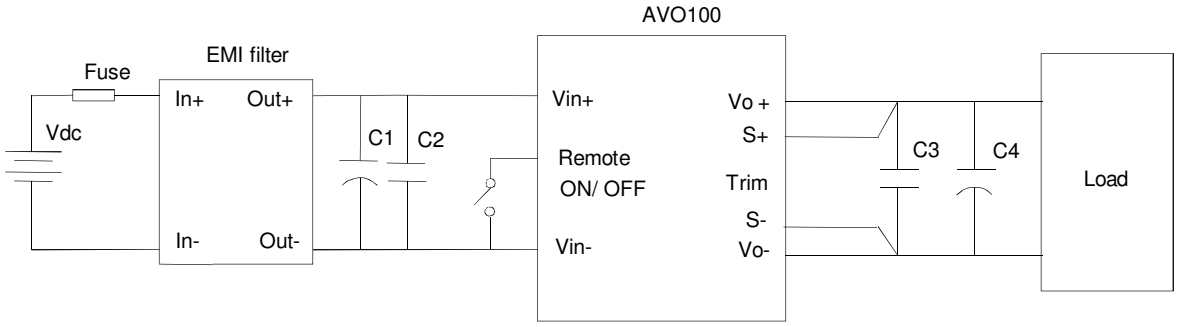

Figure 18 Typical application

C1: 100μF/100V electrolytic capacitor, P/N: UPM2A101MPD (Nichicon) or equivalent caps
C2, C3: 1μF/100V X7R ceramic capacitor, P/N: C3225X7R2A105KT0L0U (TDK) or equivalent caps
C4: 470μF/25V electrolytic capacitor, P/N: UPM1E471MED (Nichicon) or equivalent caps
Note: If ambient temperature is below -5° C, additional 220μF tantalum capacitor (Low ESR, ESR≤100mΩ) is needed for output.
Fuse: External fast blow fuse with a rating of 10A/250Vac. The recommended fuse model is 0314010.MXP from Littlefuse Far East Pte LTD.

Remote ON/OFF

Either positive or negative remote ON/OFF logic is available in AVO100-36S3V3B-6L. The logic is CMOS and TTL compatible. Below is the detailed internal circuit and reference in AVO100-36S3V3B-6L.

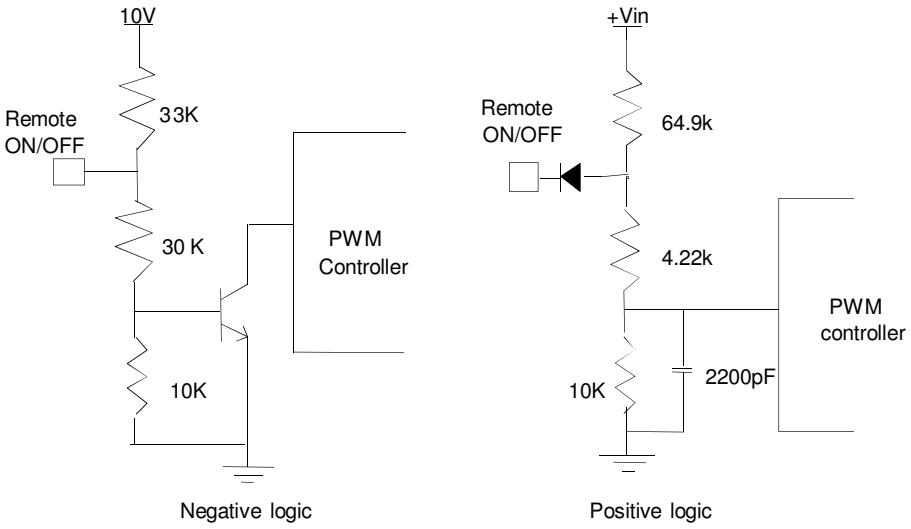

Figure 19 Remote ON/OFF internal diagram

The voltage between pin Remote ON/OFF and pin Vin- must not exceed the range listed in table “Feature characteristics” to ensure proper operation. The external Remote ON/OFF circuit is highly recommended as shown in figure 20.

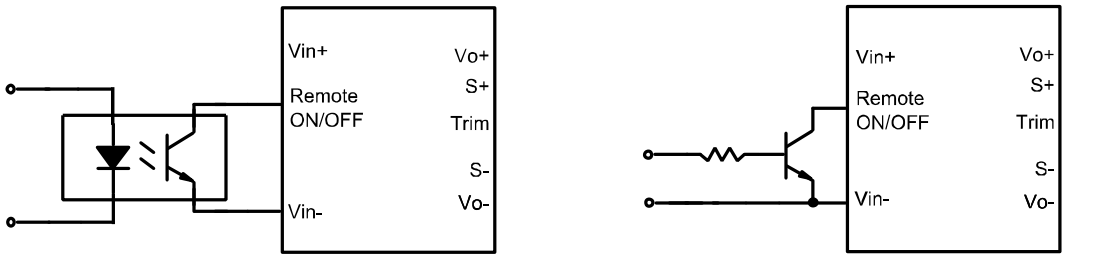

Isolated remote ON/OFF circuit

non-isolated remote ON/OFF circuit

Figure 20 External Remote ON/OFF circuit

Trim Characteristics

Connecting an external resistor between Trim pin and Vo- pin will decrease the output voltage. While connecting it between Trim and Vo+ will increase the output voltage. The following equations determine the external resistance to obtain the trimmed output voltage.

$$R_{adj-down} = \frac{510}{\Delta} - 10.2(K\Omega)$$

$$R_{adj-up} = \frac{5.1 \times V_{nom} \times (100 + \Delta)}{1.225 \times \Delta} - \frac{510}{\Delta} - 10.2(K\Omega)$$

△:Output e rate against nominal output voltage.

$$\Delta = \frac{100 \times (V_{nom} - V_0)}{V_{nom}}$$

V_{nom}: Nominal output voltage.

For example, to get 3.63V output, the trimming resistor is

$$\Delta = \frac{100 \times (V_{nom} - V_0)}{V_{nom}} = \frac{100 \times (3.63 - 3.3)}{3.3} = 10$$

$$R_{adj-up} = \frac{5.1 \times 3.3 \times (100 + 10)}{1.225 \times 10} - \frac{510}{10} - 10.2 = 89.9(K\Omega)$$

The output voltage can also be trimmed by potential applied at the Trim pin.

$$V_O = (V_{trim} + 1.225) \times 1.347$$

Where V_{trim} is the potential applied at the Trim pin, and V_o is the desired output voltage.

When trimming up, the output current should be decreased accordingly so as not to exceed the maximum output power.

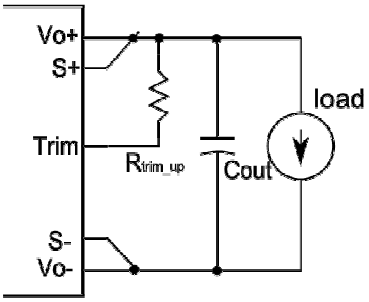

Figure 21 Trim up



Figure 22 Trim down

Input Ripple & Output Ripple & Noise Test Configuration

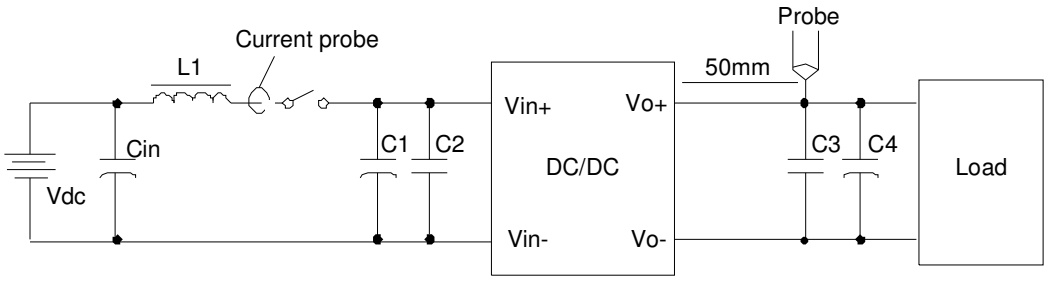

Figure 23 Input ripple & output ripple & noise test configuration

Vdc: DC power supply

L1: 12uH

Cin: 220uF/100V typical

C1 ~ C4: See Figure 18

Note - Using a coaxial cable with series 50ohm resistor and 0.68uF ceramic capacitor or a ground ring of probe to test output ripple & noise is recommended.

Sense Characteristics

If the load is far from the unit, connect S+ and S- to the terminals of the load respectively to compensate the voltage drop on the transmission line. See Figure 18.

If the sense compensation function is not necessary, connect S+ to V_o+ and S- to V_o- directly.

Soldering

The product is intended for standard manual or wave soldering.

When wave soldering is used, the temperature on pins is specified to maximum 255 ^{O}C for maximum 7s.

When soldering by hand, the iron temperature should be maintained at 300 ^{O}C ~ 380 ^{O}C and applied to the converter pins for less than 10s. Longer exposure can cause internal damage to the converter.

Cleaning of solder joint can be performed with cleaning solvent IPA or similative.

.

Hazardous Substances Announcement (RoHS of China)

Parts	Hazardous Substances					
	Pb	Hg	Cd	Cr^{6+}	PBB	PBDE
AVO100-36S3V3B-6L	x	x	x	x	x	x

x: Means the content of the hazardous substances in all the average quality materials of the part is within the limits specified in SJ/T-11363-2006

√: Means the content of the hazardous substances in at least one of the average quality materials of the part is outside the limits specified in SJ/T11363-2006

Artesyn Embedded Technologies has been committed to the design and manufacturing of environment-friendly products. It will reduce and eventually eliminate the hazardous substances in the products through unremitting efforts in research. However, limited by the current technical level, the following parts still contain hazardous substances due to the lack of reliable substitute or mature solution:

1. Solders (including high-temperature solder in parts) contain plumbum.
2. Glass of electric parts contains plumbum.
3. Copper alloy of pins contains plumbum

WORLDWIDE OFFICES

Americas
2900 S.Diablo Way
Tempe, AZ 85282
USA
+1 888 412 7832

Europe (UK)
Waterfront Business Park
Merry Hill, Dudley
West Midlands, DY5 1LX
United Kingdom
+44 (0) 1384 842 211

Asia (HK)
14/F, Lu Plaza
2 Wing Yip Street
Kwun Tong, Kowloon
Hong Kong
+852 2176 3333

ARTESYN™
EMBEDDED TECHNOLOGIES

www.artesyn.com

For more information: **www.artesyn.com/power**
For support: **productsupport.ep@artesyn.com**

While every precaution has been taken to ensure accuracy and completeness in this literature, Artesyn Embedded Technologies assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions. Artesyn Embedded Technologies, Artesyn and the Artesyn Embedded Technologies logo are trademarks and service marks of Artesyn Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners.
© 2014 All rights reserved.

LifeElectronics
Живое партнерство

ООО «ЛайфЭлектроникс» **“LifeElectronics” LLC**

ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- *Конкурентоспособные цены и скидки постоянным клиентам.*
- *Специальные условия для постоянных клиентов.*
- *Подбор аналогов.*
- *Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.*

- *Приемлемые сроки поставки, возможна ускоренная поставка.*
- *Доставку товара в любую точку России и стран СНГ.*
- *Комплексную поставку.*
- *Работу по проектам и поставку образцов.*
- *Формирование склада под заказчика.*

- *Сертификаты соответствия на поставляемую продукцию (по желанию клиента).*
- *Тестирование поставляемой продукции.*
- *Поставку компонентов, требующих военную и космическую приемку.*
- *Входной контроль качества.*
- *Наличие сертификата ISO.*

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- *Регистрацию проекта у производителя компонентов.*
- *Техническую поддержку проекта.*
- *Защиту от снятия компонента с производства.*
- *Оценку стоимости проекта по компонентам.*
- *Изготовление тестовой платы монтаж и пусконаладочные работы.*

Тел: +7 (812) 336 43 04 (многоканальный)
Email: org@lifeelectronics.ru

www.lifeelectronics.ru