

## AVO100-36S3V3B-6L

**100 Watts**

**Eighth-brick Converter**


**Total Power:** 100 Watts  
**Input Voltage:** 18 to 75 Vdc  
**# of Outputs:** Single

### Special Features

- Delivering up to 30A output
- Ultra-high efficiency 92% typ. at full load
- Wide input range: 18V ~ 75V
- Excellent thermal performance
- No minimum load requirement
- Start-up and shut-down monotonically into any normal and pre-biased loads, internal pre-bias function circuit prevents back negative current drawn from external load
- RoHS 6 compliant
- Remote control function
- Remote output sense
- Trim function: 80% ~ 110%
- Input under voltage lockout
- Output over current protection
- Output over voltage protection
- Over temperature protection
- Industry standard eighth-brick pin-out outline
- Open frame
- Baseplate
- Pin length Option: 3.8mm

### Safety

IEC/EN 60950-1  
UL/TUV  
GB4943  
CE Marking  
EN55022 Class A

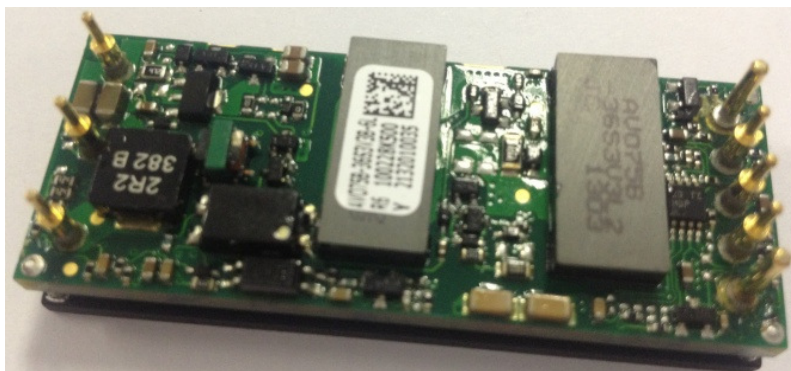

### Product Descriptions

The AVO100-36S3V3B-6L is a single output DC/DC converter with standard eighth-brick form factor and pin configuration. It delivers up to 30A output current with 3.3V output. Ultra-high 92% efficiency and excellent thermal performance makes it an ideal choice for use in computing and telecommunication applications and can operate over an ambient temperature range of -40 °C ~ +85 °C.

### Applications

Telecom/ Datacom

## Model Numbers

| Standard          | Output Voltage | Structure | Remote ON/OFF logic | RoHS Status |
|-------------------|----------------|-----------|---------------------|-------------|
| AVO100-36S3V3B-6L | 3.3Vdc         | Baseplate | Negative            | R6          |

## Ordering information

|        |   |    |   |     |   |   |   |   |   |
|--------|---|----|---|-----|---|---|---|---|---|
| AVO100 | - | 36 | S | 3V3 | P | B | - | 6 | L |
| ①      |   | ②  | ③ | ④   | ⑤ | ⑥ |   | ⑦ | ⑧ |

|   |                      |                                                                  |
|---|----------------------|------------------------------------------------------------------|
| ① | Model series         | AVO: high efficiency eighth brick series, 100: output power 100W |
| ② | Input voltage        | 36: 18V ~ 75V input range, rated input voltage 36V               |
| ③ | Output number        | S: single output                                                 |
| ④ | Rated output voltage | 3v3: 3.3V output                                                 |
| ⑤ | Remote ON/OFF logic  | Default: negative logic; P: positive logic                       |
| ⑥ | Baseplate status     | B: with baseplate; default: open frame                           |
| ⑦ | Pin length           | 6: 3.8mm                                                         |
| ⑧ | RoHS status          | Y: RoHS, R5; L: RoHS, R6                                         |

## Options

None

## Electrical Specifications

### Absolute Maximum Ratings

Stress in excess of those listed in the “Absolute Maximum Ratings” may cause permanent damage to the power supply. These are stress ratings only and functional operation of the unit is not implied at these or any other conditions above those given in the operational sections of this TRN. Exposure to any absolute maximum rated condition for extended periods may adversely affect the power supply’s reliability.

Table 1. Absolute Maximum Ratings:

| Parameter                      | Model            | Symbol      | Min  | Typ | Max  | Unit |
|--------------------------------|------------------|-------------|------|-----|------|------|
| Input Voltage                  | All              | $V_{IN,DC}$ | -    | -   | 80   | Vdc  |
| Operating -Continuous          | All              |             | -    | -   | 100  | Vdc  |
| Non-operating -100mS           |                  |             |      |     |      |      |
| Maximum Output Power           | All              | $P_{O,max}$ | -    | -   | 100  | W    |
| Isolation Voltage <sup>1</sup> | Baseplate module |             | -    | -   | 1500 | Vdc  |
| Input to outputs               |                  |             | -    | -   | 1000 |      |
| input to metal                 |                  |             | -    | -   | 1000 |      |
| output to metal                |                  |             |      |     |      |      |
| Ambient Operating Temperature  | All              | $T_A$       | -40  | -   | +85  | °C   |
| Storage Temperature            | All              | $T_{STG}$   | -55  | -   | +125 | °C   |
| Voltage at remote ON/OFF pin   | All              |             | -0.7 | -   | 12   | Vdc  |

Note 1 - 1mA for 60s, slew rate of 1500V/10s.

## Input Specifications

Table 2. Input Specifications:

| Parameter                                          | Conditions                                                       | Symbol            | Min  | Typ   | Max   | Unit             |
|----------------------------------------------------|------------------------------------------------------------------|-------------------|------|-------|-------|------------------|
| Operating Input Voltage, DC                        | All                                                              | $V_{IN,DC}$       | 18   | 36    | 75    | Vdc              |
| Turn-on Voltage Threshold                          | $I_O = I_{O,max}$                                                | $V_{IN,ON}$       | 16.6 | 17    | 18    | Vdc              |
| Turn-off Voltage Threshold                         | $I_O = I_{O,max}$                                                | $V_{IN,OFF}$      | 15.2 | 16    | 16.6  | Vdc              |
| Lockout Voltage Hysteresis                         | $I_O = I_{O,max}$                                                |                   | 1    | -     | 3     | V                |
| Maximum Input Current<br>( $I_O = I_{O,max}$ )     | $V_{IN,DC} = 18V_{DC}$                                           | $I_{IN,max}$      | -    | -     | 7     | A                |
| No-load Input Current<br>( $V_O$ On, $I_O = 0A$ )  | $V_{IN,DC} = 18V_{DC}$                                           | $I_{IN,no\_load}$ | -    | 0.1   | -     | A                |
| Standby Input Current<br>( $V_O$ Off, $I_O = 0A$ ) | $V_{IN,DC} = 18V_{DC}$                                           | $I_{IN,no\_load}$ | -    | -     | 0.015 | A                |
| Inrush Current Transient Rating                    | All                                                              |                   | -    | -     | 1.5   | A <sup>2</sup> s |
| Input Reflected Ripple Current                     | Through 12μH inductor                                            |                   | -    | 15    | -     | mA               |
| Recommended Input Fuse                             | Fast blow external fuse recommended                              |                   | -    | -     | 12    | A                |
| Input filter component values (C\L)                | Internal values                                                  |                   | -    | 2\2.2 | -     | μF\μH            |
| Recommended external input capacitance             | All                                                              |                   | -    | 100   | -     | μF               |
| Operating Efficiency                               | $T_A = 25^\circ C$<br>$I_O = I_{O,max}$<br>$I_O = 50\%I_{O,max}$ | $\eta$            | -    | 91    | -     | %                |
|                                                    |                                                                  |                   | -    | 92    | -     | %                |

## Output Specifications

Table 3. Output Specifications:

| Parameter                                                     |                          | Condition                                                                                             | Symbol             | Min    | Typ        | Max    | Unit                |
|---------------------------------------------------------------|--------------------------|-------------------------------------------------------------------------------------------------------|--------------------|--------|------------|--------|---------------------|
| Factory Set Voltage                                           |                          | $V_{IN,DC} = 36V_{DC}$<br>$I_O = I_{O,max}$                                                           | $V_O$              | 3.25   | 3.3        | 3.35   | Vdc                 |
| Total Regulation                                              |                          | Inclusive of line, load temperature change, warm-up drift                                             | $V_O$              | 3.2    | 3.3        | 3.4    | Vdc                 |
| Output Voltage Line Regulation                                |                          | All                                                                                                   | $\%V_O$            | -      | 0.1        | 0.3    | %                   |
| Output Voltage Load Regulation                                |                          | All                                                                                                   | $\%V_O$            | -      | 0.1        | 0.6    | %                   |
| Output Voltage Temperature Regulation                         |                          | All                                                                                                   | $\%V_O$            | -      | -          | 0.02   | %/°C                |
| Output Voltage Trim Range                                     |                          | All                                                                                                   | $V_O$              | 2.64   | -          | 3.63   | V                   |
| Output Ripple, pk-pk                                          |                          | Measure with a 1uF ceramic capacitor in parallel with a 10uF tantalum capacitor, 0 to 20MHz bandwidth | $V_O$              | -      | 60         | -      | mV <sub>PK-PK</sub> |
| Output Current                                                |                          | All                                                                                                   | $I_O$              | 0      | -          | 30     | A                   |
| Output DC current-limit inception <sup>1</sup>                |                          | All                                                                                                   | $I_O$              | 33     | 35         | 40     | A                   |
| Vout pre-bias level                                           |                          | All                                                                                                   |                    | -      | -          | 75     | $\%V_O$             |
| $V_O$ Load Capacitance <sup>2</sup>                           |                          | All                                                                                                   | $C_O$              | 220    | -          | 10000  | uF                  |
| $V_O$ Dynamic Response<br><br>Peak Deviation<br>Settling Time |                          | 25% load change<br>slew rate = 0.1A/us                                                                | $\pm V_O$<br>$T_s$ | -<br>- | 70<br>100  | -<br>- | mV<br>uSec          |
|                                                               |                          | 25% load change<br>slew rate = 1A/us                                                                  | $\pm V_O$<br>$T_s$ | -<br>- | 100<br>100 | -<br>- | mV<br>uSec          |
| Turn-on transient                                             | Rise time                | $I_O = I_{max}$                                                                                       | $T_{rise}$         | -      | -          | 50     | mS                  |
|                                                               | Turn-on delay time       | $I_O = I_{max}$                                                                                       | $T_{turn-on}$      | -      | -          | 30     | mS                  |
|                                                               | Output voltage overshoot | $I_O = 0$                                                                                             | $\%V_O$            | -      | -          | 5      | %                   |
| Switching frequency                                           |                          | All                                                                                                   | $f_{SW}$           | 300    | 310        | 320    | KHz                 |
| Remote ON/OFF control (positive logic)                        | Off-state voltage        | All                                                                                                   |                    | -0.7   | -          | 1.2    | V                   |
|                                                               | On-state voltage         | All                                                                                                   |                    | 3.5    | -          | 12     | V                   |

Note 1 - Hiccup: auto-restart when over-current condition is removed.

Note 2 - High frequency and low ESR is recommended.

## Output Specifications

Table 3. Output Specifications, con't:

| Parameter                                       |                   | Condition                                                                        | Symbol         | Min  | Typ | Max   | Unit              |
|-------------------------------------------------|-------------------|----------------------------------------------------------------------------------|----------------|------|-----|-------|-------------------|
| Remote ON/OFF control (Negative logic)          | Off-state voltage | All                                                                              |                | 3.5  | -   | 12    | V                 |
|                                                 | On-state voltage  | All                                                                              |                | -0.7 | -   | 1.2   | V                 |
| Output voltage remote sense range               |                   | All                                                                              |                | -    | -   | 0.165 | V                 |
| Output over-voltage protection <sup>3</sup>     |                   | All                                                                              | V <sub>O</sub> | 3.8  | -   | 4.6   | V                 |
| Output over-temperature protection <sup>4</sup> |                   | All                                                                              | T              | -    | 110 | 125   | °C                |
| MTBF                                            |                   | Telcordia SR-332<br>Method 1 Case3; 80%<br>load, 300LFM, 40 °C<br>T <sub>A</sub> |                | -    | 1.5 | -     | 10 <sup>6</sup> h |

Note 3 - Hiccup: auto-restart when over-voltage condition is removed.

Note 4 - Auto recovery.

## AVO100-36S3V3B-6L Performance Curves

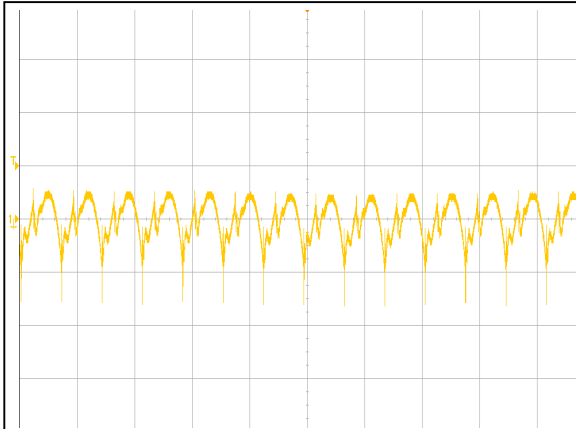


Figure 1: AVO100-36S3V3B-6L Ripple and Noise Measurement  
Ch 1: Vo (5 $\mu$ s/div, 20mV/div)

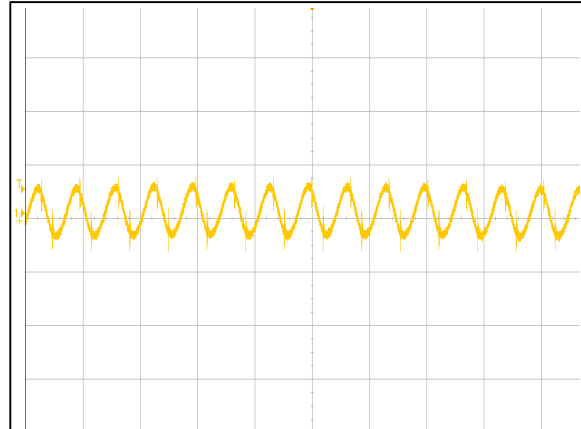


Figure 2: AVO100-36S3V3B-6L Input reflected ripple current  
Ch 1: Vo (5 $\mu$ s/div, 10mA/div)

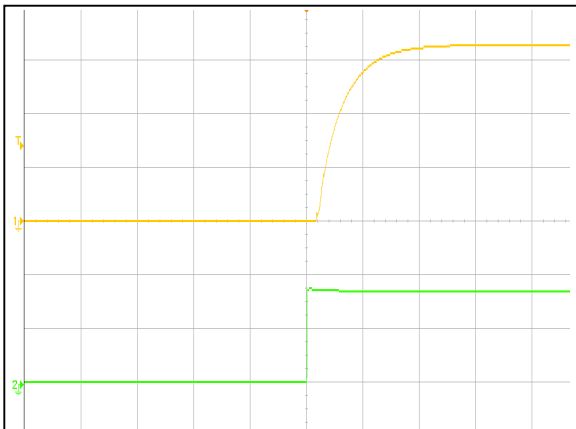


Figure 3: AVO100-36S3V3B-6L Output Voltage Startup Characteristic (50ms/div)  
Ch 1: Vo (1V/div) Ch 2: Vin (20V/div)

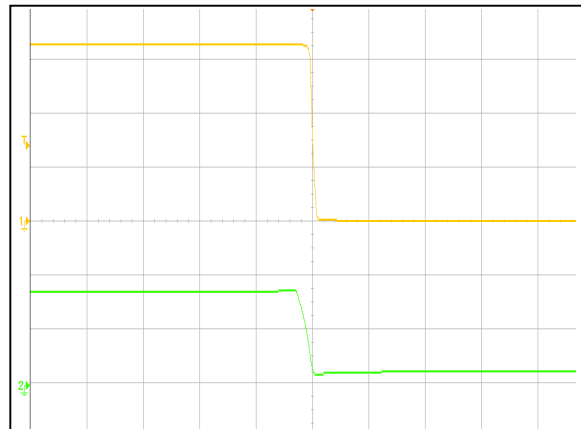


Figure 4: AVO100-36S3V3B-6L Turn Off Characteristic (2ms/div)  
Ch 1: Vo (1V/div) Ch 2: Vin (20V/div)

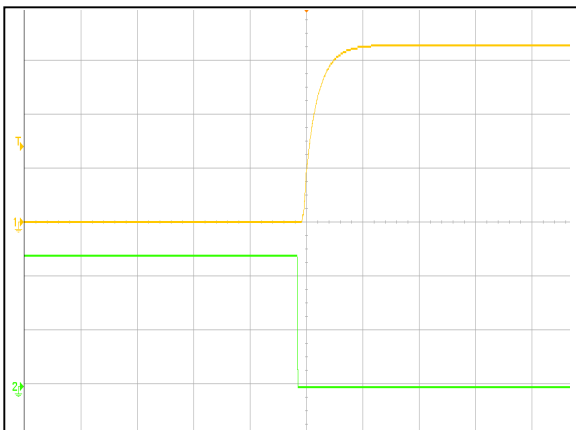


Figure 5: AVO100-36S3V3B-6L Remote ON Waveform (100ms/div)  
Ch 1: Vo (1V/div) Ch 2: Remote ON (2V/div)

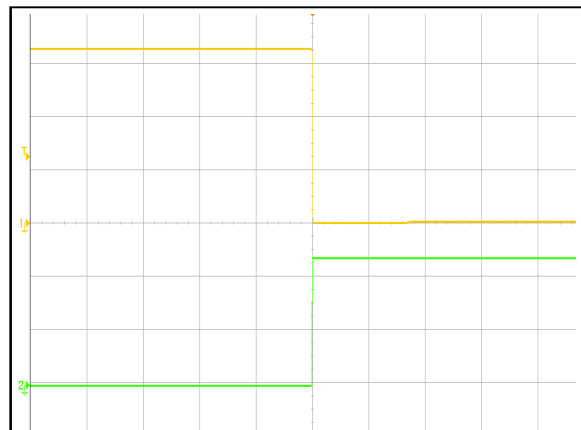


Figure 6: AVO100-36S3V3B-6L Remote OFF Waveform (50ms/div)  
Ch 1: Vo (1V/div) CH2: Remote OFF (2V/div)

## AVO100-36S3V3B-6L Performance Curves

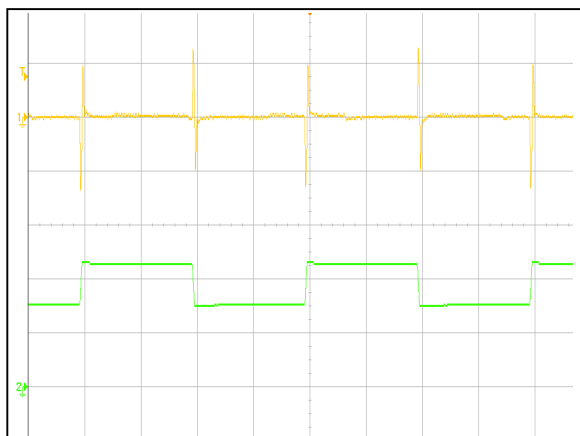


Figure 7: AVO100-36S3V3B-6L Transient Response (2mS/div)  
50%~75%~50% load change, 0.1A/uS slew rate,  
Ch 1: Vo (50mV/div) Ch 2: Io (10A/div)

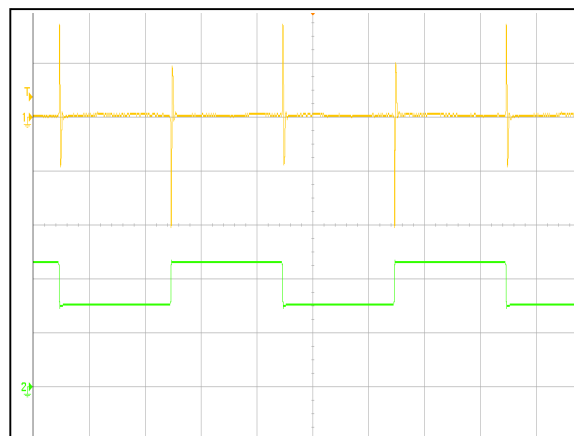


Figure 8: AVO100-36S3V3B-6L Transient Response (2mS/div)  
50%~75%~50% load change, 1A/uS slew rate,  
Ch 1: Vo (100mV/div) Ch 2: Io (10A/div)

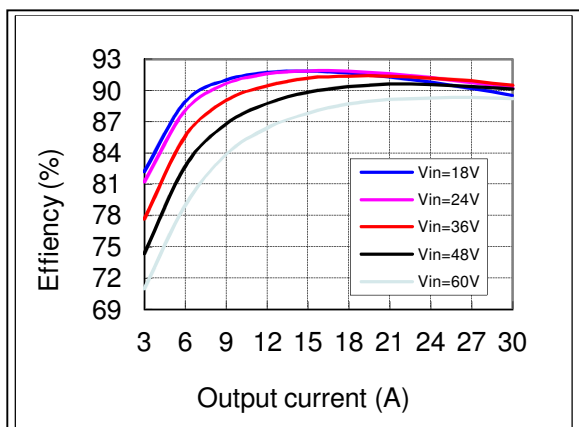



Figure 9: AVO100-36S3V3B-6L Efficiency Curves @ 25 degC

Loading: Io = 10% increment to 30A

## Mechanical Specifications

### Mechanical Outlines – Base plate Module

AVO100-36S3V3B-6L

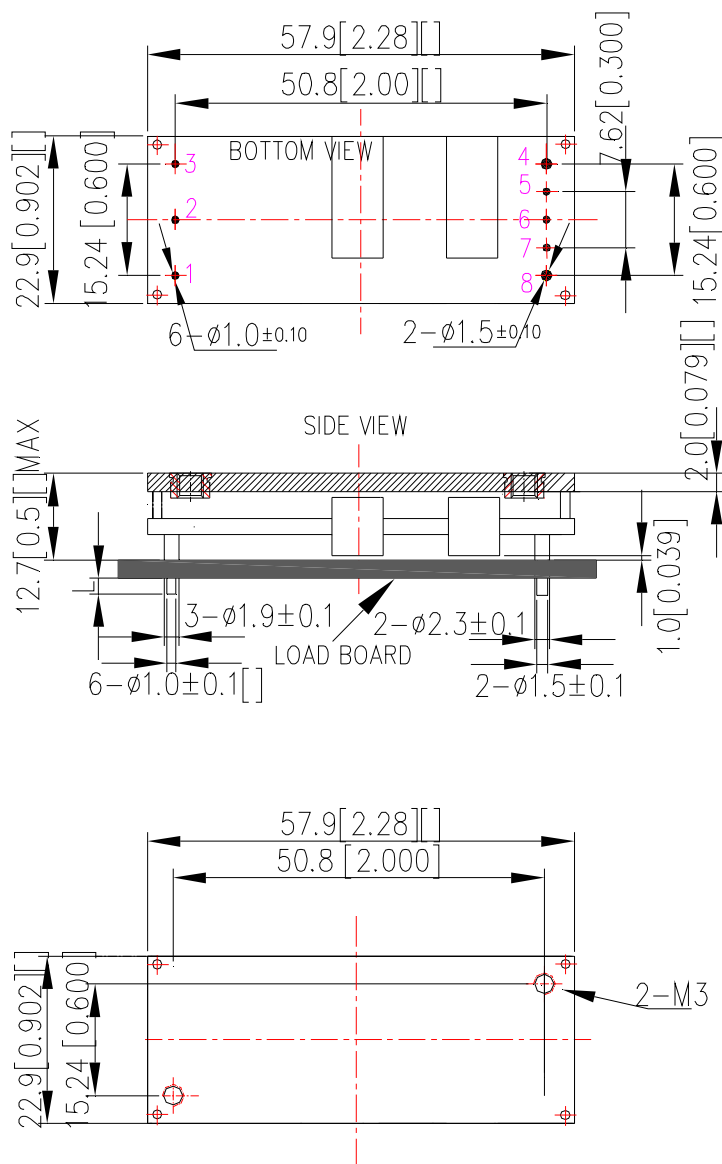

UNIT: mm[inch]

BOTTOM VIEW: pin on upside

TOLERANCE: X.Xmm $\pm$ 0.5mm[X.X in. $\pm$ 0.02in.]

X.XXmm $\pm$ 0.25mm[X.XX in. $\pm$ 0.01in.]

Figure 10 Mechanical diagram

## Pin Length Option

| Device code suffix | L                  |
|--------------------|--------------------|
| -4                 | 4.8mm $\pm$ 0.25mm |
| -6                 | 3.8mm $\pm$ 0.25mm |
| -8                 | 2.8mm $\pm$ 0.25mm |
| None               | 5.8mm $\pm$ 0.25mm |

## Pin Designations

| Pin No | Name          | Function                |
|--------|---------------|-------------------------|
| 1      | Vin+          | Positive input voltage  |
| 2      | Remote On/Off | Remote control          |
| 3      | Vin-          | Negative input voltage  |
| 4      | Vo-           | Negative output voltage |
| 5      | S-            | Negative remote sense   |
| 6      | Trim          | Output voltage trim     |
| 7      | S+            | Positive remote sense   |
| 8      | Vo+           | Positive output voltage |

## Environmental Specifications

### EMC Immunity

AVO100-36S3V3B-6L power supply is designed to meet the following EMC immunity specifications:

Table 4. Environmental Specifications:

| Document                  | Description                                                                            |
|---------------------------|----------------------------------------------------------------------------------------|
| EN55022, Class A Limits   | Conducted and Radiated EMI Limits                                                      |
| IEC/EN 61000-4-2, Level 3 | Immunity to Electrostatic Discharge. Enclosure Port                                    |
| IEC/EN 61000-4-6, Level 2 | Immunity to Continuous Conducted Interference. DC input port                           |
| IEC/EN 61000-4-4, Level3  | Immunity to Electrical Fast Transient                                                  |
| IEC/EN 61000-4-5          | Immunity to surges - 600V common mode and 600V differential mode for DC ports          |
| EN61000-4-29              | Immunity to Voltage Dips and short interruptions and voltage variations. DC input port |

### EMC Test Conditions

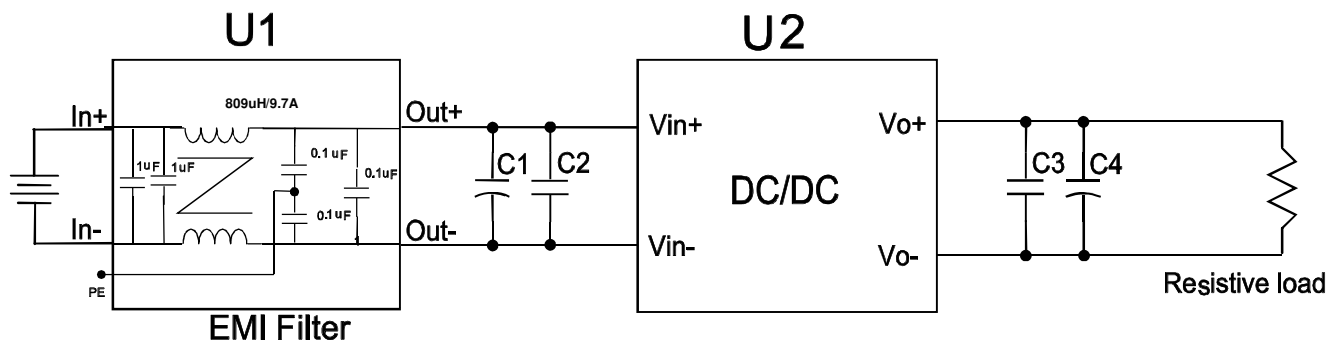


Figure 11 EMC test configuration

U1: Input EMC filter

U2: Module to test, AVO100-36S3V3B

C1 ~ C4: See Figure 18

### **Safety Certifications**

The AVO100-36S3V3B-6L power supply is intended for inclusion in other equipment and the installer must ensure that it is in compliance with all the requirements of the end application. This product is only for inclusion by professional installers within other equipment and must not be operated as a stand alone product.

Table 5. Safety Certifications for AVO100-36S3V3B-6L power supply system

| Document     | File # | Description                |
|--------------|--------|----------------------------|
| UL/CSA 60950 |        | US and Canada Requirements |
| EN60950      |        | European Requirements      |
| IEC60950     |        | International Requirements |
| CE           |        | CE Marking                 |

## Operating Temperature

The AVO100-36S3V3B-6L power supplies will start and operate within stated specifications at an ambient temperature from -40 °C to 85 °C under all load conditions. The storage temperature is -55 °C to 125 °C.

## Thermal Considerations – Baseplate module

The converter is designed to operate in different thermal environments and sufficient cooling must be provided. Proper cooling can be verified by measuring the temperature at the test points as shown in figure 12. The temperature at this point should not exceed the max values in the table 6.

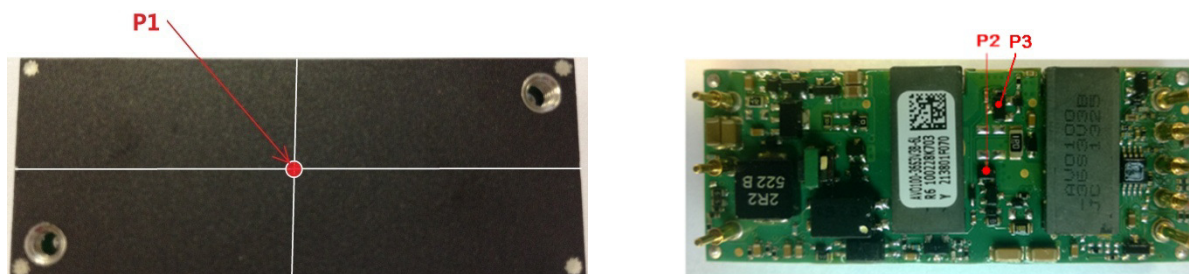


Figure 12 Temperature test point

Table 6 Temperature limit of the test points

| Test Point | Temperature limit |
|------------|-------------------|
| P1         | 105° C            |
| P2         | 120° C            |
| P3         | 122° C            |

The converter can operate with a smaller heatsink and sufficient airflow. Figure 15 and Figure 16 shows the derating output current vs. ambient air temperature at different air velocity with a specified heatsink.

The typical test condition is shown in Figure 13 and Figure 14. Figure 17 shows the thermal image taken by a RF camera at a rated I/O condition.

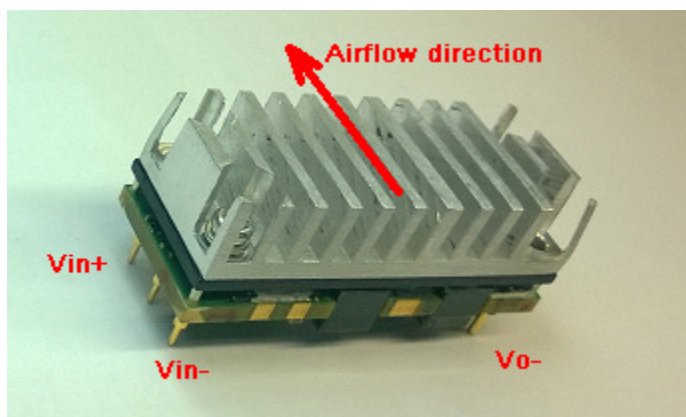


Figure 13 Typical test condition, heatsink size (L\*W\*H): 57.9mm\*22.86\*12.7mm

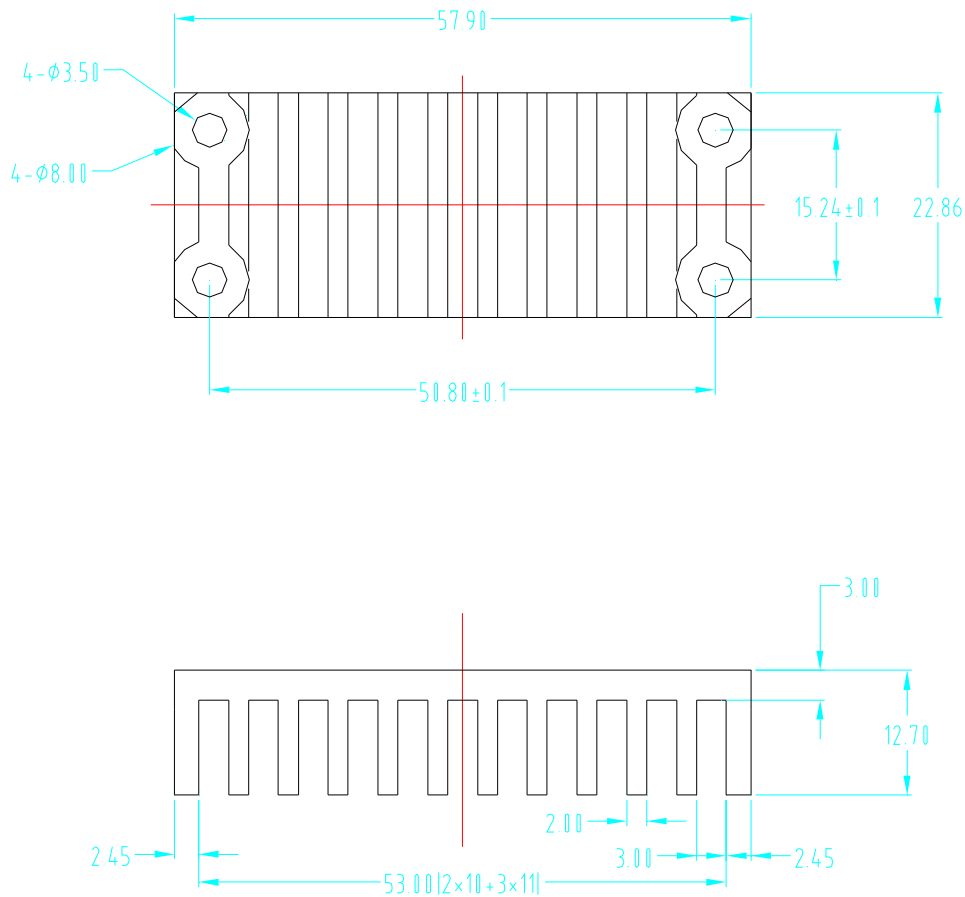


Figure 14 heatsink mechanical diagram

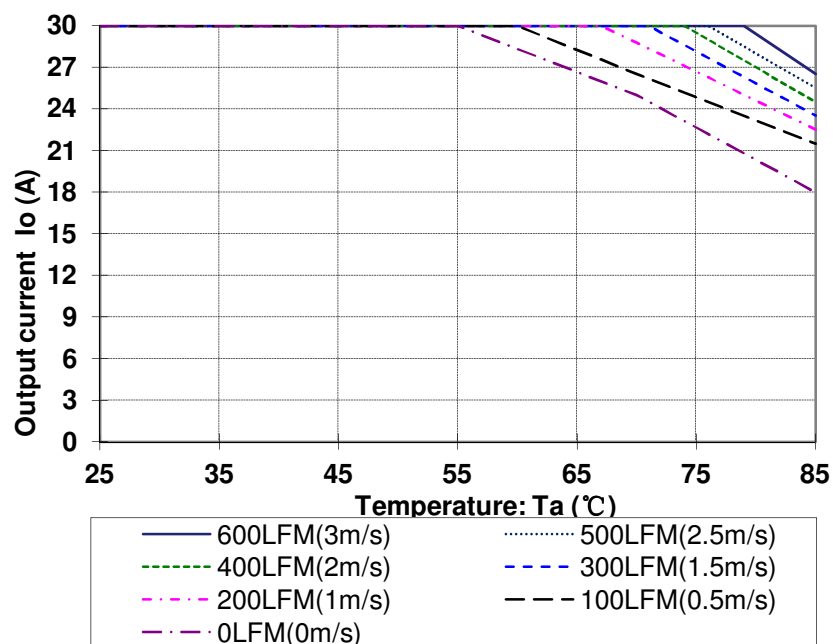


Figure 15 Output power derating, 24V<sub>in</sub>, air flowing across the converter from pin 3 to pin1

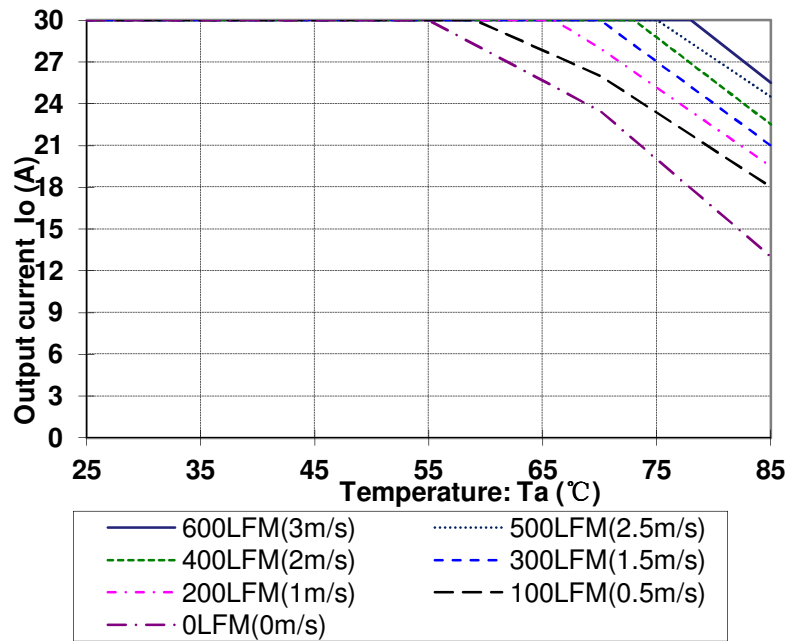


Figure 16 Output power derating,  $48V_{in}$ , air flowing across the converter from pin 3 to pin 1

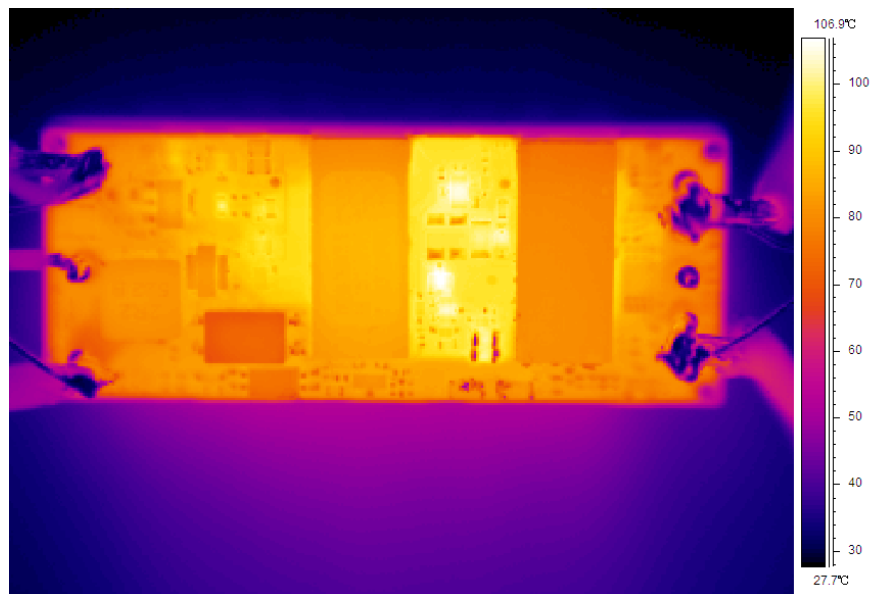


Figure 17 Thermal image,  $36V_{in}$ ,  $3.3V_o$ , full load, room temperature, 100LFM (air flowing from pin 3 to pin 1)

## Qualification Testing

| Parameter        | Unit (pcs) | Test condition                                                                                                                         |
|------------------|------------|----------------------------------------------------------------------------------------------------------------------------------------|
| Halt test        | 4-5        | $T_{a,min} - 10^{\circ}\text{C}$ to $T_{a,max} + 25^{\circ}\text{C}$ , $10^{\circ}\text{C}$ step, $V_{in}$ = min to max, 0 ~ 100% load |
| Vibration        | 3          | Frequency range: 5Hz ~ 20Hz, 20Hz ~ 200Hz, A.S.D: $1.0\text{m}^2/\text{s}^3$ , -3db/oct, axes of vibration: X/Y/Z. Time: 30min/axes    |
| Mechanical Shock | 3          | 30g, 6ms, 3axes, 6directions, 3time/direction                                                                                          |
| Thermal Shock    | 3          | $-40^{\circ}\text{C}$ to $100^{\circ}\text{C}$ , unit temperature 20cycles                                                             |
| Thermal Cycling  | 3          | $-40^{\circ}\text{C}$ to $85^{\circ}\text{C}$ , temperature change rate: $1^{\circ}\text{C}/\text{min}$ , cycles: 2cycles              |
| Humidity         | 3          | $40^{\circ}\text{C}$ , 95%RH, 48h                                                                                                      |
| Solder Ability   | 15         | IPC J-STD-002C-2007                                                                                                                    |

## Application Notes

### Typical Application

Below is the typical application of the AVO100-36S3V3B-6L power supply.

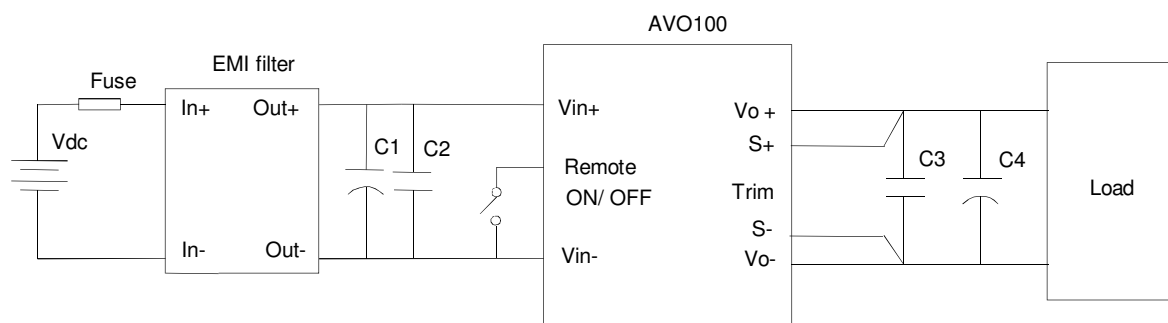


Figure 18 Typical application

C1: 100 $\mu$ F/100V electrolytic capacitor, P/N: UPM2A101MPD (Nichicon) or equivalent caps

C2, C3: 1 $\mu$ F/100V X7R ceramic capacitor, P/N: C3225X7R2A105KT0L0U (TDK) or equivalent caps

C4: 470 $\mu$ F/25V electrolytic capacitor, P/N: UPM1E471MED (Nichicon) or equivalent caps

Note: If ambient temperature is below -5° C, additional 220 $\mu$ F tantalum capacitor (Low ESR, ESR $\leq$ 100m $\Omega$ ) is needed for output.

Fuse: External fast blow fuse with a rating of 10A/250Vac. The recommended fuse model is 0314010.MXP from Littlefuse Far East Pte LTD.

## Remote ON/OFF

Either positive or negative remote ON/OFF logic is available in AVO100-36S3V3B-6L. The logic is CMOS and TTL compatible. Below is the detailed internal circuit and reference in AVO100-36S3V3B-6L.

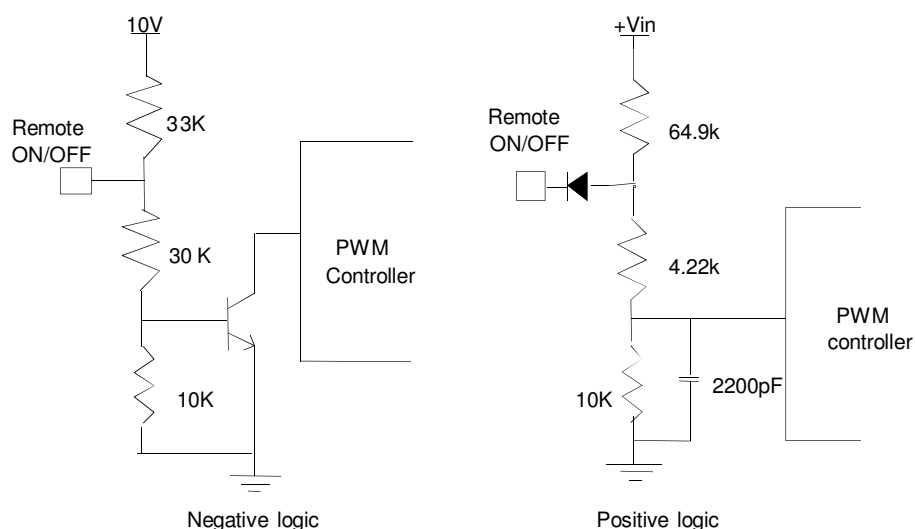


Figure 19 Remote ON/OFF internal diagram

The voltage between pin Remote ON/OFF and pin Vin- must not exceed the range listed in table “Feature characteristics” to ensure proper operation. The external Remote ON/OFF circuit is highly recommended as shown in figure 20.

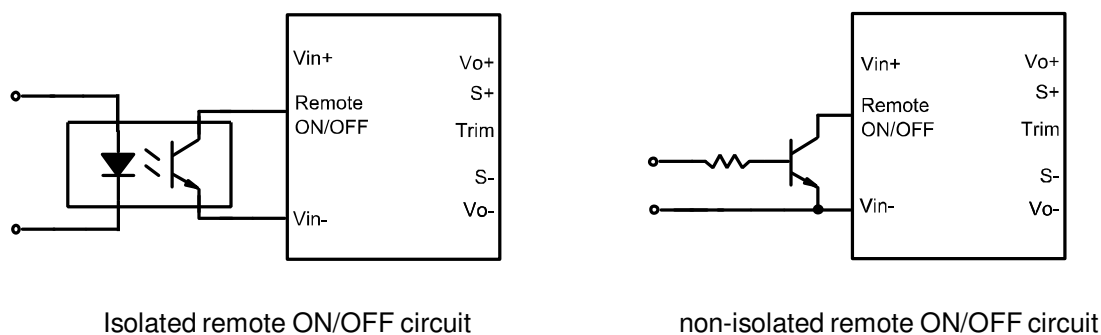


Figure 20 External Remote ON/OFF circuit

## Trim Characteristics

Connecting an external resistor between Trim pin and Vo- pin will decrease the output voltage. While connecting it between Trim and Vo+ will increase the output voltage. The following equations determine the external resistance to obtain the trimmed output voltage.

$$R_{adj-down} = \frac{510}{\Delta} - 10.2(K\Omega)$$

$$R_{adj-up} = \frac{5.1 \times V_{nom} \times (100 + \Delta)}{1.225 \times \Delta} - \frac{510}{\Delta} - 10.2(K\Omega)$$

$\Delta$ : Output error rate against nominal output voltage.

$$\Delta = \frac{100 \times (V_{nom} - V_o)}{V_{nom}}$$

$V_{nom}$ : Nominal output voltage.

For example, to get 3.63V output, the trimming resistor is

$$\Delta = \frac{100 \times (V_{nom} - V_o)}{V_{nom}} = \frac{100 \times (3.63 - 3.3)}{3.3} = 10$$

$$R_{adj-up} = \frac{5.1 \times 3.3 \times (100 + 10)}{1.225 \times 10} - \frac{510}{10} - 10.2 = 89.9(K\Omega)$$

The output voltage can also be trimmed by potential applied at the Trim pin.

$$V_o = (V_{trim} + 1.225) \times 1.347$$

Where  $V_{trim}$  is the potential applied at the Trim pin, and  $V_o$  is the desired output voltage.

When trimming up, the output current should be decreased accordingly so as not to exceed the maximum output power.

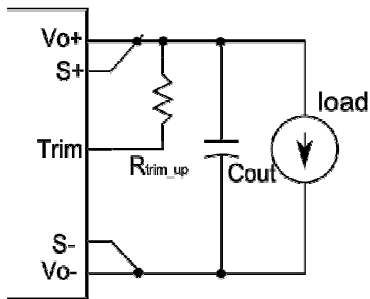


Figure 21 Trim up




Figure 22 Trim down

## Input Ripple & Output Ripple & Noise Test Configuration

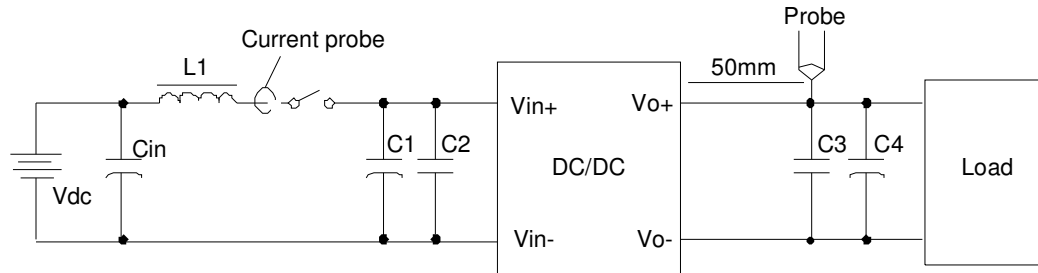


Figure 23 Input ripple & output ripple & noise test configuration

V<sub>dc</sub>: DC power supply

L1: 12uH

C<sub>in</sub>: 220uF/100V typical

C1 ~ C4: See Figure 18

Note - Using a coaxial cable with series 50ohm resistor and 0.68uF ceramic capacitor or a ground ring of probe to test output ripple & noise is recommended.

### **Sense Characteristics**

If the load is far from the unit, connect S+ and S- to the terminals of the load respectively to compensate the voltage drop on the transmission line. See Figure 18.

If the sense compensation function is not necessary, connect S+ to  $V_o+$  and S- to  $V_o-$  directly.

### **Soldering**

The product is intended for standard manual or wave soldering.

When wave soldering is used, the temperature on pins is specified to maximum 255 °C for maximum 7s.

When soldering by hand, the iron temperature should be maintained at 300 °C ~ 380 °C and applied to the converter pins for less than 10s. Longer exposure can cause internal damage to the converter.

Cleaning of solder joint can be performed with cleaning solvent IPA or simulative.

## Hazardous Substances Announcement (RoHS of China)

| Parts                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Hazardous Substances |    |    |                  |     |      |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|----|----|------------------|-----|------|
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Pb                   | Hg | Cd | Cr <sup>6+</sup> | PBB | PBDE |
| AVO100-36S3V3B-6L                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | x                    | x  | x  | x                | x   | x    |
| <p>x: Means the content of the hazardous substances in all the average quality materials of the part is within the limits specified in SJ/T-11363-2006</p> <p>√: Means the content of the hazardous substances in at least one of the average quality materials of the part is outside the limits specified in SJ/T11363-2006</p> <p>Artesyn Embedded Technologies has been committed to the design and manufacturing of environment-friendly products. It will reduce and eventually eliminate the hazardous substances in the products through unremitting efforts in research. However, limited by the current technical level, the following parts still contain hazardous substances due to the lack of reliable substitute or mature solution:</p> <ol style="list-style-type: none"> <li>1. Solders (including high-temperature solder in parts) contain plumbum.</li> <li>2. Glass of electric parts contains plumbum.</li> <li>3. Copper alloy of pins contains plumbum</li> </ol> |                      |    |    |                  |     |      |

### WORLDWIDE OFFICES

#### Americas

2900 S.Diablo Way  
Tempe, AZ 85282  
USA  
+1 888 412 7832

#### Europe (UK)

Waterfront Business Park  
Merry Hill, Dudley  
West Midlands, DY5 1LX  
United Kingdom  
+44 (0) 1384 842 211

#### Asia (HK)

14/F, Lu Plaza  
2 Wing Yip Street  
Kwun Tong, Kowloon  
Hong Kong  
+852 2176 3333



[www.artesyn.com](http://www.artesyn.com)

While every precaution has been taken to ensure accuracy and completeness in this literature, Artesyn Embedded Technologies assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions. Artesyn Embedded Technologies, Artesyn and the Artesyn Embedded Technologies logo are trademarks and service marks of Artesyn Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners.  
© 2014 All rights reserved.

For more information: [www.artesyn.com/power](http://www.artesyn.com/power)  
For support: [productsupport.ep@artesyn.com](mailto:productsupport.ep@artesyn.com)

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)