



120 Watt Universal 3-Wire Input Adapter



Features

- Level VI Efficiency Compliant
- Compliant with Ecodesign ErP Directive 2009/125/EC level 2 annex 1b
- Non-vented/Spill-proof Case
- Class B EMI

Applications

- Networking
- Peripherals
- Industrial
- Test and Measurement

Safety Approvals

- UL 60950-1
- CSA 22.2 60950-1
- CE
- CB

Mechanical Characteristics

- Length: 152mm (5.98in)
- Width: 73mm (2.88in)
- Height: 37mm (1.45in)
- Weight: 800g (1.76lbs)

Output Specifications

Model	DC Output Voltage	Load			Ripple ² P-P (max.)	Regulation Line & Load
		Min.	Rated	Peak		
PSA120U-120L6-R ¹	12V	0A	9A	11A	200mV	±5%
PSA120U-240L6-R	24V	0A	5A	6A	380mV	±5%
PSA120U-480L6-R	48V	0A	2.5A	3A	480mV	±5%
PSA120U-540L6-R	54V	0A	2.22A	2.66A	500mV	±5%
PSA120U-560L6-R	56V	0A	2.14A	2.56A	560mV	±5%

(1) 12V model is 108W

(2) Measured using 12-inch twisted pair terminated with a 10uF capacitor and 0.1uF ceramic in parallel

Phihong is not responsible for any error, and reserves the right to make changes without notice. Please visit our website at www.phihong.com for the most up-to-date specifications and contact information.

Input:**AC Input Voltage Rating**

115 to 230VAC

AC Input Voltage Range

90 to 264VAC

AC Input Frequency

47 to 63Hz

Input Current

1.5A at 115VAC

0.75A at 230VAC

Leakage Current

<250uA at 250VAC/50Hz

Inrush Current

<220A at 115VAC

(Cold Start at ambient 25°C)

Input Power Saving

≤0.15W at 230VAC input

Power Factor

>0.95 at 115VAC and >0.9 at 230VAC for both 50/60Hz frequency range at rated load output condition.

OUTPUT:**Efficiency Level**

DOE Level VI

Over-Voltage Protection

<70V. Latch –off mode. Auto-recover

Over-Load, Short-Circuit &**Over-Temperature Protections**

Auto-recover

ENVIRONMENTAL**Temperature**

Operation 0°C to + 40°C

Non-operation -20°C to ~ +80°C

Humidity 10°C to 90%

Emissions

Complies with FCC Class B

Complies with EN55032 Class B

EN61000-3-2 Class D

EN61000-3-3

Immunity

ESD EN61000-4-2

RS EN61000-4-3

EFT EN61000-4-4

Surge EN61000-4-5

CS EN61000-4-6

Power Frequency Magnetic Field EN61000-4-8

Voltage Dips EN61000-4-11

Dielectric Withstand (Hi-Pot) Test

Primary to Secondary: >3000V AC for 1 min., 10mA

DC Output Connector (12V)

4 pin Mini DIN

DC Plug Pin assignment(12V)

Pin 2,4 (+V)

Pin 1,3 GND (-)

DC Output Connector(24V,48V, 54V 56V)

2.5mm x 5.5mm x 10mm Center Positive

Barrel Standard

DC Plug pin assignment(24V,48V, 54V 56V)

Inner (+V)


Outer GND (-)

Input Connector

3-Wire IEC320-C14


PSA120U-120L6 -R

Dimension Diagram Unit: mm

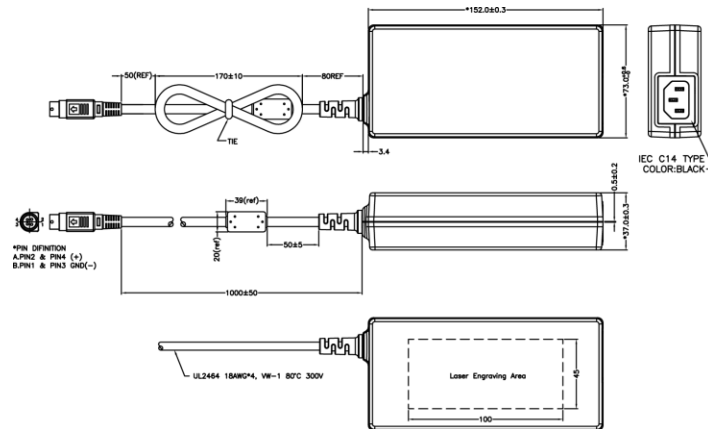


PSA120U-240L6 -R

Dimension Diagram Unit: mm

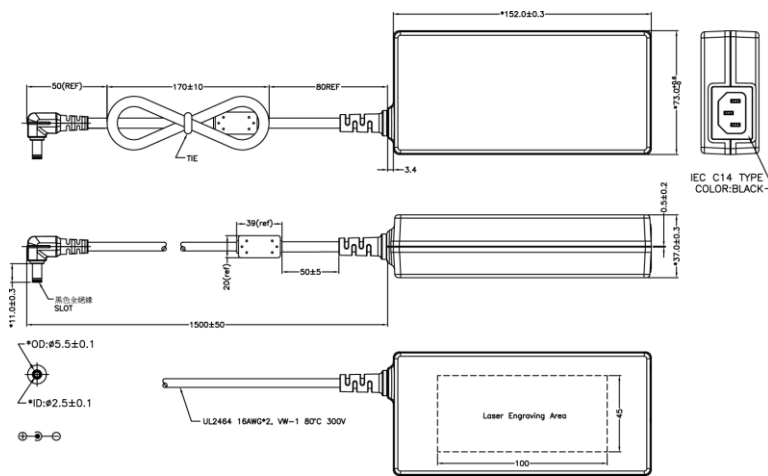

PSA120U-480L6-R, 540L6-R, 560L6 -R

Dimension Diagram Unit: mm

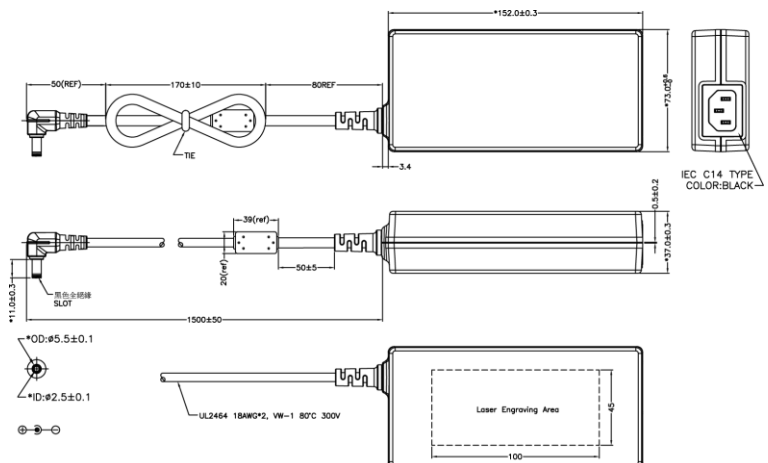

Supplier's Declaration of Conformity
47 CFR § 2.1077 Compliance Information

Phihong USA Corporation
47800 Fremont Boulevard
Fremont, CA 94538
Telephone: (510) 445-0100
www.phihong.com

NOTE: This model has/The models in this products series have been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications to equipment not expressly approved by PHIHONG could void the user's authority to operate the equipment.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru