


CGHV14500

500 W, 1200 - 1400 MHz, GaN HEMT for L-Band Radar Systems

Cree's CGHV14500 is a gallium nitride (GaN) high electron mobility transistor (HEMT) designed specifically with high efficiency, high gain and wide bandwidth capabilities, which makes the CGHV14500 ideal for 1.2 - 1.4 GHz L-Band radar amplifier applications. The transistor could be utilized for band specific applications ranging from 800 through 1600 MHz. The package options are ceramic/metal flange and pill package.

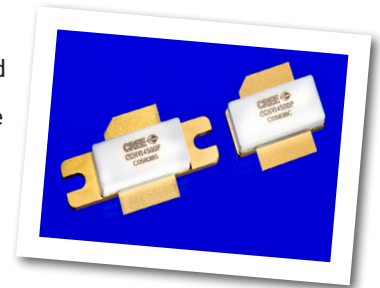

Package Type: 440117, 440133
PN: CGHV14500

Typical Performance Over 1.2-1.4 GHz ($T_c = 25^\circ\text{C}$) of Demonstration Amplifier

| Parameter | 1.2 GHz | 1.25 GHz | 1.3 GHz | 1.35 GHz | 1.4 GHz | Units |
|------------------|---------|----------|---------|----------|---------|-------|
| Output Power | 545 | 540 | 530 | 530 | 530 | W |
| Gain | 16.4 | 16.3 | 16.2 | 16.2 | 16.2 | dB |
| Drain Efficiency | 69 | 69 | 68 | 66 | 65 | % |

Note:

Measured in the CGHV14500-AMP1 amplifier circuit, under 500 μs pulse width, 10% duty cycle, $P_{IN} = 41 \text{ dBm}$.

Features

- Reference design amplifier 1.2 - 1.4 GHz Operation
- FET tuning range UHF through 1800 MHz
- 530 W Typical Output Power
- 16 dB Power Gain
- 68% Typical Drain Efficiency
- <0.3 dB Pulsed Amplitude Droop
- Internally pre-matched on input, unmatched output

Large Signal Models Available for ADS and MWO

Absolute Maximum Ratings (not simultaneous)

| Parameter | Symbol | Rating | Units | Conditions |
|--|-----------------|-----------|-------|---|
| Drain-Source Voltage | V_{DSS} | 125 | Volts | 25°C |
| Gate-to-Source Voltage | V_{GS} | -10, +2 | Volts | 25°C |
| Storage Temperature | T_{STG} | -65, +150 | °C | |
| Operating Junction Temperature | T_J | 225 | °C | |
| Maximum Forward Gate Current | I_{GMAX} | 84 | mA | 25°C |
| Maximum Drain Current ¹ | I_{DMAX} | 36 | A | 25°C |
| Soldering Temperature ² | T_s | 245 | °C | |
| Screw Torque | τ | 40 | in-oz | |
| CW Thermal Resistance, Junction to Case ³ | $R_{\theta JC}$ | 0.47 | °C/W | $P_{DISS} = 334 \text{ W}, 65^\circ\text{C}$ |
| Pulsed Thermal Resistance, Junction to Case ³ | $R_{\theta JC}$ | 0.28 | °C/W | $P_{DISS} = 334 \text{ W}, 500 \mu\text{sec}, 10\%, 85^\circ\text{C}$ |
| Pulsed Thermal Resistance, Junction to Case ⁴ | $R_{\theta JC}$ | 0.31 | °C/W | $P_{DISS} = 334 \text{ W}, 500 \mu\text{sec}, 10\%, 85^\circ\text{C}$ |
| Case Operating Temperature ⁵ | T_C | -40, +130 | °C | $P_{DISS} = 334 \text{ W}, 500 \mu\text{sec}, 10\%$ |

Note:

¹ Current limit for long term, reliable operation

² Refer to the Application Note on soldering at <http://www.cree.com/rf/document-library>

³ Measured for the CGHV14500P

⁴ Measured for the CGHV14500F

⁵ See also, the Power Dissipation De-rating Curve on Page 5

Electrical Characteristics

| Characteristics | Symbol | Min. | Typ. | Max. | Units | Conditions |
|---|--------------|-------|-------|------|----------|--|
| DC Characteristics¹ ($T_C = 25^\circ\text{C}$) | | | | | | |
| Gate Threshold Voltage | $V_{GS(th)}$ | -3.8 | -3.0 | -2.3 | V_{DC} | $V_{DS} = 10 \text{ V}, I_D = 83.6 \text{ mA}$ |
| Gate Quiescent Voltage | $V_{GS(Q)}$ | - | -2.7 | - | V_{DC} | $V_{DS} = 50 \text{ V}, I_D = 500 \text{ mA}$ |
| Saturated Drain Current ² | I_{DS} | 62.7 | 75.2 | - | A | $V_{DS} = 6.0 \text{ V}, V_{GS} = 2.0 \text{ V}$ |
| Drain-Source Breakdown Voltage | V_{BR} | 150 | - | - | V_{DC} | $V_{GS} = -8 \text{ V}, I_D = 83.6 \text{ mA}$ |
| RF Characteristics³ ($T_C = 25^\circ\text{C}, F_0 = 1.3 \text{ GHz}$ unless otherwise noted) | | | | | | |
| Output Power | P_{OUT} | 422 | 530 | - | W | $V_{DD} = 50 \text{ V}, I_{DQ} = 500 \text{ mA}, P_{IN} = 41 \text{ dBm}$ |
| Drain Efficiency | D_E | 63 | 68 | - | % | $V_{DD} = 50 \text{ V}, I_{DQ} = 500 \text{ mA}, P_{IN} = 41 \text{ dBm}$ |
| Power Gain | G_p | 15.25 | 16.2 | - | dB | $V_{DD} = 50 \text{ V}, I_{DQ} = 500 \text{ mA}, P_{IN} = 41 \text{ dBm}$ |
| Pulsed Amplitude Droop | D | - | -0.3 | - | dB | $V_{DD} = 50 \text{ V}, I_{DQ} = 500 \text{ mA}$ |
| Output Mismatch Stress | VSWR | - | 5 : 1 | - | Ψ | No damage at all phase angles, $V_{DD} = 50 \text{ V}, I_{DQ} = 500 \text{ mA}, P_{IN} = 41 \text{ dBm Pulsed}$ |

Notes:

¹ Measured on wafer prior to packaging.

² Scaled from PCM data.

³ Measured in CGHV14500-AMP1. Pulse Width = 500 μs , Duty Cycle = 10%.

Typical Performance

Figure 1. - CGHV14500 Typical Sparmeters
 $V_{DD} = 50\text{ V}, I_{DQ} = 500\text{ mA}$


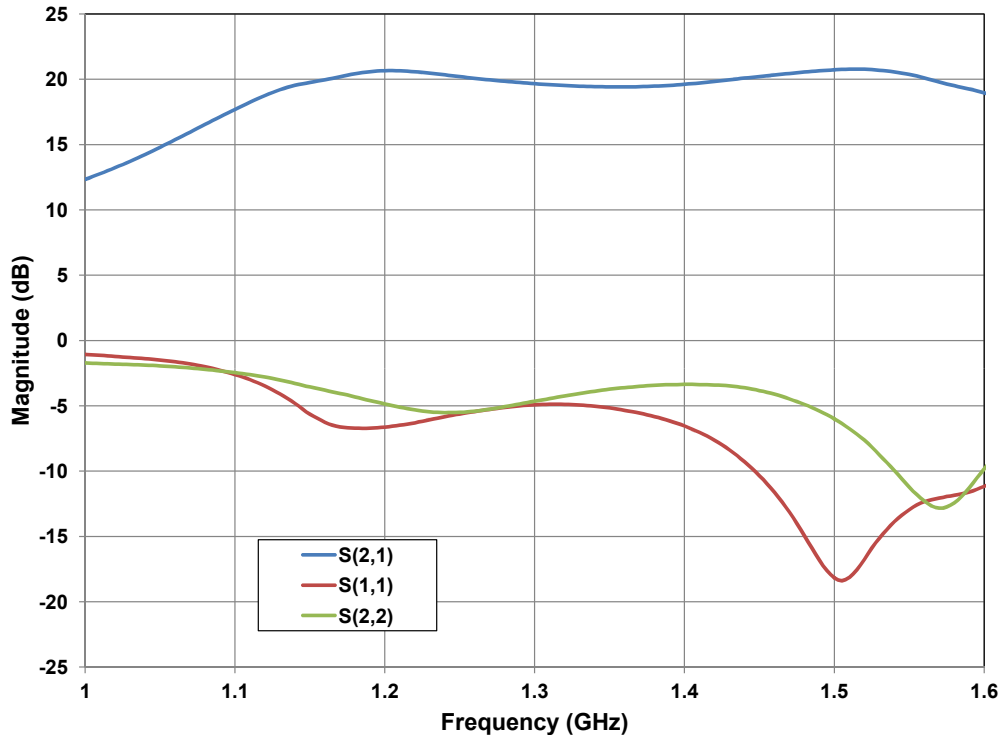


Figure 2. - CGHV14500 Typical RF Results
 $V_{DD} = 50\text{ V}, I_{DQ} = 500\text{ mA}, P_{IN} = 41\text{ dBm}$
 $T_{case} = 25^\circ\text{C}, \text{Pulse Width} = 500\ \mu\text{s}, \text{Duty Cycle} = 10\%$

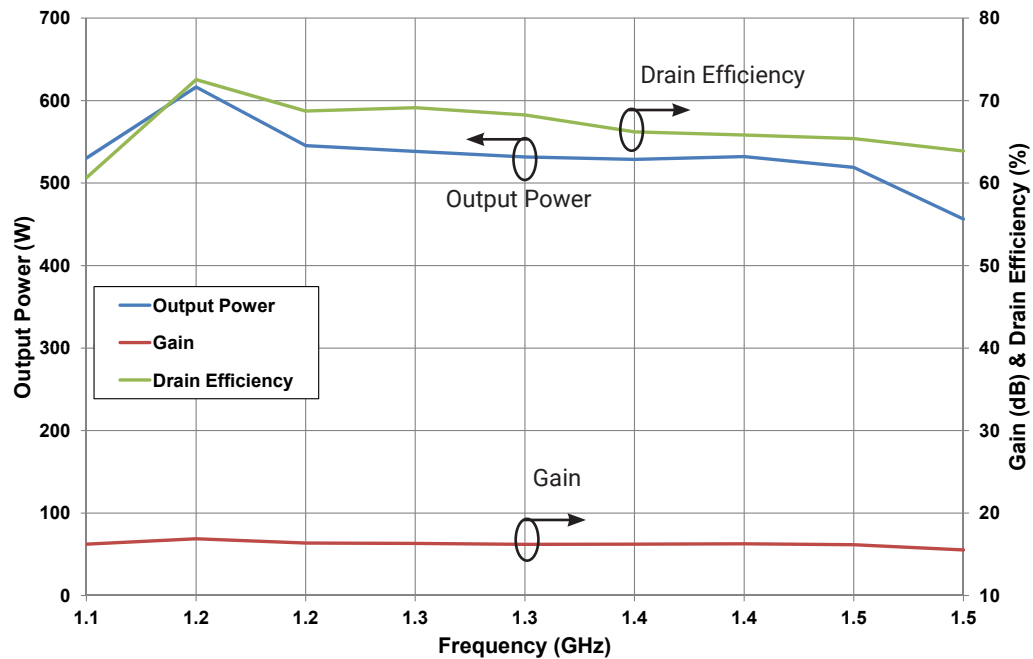

Typical Performance

Figure 3. - CGHV14500 Typical RF Results

$V_{DD} = 50\text{ V}$, $I_{DQ} = 500\text{ mA}$, $P_{IN} = 41\text{ dBm}$
 $T_{case} = 85^\circ\text{C}$, Pulse Width = $500\ \mu\text{s}$, Duty Cycle = 10 %



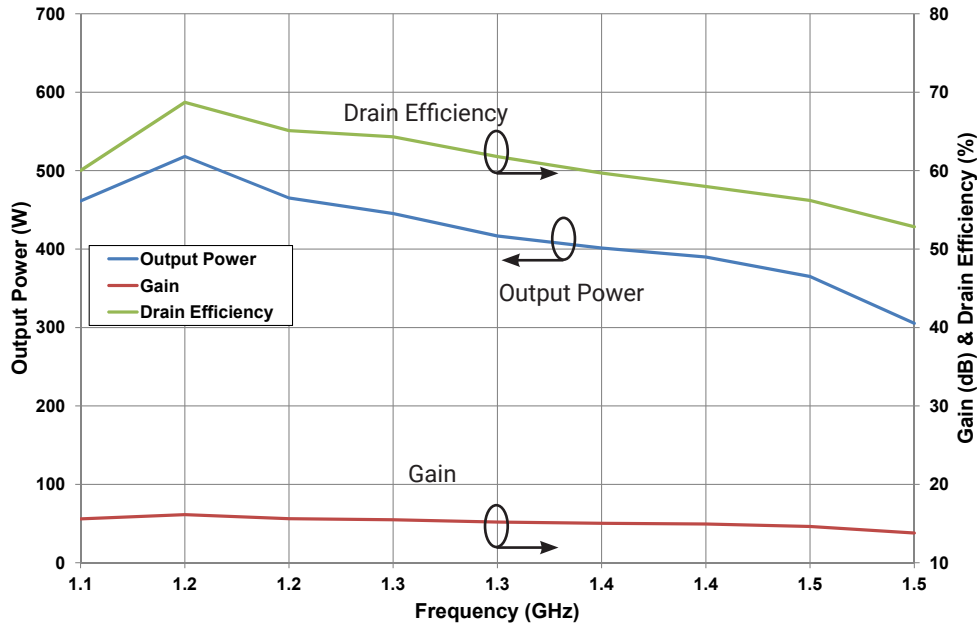


Figure 4. - CGHV14500 Typical CW RF Results

$V_{DD} = 50\text{ V}$, $I_{DQ} = 500\text{ mA}$, $P_{IN} = 40\text{ dBm}$, $T_{case} = 50^\circ\text{C}$

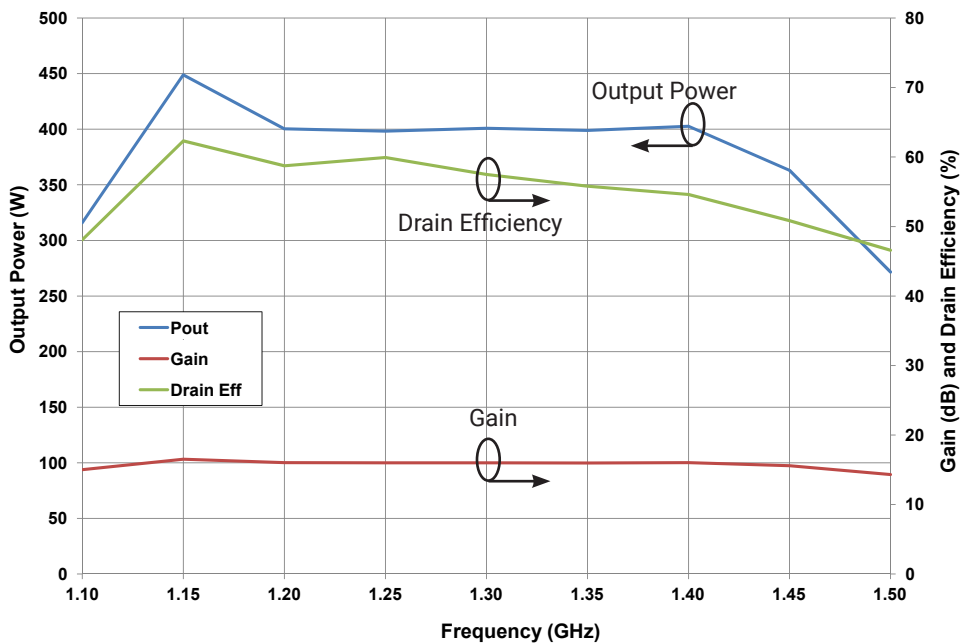

Source and Load Impedances

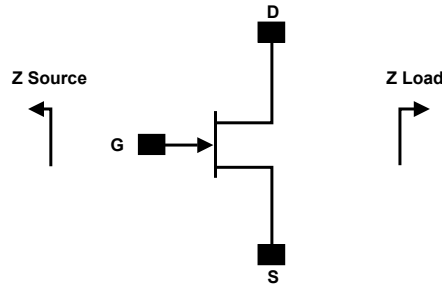

| Frequency (MHz) | Z Source | Z Load |
|-----------------|------------|------------|
| 900 | 0.3 - j0.3 | 2.1 + j1.4 |
| 1000 | 0.3 - j0.4 | 2.0 + j0.7 |
| 1100 | 0.6 - j0.4 | 1.8 + j0.9 |
| 1200 | 0.8 - j0.7 | 1.5 + j0.9 |
| 1300 | 1.1 - j0.7 | 1.3 + j0.7 |
| 1400 | 1.2 - j0.1 | 1.2 + j0.5 |
| 1500 | 1.8 - j0.1 | 1.1 + j0.4 |


Note 1. $V_{DD} = 50\text{ V}$, $I_{DQ} = 500\text{ mA}$ in the 440117 package

Note 2. Optimized for power gain, P_{SAT} and Drain Efficiency

Note 3. When using this device at low frequency, series resistors should be used to maintain amplifier stability

CGHV14500 Power Dissipation De-rating Curve

Figure 5. - CGHV14500 Transient Power Dissipation De-Rating Curve

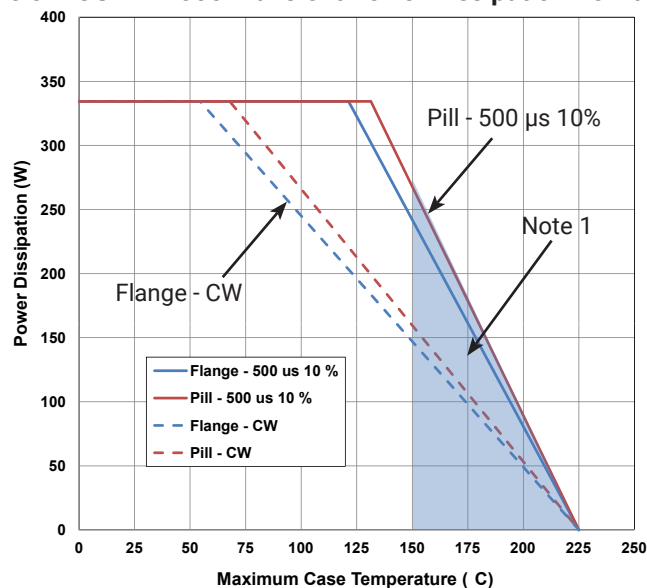


Note 1. Area exceeds Maximum Case Temperature (See Page 2).


CGHV14500-AMP1 Demonstration Amplifier Circuit Bill of Materials

| Designator | Description | Qty |
|------------|---|-----|
| R1 | RES, 1/16W, 0603, 1%, 562 OHMS | 1 |
| R2 | RES, 5.1 OHM, +/-1%, 1/16W, 0603 | 1 |
| R3 | RES, 1/16W, 0603, 1%, 4700 OHMS | 1 |
| L1 | INDUCTOR, CHIP, 6.8 nH, 0603 SMT | 1 |
| C1, C23 | CAP, 27pF, +/- 5%, 250V, 0805, ATC 600F | 2 |
| C2 | CAP, 2.0pF, +/- 0.1pF, 0603, ATC | 1 |
| C3, C4 | CAP, 1.5pF, +/-0.05pF, 250V, 0805, ATC 600F | 2 |
| C5,C6 | CAP, 1.8pF, +/-0.1pF, 250V, 0805, ATC 600F | 2 |
| C7,C8 | CAP, 4.3pF, +/-0.1pF, 250V, 0805, ATC 600F | 2 |
| C9,C10 | CAP, 7.5pF, +/-0.1pF, 250V, 0805, ATC 600F | 2 |
| C11,C24 | CAP, 47pF,+/-5%, 250V, 0805, ATC 600F | 2 |
| C12,C25 | CAP, 100pF, +/-5%, 250V, 0805, ATC 600F | 2 |
| C13,C26 | CAP, 33000PF, 0805,100V, X7R | 2 |
| C14 | CAP 10uF 16V TANTALUM | 1 |
| C15,C16 | CAP, 5.6pF, +/-0.1pF, 250V, 0805, ATC 600F | 2 |
| C17,C18 | CAP, 3.6pF, +/-0.1pF, 250V, 0805, ATC 600F | 2 |
| C19,C20 | CAP, 2.0pF, +/-0.1pF, 250V, 0805, ATC 600F | 2 |
| C21,C22 | CAP, 0.7pF, +/-0.05pF, 0805, ATC 600F | 2 |
| C27 | CAP, 1.0UF, 100V, 10%, X7R, 1210 | 1 |
| C28 | CAP, 3300 UF, +/-20%, 100V, ELECTROLYTIC | 1 |
| J1,J2 | CONN, SMA, PANEL MOUNT JACK, FL | 2 |
| J3 | HEADER RT>PLZ .1CEN LK 9POS | 1 |
| J4 | CONNECTOR ; SMB, Straight, JACK,SMD | 1 |
| W1 | CABLE ,18 AWG, 4.2 | 1 |
| | PCB, RO4350B, 0.020' MIL THK, CGHV14500, 1.2-1.4GHZ | 1 |
| Q1 | CGHV14500 | 1 |


CGHV14500-AMP1 Demonstration Amplifier Circuit

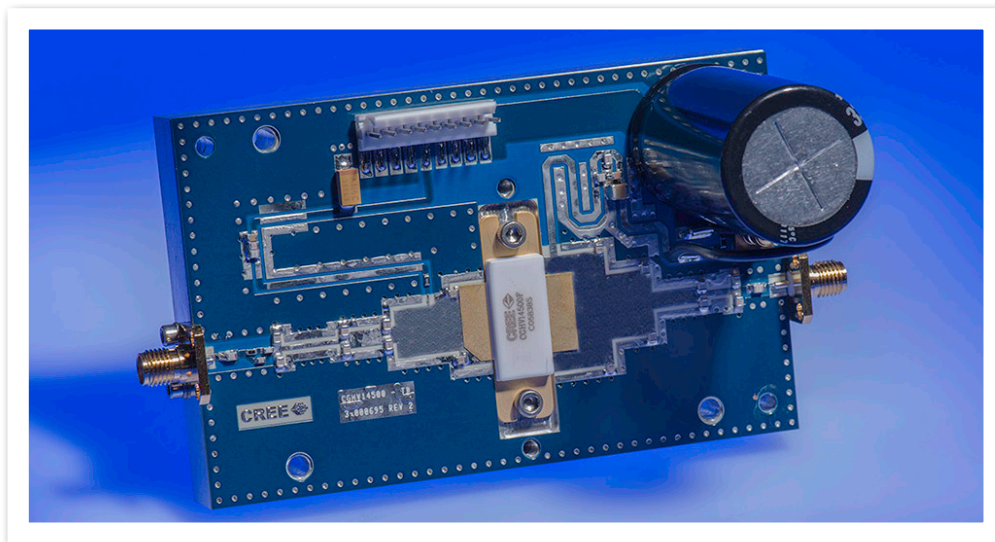


CGHV14500-AMP1 Demonstration Amplifier Circuit Outline

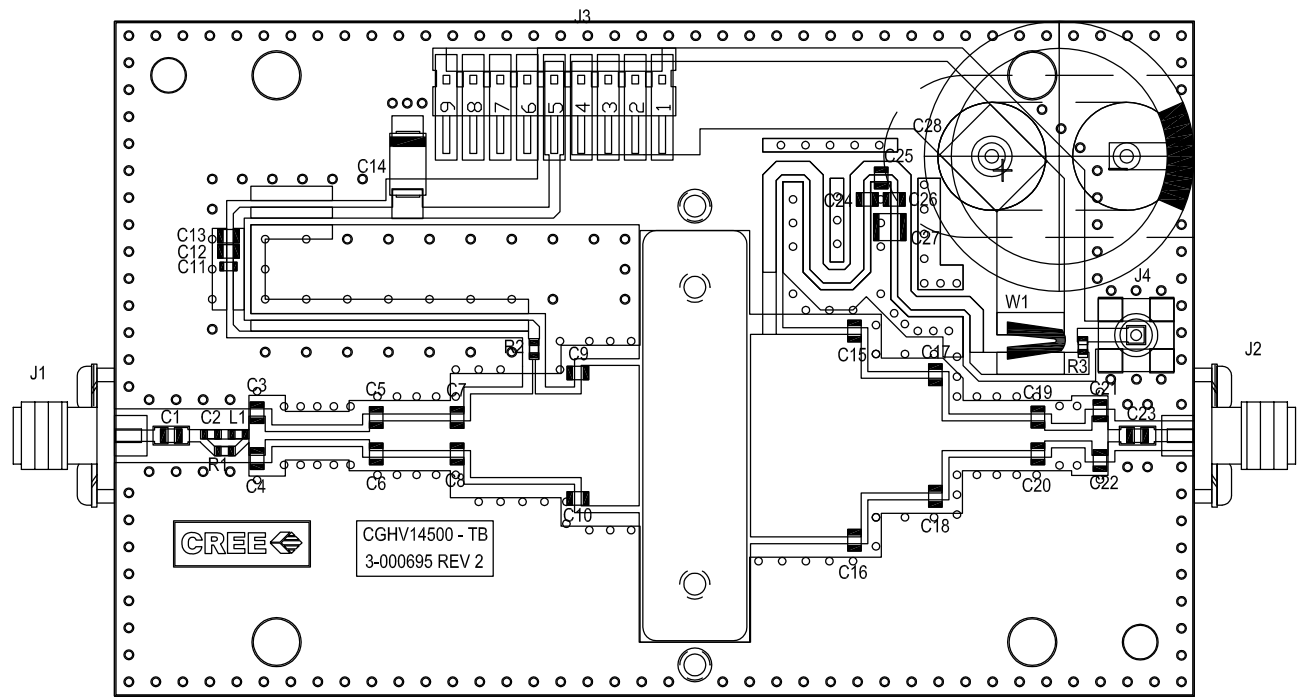

CGHV14500-AMP1 Demonstration Amplifier Circuit Schematic

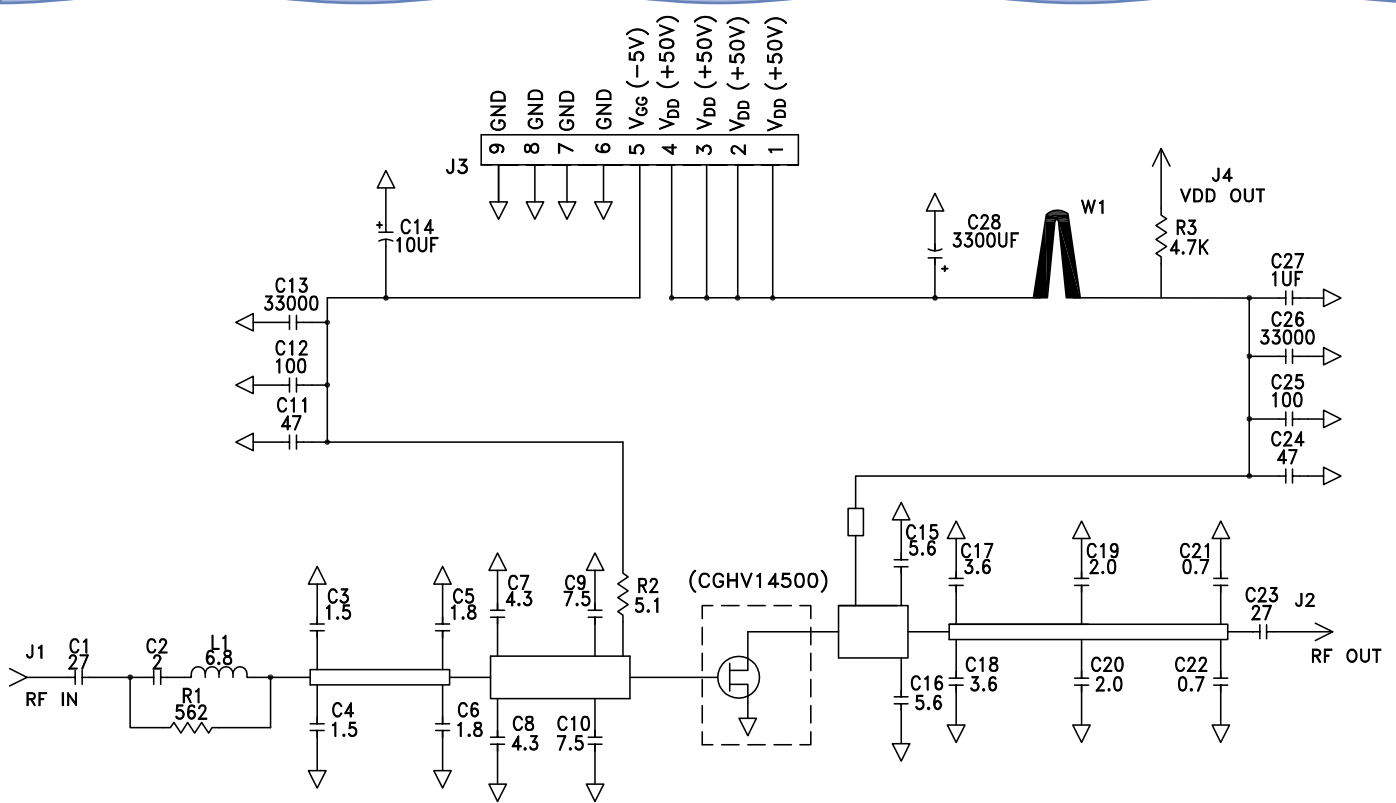

Product Dimensions CGHV14500F (Package Type – 440117)

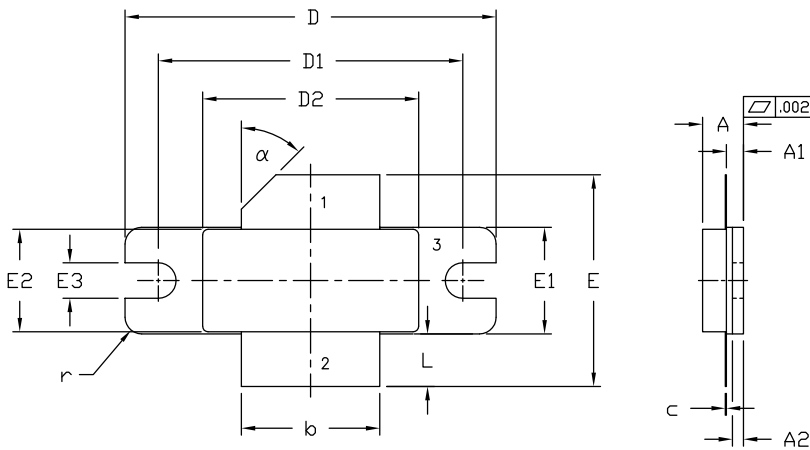



PIN 1. GATE
2. DRAIN
3. SOURCE

NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M - 1994.
2. CONTROLLING DIMENSION: INCH.
3. ADHESIVE FROM LID MAY EXTEND A MAXIMUM OF 0.020" BEYOND EDGE OF LID.
4. LID MAY BE MISALIGNED TO THE BODY OF PACKAGE BY A MAXIMUM OF 0.008" IN ANY DIRECTION.

| DIM | INCHES | | MILLIMETERS | | NOTES |
|-----|----------|-------|-------------|-------|-------|
| | MIN | MAX | MIN | MAX | |
| A | 0.138 | 0.158 | 3.51 | 4.01 | |
| A1 | 0.057 | 0.067 | 1.45 | 1.70 | |
| A2 | 0.035 | 0.045 | 0.89 | 1.14 | |
| b | 0.495 | 0.505 | 12.57 | 12.83 | 2x |
| c | 0.003 | 0.006 | 0.08 | 0.15 | |
| D | 1.335 | 1.345 | 33.91 | 34.16 | |
| D1 | 1.095 | 1.105 | 27.81 | 28.07 | |
| D2 | 0.773 | 0.787 | 19.63 | 20.00 | |
| E | 0.745 | 0.785 | 18.92 | 19.94 | |
| E1 | 0.380 | 0.390 | 9.65 | 9.91 | |
| E2 | 0.365 | 0.375 | 9.72 | 9.53 | |
| E3 | 0.123 | 0.133 | 3.12 | 3.38 | |
| L | 0.170 | 0.210 | 4.32 | 5.33 | 2x |
| r | 0.06 TYP | | 0.06 TYP | | 4x |
| α | 45° REF | | 45° REF | | |

Product Dimensions CGHV14500P (Package Type – 440133)

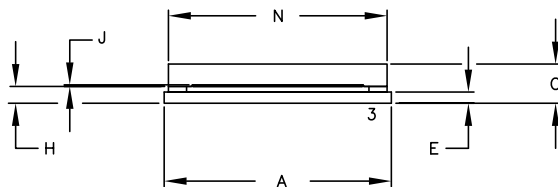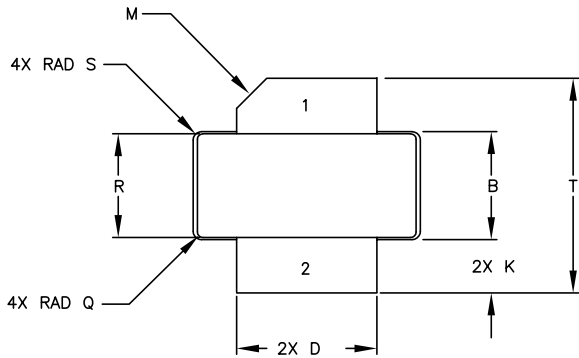

STYLE 1:
PIN 1. GATE
2. DRAIN
3. SOURCE

NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. ADHESIVE FROM LID MAY EXTEND A MAXIMUM OF 0.020" BEYOND EDGE OF LID.
4. LID MAY BE MISALIGNED TO THE BODY OF PACKAGE BY A MAXIMUM OF 0.008" IN ANY DIRECTION.

| DIM | INCHES | | MILLIMETERS | |
|-----|-----------|-------|-------------|-------|
| | MIN | MAX | MIN | MAX |
| A | 0.805 | 0.815 | 20.45 | 20.70 |
| B | 0.380 | 0.390 | 9.65 | 9.91 |
| C | 0.135 | 0.149 | 3.43 | 3.78 |
| D | 0.495 | 0.505 | 12.57 | 12.83 |
| E | 0.035 | 0.045 | .89 | 1.14 |
| H | 0.057 | 0.067 | 1.45 | 1.70 |
| J | 0.003 | 0.006 | .08 | .15 |
| K | 0.170 | 0.210 | 4.32 | 5.33 |
| M | 45° REF | | 45° REF | |
| N | 0.773 | 0.787 | 19.63 | 19.99 |
| Q | 0.020 REF | | 0.51 REF | |
| R | 0.364 | 0.374 | 9.25 | 9.50 |
| S | 0.030 REF | | 0.76 REF | |
| T | 0.745 | 0.785 | 18.92 | 19.94 |

Part Number System

CGHV14500F



| Parameter | Value | Units |
|------------------------------|----------------------------|-------|
| Upper Frequency ¹ | 1.4 | GHz |
| Power Output | 500 | W |
| Type | F = Flanged P = Package | - |





Table 1.

Note¹: Alpha characters used in frequency code indicate a value greater than 9.9 GHz. See Table 2 for value.

| Character Code | Code Value |
|----------------|--------------------------------|
| A | 0 |
| B | 1 |
| C | 2 |
| D | 3 |
| E | 4 |
| F | 5 |
| G | 6 |
| H | 7 |
| J | 8 |
| K | 9 |
| Examples: | 1A = 10.0 GHz 2H = 27.0 GHz |

Table 2.

Product Ordering Information
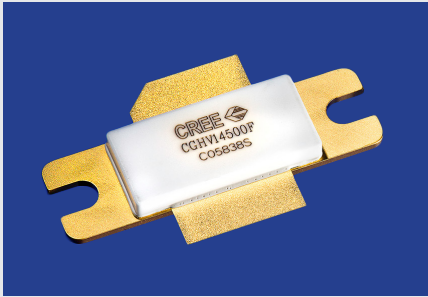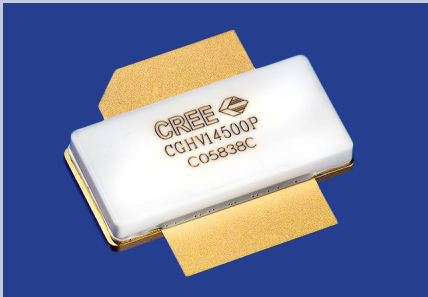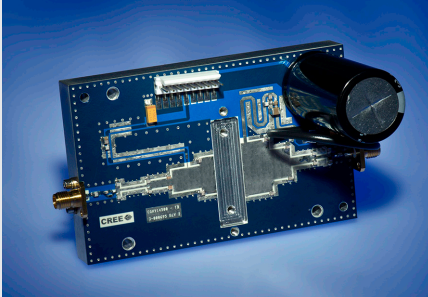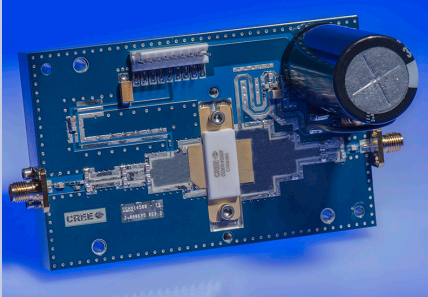
| Order Number | Description | Unit of Measure | Image |
|-----------------|------------------------------------|-----------------|---|
| CGHV14500F | GaN HEMT | Each |  |
| CGHV14500P | GaN HEMT | Each |  |
| CGHV14500v-TB | Test board without GaN HEMT | Each |  |
| CGHV14500F-AMP1 | Test board with GaN HEMT installed | Each |  |



Disclaimer

Specifications are subject to change without notice. Cree, Inc. believes the information contained within this data sheet to be accurate and reliable. However, no responsibility is assumed by Cree for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Cree. Cree makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. "Typical" parameters are the average values expected by Cree in large quantities and are provided for information purposes only. These values can and do vary in different applications and actual performance can vary over time. All operating parameters should be validated by customer's technical experts for each application. Cree products are not designed, intended or authorized for use as components in applications intended for surgical implant into the body or to support or sustain life, in applications in which the failure of the Cree product could result in personal injury or death or in applications for planning, construction, maintenance or direct operation of a nuclear facility.

For more information, please contact:

Cree, Inc.
4600 Silicon Drive
Durham, North Carolina, USA 27703
www.cree.com/rf

Sarah Miller
Marketing
Cree, RF Components
1.919.407.5302

Ryan Baker
Marketing & Sales
Cree, RF Components
1.919.407.7816

Tom Dekker
Sales Director
Cree, RF Components
1.919.407.5639

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)
Email: org@lifeelectronics.ru