

# Features

# Regulated Converter


- 30mW max. no load power consumption
- High efficiency up to 80%
- Isolated output 3kVAC / 1 min
- SCP, OVP protection
- Wide operating temperature range: -40°C to +85°C
- Universal input 85-305VAC

# RECOM

## AC/DC Converter

# RAC03-SE/277/W

## 3 Watt Single Output

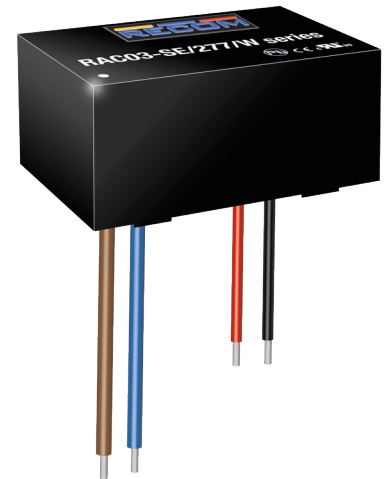

IEC/EN60950-1 certified  
 CAN/CSA-22.2 No. 60950 certified  
 UL60950-1 certified  
 EN60335-1 certified  
 EN55032 certified  
 EN55024 certified  
 EN55014 certified  
 CB Report

## Description

The ultra-compact wired RAC03-SE/277/W modules are available with output voltages of 3.3, 5, 12 and 24V, and the input-to-output isolation is 3kVAC/1min. With a standby consumption of 30mW typical, the mini power supplies are particularly suitable for energy-saving sleep mode and standby applications. Because of its compact design (height <18mm), it is a versatile solution for home automation and other similar applications. Complete with an integrated input filter, the series has enhanced EMI performance and complies with EN55032, class B. The mini power supplies are also protected against short circuit with fully automatic restart after the error has been solved. The converters are EN/UL60950-1 certified and come complete with a 3 year warranty.

## Selection Guide


| Part Number       | nom. Input Voltage Range [VAC] | Output Voltage [VDC] | Output Current [mA] | Efficiency typ <sup>(1)</sup> [%] | Max. Capacitive Load <sup>(2)</sup> [µF] |
|-------------------|--------------------------------|----------------------|---------------------|-----------------------------------|--|
| RAC03-3.3SE/277/W | 100-277                        | 3.3                  | 900                 | 71                                | 22000                                    |
| RAC03-05SE/277/W  | 100-277                        | 5                    | 600                 | 76                                | 7500                                     |
| RAC03-12SE/277/W  | 100-277                        | 12                   | 250                 | 78                                | 1000                                     |
| RAC03-24SE/277/W  | 100-277                        | 24                   | 125                 | 80                                | 200                                      |

### Notes:

Note1: Efficiency is tested at 230VAC and full load at +25°C ambient

Note2: Max Cap Load is tested at nominal input and full resistive load

## Model Numbering

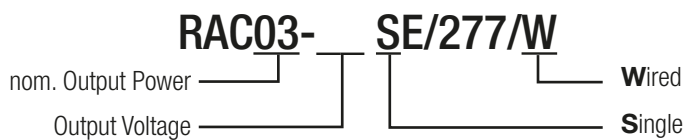

### Ordering Examples:

|                  |        |        |               |               |
|------------------|--------|--------|---------------|---------------|
| RAC03-05SE/277/W | 3 Watt | 5Vout  | Single Output | Wired Version |
| RAC03-12SE/277/W | 3 Watt | 12Vout | Single Output | Wired Version |

**Specifications** (measured @ Ta= 25°C, nom. Vin (115/230VAC), full load and after warm-up unless otherwise stated)

### BASIC CHARACTERISTICS


| Parameter                              | Condition                | Min.             | Typ.         | Max.             |
|--|--------------------------|------------------|--------------|------------------|
| Input Voltage Range <sup>(3)</sup>     | nom. Vin= 230VAC         | 85VAC<br>120VDC  | 277VAC       | 305VAC<br>430VDC |
| Input Current                          | 115VAC<br>230VAC         |                  | 70mA<br>45mA |                  |
| Inrush Current                         | cold start at +25°C      | 115VAC<br>230VAC |              | 15A<br>30A       |
| No load Power Consumption              | 85-305VAC, 47-63Hz       |                  |              | 30mW             |
| Input Frequency Range                  | AC Input                 | 47Hz             |              | 440Hz            |
| Minimum Load                           |                          |                  | 2%           |                  |
| Hold-up Time                           | 115VAC<br>230VAC         |                  | 15ms<br>80ms |                  |
| Internal Operating Frequency           | 100% load at nominal Vin |                  | 55kHz        |                  |
| Output Ripple and Noise <sup>(4)</sup> |                          |                  | 200mVp-p     |                  |

**Notes:**

Note3: No line derating required

Note4: Ripple and Noise is the maximum peak-to-peak voltage value measured at the output with a 20MHz bandwidth, at rated line voltage at full load. And with a 47µF low-ESR electrolytic capacitor in parallel with a 0.1µF ceramic capacitor across output

### Efficiency vs. Load

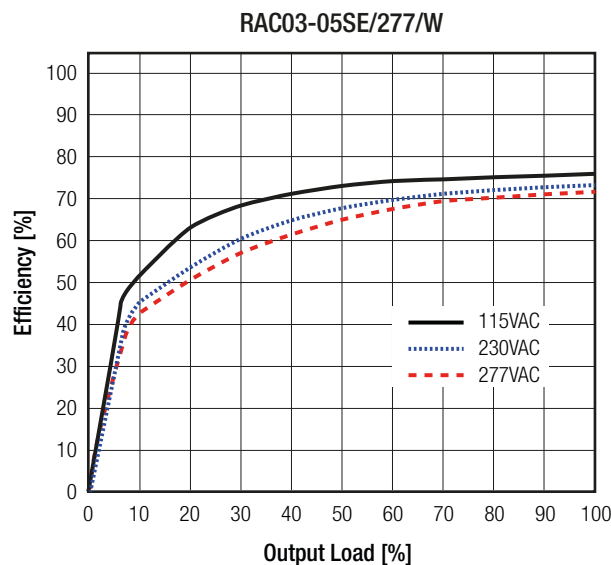

### REGULATIONS

| Parameter                               | Condition                        | Value                 |
|---|----------------------------------|-----------------------|
| Output Voltage Tolerance <sup>(5)</sup> |                                  | ±6.0% max.            |
| Line Regulation                         | low line to high line, full load | ±1% typ. / ±1.5% max. |
| Load Regulation                         | 10% to 100% load                 | 6.0% typ.             |

**Notes:**

Note5: Includes initial voltage accuracy, thermal drift, line regulation and load regulation at rated input voltage and load conditions


**Specifications** (measured @ Ta= 25°C, nom. Vin (115/230VAC), full load and after warm-up unless otherwise stated)

**PROTECTIONS**

| Parameter                      | Type               |                     | Value                          |
|--------------------------------|--------------------|---------------------|--------------------------------|
| Short Circuit Protection (SCP) | below 100mΩ        |                     | continuous, automatic recovery |
| Over Voltage Protection (OVP)  | zener diode clamp  |                     | 112% - 140%                    |
| Over Current Limit             |                    |                     | 120% - 190%                    |
| Over Voltage Category          |                    |                     | OVCII                          |
| Isolation Voltage              | I/P to O/P         | tested for 1 minute | 3kVAC                          |
| Isolation Resistance           |                    |                     | 1GΩ min.                       |
| Leakage Current                | 85-305VAC, 47-63Hz |                     | 10μA max.                      |

**Notes:**

Note6: Refer to local wiring regulations if input over-current protection is also required

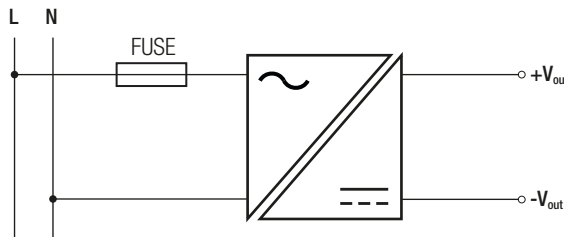



**ENVIRONMENTAL**

| Parameter                                  | Condition                        |       |        | Value                        |
|--|----------------------------------|-------|--------|------------------------------|
| Operating Temperature Range <sup>(7)</sup> | full load, 230VAC                |       |        | -40°C to +75°C               |
|  | refer to derating graph          |       |        | -40°C to +85°C               |
| Maximum Case Temperature                   |                                  |       |        | +105°C                       |
| Thermal Impedance                          |                                  |       |        | 10K/W typ.                   |
| Operating Humidity                         | non-condensing                   |       |        | 5% - 95% RH max.             |
| MTBF                                       | according to MIL-HDBK-217F, G.B. | +25°C | 115VAC | 3503 x 10 <sup>3</sup> hours |
|  |                                  |       | 230VAC | 1816 x 10 <sup>3</sup> hours |

**Notes:**

Note7: At low input voltage (85-140VAC) and temperature below -25°C the RAC03-3.3SE/277/W and RAC03-05SE/277/W, will not start

**Derating Graph**

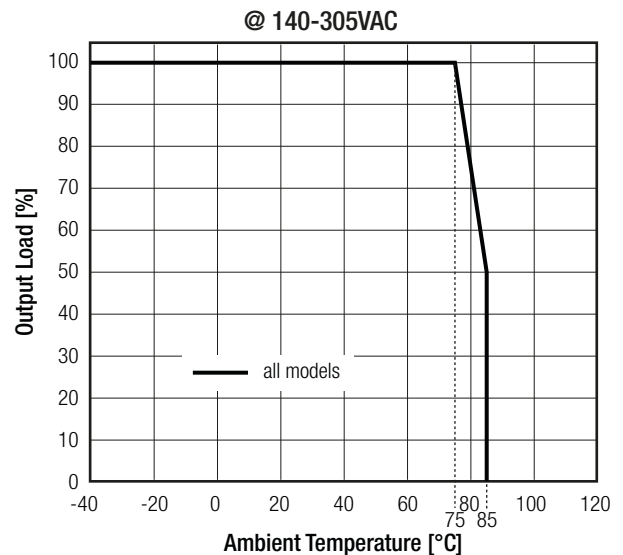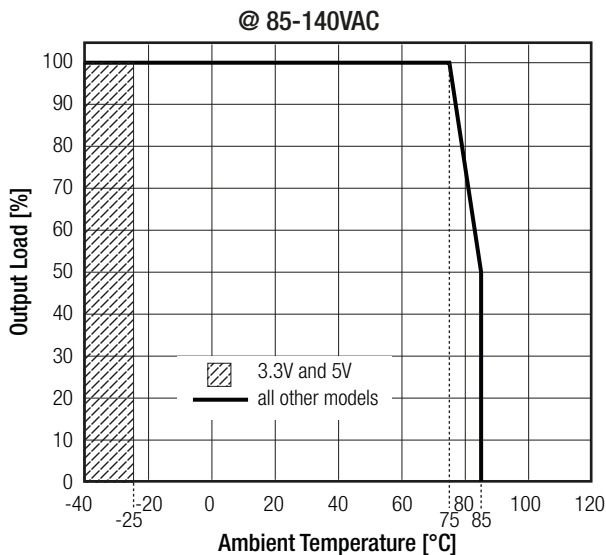

**Specifications** (measured @ Ta= 25°C, nom. Vin (115/230VAC), full load and after warm-up unless otherwise stated)

### SAFETY AND CERTIFICATIONS

| Certificate Type (Safety)   | Report / File Number | Standard   |
|---|----------------------|--|
| Information Technology Equipment, General Requirements for Safety | L0339L26-CB-1-B4     | IEC60950-1:2005 2nd Edition + A2:2013<br>EN60950-1:2006 + A2:2013                    |
| Information Technology Equipment, General Requirements for Safety | E224736-X1-A24-UL    | UL No. 60950-1, 2nd Edition, 2014<br>CAN/CSA-C22.2 No. 60950-1-07, 2nd Edition, 2014 |
| Household and similar electrical appliances, General requirements | L0339L26-B2-L        | EN60335-1:2012+A11:2014  |
| EAC Safety of Low Voltage Equipment                               | RU-AT.37.02367       | TP TC 004/2011   |
| RoHS2+  |                      | RoHS-2011/65/EU + AM-2015/863  |

| EMC Compliance (Industrial)   | Condition  | Standard / Criterion  |
|---|--|---|
| Electromagnetic compatibility of multimedia equipment - Emission requirements                   |  | EN55032:2015, Class B   |
| Information technology equipment - Immunity characteristics - Limits and methods of measurement |  | EN55024:2010  |
| ESD Electrostatic discharge immunity test   | ±8kV air, ±4kV contact   | EN61000-4-2:2009, Criteria B  |
| Radiated, radio-frequency, electromagnetic field immunity test                                  | 3V/m   | EN61000-4-3:2006 + A2:2010, Criteria A  |
| Fast Transient and Burst Immunity   | AC Power Port: ±1kV  | EN61000-4-4:2012, Criteria A  |
| Power Magnetic Field Immunity   | 50Hz, 1A/m   | EN61000-4-8:2010, Criteria A  |
| Voltage Dips and Interruption   | Voltage Dips: >95% reduction<br>>30% reduction<br>Interruption: >95% | EN61000-4-11:2004, Criteria A<br>EN61000-4-11:2004, Criteria A<br>EN61000-4-11:2004, Criteria B |
| Limits of Voltage Fluctuations & Flicker  |  | EN61000-3-3:2013  |

| EMC Compliance (Household)  | Condition  | Standard / Criterion   |
|---|--|--|
| Electromagnetic compatibility of multimedia equipment – Emission Requirements                   |  | EN55014-1:2006+A2:2011   |
| Information technology equipment - Immunity characteristics - Limits and methods of measurement |  | EN55014-2:2015   |
| ESD Electrostatic discharge immunity test   | ±8kV air, ±4kV contact   | IEC61000-4-2:2008, Criteria A  |
| Radiated, radio-frequency, electromagnetic field immunity test                                  | 3V/m   | IEC61000-4-3:2006 + A2:2010, Criteria A  |
| Fast Transient and Burst Immunity   | AC Power Port ±1.0kV<br>DC Output ±0.5kV                             | IEC61000-4-4:2012, Criteria A  |
| Surge Immunity  | AC Power Port L-N ±2kV<br>DC Output L-N ±1kV                         | IEC61000-4-5:2014, Criteria B  |
| Immunity to conducted disturbances, induced by radio-frequency fields                           | AC Power Port 3V, DC Output 3V                                       | IEC61000-4-6:2013, Criteria A  |
| Voltage Dips and Interruption   | Voltage Dips: >95% reduction<br>>30% reduction<br>Interruption: >95% | IEC61000-4-11:2004, Criteria B<br>IEC61000-4-11:2004, Criteria C<br>IEC61000-4-11:2004, Criteria C |
| Limits of Harmonic Current Emissions  |  | EN61000-3-2:2014   |
| Limits of Voltage Fluctuations & Flicker  |  | EN61000-3-3:2013   |






### DIMENSION AND PHYSICAL CHARACTERISTICS

| Parameter         | Type            | Value  |
|-------------------|-----------------|--|
| Material          | case<br>potting | black plastic, (UL94V-0)<br>epoxy, (UL94V-0) |
| Dimension (LxWxH) |                 | 38.25 x 24.35 x 17.4mm                       |
| Weight            |                 | 29g typ.                                     |

continued on next page

Specifications (measured @ Ta= 25°C, nom. Vin (115/230VAC), full load and after warm-up unless otherwise stated)

Dimension Drawing (mm)

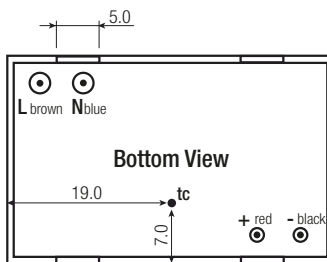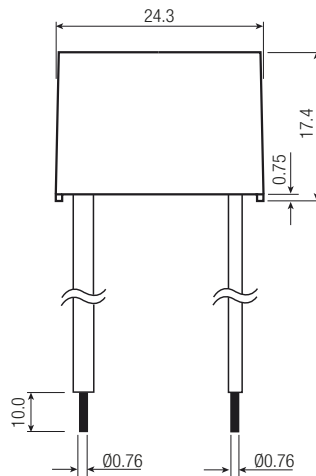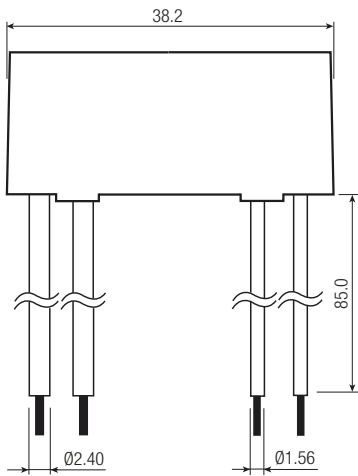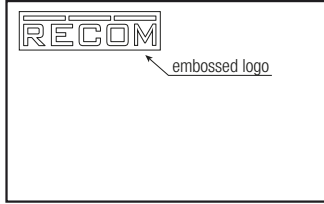

Wired Connections

| Wired Color | Type           | Function   |
|-------------|----------------|------------|
| 1, brown    | UL-1015, AWG22 | VAC in (L) |
| 2, blue     | UL-1015, AWG22 | VAC in (N) |
| 3, red      | UL-1430, AWG22 | +Vout      |
| 4, black    | UL-1430, AWG22 | -Vout      |

tc= case temperature measuring point

Tolerance: xx.x= ±0.5mm

xx.xx= ±0.35mm

PACKAGING INFORMATION

| Parameter                   | Type          | Value                  |
|-----------------------------|---------------|------------------------|
| Packaging Dimension (LxWxH) | cardboard box | 520.0 x 195.0 x 68.0mm |
| Packaging Quantity          |               | 30pcs                  |
| Storage Temperature Range   |               | -40°C to +85°C         |

The product information and specifications may be subject to changes even without prior written notice. The product has been designed for various applications; its suitability lies in the responsibility of each customer. The products are not authorized for use in safety-critical applications without RECOM's explicit written consent. A safety-critical application is an application where a failure may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The applicant shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)  
Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)