Honeywell

THE POWER OF **CONNECTED**

# MICRO SWITCH Compact Limit Switches

NGC Series

***002409***

*Issue 9*

**Datasheet**

## DESCRIPTION

Honeywell's MICRO SWITCH Compact Limit Switches, NGC Series, are a configurable platform of medium-duty switches that allow the customer to choose SPDT (single pole, double throw) or DPDT (double pole, double throw) circuitry while maintaining the same housing and mounting footprint throughout the NGC Series. MICRO SWITCH NGC Series can be configured more than 380,000 ways, carries global approvals, and are sealed to IP67 for potential use in indoor and outdoor applications.

## VALUE TO CUSTOMERS

- **Cost-effective:** Provides a single source for a compact SPDT and DPDT limit switch, which can help minimize the Original Equipment Manufacturer's sourcing expenses by simplifying their supply chain
- **Versatile:** Durable packaging allows for use in many harsh indoor or outdoor applications, providing performance confidence
- **Configurable:** Allows design engineers to standardize on a single footprint while meeting a variety of electrical requirements
- **Application support:** Customers with a global footprint can count on Honeywell for regional support for new applications and troubleshooting

## FEATURES

- SPDT or DPDT configurable circuitry
- Snap-action, positive-break contacts
- Silver alloy and gold-plated contact options
- UL, CE, cUL, and CCC approvals
- Conforms to IEC 60947-5-1, IEC 61373, EN45545-2 (metal variants with M12 connectors only)
- NEMA 1, 4, 12, 13; IP67 sealing
- Metal and plastic housing options
- Low and high temperature variants
- Cable and connector terminations
- Variety of heads and actuator levers

## POTENTIAL INDUSTRIAL APPLICATIONS

- Boom position detection
- Elevators and escalators
- Machine tools
- Mobile light towers
- Packaging equipment
- Rail doors
- Scissor lifts

## DIFFERENTIATION

- With two times the vibration (10 g) and shock (50 g) ratings of comparable competitive devices, the NGC Series can be implemented in the harshest of environmental conditions, providing enhanced reliability and repeatability
- Broader current capacity (10 A) than comparable devices allows for potential use in a wider set of applications, making platform standardization an easier task

## PORTFOLIO

The NGC Series joins the 14CE, 914CE, LS, and E6/V6 Series of Medium-Duty Limit Switches. Honeywell also offers a portfolio of MICRO SWITCH Heavy-Duty Limit Switches and Global Limit Switches.

**Table 1. Specifications**

| Characteristic | Parameter |
|---|---|
| Description | compact, medium-duty limit switches |
| Actuators | **Side Rotary Configurations**<br>• Side rotary<br>• Side rotary (short)<br>• Side rotary with adjustable length roller lever<br>• Reversed side rotary (short)<br>• Reversed side rotary with adjustable length roller lever<br><br>**Plunger Configurations**<br>• Pin plunger (standard 4,8 mm [0.19 in] and long 7,4 mm [0.29 in])<br>• Roller plunger (standard 15,3 mm [0.60 in] and long 17,85 mm [0.70 in])<br>• Cross roller plunger (standard 15,3 mm [0.60 in] and long 17,85 mm [0.70 in])<br>• Pin plunger with boot seal<br>• Panel-mount pin plunger<br>• Panel-mount roller plunger<br>• Panel-mount cross roller plunger<br>• Panel-mount pin plunger with boot seal<br>• Top roller lever arm |
| Terminations (SPDT) | Normal cable (refer to table 4)<br>PUR cable (refer to table 4)<br>Special application cable (refer to table 4)<br>Railway cable (refer to table 4)<br>Connector, 4-pin male, M12 thread<br>Connector, 5-pin male, M12 thread |
| Terminations (DPDT) | Normal cable (refer to table 4)<br>PUR cable (refer to table 4)<br>Special application cable (refer to table 4)<br>Railway cable (refer to table 4) |
| Material approval standard | (only applicable for product with non-halogen cable)<br>DIN5510-2-2009 (flammability rating: S3; smoke rating: > SRI; welt rating: ST2;<br>toxic gas rating: FED(TZUL=15min)< 1) |
| Switching options | SPDT, DPDT; snap action contacts (1NC/1NO, 2NC/2NO) |
| Sealing | NEMA 1, 4, 12, 13; IP67 per IEC 60529<br>suitable for outdoor applications |
| Contacts | snap action, positive break<br>standard: silver alloy; gold: gold-plated |
| Operating temperature | -25 °C to 75 °C [ -13 °F to 167 °F] (for extended operating temperature options, see Table 3) |
| Storage temperature | -40 °C to 85 °C [-40 °F to 185 °F] |
| Mechanical endurance | 1NC/1NO: 5 M cycles min. at 120 CPM<br>2NC/2NO: 5 M cycles min. at 60 CPM – for AgNi contacts only |
| Electrical life | see table 3 |
| Contact bounce limit | 50 msec max., use proper signal filter accordingly |
| Thermal current | 1NC/1NO: 10 A; 2NC/2NO: 5 A |
| Rated insulation voltage (Ui) | 1NC/1NO: 400 V as per IEC 60947-5-1<br>2NC/2NO: 250 V as per IEC 60947-5-1 |
| Dielectric strength | 1890 Vac for metal housing; 2890 Vac for plastic housing<br>1500 Vac between all terminals to enclsoure after durability test |
| Impulse voltage | 1NC/1NO: 2500 Vdc as per IEC 60947-5-1<br>2NC/2NO: 1500 Vac as per IEC 60947-5-1 |
| Pollution degree | 3 (III) |
| Humidity | 95 %RH max. |
| Operating speed | 0,3 mm/s to 2 m/s |
| Switching frequency | 1NC/1NO: 120 CPM max.<br>2NC/2NO: 60 CPM max. |
| Shock | 50 g for 11 μs as per IEC 60068-2-27; railway application, per IEC 61373 Class I Car B type |
| Vibration | 10 g as per IEC 60068-2-6, frequency range 10 Hz to 500 Hz;<br>railway application per IEC 61373 Class I Car B type |
| Approvals | UL (UL508), cUL, CE (IEC 60947-5-1), CCC (GB14048.5-2008) |
| Conforming to standards | IEC 60947-5-1, IEC 61373, EN45545-2 HL 3 (metal variants with M12 connectors only) |

# MICRO SWITCH Compact Limit Switches, NGC Series

### Table 2. Electrical Rating and Utilization Category

| SPDT 1NO/1NC | | | | DPDT 2NO/2NC | | | | SPDT and DPDT |
|---|---|---|---|---|---|---|---|---|
| ac | | dc | | ac | | dc | | gold-plated contacts |
| A300 Ue (volts) | AC15 Ie (amps) | Q300 Ue (volts) | DC13 Ie (amps) | C300 Ue (volts) | AC15 Ie (amps) | R300 Ue (volts | DC13 Ie (amps) | |
| 120 | 6 | 125 | 0.55 | 240 | 0.75 | 250 | 0.1 | 30 mVdc 10 mA resistive |
| 240 | 3 | 250 | 0.27 | | | | | |
| Per IEC 60947-5-1 and UL 508 | | | | | | | | |

### Table 3. Electgrical Life Expectancy at Illustrated Load

| Switch Type | Voltage | Current | Life |
|---|---|---|---|
| SPDT (01) silver contact[1] | 110 Vdc | 1A | 500,000 |
| DPDT (24) silver contact[1] | 110 Vdc | 1 A | 500,000 |
| DPDT (24) silver contact[2] | 24 Vdc | 15 mA | 1,500,000 |
| DPDT (32) gold-plated contact[2] | 30 mVdc | 10 mA | 50,000 |
| SPDT (07) gold-plated contact[2] | 30 mVdc | 10 mA | 50,000 |

[1] 15 cycles/minute max. Applicable to NC circuit only. All loads resistive. Life mentioned are min. life.
[2] 30 cycles/minute max. All loads resistive. Life mentioned are min. life.

### Figure 1. Product Nomenclature and Order Guide

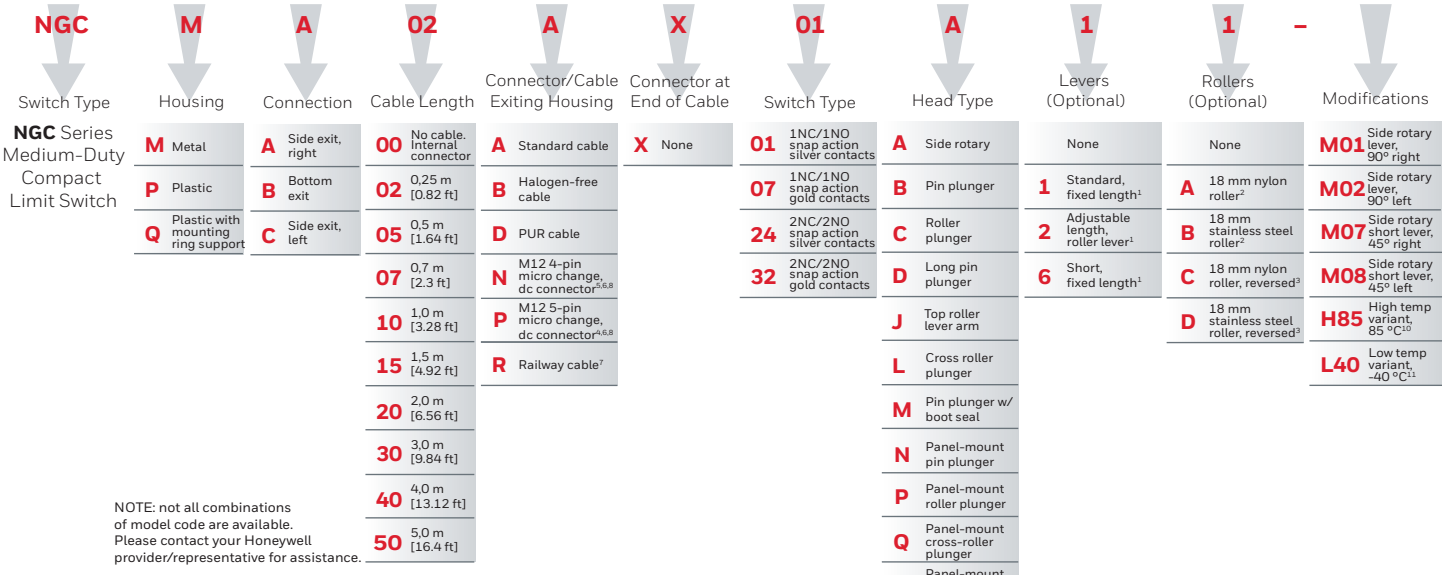


NOTE: not all combinations of model code are available. Please contact your Honeywell provider/representative for assistance.

[1] Only applicable for head type "A"
[2] Only applicable for lever types "1, 2, 6" and switch types "01" and "07"
[3] Only applicable for lever types "2, 6"
[4] Only applicable for metal housing Type "M"
[5] Typically applicable for plastic housing Type "P" and "Q", and without grounding metal housing Type "M"
[6] Only applicable for switch type "01" and "07"
[7] Cable meets EN 50306, but does not meet with UL requirement
[8] Only applicable for "00" cable length. Not applicable to switch types "24" and "32"
[9] "00" cable length is not applicable for connector/cable exit type "A", "B", "D", and "R". Not applicable to switch types "24" and "32"
[10] DIN 5510-2-2009 does not apply to NGC variant with suffix modification code "H85". Also applicable only for connector/cable types "B", "R", "N", and "P". See table 3
[11] Modification code "L40" is a -40 °C variant. Only applicable to connector/cable types "B", "R", "N", and "P". See table 3

**Table 4. Connector/Cable Type Temperature Options[10, 11]**

| Connector/Cable type | Standard NGC Series (with modification code, none) | | High Temp NGC Series (with modification code, H85) | | Low Temp NGC Series (with modification code, L40) | |
|---|---|---|---|---|---|---|
| | Tmin | Tmax | Tmin | Tmax | Tmin | Tmax |
| **A** | -25 °C | 75 °C | – | – | – | – |
| **B** | -25 °C | 75 °C | -25 °C | 85 °C | -40 °C | 75 °C |
| **D** | -25 °C | 75 °C | – | – | – | – |
| **R** | -25 °C | 75 °C | -25 °C | 85 °C | -40 °C | 75 °C |
| **N** | -25 °C | 75 °C | -25 °C | 85 °C | -40 °C | 75 °C |
| **P** | -25 °C | 75 °C | -25 °C | 85 °C | -40 °C | 75 °C |

**Figure 2. Connector Dimensions and Pin-Out Identification**

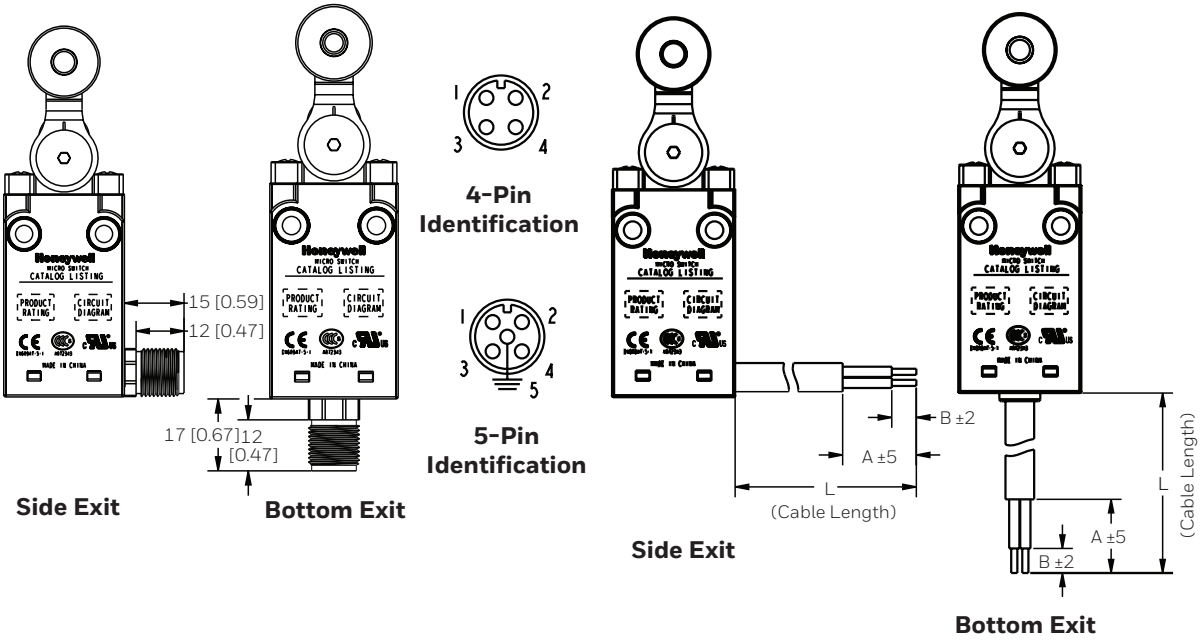


**Table 5. Cable Descriptions**

| Listing | Cable Description | | | | | | |
|---|---|---|---|---|---|---|---|
| | Length (L) min. | Jacket strip length (A) | Insulation strip length (B) | NGCP*01* NGCP*07* (01 or 07 switch type) | NGCM*01* NGCM*07* (01 or 07 switch type) | NGCP*24* NGCP*32* (24 or 32 switch type) | NGCM*24* NGCM*32* (24 or 32 switch type) |
| NGC*00* | no cable (internal connector) | | | | | | |
| NGC*02* | 0,25 m [9.8 in] | 23 mm [0.91 in] | 5 mm [0.20 in] | 18 AWG or 4 x 0,75 mm$^2$ | 18 AWG or 5 x 0,75 mm$^2$ | 20 AWG or 8 x 0,5 mm$^2$ | 20 AWG or 9 x 0,5 mm$^2$ |
| NGC*05* | 0,5 m [19,7] | 32 mm [1.26] | 17 mm [0.67 in] | | | | |
| NGC*07* | 0,7 m [27.6 in] | 32 mm [1.26] | 17 mm [0.67 in] | | | | |
| NGC*10* | 1 m [39.37 in] | 23 mm [0.91 in] | 5 mm [0.20 in] | | | | |
| NGC*15* | 1,5 m [59 in] | 23 mm [0.91 in] | 5 mm [0.20 in] | | | | |
| NGC*20* | 2 m [78.74 in] | 23 mm [0.91 in] | 5 mm [0.20 in] | | | | |
| NGC*30* | 3 m [9.84 ft] | 23 mm [0.91 in] | 5 mm [0.20 in] | | | | |
| NGC*40* | 4 m [13.12 ft] | 23 mm [0.91 in] | 5 mm [0.20 in] | | | | |
| NGC*50* | 5 m [16.4 ft] | 23 mm [0.91 in] | 5 mm [0.20 in] | | | | |

**Figure 3. Side Rotary A1A/A1B Dimensions**

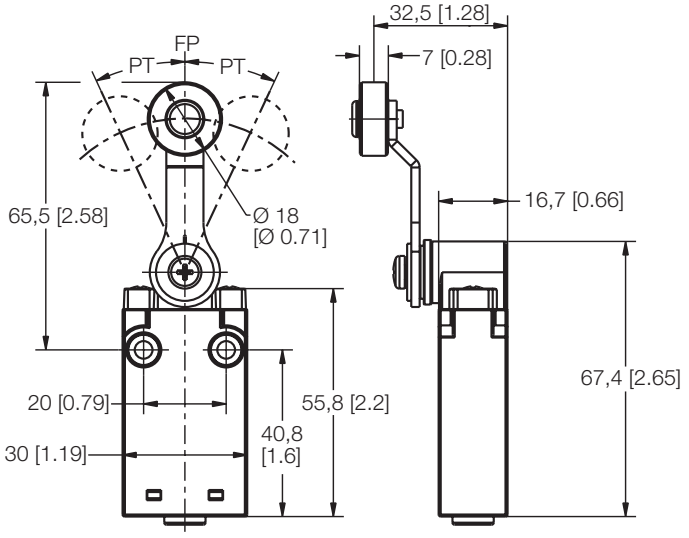


**Type A1A/A1B • Side Rotary**

**Figure 4. Side Rotary A6A/A6B Dimensions**

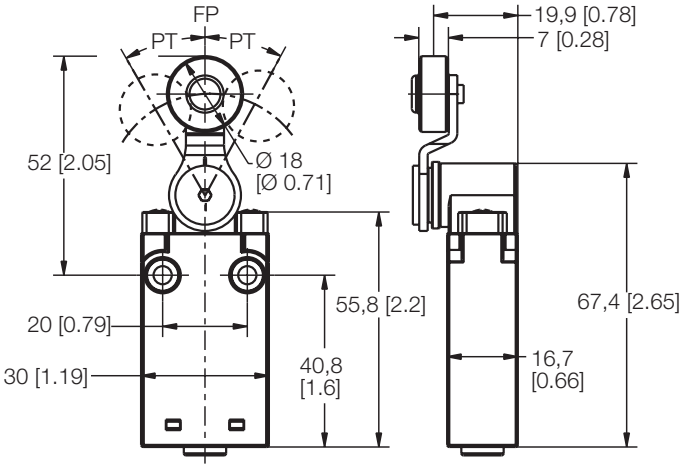


**Type A6A/A6B • Side Rotary (Short)**

**Figure 5. Side Rotary A2A/A2B Dimensions**

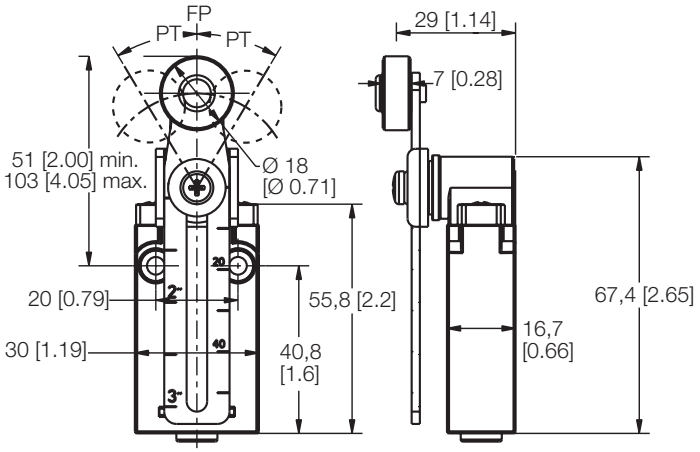


**Type A2A/A2B • Side Rotary with Adjustable Length Roller Lever**

**Figure 6. Side Rotary A6C/A6D Dimensions**

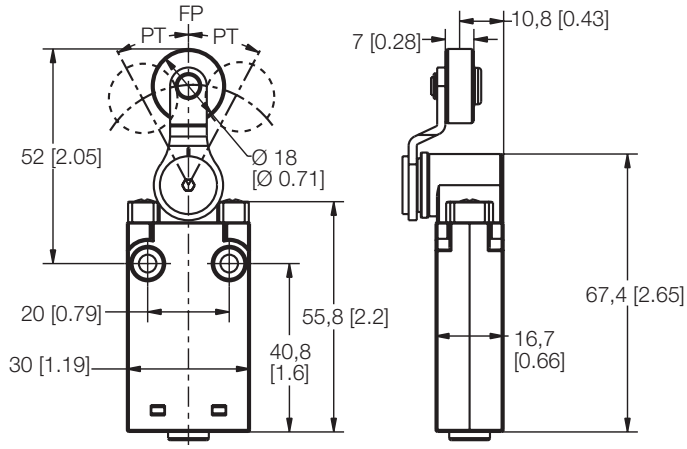


**Type A6C/A6D • Reversed Side Rotary (Short)**

**Figure 7. Side Rotary A2C/A2D Dimensions**

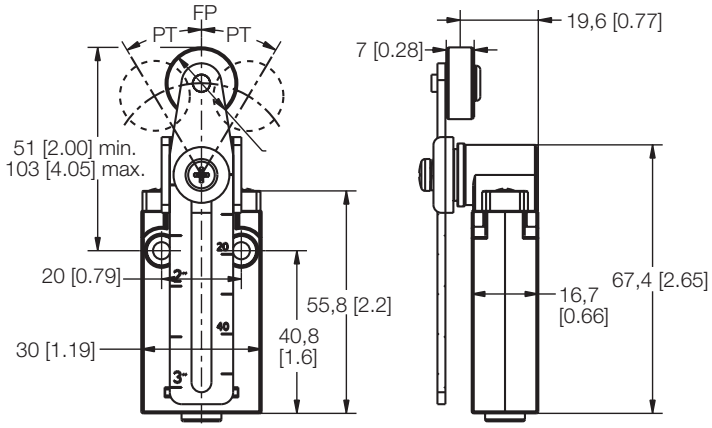


**Type A2C/A2D • Reversed Side Rotary with Adjustable Length Roller Lever**

**Table 5. Side Rotary Operating Characteristics**

| Actuation | Catalog Listing | Connector/ Cable Exit | Switch Type | Circuit Diagram | Bar Charts | Differential Travel max. | Operating Force/ Torque max. | Release Force/ Torque max. |
|---|---|---|---|---|---|---|---|---|
| Side Rotary | NGCP*****X01A** | A | 01 |  |  | 15° | 18 Ncm [1.59 in-lb] | 2,5 Ncm [0.22 in-lb] |
| | NGCP*****X01A** | B | | | | | | |
| | NGCP*****X01A** | D | | | | | | |
| | NGCP*****X07A** | A | 07 | | | | | |
| | NGCP*****X07A** | B | | | | | | |
| | NGCP*****X07A** | D | | | | | | |
| | NGCP*****X01A** | N | 01 |  | | | | |
| | NGCP*****X07A** | N | 07 | | | | | |
| | NGCM*****X01A** | A | 01 |  | | | | |
| | NGCM*****X01A** | B | | | | | | |
| | NGCM*****X01A** | D | | | | | | |
| | NGCM*****X07A** | A | 07 | | | | | |
| | NGCM*****X07A** | B | | | | | | |
| | NGCM*****X07A** | D | | | | | | |
| | NGCM*****X01A** | P | 01 |  | | | | |
| | NGCM*****X07A** | P | 07 | | | | | |
| | NGCP*****X24A** | A | 24 |  |  | 16.5° | 17 Ncm [1.5 in-lb] | 2,1 Ncm [0.19 in-lb] |
| | NGCP*****X24A** | B | | | | | | |
| | NGCP*****X24A** | D | | | | | | |
| | NGCP*****X32A** | A | 32 | | | | | |
| | NGCP*****X32A** | B | | | | | | |
| | NGCP*****X32A** | D | | | | | | |
| | NGCM*****X24A** | A | 24 |  | | | | |
| | NGCM*****X24A** | B | | | | | | |
| | NGCM*****X24A** | D | | | | | | |
| | NGCM*****X32A** | A | 32 | | | | | |
| | NGCM*****X32A** | B | | | | | | |
| | NGCM*****X32A** | D | | | | | | |

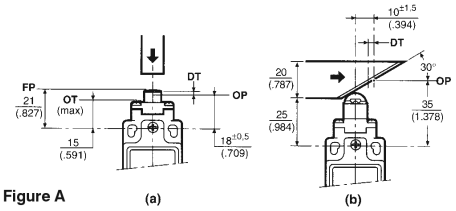


Figure A

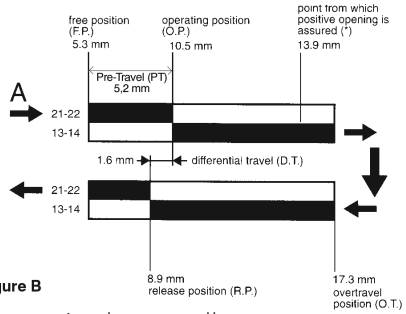


Figure B

**How to read and understand the bar chart information**

The following example relates to a unit which has a snap action basic and which has a roller pin plunger actuator. Follow the black arrows and the black strip on the chart. The black strip indicates that there is a circuit between the terminals whose numbers are shown on the left and when white there is no circuit.

Look at Figures A and B as examples. Actuator type used for test is the linear Cam travel type (b) shown left. The start point is at the arrow marked "A" (See fig. B). This shows the free position to be 5.3 mm from the vertical center line of the unit. At this stage there is a circuit between the terminals 21-22 but no circuit between terminals 13-14. The unit can be actuated until it reaches the operating position which is 10,5 mm from the center line – a travel distance of 10,5 – 5,3 = 5,2 mm from the free position. At this point the circuit arrangement changes – no circuit between 21-22 but making a circuit between 13-14. If, however, the contacts of terminals 21-22 weld together and will not separate, a mechanical safety feature will take effect if the switch is travelled past the point from which positive opening is assured, 13,9 mm. As the switch returns it reaches the release position at 8,9 mm from the center line. The circuit will change back to the original state and the difference between the operating position and the release position gives what is known as the differential travel i.e. 10,5 – 8,9 = 1,6 mm. The asterisk (*) indicates the point from which the positive opening is assured.

**Figure 8. Pin Plunger B & D Dimensions**




NGC_B | FP 19,8 mm; TT 15,9 mm
NGC_D | FP 22,4 mm; TT 18,5 mm
Pin Plunger

**Figure 9. Roller Plunger C & S Dimensions**

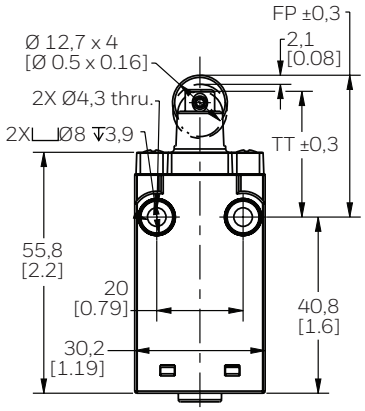


NGC_C | FP 30,3 mm; TT 26,4 mm
NGC_S | FP 32,85 mm; TT 28,95 mm
Roller Plunger

**Figure 10. Cross Roller Plunger L & T Dimensions**

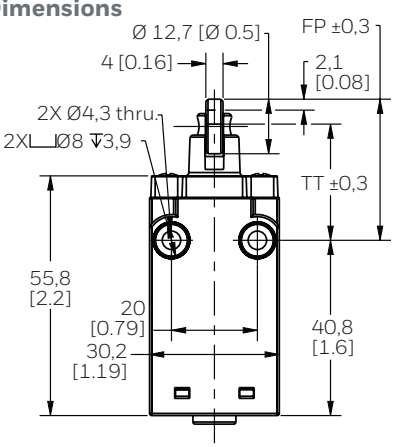


NGC_L | FP 30,3 mm; TT 26,4 mm
NGC_T | FP 32,85 mm; TT 28,95 mm
Cross Roller Plunger

**Figure 11. Pin Plunger with Boot Seal M Dimensions**

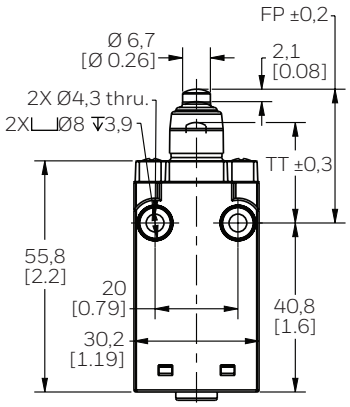


NGC_M | FP 32,3 mm; TT 28,4 mm
Pin Plunger with Boot Seal

**Figure 12. Panel-Mount PIn Plunger N Dimensions**

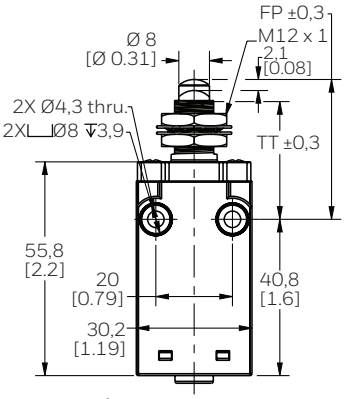


NGC_N | FP 36,5 mm; TT 32,6 mm
Panel Mount Pin Plunger

**Figure 13. Panel-Mount Roller Plunger P Dimensions**

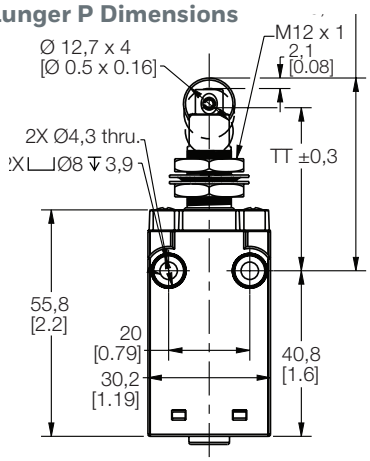


NGC_P | FP 47,5 mm; TT 43,6 mm
Panel-Mount Roller Plunger

**Figure 14. Panel-Mount Cross Roller Plunger Q Dimensions**

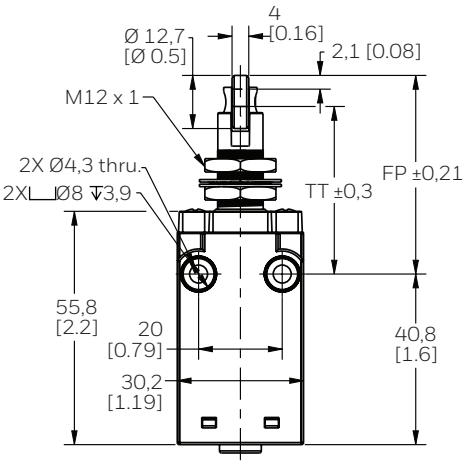


NGC_Q | FP 47,5 mm; TT 43,6 mm
Panel-Mount Cross Roller Plunger

**Figure 15. Panel-Mount PIn Plunger With Boot Seal R Dimensions**

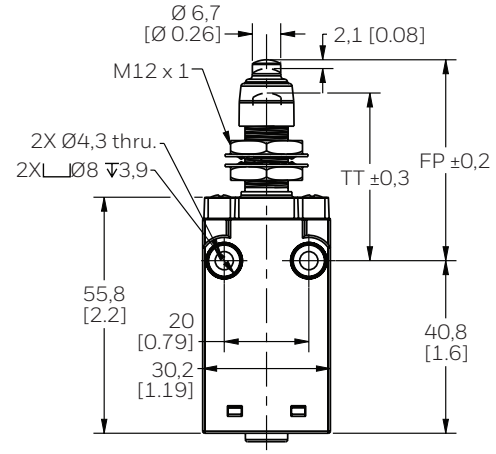


NGC_R | FP 47,5 mm; TT 43,6 mm
Panel-Mount Pin Plunger with Boot Seal

**Figure 16. Top Roller Lever Arm J Dimensions**

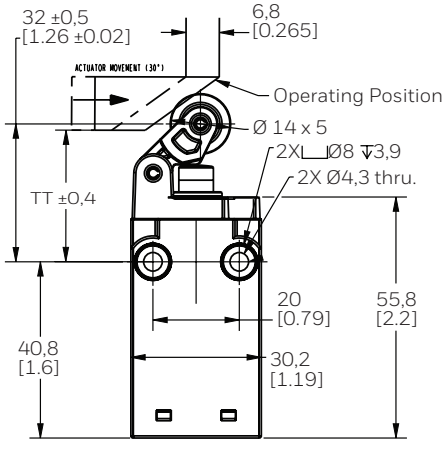


NGC_J | TT 33,3 mm
Top Roller Lever Arm

**Figure 17. Wedge Actuation**

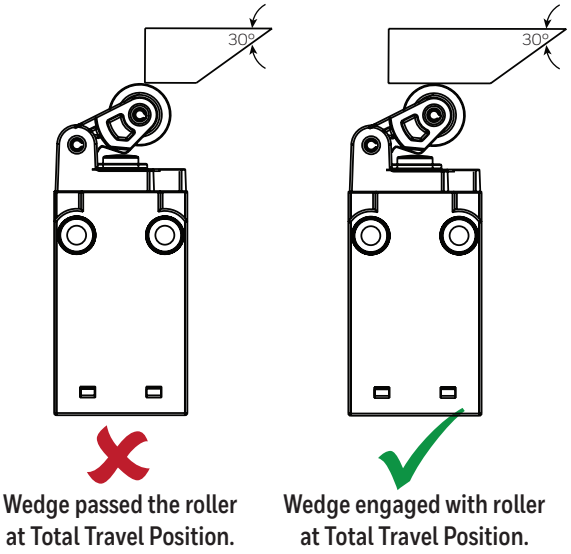


**Figure 18. Final Installation Check at TTP**

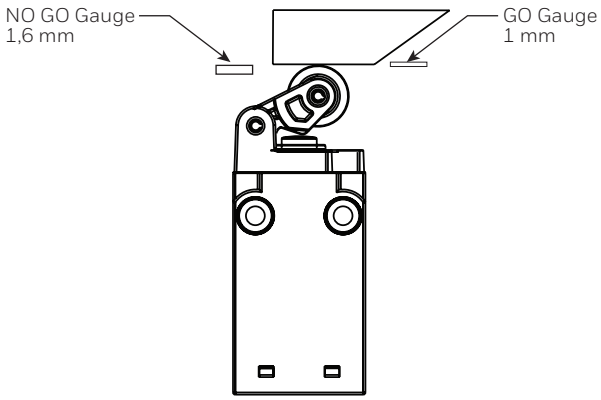


**NOTE:** Strictly adhere to installation instruction mentioned in Figures 1 to 18. Failure to comply with these could result in a functional issue.

**Table 6. Plunger Operating Characteristics**

| Actuation | Catalog Listing | Connector/ Cable Exit | Switch Type | Circuit Diagram | Bar Charts | Differential Travel max. | Operating Force/ Torque max. | Release Force/ Torque max. |
|---|---|---|---|---|---|---|---|---|
| Plunger Head | NGCP*****X01 B/C/D/L/M/N/P/Q/R/S/T | A | 01 |  |  | 1,2 mm [0.047 in] | 11 N [2.47 lb] | 3 N [0.67 lb] |
| | NGCP*****X01 B/C/D/L/M/N/P/Q/R/S/T | B | | | | | | |
| | NGCP*****X01 B/C/D/L/M/N/P/Q/R/S/T | D | | | | | | |
| | NGCP*****X07 B/C/D/L/M/N/P/Q/R/S/T | A | 07 | | | | | |
| | NGCP*****X07 B/C/D/L/M/N/P/Q/R/S/T | B | | | | | | |
| | NGCP*****X07 B/C/D/L/M/N/P/Q/R/S/T | D | | | | | | |
| | NGCP*****X01 B/C/D/L/M/N/P/Q/R/S/T | N | 01 |  | | | | |
| | NGCP*****X07 B/C/D/L/M/N/P/Q/R/S/T | N | 07 | | | | | |
| | NGCM*****X01 B/C/D/L/M/N/P/Q/R/S/T | A | 01 |  | | | | |
| | NGCM*****X01 B/C/D/L/M/N/P/Q/R/S/T | B | | | | | | |
| | NGCM*****X01 B/C/D/L/M/N/P/Q/R/S/T | D | | | | | | |
| | NGCM*****X07 B/C/D/L/M/N/P/Q/R/S/T | A | 07 | | | | | |
| | NGCM*****X07 B/C/D/L/M/N/P/Q/R/S/T | B | | | | | | |
| | NGCM*****X07 B/C/D/L/M/N/P/Q/R/S/T | D | | | | | | |
| | NGCM*****X01 B/C/D/L/M/N/P/Q/R/S/T | P | 01 |  | | | | |
| | NGCP*****X07 B/C/D/L/M/N/P/Q/R/S/T | P | 07 | | | | | |
| | NGCP*****X24 B/C/D/L/M/N/P/Q/R/S/T | A | 24 |  |  | 1,4 mm [0.051 lb] | 9,5 N [2.14 lb] | 2,2 N [0.49 lb] |
| | NGCP*****X24 B/C/D/L/M/N/P/Q/R/S/T | B | | | | | | |
| | NGCP*****X24 B/C/D/L/M/N/P/Q/R/S/T | D | | | | | | |
| | NGCP*****X32 B/C/D/L/M/N/P/Q/R/S/T | A | 32 | | | | | |
| | NGCP*****X32 B/C/D/L/M/N/P/Q/R/S/T | B | | | | | | |
| | NGCP*****X32 B/C/D/L/M/N/P/Q/R/S/T | D | | | | | | |
| | NGCM*****X24 B/C/D/L/M/N/P/Q/R/S/T | A | 24 |  | | | | |
| | NGCM*****X24 B/C/D/L/M/N/P/Q/R/S/T | B | | | | | | |
| | NGCM*****X24 B/C/D/L/M/N/P/Q/R/S/T | D | | | | | | |
| | NGCM*****X32 B/C/D/L/M/N/P/Q/R/S/T | A | 32 | | | | | |
| | NGCM*****X32 B/C/D/L/M/N/P/Q/R/S/T | B | | | | | | |
| | NGCM*****X32 B/C/D/L/M/N/P/Q/R/S/T | D | | | | | | |

**Table 7. Top Roller Arm Operating Characteristics, Head Type J**

| Actuation | Catalog Listing | Connector/ Cable Exit | Switch Type | Circuit Diagram | Bar Charts | Differential Travel max. | Operating Force/ Torque max. | Release Force/ Torque max. |
|---|---|---|---|---|---|---|---|---|
| Top Roller Arm | NGCP*****X01 J | A | 01 |  |  | 4 mm [0.157 in] | 5,5 N [1.24 lb] | 1,2 N [0.27 lb] |
| | NGCP*****X01 J | B | | | | | | |
| | NGCP*****X01 J | D | | | | | | |
| | NGCP*****X07 J | A | 07 | | | | | |
| | NGCP*****X07 J | B | | | | | | |
| | NGCP*****X07 J | D | | | | | | |
| | NGCP*****X01 J | N | 01 |  | | | | |
| | NGCP*****X07 J | N | 07 | | | | | |
| | NGCM*****X01 J | A | 01 |  | | | | |
| | NGCM*****X01 J | B | | | | | | |
| | NGCM*****X01 J | D | | | | | | |
| | NGCM*****X07 J | A | 07 | | | | | |
| | NGCM*****X07 J | B | | | | | | |
| | NGCM*****X07 J | D | | | | | | |
| | NGCM*****X01 J | P | 01 |  | | | | |
| | NGCP*****X07 J | P | 07 | | | | | |
| | NGCP*****X24 J | A | 24 |  |  | 4,3 mm [0.169 in] | 4,5 N [1.01 lb] | 1,2 N [0.27 lb] |
| | NGCP*****X24 J | B | | | | | | |
| | NGCP*****X24 J | D | | | | | | |
| | NGCP*****X32 J | A | 32 | | | | | |
| | NGCP*****X32 J | B | | | | | | |
| | NGCP*****X32 J | D | | | | | | |
| | NGCM*****X24 J | A | 24 |  | | | | |
| | NGCM*****X24 J | B | | | | | | |
| | NGCM*****X24 J | D | | | | | | |
| | NGCM*****X32 J | A | 32 | | | | | |
| | NGCM*****X32 J | B | | | | | | |
| | NGCM*****X32 J | D | | | | | | |

## ADDITIONAL MATERIALS

The following associated literature is available on the Honeywell web site at sensing.honeywell.com:

- Product line guide
- Product part listing/nomenclature tree
- Product range guide
- Application note

### Warranty/Remedy

Honeywell warrants goods of its manufacture as being free of defective materials and faulty workmanship during the applicable warranty period. Honeywell's standard product warranty applies unless agreed to otherwise by Honeywell in writing; please refer to your order acknowledgement or consult your local sales office for specific warranty details. If warranted goods are returned to Honeywell during the period of coverage, Honeywell will repair or replace, at its option, without charge those items that Honeywell, in its sole discretion, finds defective. **The foregoing is buyer's sole remedy and is in lieu of all other warranties, expressed or implied, including those of merchantability and fitness for a particular purpose. In no event shall Honeywell be liable for consequential, special, or indirect damages.**

While Honeywell may provide application assistance personally, through our literature and the Honeywell web site, it is buyer's sole responsibility to determine the suitability of the product in the application.

Specifications may change without notice. The information we supply is believed to be accurate and reliable as of this writing. However, Honeywell assumes no responsibility for its use.

**⚠ WARNING**
**IMPROPER INSTALLATION**

- Consult with local safety agencies and their requirements when designing a machine-control link, interface, and all control elements that affect safety.
- Strictly adhere to all installation instructions.

**Failure to comply with these instructions could result in death or serious injury.**

**⚠ WARNING**
**IMPROPER OPERATION**

- For safety-related applications, always use normally closed (NC) contact. Normally open (NO) contact of a second switch can be used to achieve redundancy.
- Ensure that the switch actuator achieves sufficient travel for positive opening of normally closed (NC) contact to occur.

**Failure to comply with these instructions could result in death or serious injury.**

**⚠ WARNING**
**MISUSE OF DOCUMENTATION**

- The information presented in this product sheet is for reference only. Do not use this document as a product installation guide.
- Complete installation, operation, and maintenance information is provided in the instructions supplied with each product.

**Failure to comply with these instructions could result in death or serious injury.**

### For more information

Honeywell Sensing and Internet of Things services its customers through a worldwide network of sales offices and distributors. For application assistance, current specifications, pricing or the nearest Authorized Distributor, visit sensing.honeywell.com or call:

| | |
|---|---|
| Asia Pacific | +65 6355-2828 |
| Europe | +44 1698 481481 |
| USA/Canada | +1-800-537-6945 |

**Honeywell Sensing and Internet of Things**
9680 Old Bailes Road
Fort Mill, SC 29707
honeywell.com

002409-8-EN | 9 | 11/18
© 2018 Honeywell International Inc. All rights reserved.

Honeywell

LifeElectronics
Живое партнерство

**ООО «ЛайфЭлектроникс»** **“LifeElectronics” LLC**

*ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703*

*Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.*

*С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров*

*Мы предлагаем:*

- *Конкурентоспособные цены и скидки постоянным клиентам.*
- *Специальные условия для постоянных клиентов.*
- *Подбор аналогов.*
- *Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.*

- *Приемлемые сроки поставки, возможна ускоренная поставка.*
- *Доставку товара в любую точку России и стран СНГ.*
- *Комплексную поставку.*
- *Работу по проектам и поставку образцов.*
- *Формирование склада под заказчика.*

- *Сертификаты соответствия на поставляемую продукцию (по желанию клиента).*
- *Тестирование поставляемой продукции.*
- *Поставку компонентов, требующих военную и космическую приемку.*
- *Входной контроль качества.*
- *Наличие сертификата ISO.*

*В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.*

*Конструкторский отдел помогает осуществить:*

- *Регистрацию проекта у производителя компонентов.*
- *Техническую поддержку проекта.*
- *Защиту от снятия компонента с производства.*
- *Оценку стоимости проекта по компонентам.*
- *Изготовление тестовой платы монтаж и пусконаладочные работы.*

*Тел: +7 (812) 336 43 04 (многоканальный)*
*Email: org@lifeelectronics.ru*

***www.lifeelectronics.ru***