SPECIFICATION CONTROL DRAWING

SCD **FLTW+0311**

Title: GENERAL PURPOSE HOOKUP WIRE, MODIFIED POLYESTER-INSULATED, 600 VOLT

Date: 12-4-14

Revision: K

The complete requirements for procuring the wire described herein shall consist of this document and the issue in effect of Raychem Specification WCD 3106, UL Subject 758, Style 10208, File E303150, and carries UL labels to this effect.

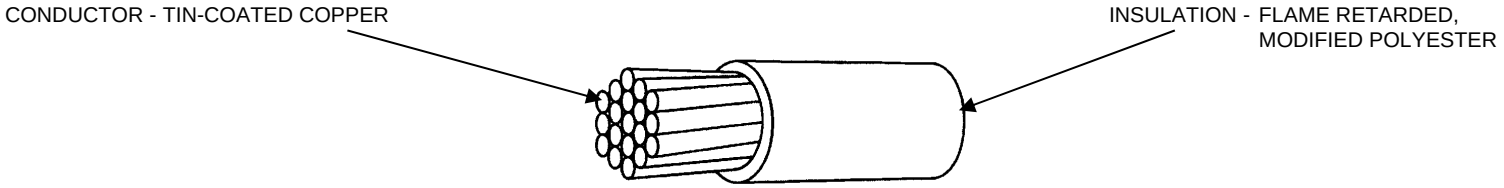

CONSTRUCTION DETAILS

PART NUMBER 1/	WIRE SIZE (AWG)	CONDUCTOR STRANDING (number x AWG)	NOMINAL CONDUCTOR DIAMETER (inch) *(mm)*	FINISHED WIRE				
				MAXIMUM RESISTANCE AT 20°C (ohms/1000 ft.) *(ohms/km)*	DIAMETER (inch) *(mm)*			NOMINAL WEIGHT (lbs/1000 ft.) *(kg/km)*
					MINIMUM	NOMINAL	MAXIMUM	
FLTWB0311-30-*	30	7 x 38	.012 *(.305)*	116. *(381.)*	.025 *(.635)*	.027 *(.686)*	.029 *(.737)*	.62 *(.92)*
FLTWB0311-28-*	28	7 x 36	.015 *(.381)*	72.8 *(239.)*	.028 *(.711)*	.030 *(.762)*	.032 *(.813)*	.86 *(1.28)*
FLTWC0311-28-*	28	19 x 40	.015 *(.381)*	72.8 *(239.)*	.029 *(.737)*	.031 *(.787)*	.033 *(.838)*	.91 *(1.35)*
FLTWC0311-26-*	26	19 x 38	.019 *(.483)*	45.8 *(150.)*	.032 *(.813)*	.034 *(.864)*	.036 *(.914)*	1.3 *(1.93)*
FLTWC0311-24-*	24	19 x 36	.024 *(.610)*	28.7 *(94.2)*	.038 *(.965)*	.040 *(1.02)*	.042 *(1.07)*	1.9 *(2.83)*
FLTWC0311-22-*	22	19 x 34	.030 *(.762)*	18.1 *(59.4)*	.045 *(1.14)*	.047 *(1.19)*	.049 *(1.24)*	2.8 *(4.17)*
FLTWC0311-20-*	20	19 x 32	.038 *(.965)*	11.4 *(37.4)*	.053 *(1.35)*	.055 *(1.40)*	.057 *(1.45)*	4.2 *(6.25)*
FLTWC0311-18-*	18	19 x 30	.047 *(1.19)*	7.15 *(23.5)*	.063 *(1.60)*	.065 *(1.65)*	.067 *(1.70)*	6.5 *(9.67)*
FLTWC0311-16-*	16	19 x 29	.053 *(1.35)*	4.82 *(15.8)*	.069 *(1.75)*	.072 *(1.83)*	.075 *(1.91)*	8.2 *(12.2)*
FLTWC0311-14-*	14	19 x 27	.066 *(1.68)*	3.05 *(10.0)*	.085 *(2.16)*	.089 *(2.26)*	.093 *(2.36)*	12.7 *(18.9)*
FLTWD0311-14-*	14	37 x 30	.068 *(1.73)*	3.22 *(10.6)*	.087 *(2.21)*	.091 *(2.31)*	.095 *(2.41)*	14.7 *(21.9)*
FLTWD0311-12-*	12	37 x 28	.085 *(2.16)*	2.01 *(6.59)*	.104 *(2.64)*	.108 *(2.74)*	.112 *(2.84)*	19.4 *(28.9)*
FLTWD0311-10-*	10	37 x 26	.107 *(2.72)*	1.26 *(4.13)*	.127 *(3.23)*	.131 *(3.33)*	.135 *(3.43)*	30.8 *(45.8)*

Users should evaluate the suitability of this product for their application. Specifications are subject to change without notice.
Tyco Electronics Corporation also reserves the right to make changes in materials or processing, which do not affect compliance with any specification, without notification to Buyer.

1/ COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681. OTHER CODES AND SUFFIXES MAY BE ADDED TO THE PART NUMBER, AS NECESSARY, TO CAPTURE ANY ADDITIONAL REQUIREMENTS IMPOSED BY THE PURCHASE ORDER.

Raychem, TE connectivity, TE connectivity (logo), and TE (logo) are trademarks.

DIMENSIONS ARE IN INCHES AND, UNLESS OTHERWISE DESIGNATED, ARE NOMINAL.

THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

Raychem Wire & Cable
501 Oakside Avenue
Redwood City, CA 94063-3800
Phone: 1-800-227-8816
Fax: 1-650-361-6297

© 2005-2014 Tyco Electronics Corporation. All rights reserved.

WIRE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 135°C
VOLTAGE RATING: 600 volts (rms) at sea level
INSULATION ELONGATION AND TENSILE STRENGTH:
Elongation, 230% (minimum)
Tensile Strength, 5200 lbf/in^2 (minimum)
INSULATION FLAWS:
Spark Test, 6.0 kV (rms)
Impulse Dielectric Test, 8.0 kV (peak)
INSULATION THICKNESS: .005 inch (minimum), .006 inch (minimum average)
SHRINKAGE: 125°C for 1 hour, 0.125 in. (maximum) per end
THERMAL STABILITY: 167°C for 168 hours
Elongation Retention, 75% (minimum)
Tensile Strength Retention, 55% (minimum)
VOLTAGE WITHSTAND (Post Environmental): 1500 volts (rms), 60 Hz

1/ PART NUMBER:
The "+" in the part number in the upper right hand corner of pages 1 and 2 shall be replaced with a letter designator to define conductor stranding (see part numbers in table).
B = 7 Strands C = 19 Strands D = 37 Strands

The "*" in the part numbers on page 1 shall be replaced by a color code designator.
Example: AWG 26, 19 strands, white: FLTWC0311-26-9
AWG 26, 19 strands, white with a black stripe: FLTWC0311-26-90

1/ See footer section of page 1

LifeElectronics
Живое партнерство

ООО «ЛайфЭлектроникс» **“LifeElectronics” LLC**

ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- *Конкурентоспособные цены и скидки постоянным клиентам.*
- *Специальные условия для постоянных клиентов.*
- *Подбор аналогов.*
- *Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.*

- *Приемлемые сроки поставки, возможна ускоренная поставка.*
- *Доставку товара в любую точку России и стран СНГ.*
- *Комплексную поставку.*
- *Работу по проектам и поставку образцов.*
- *Формирование склада под заказчика.*

- *Сертификаты соответствия на поставляемую продукцию (по желанию клиента).*
- *Тестирование поставляемой продукции.*
- *Поставку компонентов, требующих военную и космическую приемку.*
- *Входной контроль качества.*
- *Наличие сертификата ISO.*

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- *Регистрацию проекта у производителя компонентов.*
- *Техническую поддержку проекта.*
- *Защиту от снятия компонента с производства.*
- *Оценку стоимости проекта по компонентам.*
- *Изготовление тестовой платы монтаж и пусконаладочные работы.*

Тел: +7 (812) 336 43 04 (многоканальный)
Email: org@lifeelectronics.ru

www.lifeelectronics.ru