# MLV Series Low Voltage Pressure Sensors

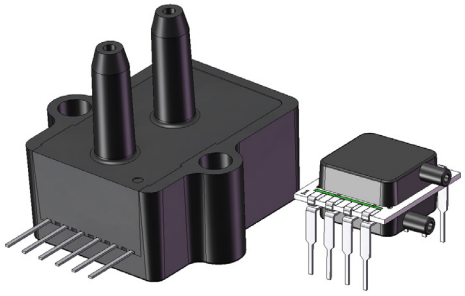

## Features

- 1 to 30 inH2O & 5 to 150 PSI Pressure Ranges
- 5V Operation
- High Output
- Low Power Consumption
- Excellent Position Sensitivity
- Low Warm-Up Shift
- Enhanced Front to Back Linearity
- Protective Parylene Coating Option

## Applications

- Medical Breathing
- Environmental Controls
- HVAC
- Industrial Controls
- Portable/Hand-Held Equipment

## General Description

The MLV Series Compensated Sensor is based on All Sensors' CoBeam$^{2}$ ™ Technology. The device provides a high output signal at a low operating voltage while maintaining comparable output levels to traditional equivalent compensated millivolt sensors operating at higher voltages. This lower supply voltage gives rise to improved warm-up shift while the CoBeam$^{2}$ Technology itself reduces package stress susceptibility resulting in improved overall long term stability. The technology also vastly improves position sensitivity compared to conventional single die devices.

These calibrated and compensated sensors give an acurate and stable output over a wide temperature range. This series is intended for use with non-corrosive, non-ionic working fluids such as air, dry gases and the like. A protective parylene coating is optionally available for moisture/harsh media protection. The output is also ratiometric to the supply voltage and designed to operate at 5.0 volts DC.

## Standard Pressure Ranges

| Device | Operating Range | Proof Pressure | Burst Pressure | Nominal Span |
|---|---|---|---|---|
| MLV-L01D | ±1 inH2O | 100 inH2O | 300 inH2O | 7 mV |
| MLV-L02D | ±2 inH2O | 100 inH2O | 300 inH2O | 10 mV |
| MLV-L05D | ±5 inH2O | 200 inH2O | 300 inH2O | 15 mV |
| MLV-L10D | ±10 inH2O | 200 inH2O | 300 inH2O | 20 mV |
| MLV-L20D | ±20 inH2O | 200 inH2O | 500 inH2O | 20 mV |
| MLV-L30D | ±30 inH2O | 200 inH2O | 800 inH2O | 20 mV |
| MLV-005D | ±5 PSI | 10 PSI | 30PSI | 25 mV |
| MLV-015D | ±15 PSI | 60 PSI | 120 PSI | 37.5 mV |
| MLV-015A | 0 - 15 PSIA | 60 PSI | 120 PSI | 37.5 mV |
| MLV-030D | ±30 PSI | 90 PSI | 150 PSI | 37.5 mV |
| MLV-100D | ±100 PSI | 200 PSI | 250 PSI | 41.67 mV |
| MLV-150D | ±150 PSI | 200 PSI | 250 PSI | 37.5 mV |

## Equivalent Circuit




a 16035 Vineyard Blvd. Morgan Hill, CA 95037 p 408 225 4314 f 408 225 2079 e www.allsensors.com all sensors

## Pressure Sensor Maximum Ratings

| | |
|---|---|
| Supply Voltage (Vs) | 12 Vdc |
| Common Mode Pressure | |
| InH2O Devices (L01, L02, L05, L10, L20, L30) | 10 psig |
| PSI Devices (005, 015, 030, 100, 150) | 50 psig |
| Lead Temperature (soldering 2-4 sec.) | 270 °C |

## Environmental Specifications

| | |
|---|---|
| Temperature Ranges | |
| Compensated | 0°C to 50°C |
| Operating | -25°C to 85 °C |
| Storage | -40°C to 125 °C |
| Humidity Limits | 0 to 95% RH (non condensing) |

## Performance Characteristics for MLV Series (InH2O)

All parameters are measured at 5.0 volt excitation and room temperature unless otherwise specified. Pressure measurements are with positive pressure applied to PORT B (the only port for the single port configuration packages).

| Parameter | Min | Typ | Max | Units | Notes |
|---|---|---|---|---|---|
| Output Span | | | | | |
| L01D @ 1 inH2O | 6.0 | 7.0 | 8.0 | mV | 4 |
| L02D @ 2 inH2O | 9.0 | 10.0 | 11.0 | mV | 4 |
| L05D @ 5 inH2O | 14.0 | 15.0 | 16.0 | mV | 4 |
| L10D @ 10 inH2O | 19.0 | 20.0 | 21.0 | mV | 4 |
| L20D @ 20 inH2O | 19.0 | 20.0 | 21.0 | mV | 4 |
| L30D @ 30 inH2O | 19.0 | 20.0 | 21.0 | mV | 4 |
| Span Temperature Shift (0°C to 50°C) | - | - | ±250 | uV | 1 |
| Offset Voltage @ Zero Diff. Pressure | - | - | ±500 | uV | - |
| Offset Temperature Shift (0°C to 50°C) | | | | | |
| L01D, L02D, L05D | - | - | ±250 | uV | 1 |
| L10D, L20D, L30D | - | - | ±200 | uV | 1 |
| Offset Warm-up Shift | - | - | ±50.0 | uV | 2 |
| Offset Position Sensitivity (1g) | | | | | |
| L01D | - | - | ±20.0 | uV | 6 |
| L02D | - | - | ±15.0 | uV | 6 |
| L05D, L10D, L20D, L30D | - | - | ±10.0 | uV | 6 |
| Offset Long Term Drift (One Year) | | | | | |
| L01D, L02D, L05D | - | ±150 | - | uV | - |
| L10D, L20D, L30D | - | ±100 | - | uV | - |
| Linearity, Hysteresis Error | - | 0.10 | 0.30 | %FSS | 3 |
| Response Time (10% to 90% Pressure Response) | - | 500 | - | us | - |
| Front to Back Linearity | - | 0.75 | - | %FSS | 5 |
| Input Resistance | - | 12.0 | - | k ohm | - |
| Output Resistance | - | 3.0 | - | k ohm | - |

## Performance Characteristics for MLV Series (PSI)

All parameters are measured at 5.0 volt excitation and room temperature unless otherwise specified. Pressure measurements are with positive pressure applied to PORT B (the only port for the single port configuration packages). Pressure is applied to Port A for absolute devices in A-Package.

| Parameter | Min | Typ | Max | Units | Notes |
|---|---|---|---|---|---|
| Output Span | | | | | |
| 005D @ 5 PSI | 24.75 | 25.0 | 25.25 | mV | 4 |
| 015D @ 15 PSI | 37.13 | 37.50 | 37.88 | mV | 4 |
| 015A @ 15 PSIA | 37.13 | 37.50 | 37.88 | mV | 4 |
| 030D @ 30 PSI | 37.13 | 37.50 | 37.88 | mV | 4 |
| 100D @ 100 PSI | 41.25 | 41.67 | 42.08 | mV | 4 |
| 150D @ 150 PSI | 37.08 | 37.50 | 37.92 | mV | 4 |
| Span Temperature Shift (0°C to 50°C) | - | - | ±1.0 | %FSS | 1 |
| Offset Voltage @ Zero Diff. Pressure | | | | | |
| 005D @ 5 PSI | - | - | 125 | uV | - |
| 015D @ 15 PSI | - | - | 125 | uV | - |
| 015A @ 15 PSIA | - | - | 208 | uV | - |
| 030D @ 30 PSI | - | - | 125 | uV | - |
| 100D @ 100 PSI | - | - | 125 | uV | - |
| 150D @ 150 PSI | - | - | 125 | uV | - |
| Offset Warm-Up Shift | - | ±20 | | uV | 2 |
| Offset Long Term Drift (one year) | - | ±100 | - | uV | - |
| Linearity, Hysteresis Error | - | 0.20 | 0.50 | %FSS | 3 |
| Response Time (10% to 90% Pressure Response) | - | 500 | - | us | - |
| Front to Back Linearity | - | 2.5 | - | %FSS | 5 |
| Input Resistance | - | 12.0 | - | k ohm | - |
| Output Resistance | - | 3.0 | - | k ohm | - |

Specification Notes

NOTE 1: Shift is relative to 25°C.

NOTE 2: Shift is within the first hour of excitation applied to the device.

NOTE 3: Measured at one-half full scale rated pressure using best straight line curve fit.

NOTE 4: The span is the algebraic difference between full scale output voltage and the offset voltage.

NOTE 5: Front-Back Linerity computed as: $\text{Lin}_{FB} = \left( \left| \frac{\text{Span}_{Front}}{\text{Span}_{Back}} \right| - 1 \right) \cdot 100\%$

NOTE 6: Parameter is characterized and not 100% tested.

all sensors
e www.allsensors.com
f 408 225 2079
p 408 225 4314
a 16035 Vineyard Blvd. Morgan Hill, CA 95037

## How To Order

### A Package

Example: MLV-L02D-A6BBF-N

MLV-□□□□-A6□□□□-□

**Series**

**Pressure Range**

| Option | Description |
|---|---|
| L01D | 1 inH2O |
| L02D | 2 inH2O |
| L05D | 5 inH2O |
| L10D | 10 in H2O |
| L20D | 20 in H2O |
| L30D | 30 in H2O |
| 005D | 5 PSI |
| 015D | 15 PSI |
| 015A | 15 PSIA |
| 030D | 30 PSI |
| 100D | 100 PSI |
| 150D | 150 PSI |

**Port Cut Configuration**

| Option | Description |
|---|---|
| A | No Port Cut |
| B | Two Ports Cut 0.085" |
| C | Two Ports Cut 0.100" |
| D | Two Ports Cut 0.150" |
| E | One Port (A) Cut 0.080" |
| F | One Port (A) Cut 0.370" |

**Port Fittings**

| Option | Description |
|---|---|
| A | No Fittings |
| B | Barb Fitting Port A Only |
| C | Barb Fitting Port B Only |
| D | Barb Fittings Ports A & B |

**Lead Configuration**

| Option | Description |
|---|---|
| F | Flat (Straight) |
| Q | Right Angle 0.075" |
| R | Right Angle 0.100" |
| J | Jogged Bend |

**Coating**

| Option | Description |
|---|---|
| N | No Coating |
| P | Parylene Coating |

(See NOTE 1 below)

### E Package

Example: MLV-L02D-E1ND-N

MLV-□□□□-E□□□-□

**Series**

**Pressure Range**

| Option | Description |
|---|---|
| L01D | 1 inH2O |
| L02D | 2 inH2O |
| L05D | 5 inH2O |
| L10D | 10 in H2O |
| L20D | 20 in H2O |
| L30D | 30 in H2O |
| 005D | 5 PSI |
| 015D | 15 PSI |
| 015A | 15 PSIA |
| 030D | 30 PSI |

**Port Orientation**

| Option | Description |
|---|---|
| 1 | Dual Port Same Side |
| 2 | Dual Port Opposite Side |
| G | Single Port (Gage) |

**Lid Style**

| Option | Description |
|---|---|
| N | Non-Barbed |
| B | Barbed |

**Lead Type**

| Option | Description |
|---|---|
| S | SIP |
| D | DIP |
| J | J-Lead SMT |
| L | Low Profile DIP |

**Coating**

| Option | Description |
|---|---|
| N | No Coating |
| P | Parylene Coating |

TABLE 1: Available E-Series Package Configurations

| Port Orientation | Non-Barbed Lid, Lead Style: SIP | DIP | J Lead SMT | Low Profile DIP | Barbed Lid, Lead Style: SIP | DIP | J Lead SMT | Low Profile DIP |
|---|---|---|---|---|---|---|---|---|
| Dual Port Same Side |  E1NS |  E1ND | E1NJ | N/A |  E1BS |  E1BD | N/A | N/A |
| Dual Port Opposite Side |  E2NS |  E2ND | E2NJ | N/A |  E2BS |  E2BD | N/A | N/A |
| Single Port (Gage) |  EGNS |  EGND | EGNJ | EGNL |  EGBS |  EGBD |  EGBJ |  EGBL |

NOTE 1) Parylene Coating: Parylene coating provides a moisture barrier and protection from some harsh media. Consult factory for applicability of Parylene for the target application and sensor type.

## A6 Package (Without Options)

| Pinout (Gage) | Pinout (Absolute) |
|---|---|
| 1) N/C | 1) N/C |
| 2) Vs | 2) Vs |
| 3) +Out | 3) -Out |
| 4) Gnd | 4) Gnd |
| 5) -Out | 5) +Out |
| 6) N/C | 6) N/C |



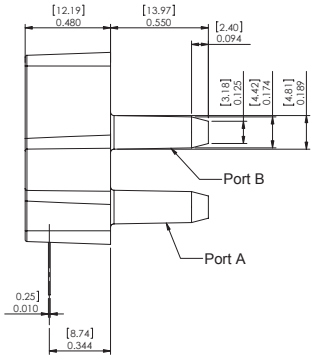


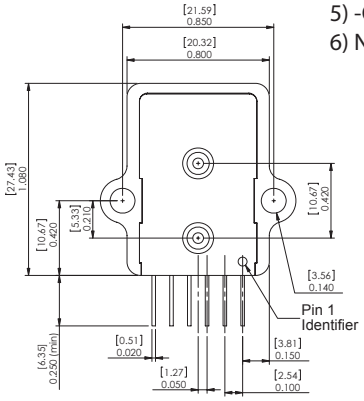


NOTES
1) Dimensions are in inches [mm].
2) For suggested pad layout, see drawing: PAD-09

## A-Package: Port Cut Options

Example: MLV-L10D-A6xAF-N
Port Cut Options

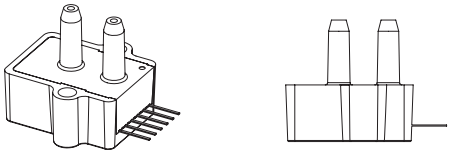

A- No Port Cut Configuration

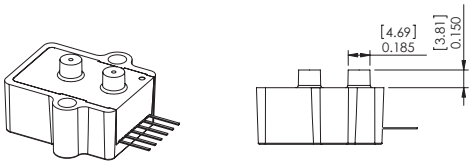


D- Two Ports Cut 0.150" Configuration

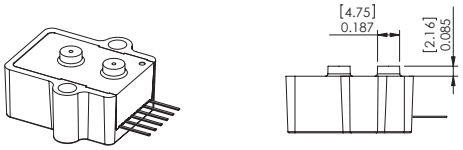


B- Two Ports Cut 0.085" Configuration

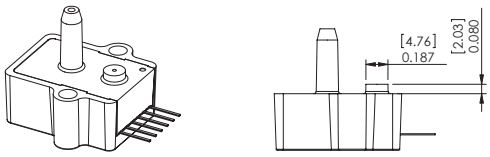


E- Port A cut 0.080" Configuration

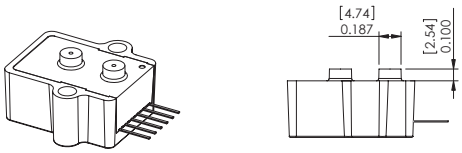


C- Two Ports Cut 0.100" Configuration

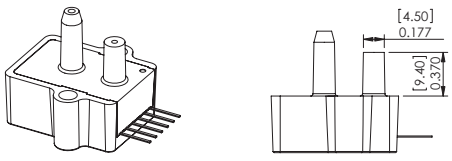


F- Port A Cut 0.370" Configuration

a 16035 Vineyard Blvd. Morgan Hill, CA 95037 p 408 225 4314 f 408 225 2079 e www.allsensors.com all sensors

## A-Package: Port Fitting Options

Example: MLV-L10D-A6DxF-N

Port Fitting Options

NOTE: Port Cut Configuration "D" Shown As Reference.

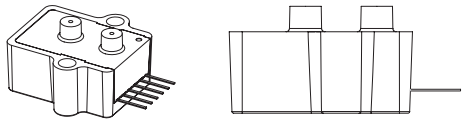

A- No Fittings Configuration

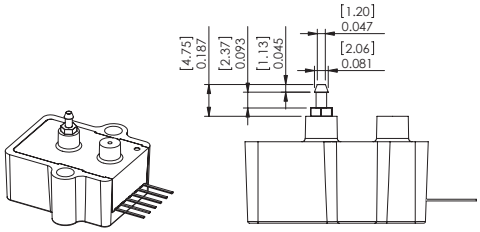


C- Barb Fitting Port B Only Configuration

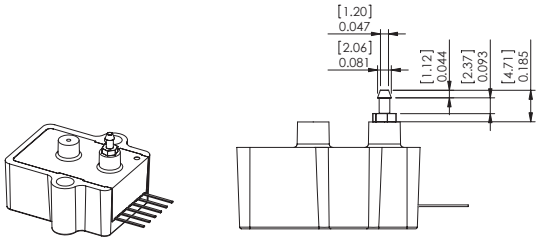


B- Barb Fitting Port A Only Configuration

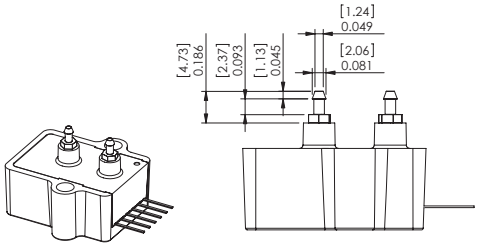


D- Barb Fitting Ports A and B Configuration

## A-Package: Lead Bend Options

Example: MLV-L10D-A6AAx-N

Lead Bend Options

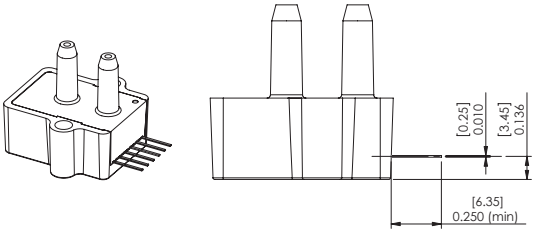


F- Flat (Straight) Configuration

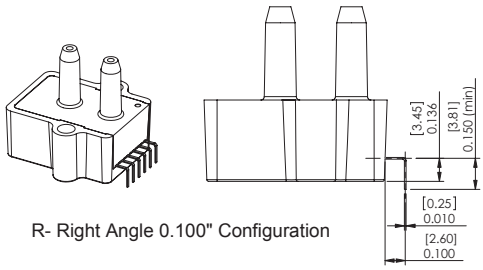


R- Right Angle 0.100" Configuration

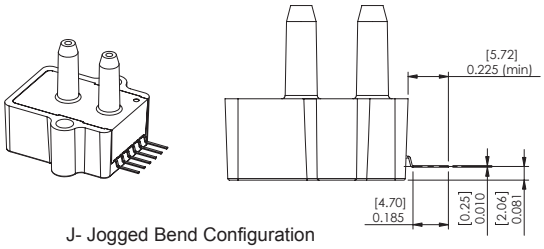


J- Jogged Bend Configuration

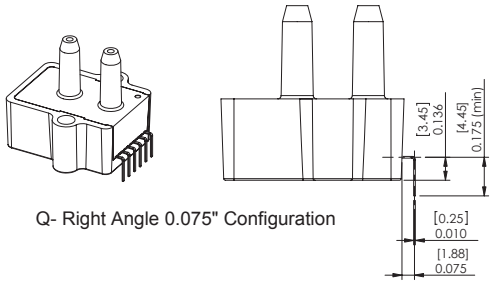


Q- Right Angle 0.075" Configuration

## E1NS Package



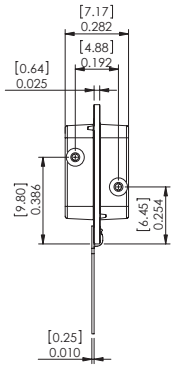


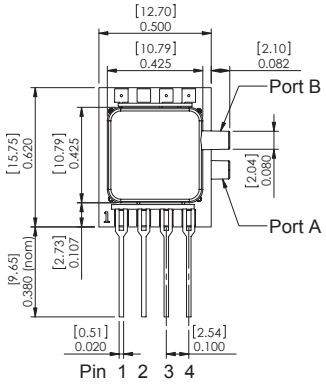


**Pinout**
1) Gnd
2) +Out
3) Vs
4) -Out

NOTES
1)Dimensions are in inches [mm]
2)For suggested pad layout, see drawing: PAD-01

## E1BS Package



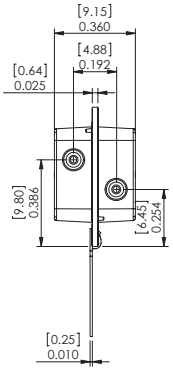


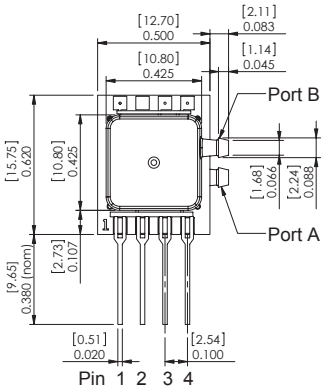


**Pinout**
1) Gnd
2) +Out
3) Vs
4) -Out

NOTES
1)Dimensions are in inches [mm]
2)For suggested pad layout, see drawing: PAD-01


a 16035 Vineyard Blvd. Morgan Hill, CA 95037 p 408 225 4314 f 408 225 2079 e www.allsensors.com all sensors

## E2NS Package

**Pinout**
1) Gnd
2) +Out
3) Vs
4) -Out






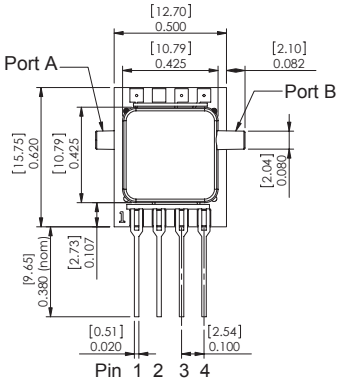


NOTES
1)Dimensions are in inches [mm]
2)For suggested pad layout, see drawing: PAD-01

## E2BS Package

**Pinout**
1) Gnd
2) +Out
3) Vs
4) -Out



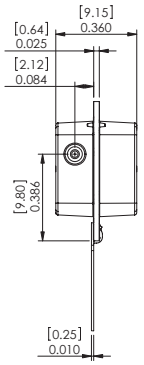


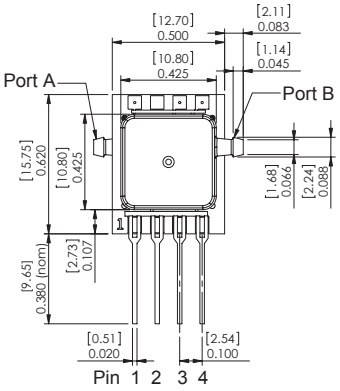


NOTES
1)Dimensions are in inches [mm]
2)For suggested pad layout, see drawing: PAD-01

## EGNS Package



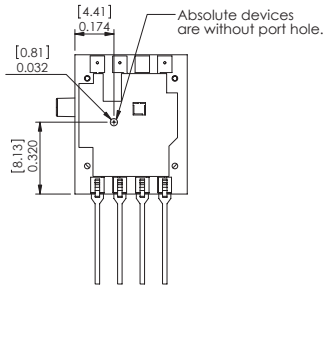


**Pinout**
1) Gnd
2) +Out
3) Vs
4) -Out

NOTES
1)Dimensions are in inches [mm]
2)For suggested pad layout, see drawing: PAD-01

## EGBS Package



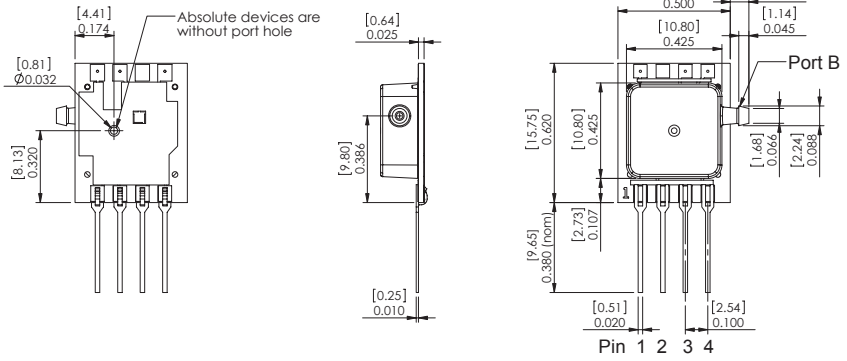


**Pinout**
1) Gnd
2) +Out
3) Vs
4) -Out

NOTES
1)Dimensions are in inches [mm]
2)For suggested pad layout, see drawing: PAD-01


a 16035 Vineyard Blvd. Morgan Hill, CA 95037 p 408 225 4314 f 408 225 2079 e www.allsensors.com all sensors

## E1ND Package






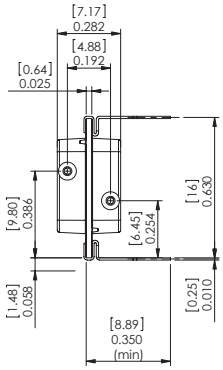


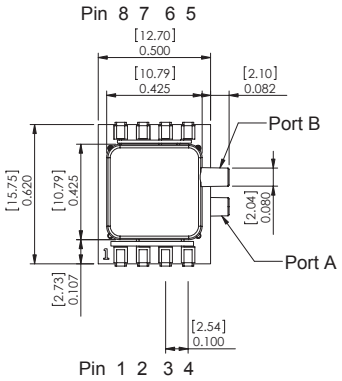


### Pinout

1) Gnd
2) +Out
3) Vs
4) -Out
5) Do Not Connect
6) Do Not Connect
7) Do Not Connect
8) Do Not Connect

NOTES
1) Dimensions are in inches [mm]
2) For suggested pad layout, see drawing: PAD-03

## E1BD Package






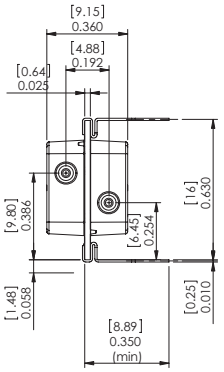


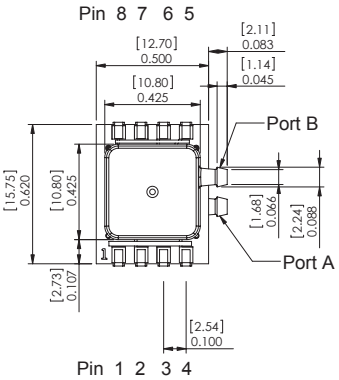


### Pinout

1) Gnd
2) +Out
3) Vs
4) -Out
5) Do Not Connect
6) Do Not Connect
7) Do Not Connect
8) Do Not Connect

NOTES
1) Dimensions are in inches [mm]
2) For suggested pad layout, see drawing: PAD-03

## E2ND Package






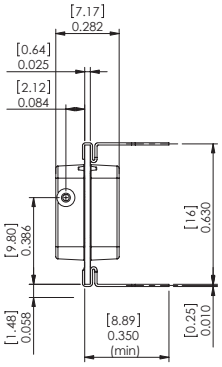


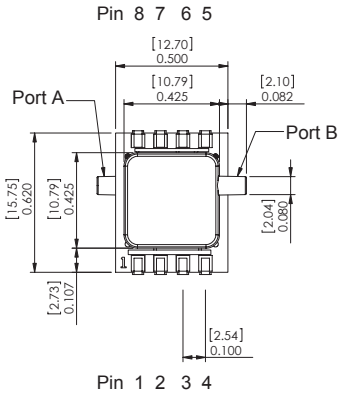


### Pinout
1) Gnd
2) +Out
3) Vs
4) -Out
5) Do Not Connect
6) Do Not Connect
7) Do Not Connect
8) Do Not Connect

NOTES
1) Dimensions are in inches [mm]
2) For suggested pad layout, see drawing: PAD-03

## E2BD Package






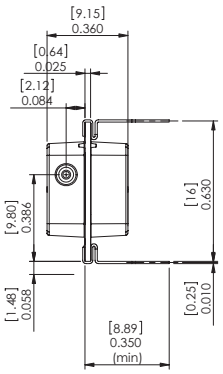


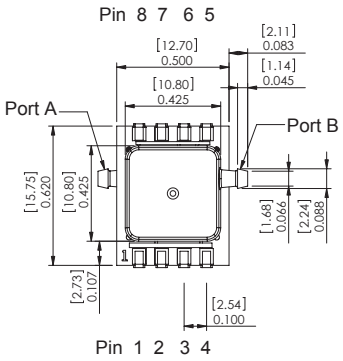


### Pinout
1) Gnd
2) +Out
3) Vs
4) -Out
5) Do Not Connect
6) Do Not Connect
7) Do Not Connect
8) Do Not Connect

NOTES
1) Dimensions are in inches [mm]
2) For suggested pad layout, see drawing: PAD-03

a 16035 Vineyard Blvd. Morgan Hill, CA 95037 p 408 225 4314 f 408 225 2079 e www.allsensors.com all sensors

## EGND Package






**Pinout**

1) Gnd
2) +Out
3) Vs
4) -Out
5) Do Not Connect
6) Do Not Connect
7) Do Not Connect
8) Do Not Connect




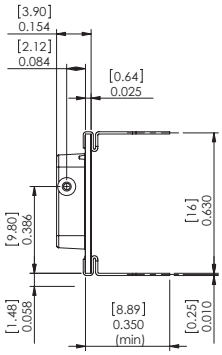


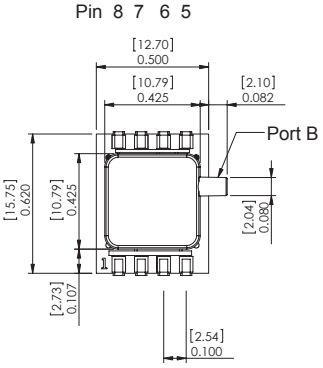


NOTES
1) Dimensions are in inches [mm]
2) For suggested pad layout, see drawing: PAD-03

## EGBD Package






**Pinout**

1) Gnd
2) +Out
3) Vs
4) -Out
5) Do Not Connect
6) Do Not Connect
7) Do Not Connect
8) Do Not Connect







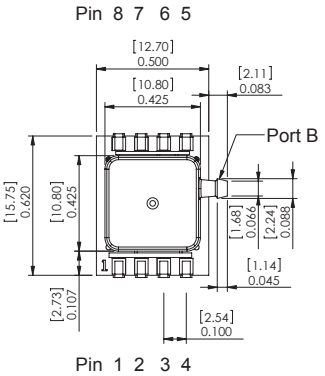


NOTES
1) Dimensions are in inches [mm]
2) For suggested pad layout, see drawing: PAD-03

## E1NJ Package

**Pinout**
1) Gnd
2) +Out
3) Vs
4) -Out
5) Do Not Connect
6) Do Not Connect
7) Do Not Connect
8) Do Not Connect






DETAIL A
SCALE 4 : 1




A

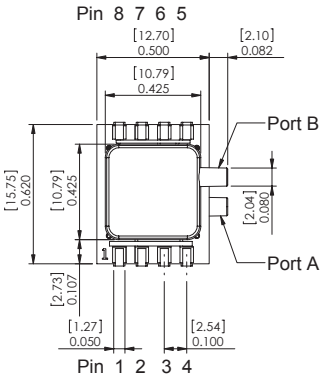


NOTES
1)Dimensions are in inches [mm]
2)For suggested pad layout, see drawing: PAD-10

## E2NJ Package

**Pinout**
1) Gnd
2) +Out
3) Vs
4) -Out
5) Do Not Connect
6) Do Not Connect
7) Do Not Connect
8) Do Not Connect






DETAIL A
SCALE 4 : 1




A

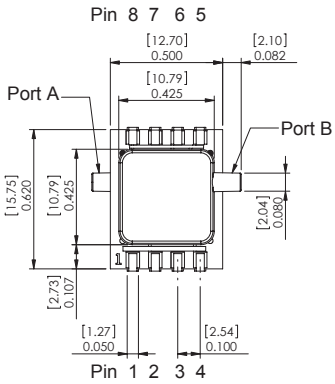


NOTES
1)Dimensions are in inches [mm]
2)For suggested pad layout, see drawing: PAD-10


a 16035 Vineyard Blvd. Morgan Hill, CA 95037 p 408 225 4314 f 408 225 2079 e www.allsensors.com all sensors

## EGNJ Package






DETAIL A
SCALE 4 : 1







A

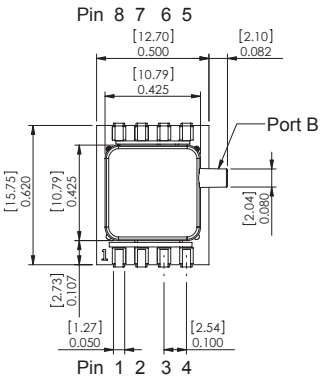


**Pinout**
1) Gnd
2) +Out
3) Vs
4) -Out
5) Do Not Connect
6) Do Not Connect
7) Do Not Connect
8) Do Not Connect

NOTES
1)Dimensions are in inches [mm]
2)For suggested pad layout, see drawing: PAD-10

## EGBJ Package






DETAIL A
SCALE 4 : 1







A

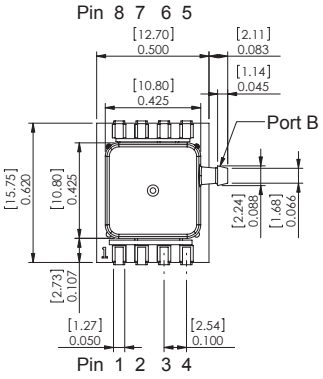


**Pinout**
1) Gnd
2) +Out
3) Vs
4) -Out
5) Do Not Connect
6) Do Not Connect
7) Do Not Connect
8) Do Not Connect

NOTES
1)Dimensions are in inches [mm]
2)For suggested pad layout, see drawing: PAD-10

## EGNL Package






### Pinout

1) Gnd
2) +Out
3) Vs
4) -Out
5) Do Not Connect
6) Do Not Connect
7) Do Not Connect
8) Do Not Connect




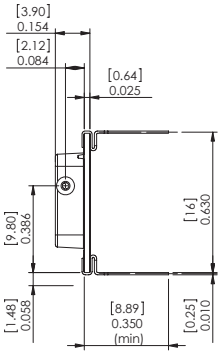


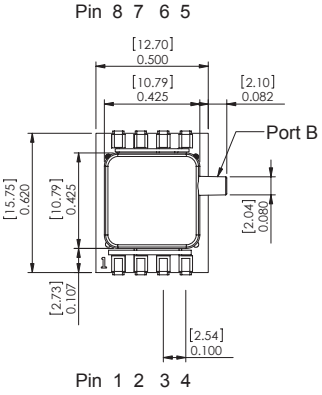


NOTES
1) Dimensions are in inches [mm]
2) For suggested pad layout, see drawing: PAD-03

## EGBL Package






### Pinout

1) Gnd
2) +Out
3) Vs
4) -Out
5) Do Not Connect
6) Do Not Connect
7) Do Not Connect
8) Do Not Connect







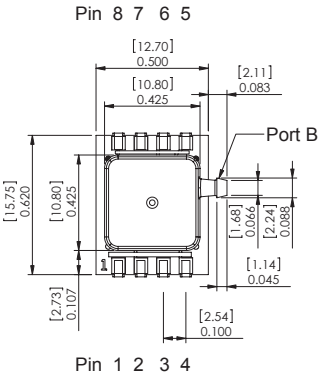


NOTES
1) Dimensions are in inches [mm]
2) For suggested pad layout, see drawing: PAD-03

a 16035 Vineyard Blvd. Morgan Hill, CA 95037 p 408 225 4314 f 408 225 2079 e www.allsensors.com all sensors

## Suggested Pad Layout

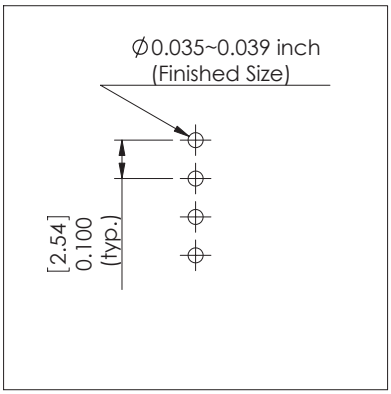


**PAD-01**

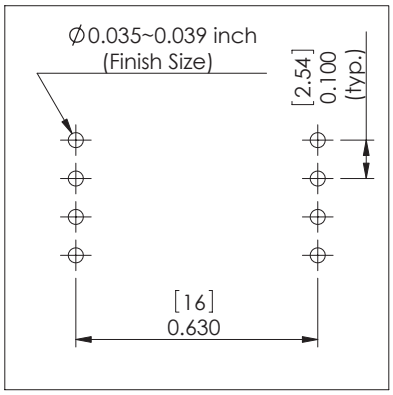


**PAD-03**

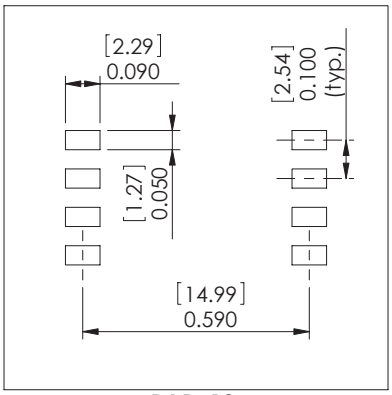


**PAD-10**

## Package Characteristics

| | Approximate Port Volume | | | | | | |
|---|---|---|---|---|---|---|---|
| Package ID | Port A | Port B | Units | Notes | Weight | Units | Notes |
| A6AAx | 132 | 33.6 | $mm^3$ | 1 | 9.3 | Grams | 2 |
| A6BAx | 119 | 20.3 | $mm^3$ | 1 | 8.7 | Grams | 2 |
| A6CAx | 119 | 20.5 | $mm^3$ | 1 | 8.8 | Grams | 2 |
| A6DAx | 120 | 21.3 | $mm^3$ | 1 | 8.8 | Grams | 2 |
| A6EAx | 119 | 33.6 | $mm^3$ | 1 | 8.9 | Grams | 2 |
| A6FAx | 125 | 33.6 | $mm^3$ | 1 | 9.2 | Grams | 2 |
| E1Nx | 174 | 168 | $mm^3$ | - | 1.2 | Grams | - |
| E2Nx | 174 | 168 | $mm^3$ | - | 1.2 | Grams | - |
| EGNx | 1.4 | 168 | $mm^3$ | - | 0.9 | Grams | - |

Package Notes
Note 1: Add 4.5 $mm^3$ per port with barb fitting.
Note 2: Add 0.15 gram per barb fitting.

## Product Labeling

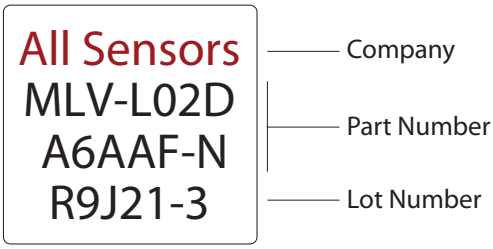


Example Device Label

* 5 PSI to 150 PSI devices may not be assembled with CoBeam²™ Technology.

All Sensors reserves the right to make changes to any products herein. All Sensors does not assume any liability arising out of the application or use of any product or circuit described herein, neither does it convey any license under its patent rights nor the rights of others.

LifeElectronics
Живое партнерство

**ООО «ЛайфЭлектроникс»** **“LifeElectronics” LLC**

*ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703*

*Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.*

*С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров*

*Мы предлагаем:*

- *Конкурентоспособные цены и скидки постоянным клиентам.*
- *Специальные условия для постоянных клиентов.*
- *Подбор аналогов.*
- *Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.*

- *Приемлемые сроки поставки, возможна ускоренная поставка.*
- *Доставку товара в любую точку России и стран СНГ.*
- *Комплексную поставку.*
- *Работу по проектам и поставку образцов.*
- *Формирование склада под заказчика.*

- *Сертификаты соответствия на поставляемую продукцию (по желанию клиента).*
- *Тестирование поставляемой продукции.*
- *Поставку компонентов, требующих военную и космическую приемку.*
- *Входной контроль качества.*
- *Наличие сертификата ISO.*

*В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.*

*Конструкторский отдел помогает осуществить:*

- *Регистрацию проекта у производителя компонентов.*
- *Техническую поддержку проекта.*
- *Защиту от снятия компонента с производства.*
- *Оценку стоимости проекта по компонентам.*
- *Изготовление тестовой платы монтаж и пусконаладочные работы.*

*Тел: +7 (812) 336 43 04 (многоканальный)*
*Email: org@lifeelectronics.ru*

***www.lifeelectronics.ru***