

Basler Accessories



Technical Specification

POWER-I/O CABLE M5 4P/OPEN

Order Number
2000031224

Document Number: DG001110
Version: 02 Language: 000 (English)
Release Date: 29 August 2017

Contacting Basler Support Worldwide

Europe, Middle East, Africa

Basler AG
An der Strusbek 60–62
22926 Ahrensburg
Germany

Tel. +49 4102 463 515
Fax +49 4102 463 599

support.europe@baslerweb.com

The Americas

Basler, Inc.
855 Springdale Drive, Suite 203
Exton, PA 19341
USA

Tel. +1 610 280 0171
Fax +1 610 280 7608

support.usa@baslerweb.com

Asia-Pacific

Basler Asia Pte. Ltd.
35 Marsiling Industrial Estate Road 3
#05–06
Singapore 739257

Tel. +65 6367 1355
Fax +65 6367 1255

support.asia@baslerweb.com

www.baslerweb.com

**All material in this publication is subject to change without notice and is copyright
Basler AG.**

Order Number	Description	Applicable Cameras
2000031224	Power-I/O Cable M5 4p/open, 10 m	ace CL

Table 1: Cable Type

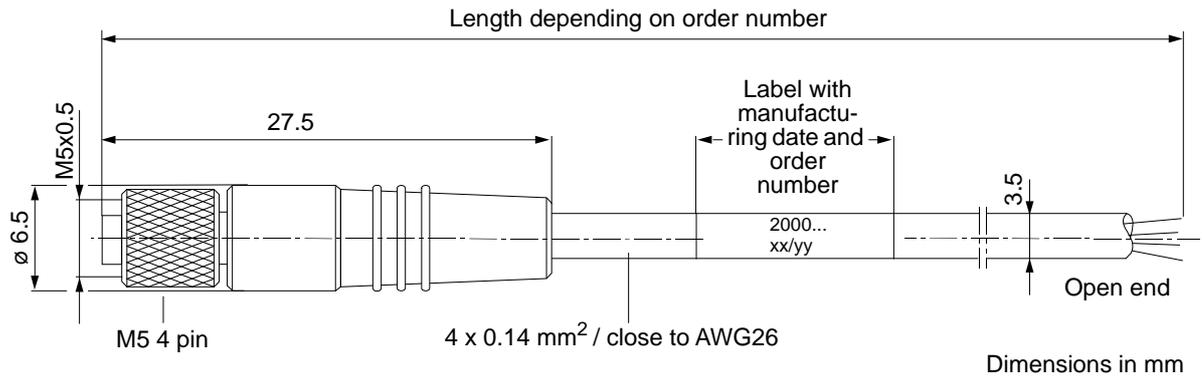


Fig. 1: Cable Overview

⚠ CAUTION	
	<p>Personal Injury Hazard and Risk of Damage to Camera in Case of Short Circuits</p> <p>Short circuits may cause an extreme rise in temperature of the camera's housing. This may damage the camera and may also lead to personal injuries, e.g., burns if touching the housing. In the worst case, the overheating may cause a fire.</p> <p>In order to prevent that, you should take additional measures to limit the current flowing through each individual wire during a short circuit. The maximum current allowed is 1 A. There are two ways how to do this:</p> <ul style="list-style-type: none"> ■ Using a fuse ■ Using a limited power supply

Wiring Information

Pin Number	Wire Color	Function
1	Brown	12 VDC Camera Power (12 VDC \pm 10 %)
2	White	General Purpose I/O (GPIO)
3	Blue	Camera Power Ground
4	Black	GPIO Ground

Table 2: Wiring Information

Physical Specifications

Camera-Side Connector	M5, 4 pin
Host-Side Connector	None, open end
Cable Cross-Section	4 x 0.14 mm ² (close to AWG 26)
Cable Diameter	3.5 mm
Wire Insulation	PVC
Outer Jacket	PUR
Minimum Bending Radius	10 x cable diameter (fixed installation)
Maximum Bending Cycles	None
Suitable for Drag Chain/Robotics Applications	No/No

Table 3: Physical Specifications

Electrical Specifications

Maximum Operating Voltage	See camera user's manual
Test Voltage	≥ 800 Vrms
Wire Resistance	≤ 148 Ω /km at 20 °C

Table 4: Electrical Specifications

Environmental Specifications

Operating Temperature Range	-25–80 °C (not moving)
-----------------------------	------------------------

Table 5: Environmental Specifications

Plug Specifications

Durability	>100 mating cycles
Contact Resistance	≤3 mΩ
Contact Plating	Gold
Protection Rating	IP 67
Plug Insulation Material	PUR

Table 6: Plug Specifications

General Information

RoHS Compliant	Yes
Warranty	1 year

Table 7: General Information



The cables are intended for use with the cameras specified in [Table 1](#) only. If they are used as intended, the cables are covered by the low voltage directive. Therefore, even though the cables conform to CE standards, CE certification is not required.

Read the camera user's manual including the safety warnings before connecting the cable to the camera. The user's manual also contains further information about pin assignments, power requirements, as well as comprehensive information about installing and using the camera.

You can download the user's manual and related documents for your camera free of charge from the Basler website: www.baslerweb.com

Revision History

Doc. ID Number	Date	Changes
DG00111001000	19 Jul 2013	Initial release of this document.
DG00111002000	29 Aug 2017	Added warning about additional short circuit protection on page 1 . Removed information about 5 m cable.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru