

FS100 SERIES

Low Current Flasher



Description

The FS100 Series (low current) may be used to control inductive, incandescent or resistive loads. This series offers a 1A (fullwave) or a 2A (halfwave) steady state, 10A inrush solid-state output and may be ordered with an input voltage of 24 or 120VAC. The FS100 Series offers a factory fixed flash rate of 75 FPM or may be ordered with a fixed, custom flash rate ranging from 45 to 150 FPM. Ideal for OEM applications where cost is a factor.

Operation

Upon application of input voltage, the T2 OFF time begins. At the end of the OFF time, the T1 ON time begins and the load energizes. At the end of T1, T2 begins and the load de-energizes. This cycle repeats until input voltage is removed.

Reset: Removing input voltage resets the output and the sequence to T2.

Wiring Diagram



V = Voltage
L = Load
R = Red Wire
B = Black Wire

Features & Benefits

FEATURES	BENEFITS
Compact Size: 38 x 23.9mm (1.5" x 0.94")	Ideal for OEM applications
Custom Flash Rates Available	Tailor to specific application: custom rates range from 45 to 150 FPM

Accessories



P1023-2 "P" Clamp
Mounting Bracket Alum. 15/16

Ordering Information

MODEL	INPUT VAC	OUTPUT RATING A	OUTPUT TYPE AC	LOAD TYPE	FLASH RATE
FS126	120	1	Fullwave	Incandescent & Resistive	75 FPM
FS126-45	120	1	Fullwave	Incandescent & Resistive	45 FPM
FS126-60	120	1	Fullwave	Incandescent & Resistive	60 FPM
FS126RC	120	1	Fullwave	Incandescent, Resistive, & Inductive	75 FPM
FS126RC-45	120	1	Fullwave	Incandescent, Resistive, & Inductive	45 FPM
FS127	120	2	Halfwave	Incandescent & Resistive	75 FPM
FS146	24	1	Fullwave	Incandescent & Resistive	75 FPM
FS146RC	24	1	Fullwave	Incandescent, Resistive, & Inductive	75 FPM

If you don't find the part you need, call us for a custom product 800-843-8848


FS100 SERIES

Specifications

Technical Data

Operation	OFF/ON solid-state flasher (continuous duty)
Flash Rate	Factory fixed at 75 FPM $\pm 20\%$
Custom Flash Rates Available	From 45-150 FPM $\pm 20\%$
ON/OFF Ratio	$\approx 50\%$
Input	
Voltage	24, 120VAC, $\pm 15\%$
AC Line Frequency	50/60Hz
Output	
Load Type	Fullwave AC or Halfwave rectified AC Incandescent, resistive, or inductive (Choose RC suffix for inductive loads)
Maximum Load Rating	Fullwave: 1A steady state Halfwave: 2A steady state 10A
Inrush	
Mechanical	
Mounting	Removable mounting bracket, use one #8 (M4 x 0.7) screw
Connection/Wires	18 AWG (0.82mm ²) wires 6 in. (15.2cm)
Dimensions	H 38.1 mm (1.5"); W 23.9 mm (0.94")
Protection	
Circuitry	Encapsulated
Environmental	
Operating/Storage	
Temperature	-20° to 60°C / -40° to 85°C
Humidity	95% relative, non-condensing
Weight	≈ 1.1 oz (31 g)

Flasher Function Diagram

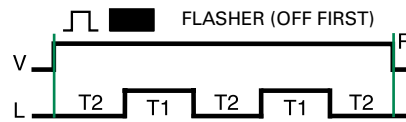

V = Voltage
R = Reset
L = Load
T1 = ONTime
T2 = OFFTime
T1 \approx T2

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)
Email: org@lifeelectronics.ru