General purpose (dual digital transistors)

Datasheet

Parameter	DTr1 and DTr2
V _{CC}	50V
I _{C(MAX.)}	100mA
R ₁	22kΩ
R ₂	22kΩ

Features

- 1)Two DTC124E chips in a EMT or UMT or SMT package.
- 2)Mounting possible with EMT3 or UMT3 or SMT3 automatic mounting machines.
- 3)Transistor elements are independent, eliminating interference.
- 4) Mounting cost and area can be cut in half.

●Outline


SOT-563	SOT-363
EMH1 (EMT6)	UMH1N (UMT6)
SOT-457	

•Inner circuit


EMH1 / UMH1N

IMH1A

(SMT6)



IMH1A



Application

INVERTER, INTERFACE, DRIVER

Packaging specifications

- r ackaging opcomodations							
Part No.	Package	Package size	Taping code	Reel size (mm)	Tape width (mm)	Basic ordering unit.(pcs)	Marking
EMH1	SOT-563 (EMT6)	1616	T2R	180	8	8000	H1
UMH1N	SOT-363 (UMT6)	2021	TN	180	8	3000	H1
IMH1A	SOT-457 (SMT6)	2928	T110	180	8	3000	H1

● Absolute maximum ratings (T_a = 25°C)

<For DTr1 and DTr2 in common>

F	Symbol	Values	Unit	
Supply voltage			50	V
Input voltage			-10 to 40	V
Output current			30	mA
Collector current			100	mA
	EMH1	P _D *2*3	150	
Power dissipation	UMH1N	P _D *2*3	150	mW
	IMH1A	P _D *2*4	300	
Junction temperature			150	°C
Range of storage temperature			-55 to +150	°C

● Electrical characteristics (T_a = 25°C)

<For DTr1 and DTr2 in common>

Danamatan	C: reele el	Canalitiana	Values			1.1:4
Parameter	Symbol	Conditions	Min.	Тур.	Max.	Unit
land traiters	$V_{I(off)}$	$V_{CC} = 5V, I_{O} = 100 \mu A$	-	-	0.5	\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \
Input voltage	V _{I(on)}	V _O = 0.2V, I _O = 5mA	3.0	-	-	V
Output voltage	V _{O(on)}	I _O = 10mA, I _I = 0.5mA	-	100	300	mV
Input current	I _I	V _I = 5V	-	-	360	μΑ
Output current	I _{O(off)}	V _{CC} = 50V, V _I = 0V	-	-	500	nA
DC current gain	G _I	$V_{O} = 5V, I_{O} = 5mA$	56	-	-	-
Input resistance	R ₁	-	15.4	22	28.6	kΩ
Resistance ratio	R ₂ /R ₁	-	8.0	1.0	1.2	-
Transition frequency	f _T *1	V _{CE} = 10V, I _E = -5mA, f = 100MHz	-	250	-	MHz

^{*1} Characteristics of built-in transistor.



^{*2} Each terminal mounted on a reference land.

^{*3 120}mW per element must not be exceeded.

^{*4 200}mW per element must not be exceeded.

● Electrical characteristic curves (T_a = 25°C)

<For DTr1 and DTr2 in common>

Fig.1 Input Voltage vs. Output Current (ON Characteristics)


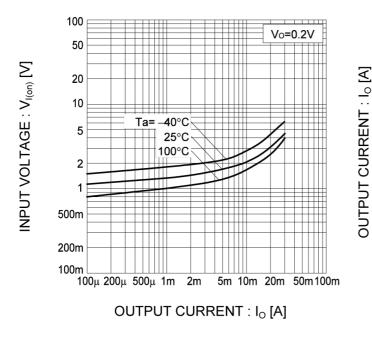


Fig.2 Output Current vs. Input Voltage (OFF Characteristics)



INPUT VOLTAGE: V_{I(off)} [V]

Fig.3 Output Current vs. Output Voltage





Fig.4 DC Current Gain vs. Output Current




OC CURRENT GAIN : G

● Electrical characteristic curves (T_a = 25°C)


<For DTr1 and DTr2 in common>

Fig.5 Output Voltage vs. Output Current



OUTPUT CURRENT : Io [A]

Dimensions

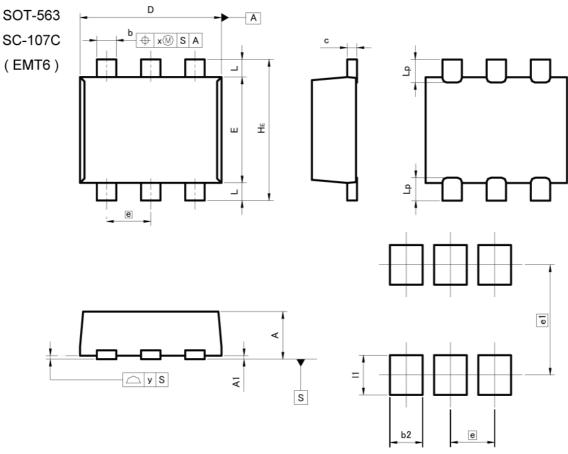

Pattern of terminal position areas [Not a pattern of soldering pads]


	MILIM	ETEDS	INCHES		
DIM	MILIMETERS		INCHES		
Diw	MIN	MAX	MIN	MAX	
Α	0.45	0.55	0.018	0.022	
A1	0.00	0.10	0.000	0.004	
b	0.17	0.27	0.007	0.011	
С	0.08	0.18	0.003	0.007	
D	1.50	1.70	0.059	0.067	
E	1.10	1.30	0.043	0.051	
е	0.	50	0.020		
HE	1.50	1.70	0.059	0.067	
L	0.10	0.30	0.004	0.012	
Lp	-	0.35	-	0.014	
х	-	0.10	_	0.004	
У	-	0.10	-	0.004	

	DIM	MILIMETERS		INCHES		
		MIN	MAX	MIN	MAX	
	b2	- 0.37		- 0.015		
	e1	1.25		0.0	49	
	- 11	-	0.45	-	0.018	

Dimension in mm/inches



Dimensions

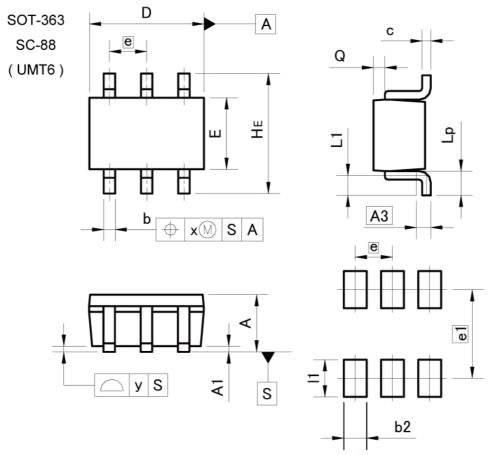

Pattern of terminal position areas [Not a pattern of soldering pads]


DIM	MILIMETERS		INCHES		
DIM	MIN	MAX	MIN	MAX	
Α	0.80	1.00	0.031	0.039	
A1	0.00	0.10	0.000	0.004	
A3	0.3	25	0.0	10	
b	0.15	0.30	0.006	0.012	
С	0.10	0.20	0.004	0.008	
D	1.90	2.10	0.075	0.083	
E	1.15	1.35	0.045	0.053	
е	0.0	65	0.026		
HE	2.00	2.20	0.079	0.087	
L1	0.20	0.50	0.008	0.020	
Lp	0.25	0.55	0.010	0.022	
Q	0.10	0.30	0.004	0.012	
х	-	0.10	, -	0.004	
У	-	0.10	e 	0.004	

DIM	MILIMETERS		INCHES		
	MIN	MAX	MIN	MAX	
b2	- 7	0.40	-	0.016	
e1	1.55		0.0	61	
- 11	-	0.65	-	0.026	

Dimension in mm/inches



Dimensions

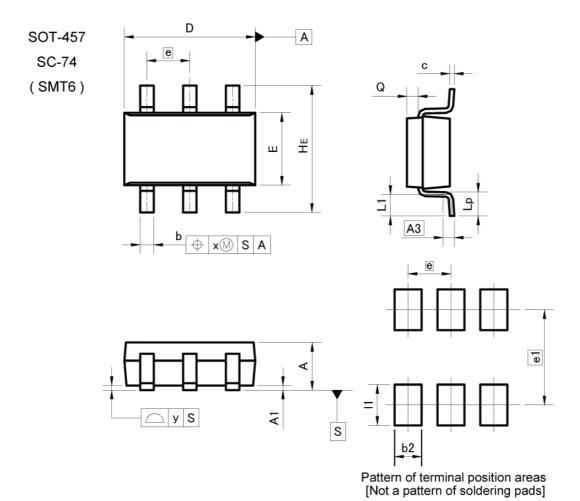

DIM	MILIMETERS		INCHES		
DIM	MIN	MAX	MIN	MAX	
Α	1.00	1.30	0.039	0.051	
A1	0.00	0.10	0.000	0.004	
A3	0.:	25	0.0	10	
b	0.25	0.40	0.010	0.016	
С	0.09	0.25	0.004	0.010	
D	2.80	3.00	0.110	0.118	
Е	1.50	1.80	0.059	0.071	
е	0.9	95	0.037		
HE	2.60	3.00	0.102	0.118	
L1	0.30	0.60	0.012	0.024	
Lp	0.40	0.70	0.016	0.028	
Q	0.20	0.30	0.008	0.012	
х	-	0.20	-	0.008	
У	-	0.10	-	0.004	

DIM	MILIMETERS		INCHES		
	MIN	MAX	MIN	MAX	
b2		0.60	-	0.024	
e1	2.10		0.0	83	
11	-	0.90	-	0.035	

Dimension in mm/inches



Notes

- 1) The information contained herein is subject to change without notice.
- Before you use our Products, please contact our sales representative and verify the latest specifications:
- 3) Although ROHM is continuously working to improve product reliability and quality, semiconductors can break down and malfunction due to various factors.

 Therefore, in order to prevent personal injury or fire arising from failure, please take safety measures such as complying with the derating characteristics, implementing redundant and fire prevention designs, and utilizing backups and fail-safe procedures. ROHM shall have no responsibility for any damages arising out of the use of our Poducts beyond the rating specified by ROHM
- 4) Examples of application circuits, circuit constants and any other information contained herein are provided only to illustrate the standard usage and operations of the Products. The peripheral conditions must be taken into account when designing circuits for mass production.
- 5) The technical information specified herein is intended only to show the typical functions of and examples of application circuits for the Products. ROHM does not grant you, explicitly or implicitly, any license to use or exercise intellectual property or other rights held by ROHM or any other parties. ROHM shall have no responsibility whatsoever for any dispute arising out of the use of such technical information.
- 6) The Products are intended for use in general electronic equipment (i.e. AV/OA devices, communication, consumer systems, gaming/entertainment sets) as well as the applications indicated in this document.
- 7) The Products specified in this document are not designed to be radiation tolerant.
- 8) For use of our Products in applications requiring a high degree of reliability (as exemplified below), please contact and consult with a ROHM representative: transportation equipment (i.e. cars, ships, trains), primary communication equipment, traffic lights, fire/crime prevention, safety equipment, medical systems, servers, solar cells, and power transmission systems.
- Do not use our Products in applications requiring extremely high reliability, such as aerospace equipment, nuclear power control systems, and submarine repeaters.
- 10) ROHM shall have no responsibility for any damages or injury arising from non-compliance with the recommended usage conditions and specifications contained herein.
- 11) ROHM has used reasonable care to ensur the accuracy of the information contained in this document. However, ROHM does not warrants that such information is error-free, and ROHM shall have no responsibility for any damages arising from any inaccuracy or misprint of such information.
- 12) Please use the Products in accordance with any applicable environmental laws and regulations, such as the RoHS Directive. For more details, including RoHS compatibility, please contact a ROHM sales office. ROHM shall have no responsibility for any damages or losses resulting non-compliance with any applicable laws or regulations.
- 13) When providing our Products and technologies contained in this document to other countries, you must abide by the procedures and provisions stipulated in all applicable export laws and regulations, including without limitation the US Export Administration Regulations and the Foreign Exchange and Foreign Trade Act.
- 14) This document, in part or in whole, may not be reprinted or reproduced without prior consent of ROHM.



Thank you for your accessing to ROHM product informations. More detail product informations and catalogs are available, please contact us.

ROHM Customer Support System

http://www.rohm.com/contact/

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

ROHM Semiconductor:



OOO «ЛайфЭлектроникс" "LifeElectronics" LLC

ИНН 7805602321 КПП 780501001 P/C 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 3010181090000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный) Email: org@lifeelectronics.ru