



# Grove - Electromagnet

Release date : 9/20/2015

Version : 1.0

Wiki: [http://www.seeedstudio.com/wiki/Grove - Electromagnet](http://www.seeedstudio.com/wiki/Grove_-_Electromagnet)

Bazaar: <http://www.seeedstudio.com/depot/Grove-Electromagnet-p-1820.html>

## Document Revision History

---

| Revision | Date         | Author    | Description |
|----------|--------------|-----------|-------------|
| 1.0      | Sep 21, 2015 | Victor.He | Create file |
|          |              |           |             |

## Contents

|                                |   |
|--------------------------------|---|
| Document Revision History..... | 2 |
| 1. Introduction .....          | 2 |
| 2. Features.....               | 3 |
| 3. Specification .....         | 4 |
| 4. Usage.....                  | 5 |
| 4.1 With Arduino.....          | 5 |
| 4.2 With Raspberry Pi .....    | 6 |
| 5. Resource.....               | 8 |

### *Disclaimer*

*For physical injuries and possessions loss caused by those reasons which are not related to product quality, such as operating without following manual guide, natural disasters or force majeure, we take no responsibility for that.*

*Under the supervision of Seeed Technology Inc., this manual has been compiled and published which covered the latest product description and specification. The content of this manual is subject to change without notice.*



### *Copyright*

*The design of this product (including software) and its accessories is under tutelage of laws. Any action to violate relevant right of our product will be penalized through law. Please consciously observe relevant local laws in the use of this product.*

## 1. Introduction

---

An electromagnet is a type of magnet in which the magnetic field is produced by electric current. An electric current flowing in a wire creates a magnetic field around the wire, due to Ampere's law (see drawing below). To concentrate the magnetic field, in an electromagnet the wire is wound into a coil with many turns of wire lying side by side. The magnetic field of all the turns of wire passes through the center of the coil, creating a strong magnetic field there. Grove - Electromagnet can shuck 1KG weight and hold on. It easy to use, to learn electromagnet principle.

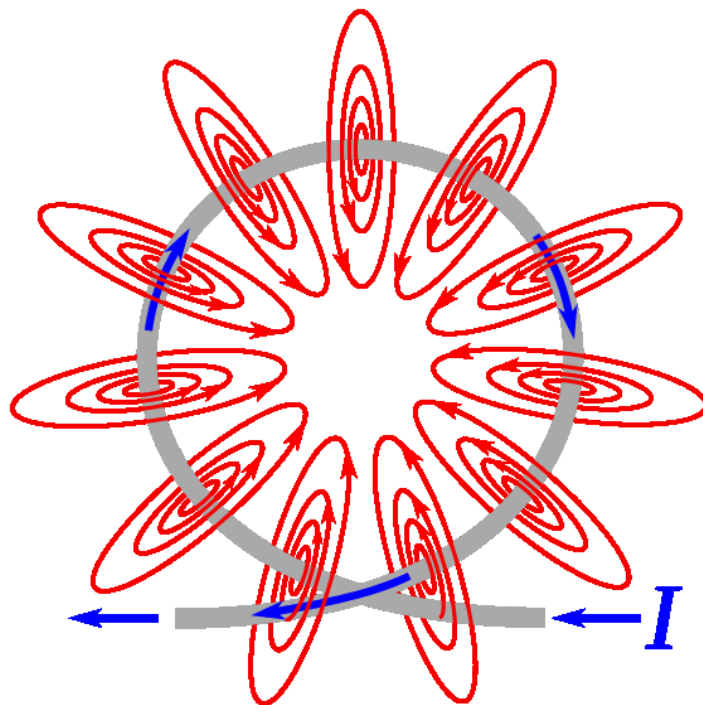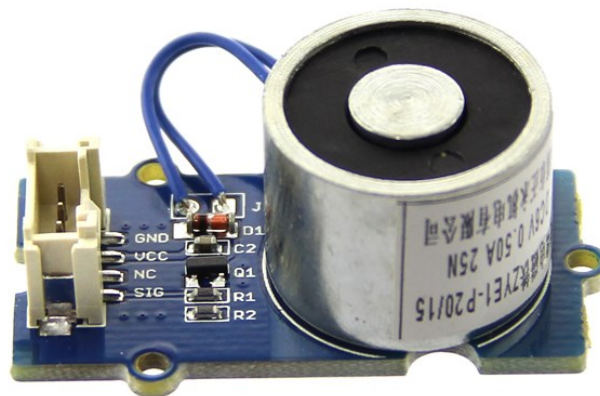

## 2. Features

---

- Grove shape
- 1KG peak suction
- Low standby current

### 3. Specification


---

|                 |       |
|-----------------|-------|
| Working Voltage | DC 5V |
| Working Current | 400mA |
| Standby current | 200uA |
| Load Weight     | 1KG   |

## 4. Usage

---

### 4.1 With [Arduino](#)

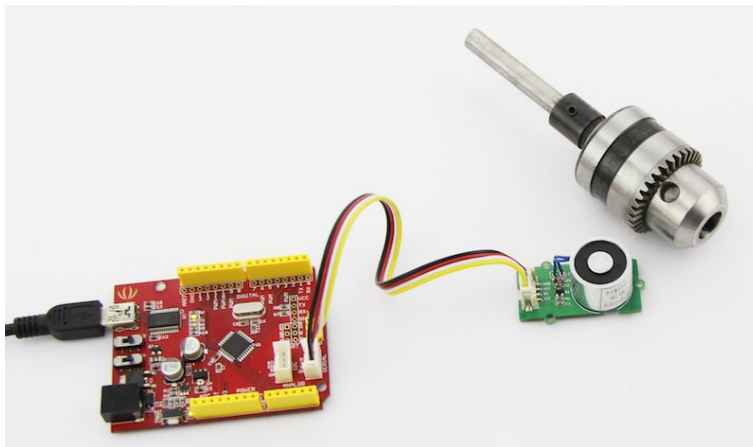

```
/*
Turns on an Electromagnet on for one second, then off for one second,
repeatedly.

This example code is in the public domain.
*/

int Electromagnet = 0;
int LED = 13;

// the setup routine runs once when you press reset:
void setup() {
    // initialize the digital pin as an output.
    pinMode(Electromagnet, OUTPUT);
    pinMode(LED, OUTPUT);
}

// the loop routine runs over and over again forever:
void loop() {
```

```
digitalWrite(Electromagnet, HIGH); // turn the Electromagnet on (HIGH
is the voltage level)
digitalWrite(LED, HIGH); // turn the LED on (HIGH is the voltage
level)
delay(1000); // wait for a second
digitalWrite(Electromagnet, LOW); // turn the Electromagnet off by
making the voltage LOW
digitalWrite(LED, LOW); // turn the LED off by making the voltage LOW
delay(1000); // wait for a second
```

## 4.2 With Raspberry Pi

1. You should have got a raspberry pi and a grovepi or grovepi+.
2. You should have completed configuring the development environment, otherwise follow [here](#).
3. Connection. Plug the sensor to grovepi socket D4 by using a grove cable.
4. Navigate to the demos' directory:

```
cd yourpath/GrovePi/Software/Python/
```

To see the code

```
nano grove_electromagnet.py # "Ctrl+x" to exit #
```

```
import time
import grovepi

# The electromagnet can hold a 1KG weight

# Connect the Grove Electromagnet to digital port D4
# SIG,NC,VCC,GND
electromagnet = 4

grovepi.pinMode(electromagnet,"OUTPUT")
time.sleep(1)

while True:
    try:
        # Switch on electromagnet
        grovepi.digitalWrite(electromagnet,1)
        print "on"
        time.sleep(2)

        # Switch off electromagnet
```

```
    grovepi.digitalWrite(electromagnet,0)
    print "off"
    time.sleep(2)

except KeyboardInterrupt:
    grovepi.digitalWrite(electromagnet,0)
    break
except IOError:
    print "Error"}
```

5. Run the demo.

```
sudo python grove_electromagnet.py
```

## 5. Resource

---

[File:Grove Electromagnet v1.0 SCH PCB.zip](#)

[Datasheet ZYE1-P20-15 PDF](#)

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)