

# Thermomagnetic device circuit breaker - CB TM2 0.5A M1

## P - 2800879

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Thermomagnetic device circuit breaker, 2-pos., tripping characteristic M1 (medium-blow), 2 PDT contacts, plug for base element.

### Product description

Thermomagnetic device circuit breaker



### Key commercial data

|                        |                                                                                                         |
|------------------------|---------------------------------------------------------------------------------------------------------|
| Packing unit           | 0                                                                                                       |
| Minimum order quantity | 1                                                                                                       |
| GTIN                   | <br>4 046356 690409 |
| Custom tariff number   | 85363010                                                                                                |
| Country of origin      | GERMANY                                                                                                 |

### Technical data

#### General

|                                         |                                                                                                               |
|-----------------------------------------|---------------------------------------------------------------------------------------------------------------|
| Installation instructions               | When mounted in rows, the nominal device current can be limited to just 80% or must be oversized accordingly. |
| Height                                  | 45 mm                                                                                                         |
| Width                                   | 24.6 mm                                                                                                       |
| Depth                                   | 52 mm                                                                                                         |
| Ambient temperature (operation)         | -30 °C ... 60 °C                                                                                              |
| Ambient temperature (storage/transport) | -40 °C ... 80 °C                                                                                              |
| Inflammability class according to UL 94 | V0                                                                                                            |
| Degree of protection                    | IP30 (Actuation area)                                                                                         |
| Mounting type                           | On base element                                                                                               |
| Color                                   | gray                                                                                                          |
| Number of positions                     | 2                                                                                                             |
| Insulating material group               | II                                                                                                            |
| Pollution degree                        | 2                                                                                                             |

# Thermomagnetic device circuit breaker - CB TM2 0.5A M1

## P - 2800879

### Technical data

#### Technical data

|                                                 |                                                                       |
|-------------------------------------------------|-----------------------------------------------------------------------|
| Fuse type                                       | normal blow                                                           |
| Rated surge voltage                             | 2.5 kV (Increased insulation in actuation area)                       |
| Rated voltage                                   | 240 V AC (Ue according to IEC 60934)                                  |
| Rated voltage                                   | 277 V AC (UL 1077)                                                    |
| Rated voltage                                   | 277 V AC (UL 508 - with plug-in base)                                 |
| Rated voltage                                   | 80 V DC (IEC 60934)                                                   |
| Rated voltage                                   | 80 V DC (UL 1077)                                                     |
| Rated voltage                                   | 80 V DC (UL 508 - with plug-in base)                                  |
| Rated current $I_n$                             | 0.5 A (IEC 60934)                                                     |
| Rated current $I_n$                             | 0.5 A AC (inductive load according to UL 1077)                        |
| Rated current $I_n$                             | 0.5 A DC (low-induction load according to UL 1077)                    |
| Rated current $I_n$                             | 0.5 A AC (inductive load according to UL 508 - with plug-in base)     |
| Rated current $I_n$                             | 0.5 A DC (low-induction load according to UL 508 - with plug-in base) |
| Rated insulation voltage $U_i$                  | 277 V AC (UL 1077)                                                    |
| Rated insulation voltage $U_i$                  | 250 V AC (IEC 60934)                                                  |
| Insulation resistance $R_{iso}$                 | > 100 MΩ (500 V DC)                                                   |
| Auxiliary circuit                               | 277 V AC / 0.5 A (Low-induction)                                      |
| Auxiliary circuit                               | 277 V AC / 1 A (Low-induction, maximum of 2000 cycles)                |
| Auxiliary circuit                               | 50 V DC / 1 A (Low-induction)                                         |
| Type of actuation                               | S type                                                                |
| Tripping method                                 | TM (thermomagnetic)                                                   |
| Tripping level                                  | Trip-free mechanism (positive)                                        |
| Required backup fuse                            | ≥ 15 A                                                                |
| Rated short-circuit switching capacity $I_{cn}$ | 400 A (240 V AC)                                                      |
| Rated short-circuit switching capacity $I_{cn}$ | 600 A (80 V DC)                                                       |
| Dielectric strength                             | 3000 V AC (Actuation area)                                            |
| Dielectric strength                             | 1500 V AC (Main to auxiliary circuit)                                 |
| Dielectric strength                             | 1500 V AC (Open main circuit)                                         |
| Dielectric strength                             | 1000 V AC (Open auxiliary circuit)                                    |
| Dielectric strength                             | 1500 V AC (Position to position)                                      |
| Voltage drop                                    | 2.5 V (at 1 x $I_n$ )                                                 |
| Cycles, max.                                    | 6000 (240 V AC/1 x $I_n$ )                                            |
| Cycles, max.                                    | 3000 (80 V DC/1 x $I_n$ )                                             |
| Contact type                                    | 2 PDT                                                                 |

#### Standards

|                              |                      |
|------------------------------|----------------------|
| Standard - Electrical safety | EN 60934             |
| Standard - Electrical safety | UL 1077              |
| Standard - Electrical safety | UL 508               |
| Standard - Electrical safety | CSA 22.2 No. 235-041 |

# Thermomagnetic device circuit breaker - CB TM2 0.5A M1 P - 2800879

## Classifications

### ETIM

|          |          |
|----------|----------|
| ETIM 3.0 | EC000899 |
| ETIM 4.0 | EC000899 |
| ETIM 5.0 | EC000899 |

### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 11     | 39121411 |
| UNSPSC 12.01  | 39121411 |
| UNSPSC 13.2   | 39121411 |
| UNSPSC 6.01   | 30211812 |
| UNSPSC 7.0901 | 39121411 |

### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 27141116 |
| eCl@ss 4.1 | 27141116 |
| eCl@ss 5.0 | 27141116 |
| eCl@ss 5.1 | 27141116 |
| eCl@ss 6.0 | 27141116 |
| eCl@ss 7.0 | 27141116 |

## Approvals

### Approvals

#### Approvals

VDE Zeichengenehmigung / UL Recognized / cUL Recognized / cULus Recognized

#### Ex Approvals

#### Approvals submitted

### Approval details

VDE Zeichengenehmigung 

UL Recognized 

# Thermomagnetic device circuit breaker - CB TM2 0.5A M1 P - 2800879

## Approvals

cUL Recognized 

cULus Recognized 

## Accessories

### Additional products

Base element - CB 1/6-2/4 PT-BE - 2800929



Base element with push-in connection technology for CB ... device circuit breakers

Jumper - CB PT BRIDGE - 2801014



Bridge plugs for the CB 1/6-2/4 PT-BE base element

Plug-in bridge - FBS 2-6 - 3030336



Plug-in bridge, Number of positions: 2, Color: red

Plug-in bridge - FBS 3-6 - 3030242



Plug-in bridge, Number of positions: 3, Color: red

# Thermomagnetic device circuit breaker - CB TM2 0.5A M1 P - 2800879

## Accessories

Plug-in bridge - FBS 4-6 - 3030255



Plug-in bridge, Number of positions: 4, Color: red

---

Plug-in bridge - FBS 5-6 - 3030349



Plug-in bridge, Number of positions: 5, Color: red

---

Plug-in bridge - FBS 10-6 - 3030271



Plug-in bridge, Number of positions: 10, Color: red

---

Plug-in bridge - FBS 20-6 - 3030365



Plug-in bridge, Number of positions: 20, Color: red

---

Plug-in bridge - FBS 50-6 - 3032224



Plug-in bridge, Number of positions: 50, Color: red

---

# Thermomagnetic device circuit breaker - CB TM2 0.5A M1 P - 2800879

## Accessories


Cable-cutting tool - CUTFOX-FBS - 1212124



Cutting tool, for separating individual jumper bars from FBS ... plug-in bridges and EB ... insertion bridges

## Drawings

### Diagram

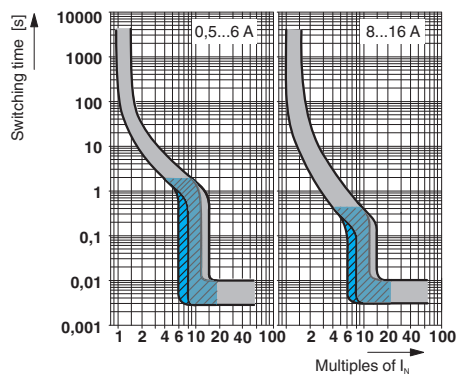

Trigger characteristic  
Gray: DC range, blue: AC range

## Thermomagnetic device circuit breaker - CB TM2 0.5A M1 P - 2800879

Dimensioned drawing



The figure shows the complete module consisting of a base element and connector



Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)