


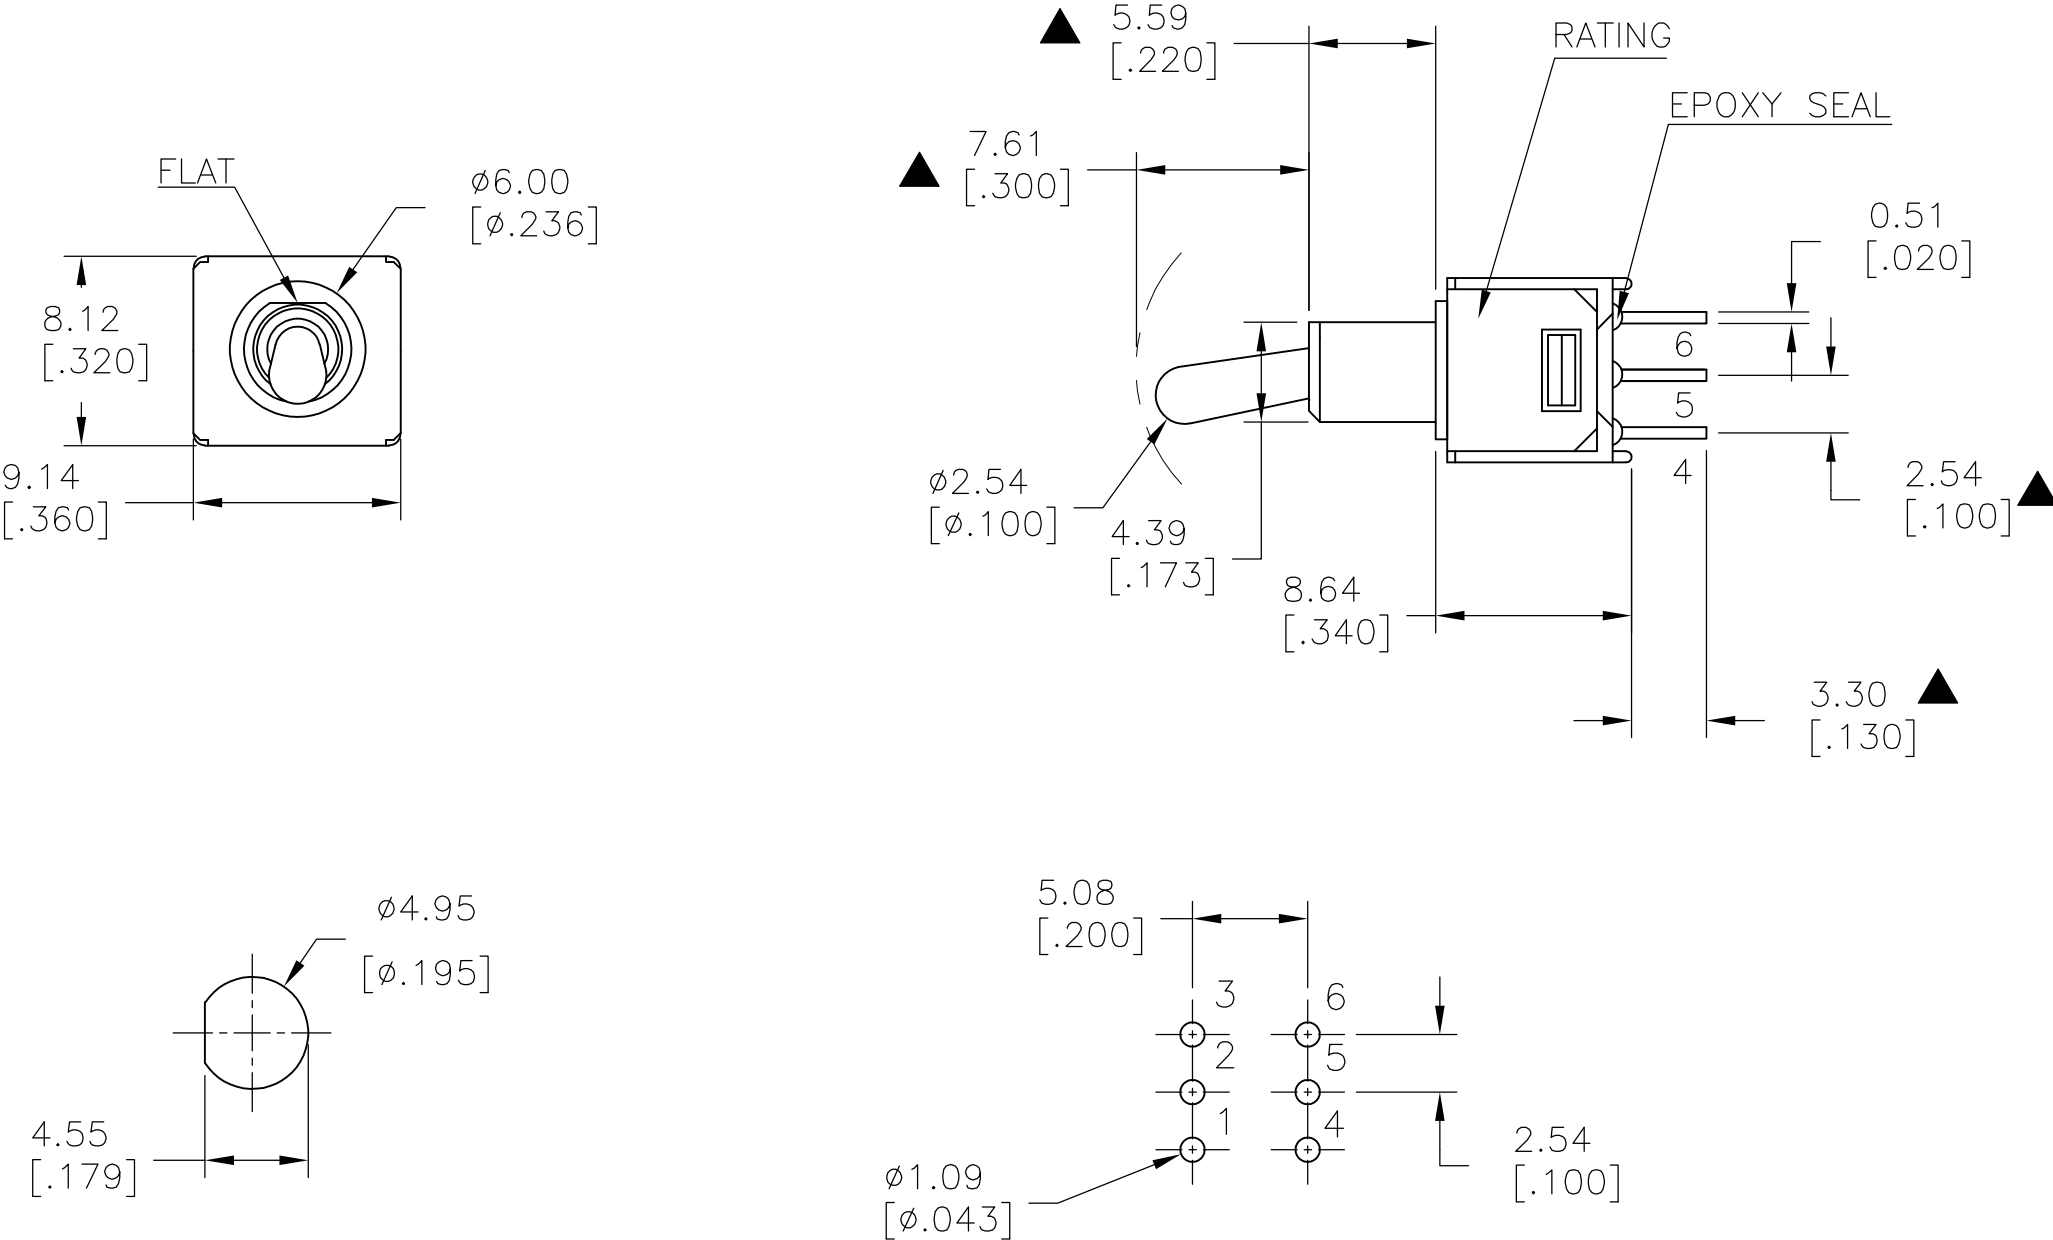

MODEL NO.	POS.1	POS.2	POS.3
TMS	ON	NONE	ON
TERM. COMM.	2-3,5-6	N/A	2-1,5-4
SCHEMATIC			

SWITCH FUNCTION

LAYOUT FOR PN 2267078-8

SPECIFICATIONS

- MECHANICAL LIFE: 30,000 MAKE-AND-BREAK CYCLES.
- CONTACT RESISTANCE: 20 mΩ MAX. INITIAL @ 2-4VDC
100mA FOR BOTH SILVER AND GOLD PLATED CONTACTS.
- CONTACT RATING: GOLD PLATED: 0.4VA MAX @ 20 V MAX (AC OR DC)
- INSULATION RESISTANCE: 1,000 MΩ MIN.
- DIELECTRIC STRENGTH: 1,000 Vrms MIN.@SEA LEVEL.
- OPERATING TEMPERATURE: -30°C TO 85°C.

GOLD	ON-ON	PC THROUGH HOLE	RIGHT ANGLE	2	2	TMD1T5B2M6RE	2267078-9
GOLD	ON-ON	PC THROUGH HOLE	VERTICAL	2	2	TMD1T5B2M2RE	2267078-8
GOLD	ON-OFF-ON	PC THROUGH HOLE	VERTICAL RIGHT ANGLE	1	2	TMS3T5B2M7RE	2267078-7
GOLD	ON-OFF-ON	PC THROUGH HOLE	RIGHT ANGLE	1	2	TMS3T5B2M6RE	2267078-6
GOLD	ON-OFF-ON	PC THROUGH HOLE	VERTICAL	1	2	TMS3T5B2M2RE	2267078-5
GOLD	ON-ON	PC THROUGH HOLE	VERTICAL RIGHT ANGLE	1	2	TMS1T5B2M7RE	2267078-4
GOLD	ON-ON	PC THROUGH HOLE	RIGHT ANGLE	1	2	TMS1T5B2M6RE	2267078-3
GOLD	ON-ON	PC THROUGH HOLE	VERTICAL	1	2	TMS1T5B2M2RE	2267078-2
GOLD	OFF-ON	PC THROUGH HOLE	VERTICAL	1	2	TMS6T5B2M2RE	2267078-1
CONTACT MATERIAL	FUNCTION	TERMINATION	MOUNT ANGLE	POLES	THROWS	DESCRIPTIVE PN	TE PN

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm [INCHES]

MATERIAL
-

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -

1 PLC ± 0.38[.015]

2 PLC ± 0.25[.010]

3 PLC ± -

4 PLC ± -

ANGLES ± 5°

FINISH
-

DWN 11JUL2014
NAGALAKSHMI K

CHK 11JUL2014
HILL, RYAN

APVD 11JUL2014
HILL, RYAN

PRODUCT SPEC
-

APPLICATION SPEC
-

WEIGHT
-

CUSTOMER DRAWING

TE Connectivity

NAME
SUBMINIATURE TOGGLE SWITCH

SIZE
A2

CAGE CODE
00779

DRAWING NO
C=2267078

RESTRICTED TO
-

SCALE 3:1
SHEET 1 of 9
REV A

D

C

B

A

D




C

B

A

MODEL NO.	POS.1	POS.2	POS.3
TMS	ON	NONE	ON
TERM. COMM.	2-3	OPEN	2-1
SCHEMATIC			

SWITCH FUNCTION

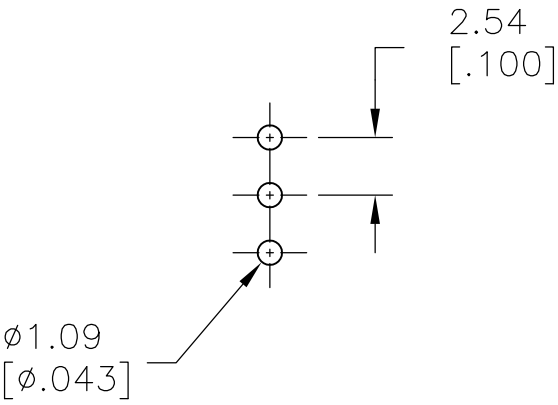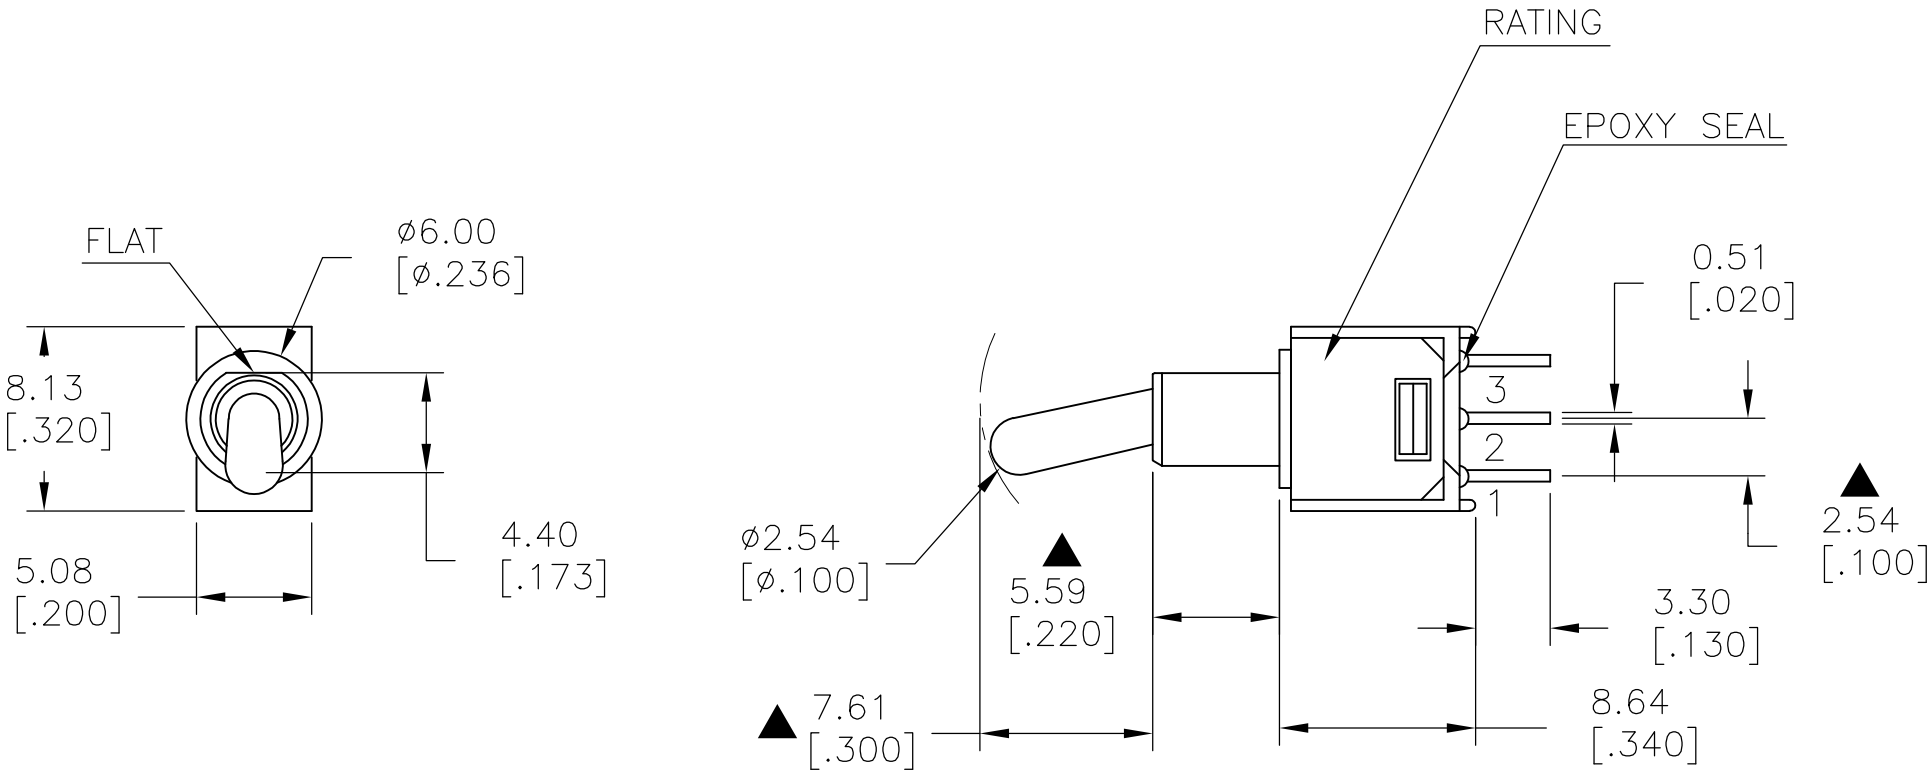

P.C. MOUNTING

LAYOUT FOR PN 2267078-2

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
NAGALAKSHMI K
11JUL2014

CHK
HILL, RYAN
11JUL2014

APVD
HILL, RYAN
11JUL2014

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

DIMENSIONS:
mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±	-
1 PLC	±	0.38[.015]
2 PLC	±	0.25[.010]
3 PLC	±	-
4 PLC	±	-
ANGLES	±	5°

FINISH

-

TE Connectivity

SUBMINIATURE TOGGLE SWITCH

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C=2267078	-

SCALE	SHEET	REV
3:1	2 of 9	A

D

C

B

A

D





C

B

A

MODEL NO.	POS.1	POS.2	POS.3
TMS	ON	OFF	ON
TERM. COMM.	2-3	OPEN	2-1
SCHEMATIC			

SWITCH FUNCTION

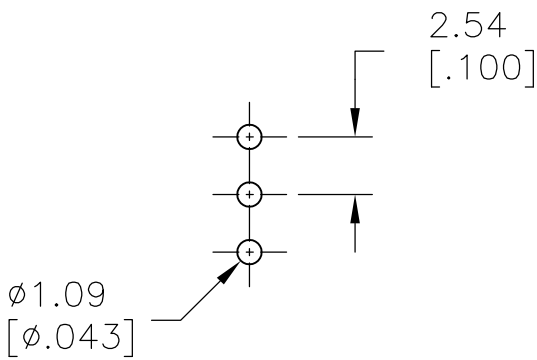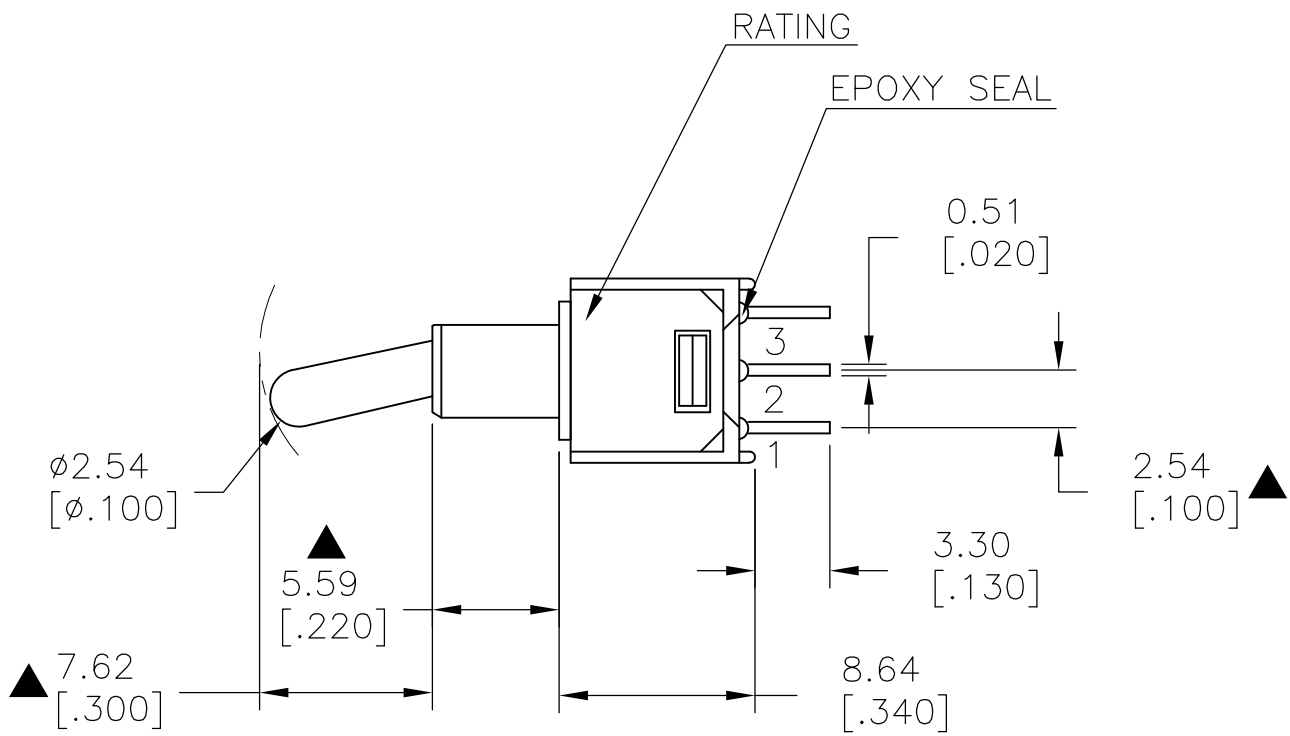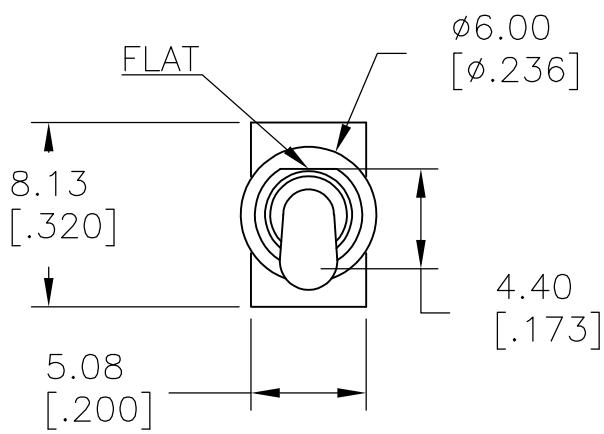



P.C. MOUNTING

LAYOUT FOR PN 2267078-5

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN NAGALAKSHMI K 11JUL2014	TE Connectivity			
DIMENSIONS: mm [INCHES]		CHK HILL, RYAN 11JUL2014				
		APVD HILL, RYAN 11JUL2014	NAME			
		PRODUCT SPEC	SUBMINIATURE TOGGLE SWITCH			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC	SIZE			
0 PLC ± -		—	CAGE CODE			
1 PLC ± 0.38[.015]		—	DRAWING NO			
2 PLC ± 0.25[.010]		—	RESTRICTED TO			
3 PLC ± -		—	SCALE			
4 PLC ± -		—	SHEET			
ANGLES ± 5°		—	REV			
FINISH		WEIGHT	CUSTOMER DRAWING			
—		—	3:1			
			3 of 9			
			A			

MODEL NO.	POS.1	POS.2	POS.3
TMS	OFF	NONE	ON
TERM. COMM.	OPEN	N/A	3-1
SCHEMATIC			

SWITCH FUNCTION

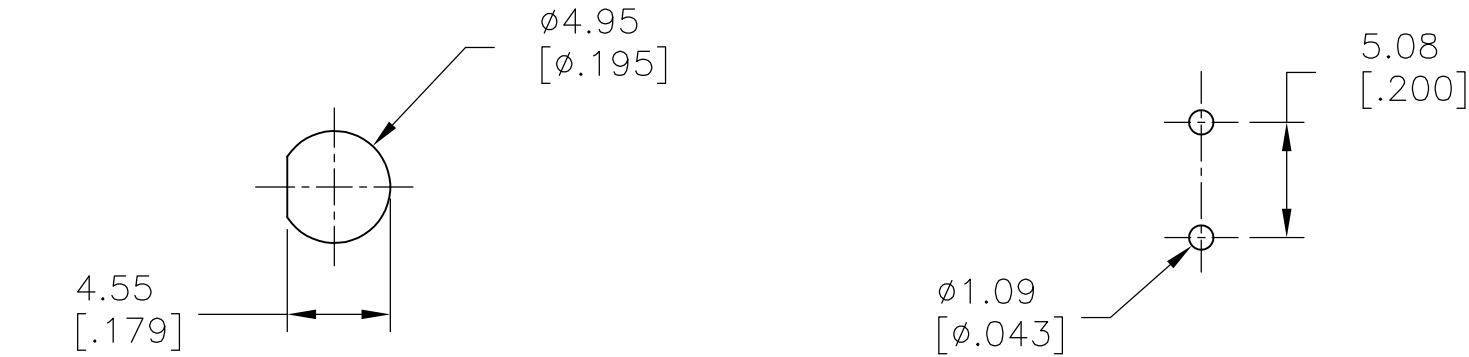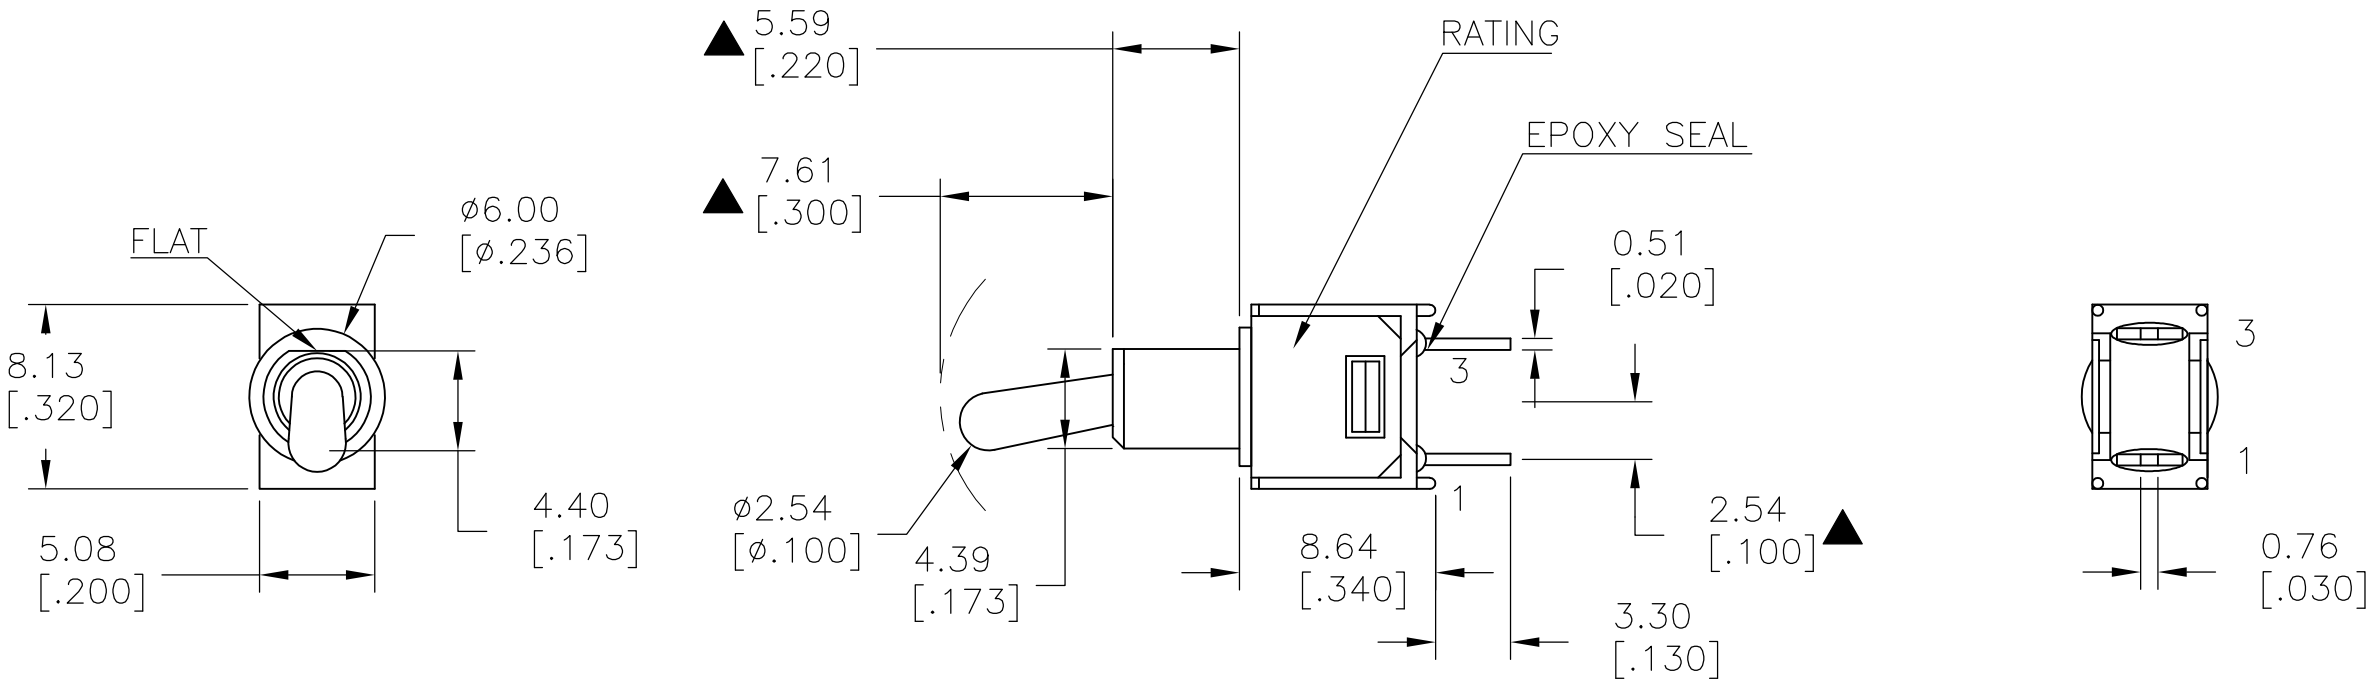

PANEL MOUNTING



P.C. MOUNTING

LAYOUT FOR PN 2267078-1


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
—	—	—	—	SEE SHEET 1	—	—

MODEL NO.	POS.1	POS.2	POS.3
TMS	ON	NONE	ON
TERM. COMM.	2-3,5-6	N/A	2-1,5-4
SCHEMATIC			

SWITCH FUNCTION

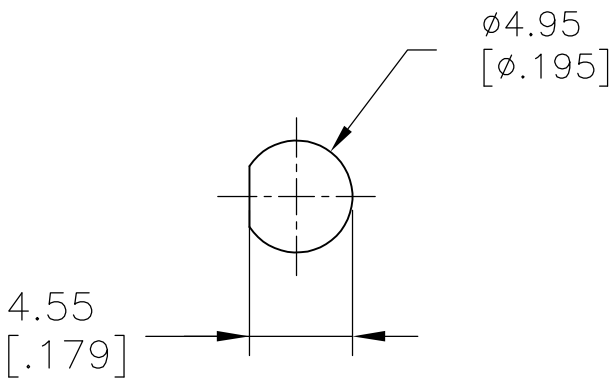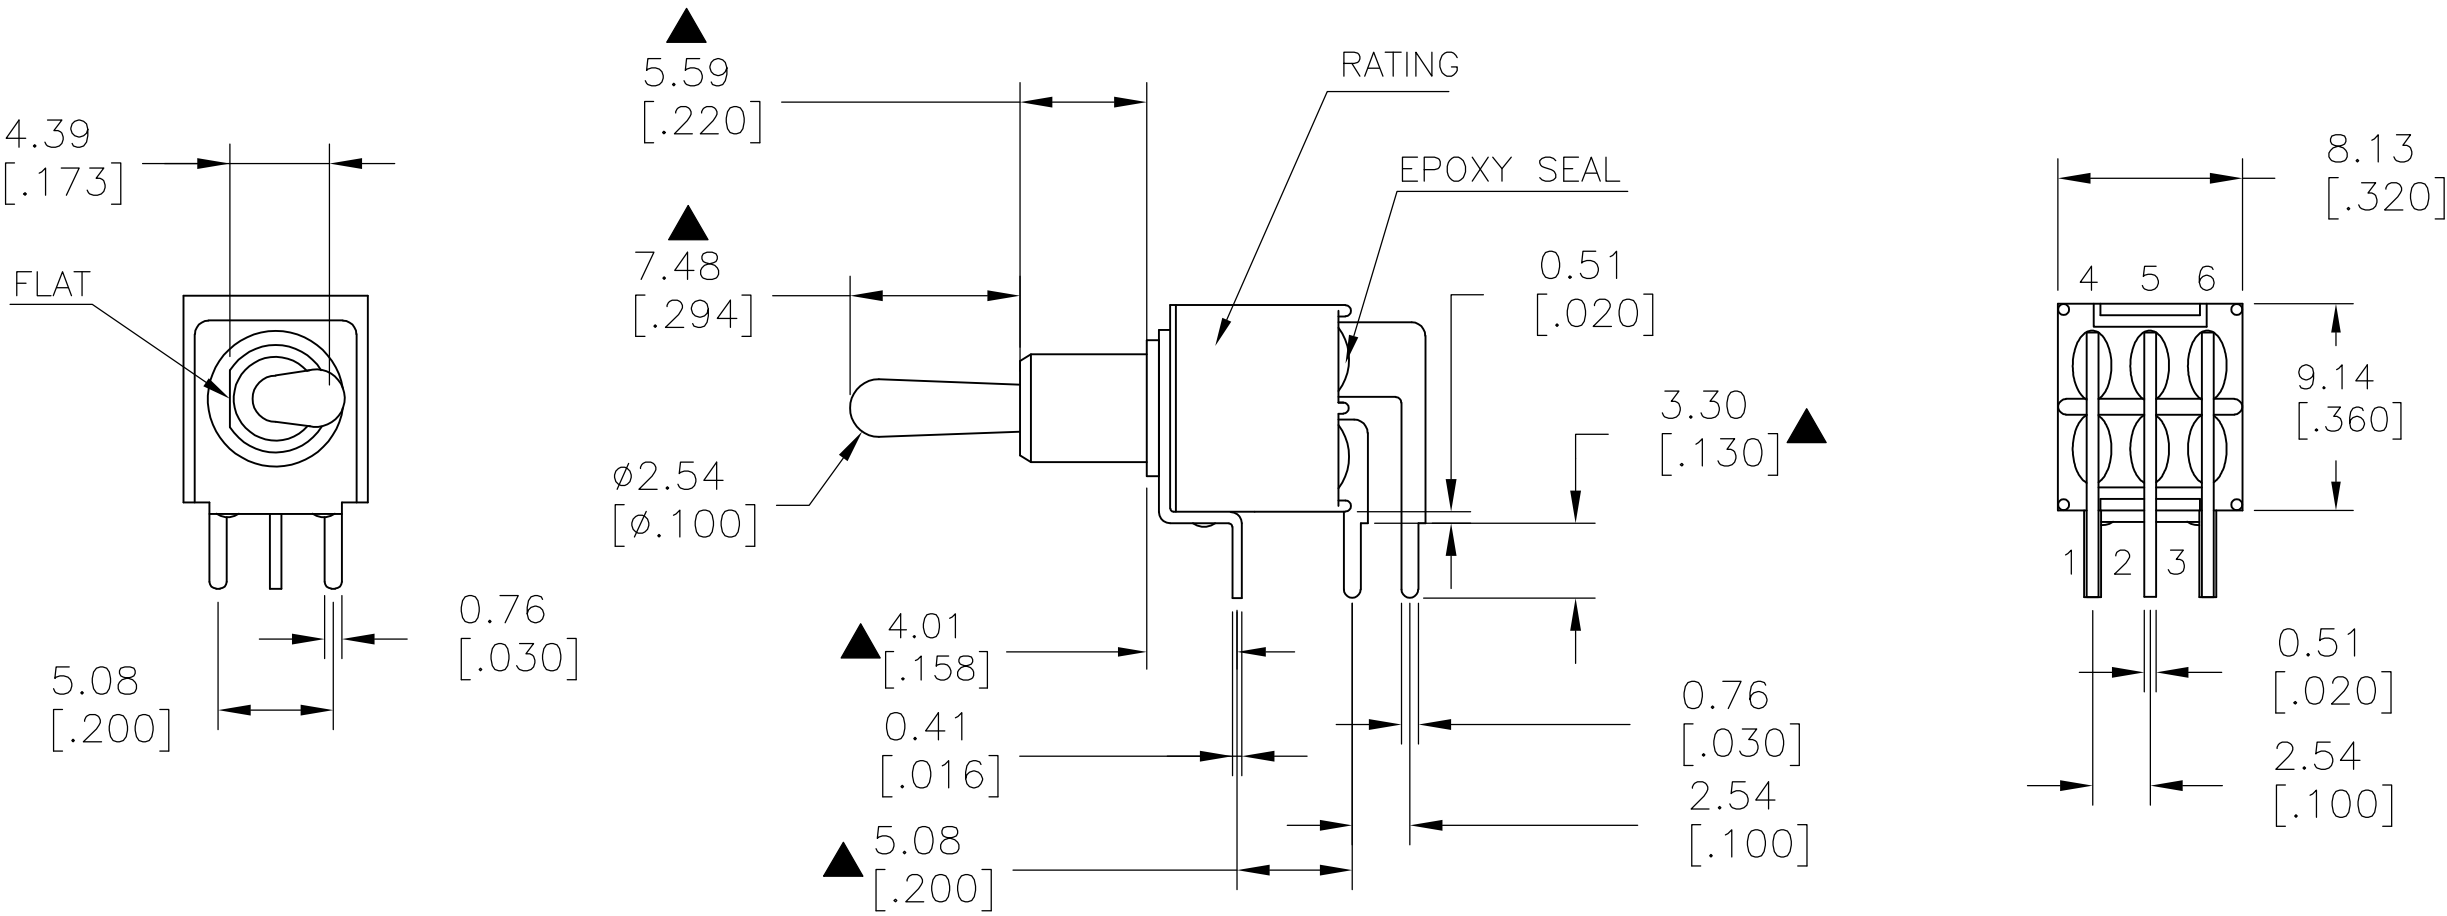

PANEL MOUNTING

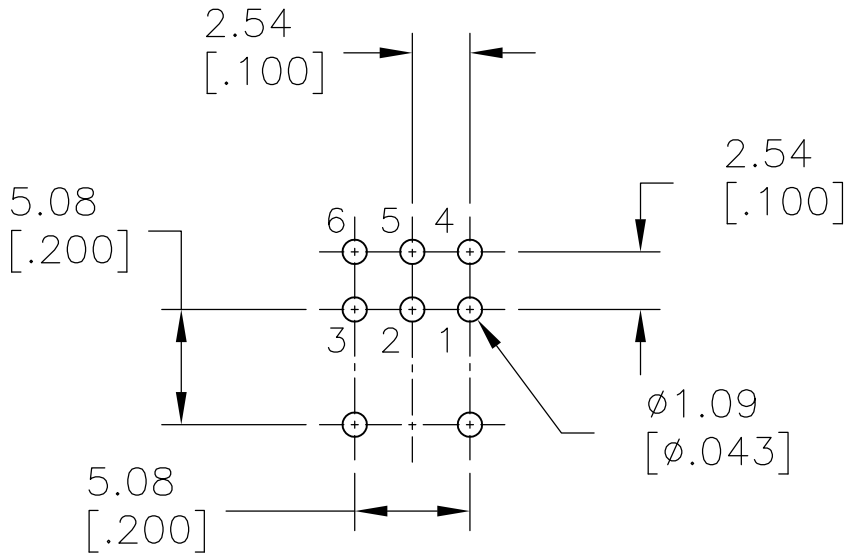




P.C. MOUNTING

LAYOUT FOR PN 2267078-9


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN NAGALAKSHMI K 11JUL2014		 TE Connectivity										
DIMENSIONS: mm [INCHES]		CHK HILL, RYAN 11JUL2014												
	TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD HILL, RYAN 11JUL2014		NAME SUBMINIATURE TOGGLE SWITCH									
	0 PLC ± - 1 PLC ± 0.38[.015] 2 PLC ± 0.25[.010] 3 PLC ± - 4 PLC ± - ANGLES ± 5°		PRODUCT SPEC —											
	MATERIAL —		FINISH —		APPLICATION SPEC —		SIZE A2		CAGE CODE 00779		DRAWING NO C=2267078		RESTRICTED TO —	
	CUSTOMER DRAWING				SCALE 3:1		SHEET 5 of 9		REV A					

MODEL NO.	POS.1	POS.2	POS.3
TMS	ON	NONE	ON
TERM. COMM.	2-3	N/A	2-1
SCHEMATIC			

SWITCH FUNCTION

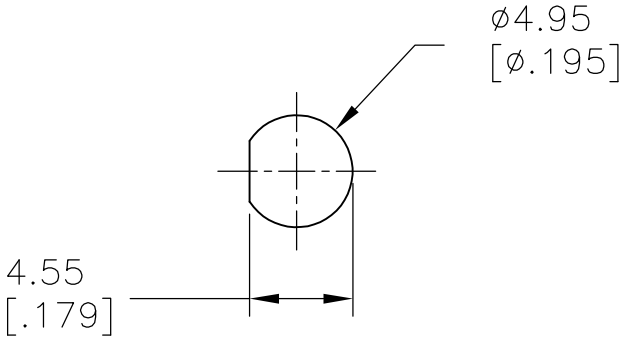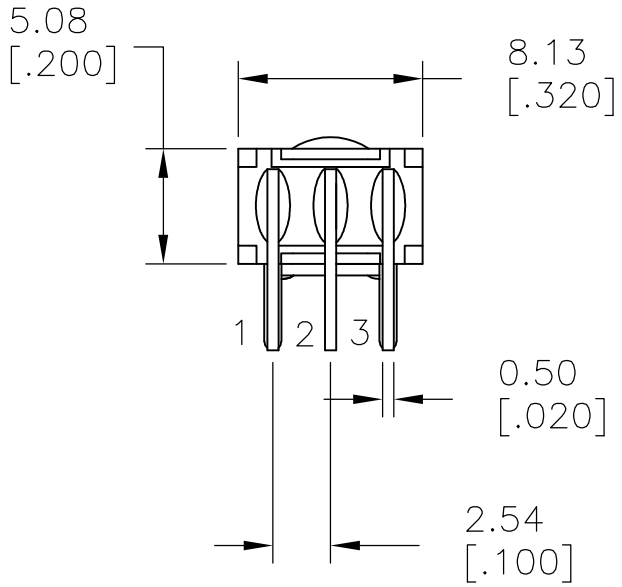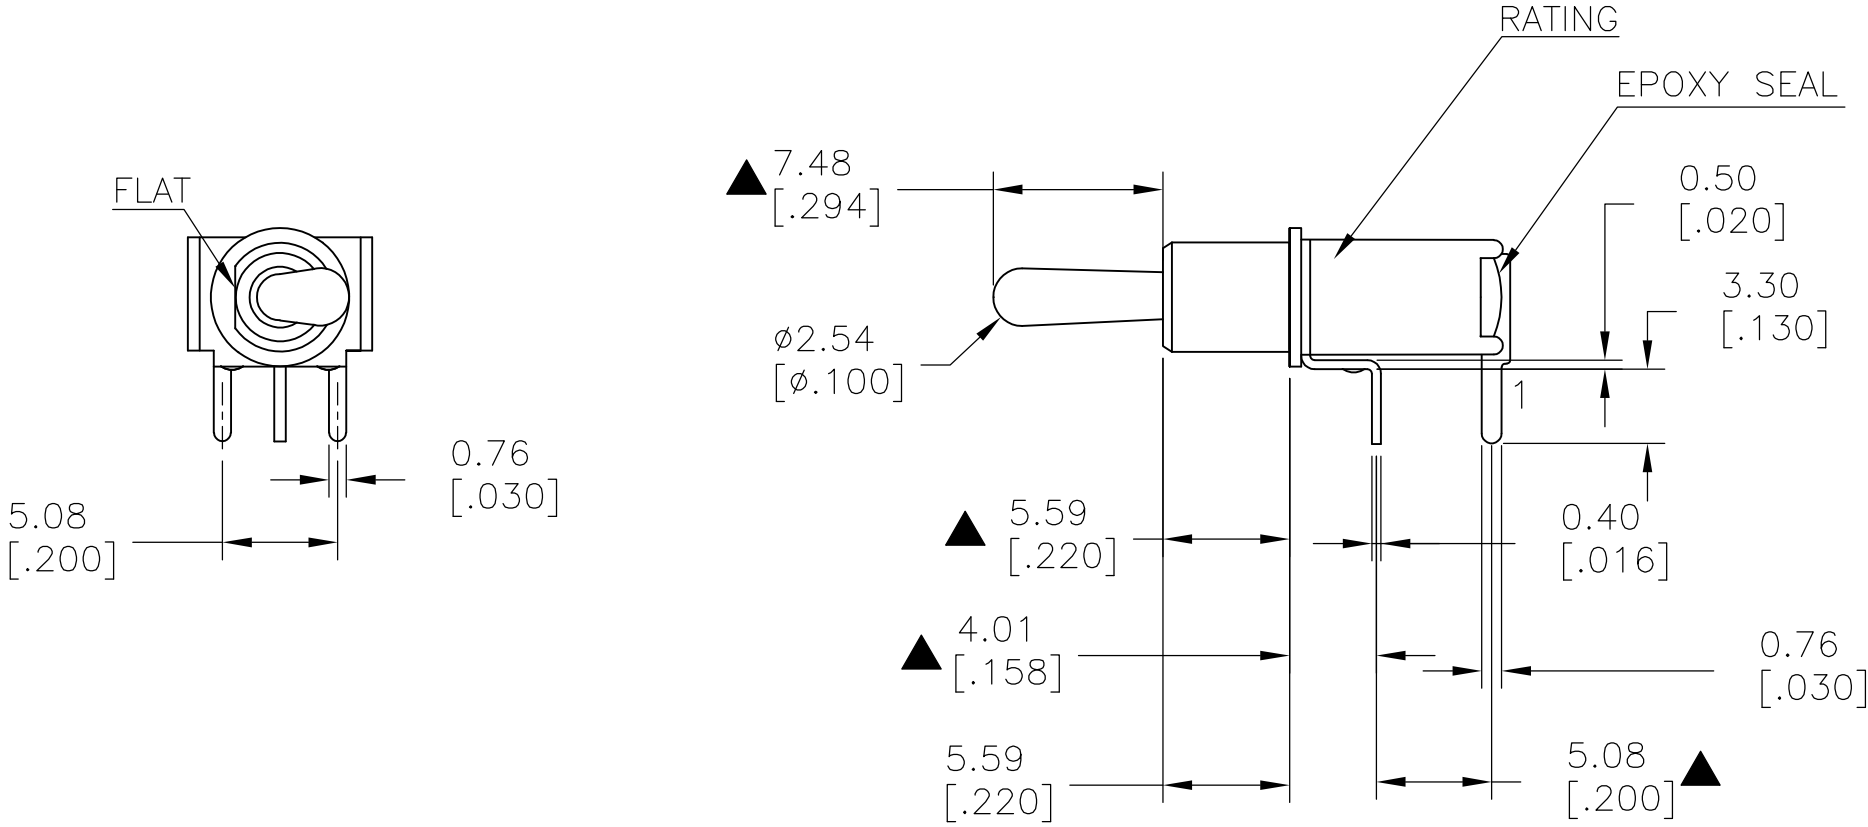

PANEL MOUNTING

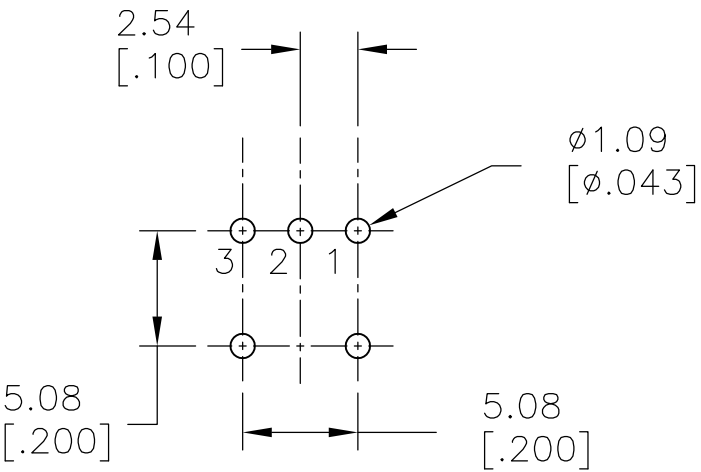

P.C. MOUNTING

LAYOUT FOR PN 2267078-3

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

NAGALAKSHMI K

11JUL2014

CHK

HILL, RYAN

11JUL2014

APVD

HILL, RYAN

11JUL2014

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

DIMENSIONS:

mm [INCHES]

MATERIAL

-

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -

1 PLC ± 0.38[.015]

2 PLC ± 0.25[.010]

3 PLC ± -

4 PLC ± -

ANGLES ± 5°

FINISH

-

TE Connectivity

NAME

SUBMINIATURE TOGGLE SWITCH

SIZE

A2

CAGE CODE

00779

DRAWING NO

C=2267078

RESTRICTED TO

-

SCALE

3:1

SHEET

6 of 9





REV

A


							1
LOC	DIST	REVISIONS					
—	—	P	LTR	DESCRIPTION	DATE	DWN	APVD
			—	SEE SHEET 1	—	—	—

MODEL NO.	POS.1	POS.2	POS.3
TMS	ON	NONE	ON
TERM. COMM.	2-3	N/A	2-1
SCHEMATIC			

SWITCH FUNCTION

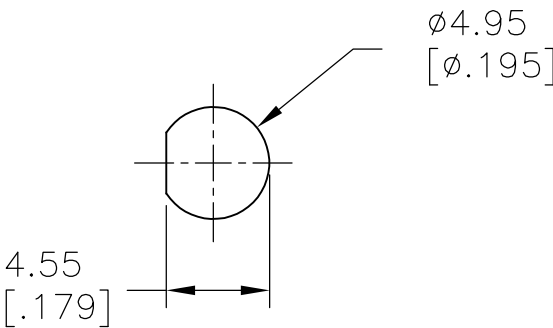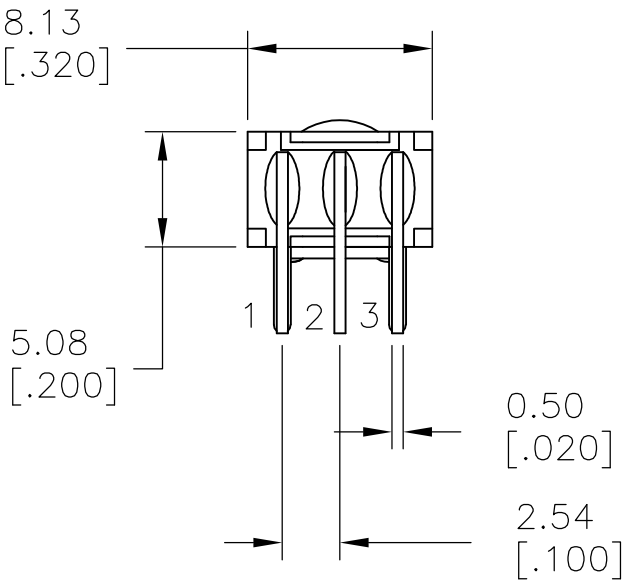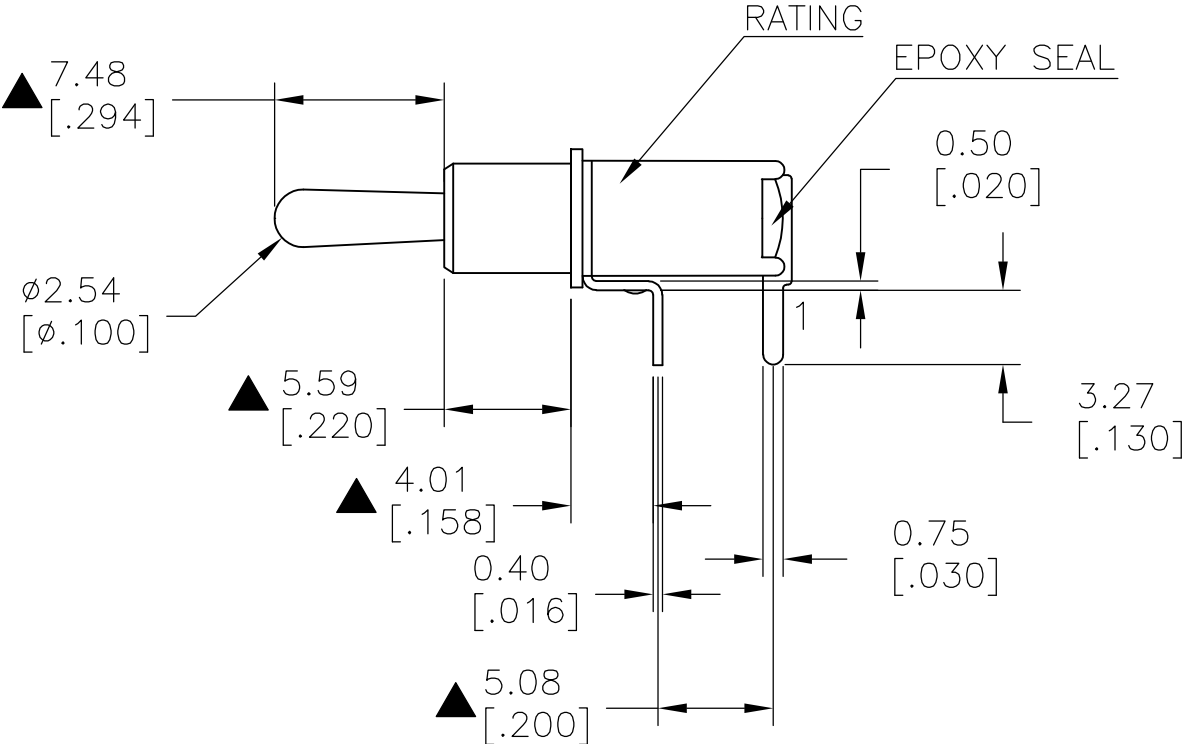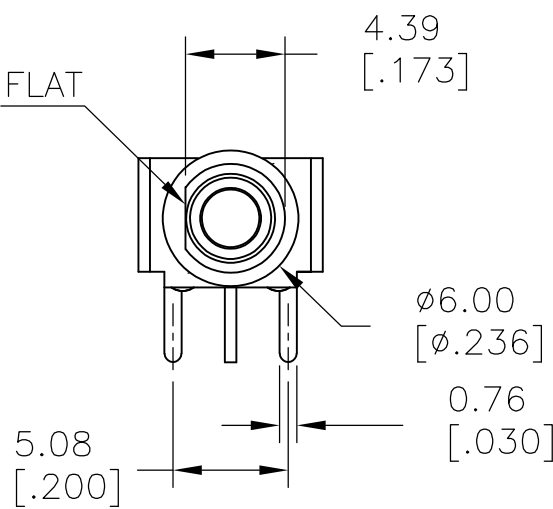



PANEL MOUNTING

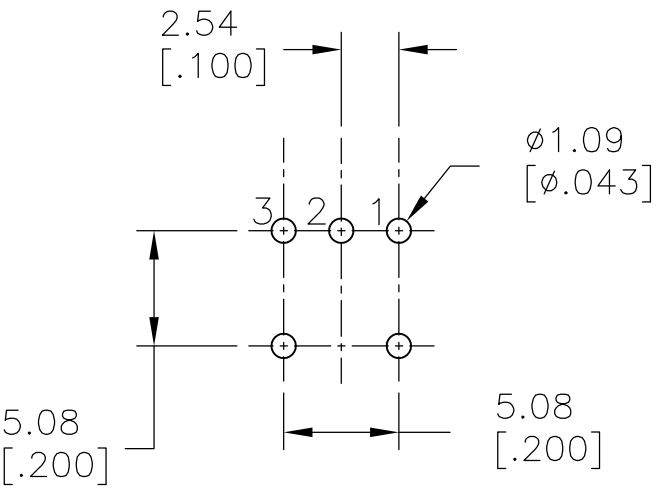

P.C. MOUNTING

LAYOUT FOR PN 2267078-6


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN NAGALAKSHMI K 11JUL2014		 TE Connectivity								
		CHK HILL, RYAN 11JUL2014										
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME								
	0 PLC ± -		APVD HILL, RYAN 11JUL2014	SUBMINIATURE TOGGLE SWITCH								
	1 PLC ± 0.38[.015]		PRODUCT SPEC —									
	2 PLC ± 0.25[.010]		APPLICATION SPEC —									
	3 PLC ± -		—									
	4 PLC ± -		—	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO					
MATERIAL	FINISH		WEIGHT	A2	00779	C=2267078	—					
			CUSTOMER DRAWING				SCALE	3:1	SHEET	7 of 9	REV	A

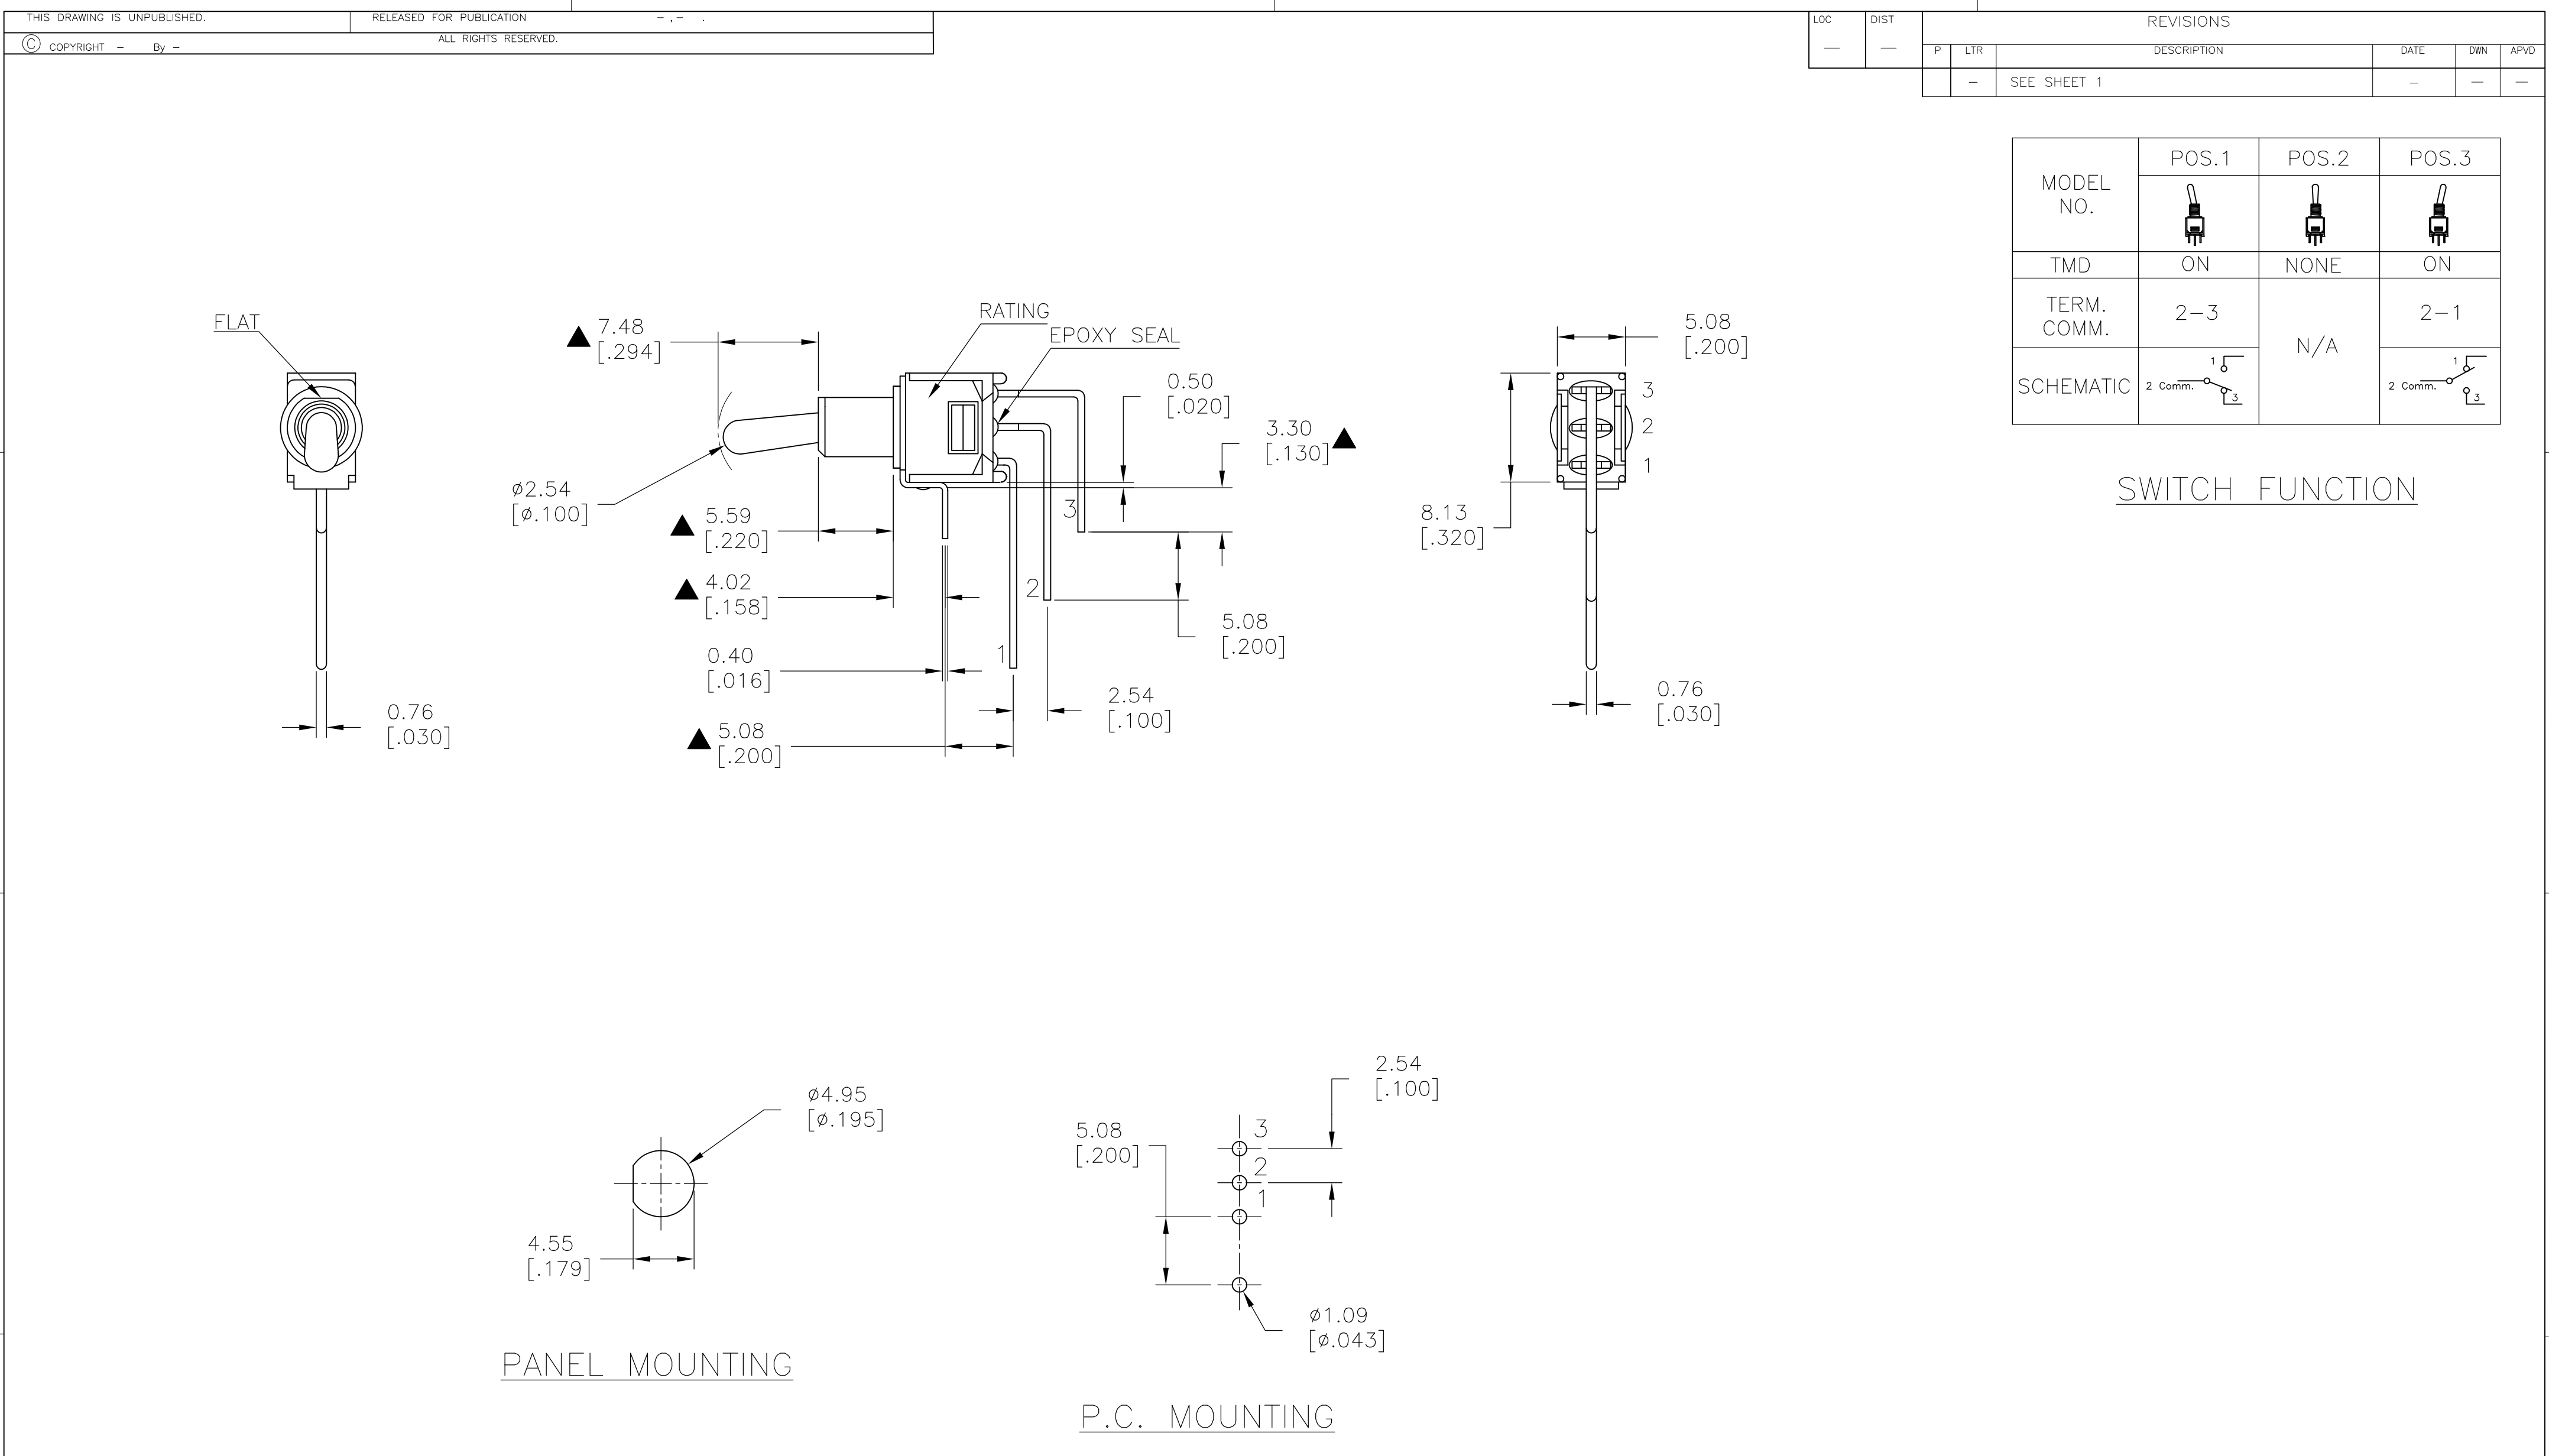

LAYOUT FOR PN 2267078-4

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN NAGALAKSHMI K 11JUL2014		TE Connectivity	
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:			
		0 PLC ± -		APVD HILL, RYAN 11JUL2014	
		1 PLC ± 0.38[.015]		PRODUCT SPEC	
MATERIAL —		2 PLC ± 0.25[.010]		APPLICATION SPEC	
		3 PLC ± -		—	
FINISH —		4 PLC ± -		WEIGHT —	
		ANGLES ± 5°		CUSTOMER DRAWING	
		SCALE 3:1		SHEET 8 of 9	
		REV A			

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
—	—	—	—	SEE SHEET 1	—	—

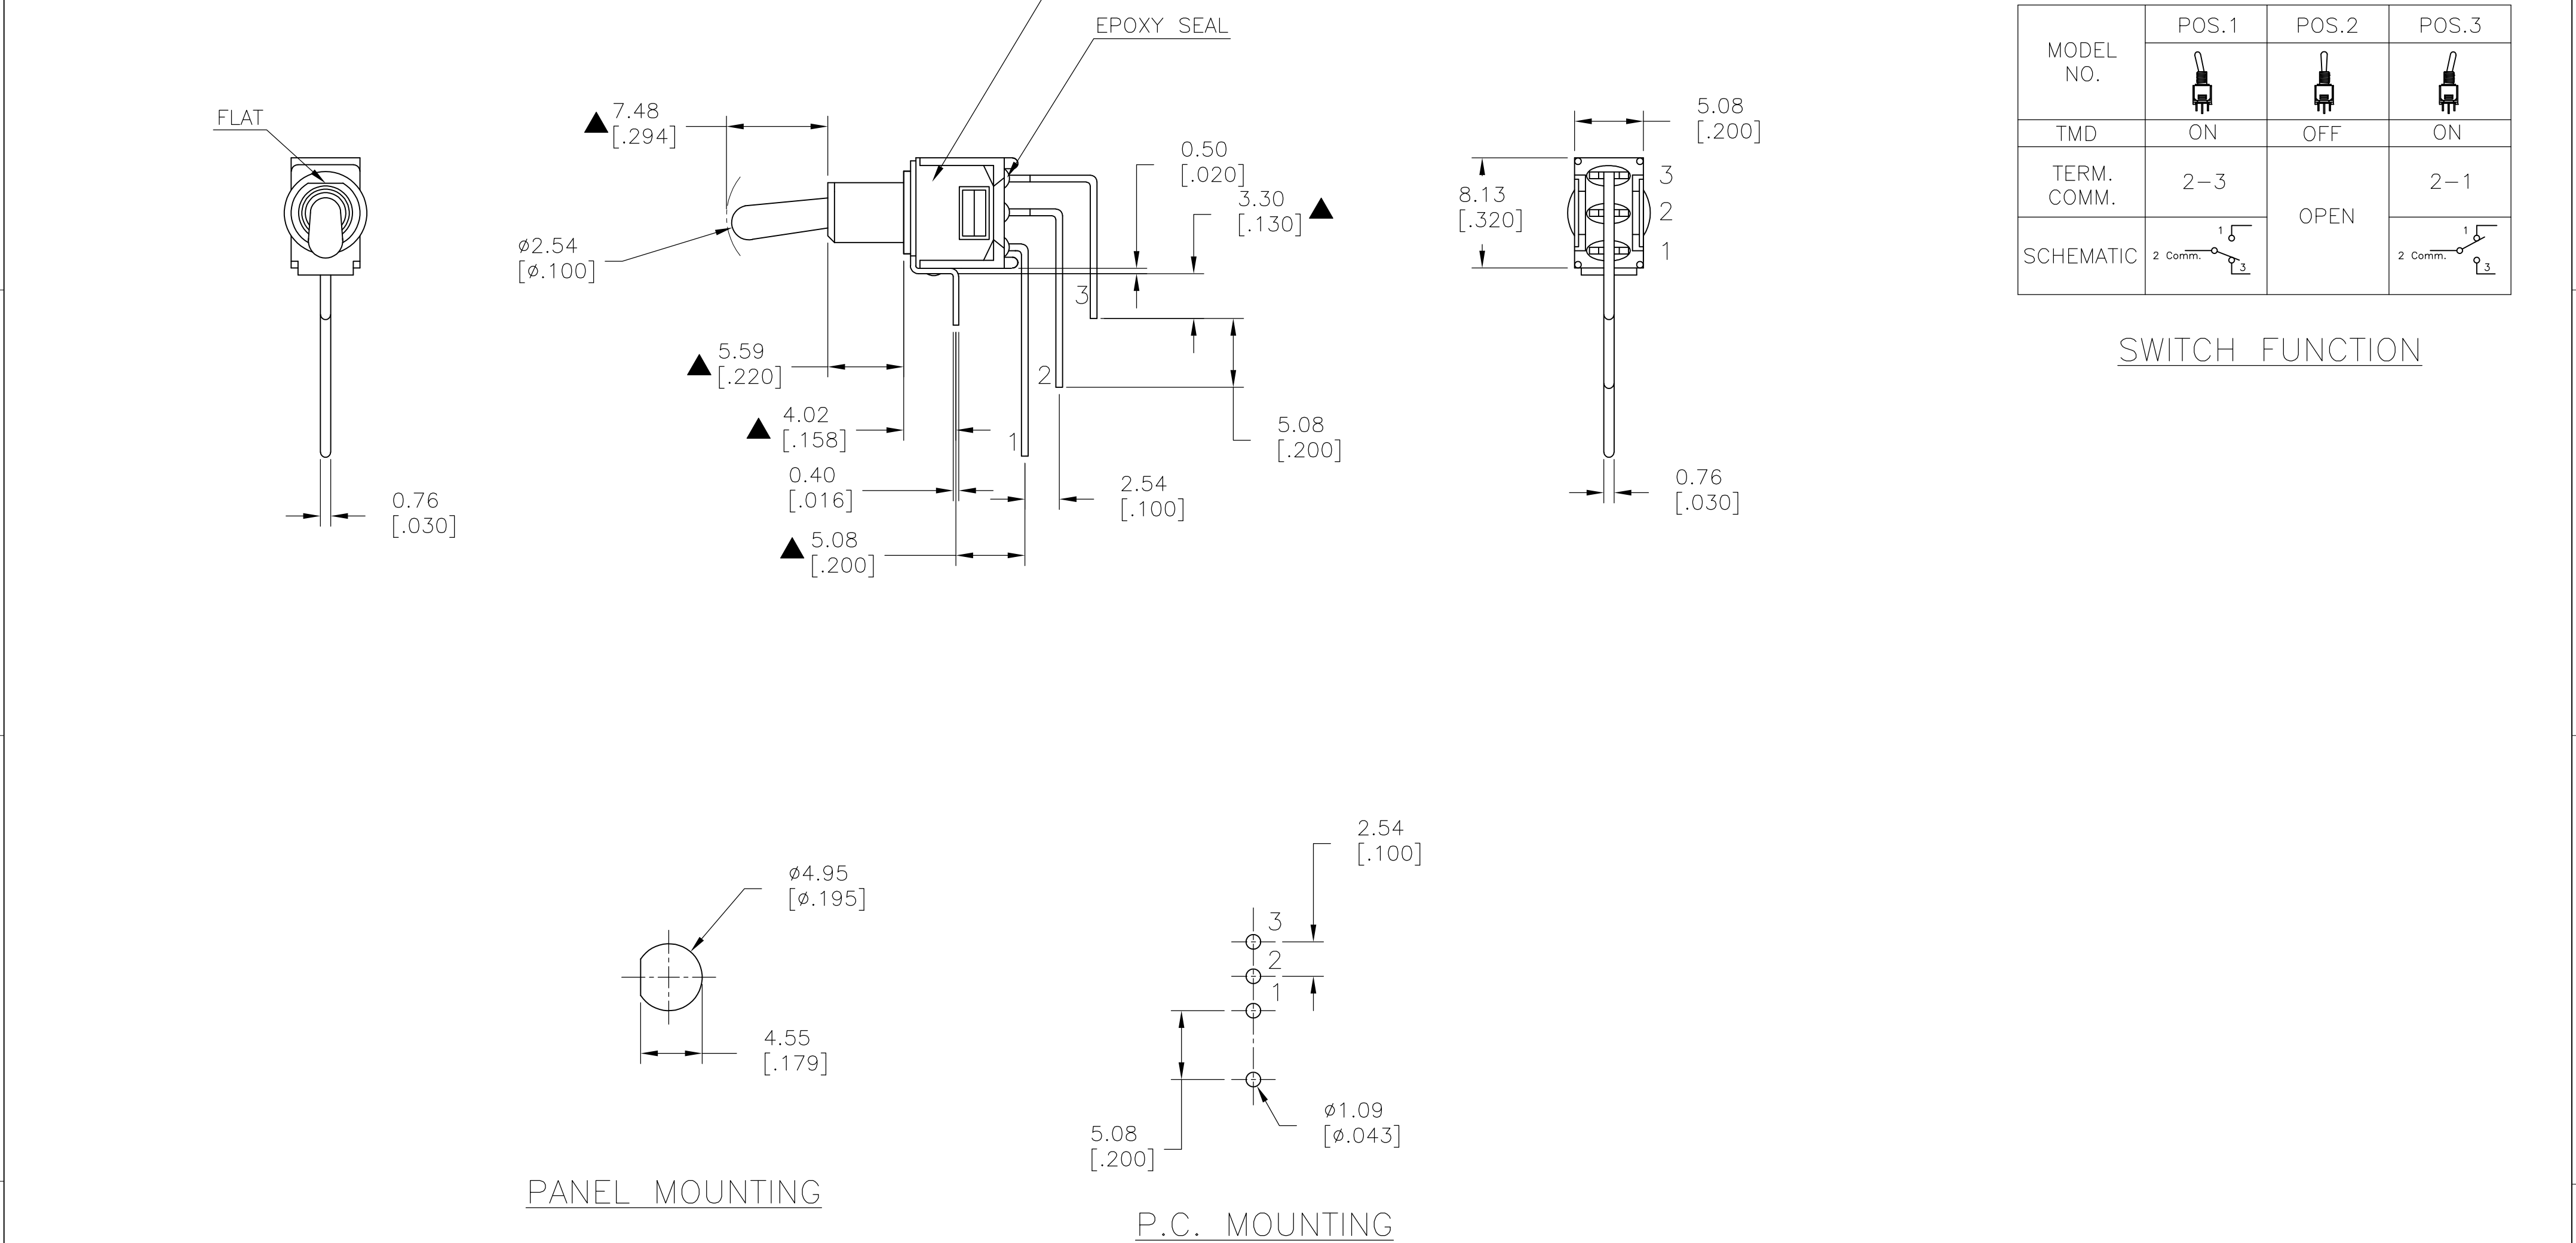

MODEL NO.	POS.1	POS.2	POS.3
TMD	ON	OFF	ON
TERM. COMM.	2-3	OPEN	2-1
SCHEMATIC			

SWITCH FUNCTION

LAYOUT FOR PN 2267078-7

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru