

CeraDiodes

Standard series

Series/Type:

Date: April 2016

© EPCOS AG 2016. Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein without EPCOS' prior express consent is prohibited.

EPCOS AG is a TDK Group Company.

CeraDiodes

Standard series

SMD

EPCOS type designation

| CD | S | 2 | C05 | GTA | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|---------------------|---|-----|-----|------|---------------------|---|-----------|---|-----------|---|-----------|---|-----------|------|---------------------|---|-----------|---|-----------|---|-----------|---|-----------|------|-----|-----|---|-----|----------|-----|---|-----|----|-----|----|-----|----|-----|----|-----|--------|-----|----|-----|----|-----|----|-----|----|-----|----|-----|-----|
| CD \triangle CeraDiode | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> Device S \triangle Single device A \triangle Array device </div> <div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> Case sizes of single devices <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 15%;">Code</th> <th style="width: 85%;">Case size (inch/mm)</th> </tr> </thead> <tbody> <tr><td>1</td><td>0201/0603</td></tr> <tr><td>2</td><td>0402/1005</td></tr> <tr><td>3</td><td>0603/1608</td></tr> <tr><td>4</td><td>1003/2508</td></tr> </tbody> </table> </div> <div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> Case sizes of array devices <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 15%;">Code</th> <th style="width: 85%;">Case size (inch/mm)</th> </tr> </thead> <tbody> <tr><td>3</td><td>0506/1216</td></tr> <tr><td>4</td><td>0508/1220</td></tr> <tr><td>5</td><td>0612/1632</td></tr> <tr><td>6</td><td>1012/2532</td></tr> </tbody> </table> </div> <div style="border: 1px solid black; padding: 5px;"> Rated voltage <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 15%;">Code</th> <th style="width: 85%;">VDC</th> </tr> </thead> <tbody> <tr><td>040</td><td>4</td></tr> <tr><td>050</td><td>5.5/ 5.6</td></tr> <tr><td>090</td><td>9</td></tr> <tr><td>120</td><td>12</td></tr> <tr><td>150</td><td>15</td></tr> <tr><td>160</td><td>16</td></tr> <tr><td>180</td><td>18</td></tr> <tr><td>200</td><td>20/ 22</td></tr> <tr><td>300</td><td>30</td></tr> <tr><td>360</td><td>36</td></tr> <tr><td>480</td><td>48</td></tr> <tr><td>700</td><td>70</td></tr> <tr><td>900</td><td>90</td></tr> <tr><td>201</td><td>200</td></tr> </tbody> </table> </div> | | | | | Code | Case size (inch/mm) | 1 | 0201/0603 | 2 | 0402/1005 | 3 | 0603/1608 | 4 | 1003/2508 | Code | Case size (inch/mm) | 3 | 0506/1216 | 4 | 0508/1220 | 5 | 0612/1632 | 6 | 1012/2532 | Code | VDC | 040 | 4 | 050 | 5.5/ 5.6 | 090 | 9 | 120 | 12 | 150 | 15 | 160 | 16 | 180 | 18 | 200 | 20/ 22 | 300 | 30 | 360 | 36 | 480 | 48 | 700 | 70 | 900 | 90 | 201 | 200 |
| Code | Case size (inch/mm) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 0201/0603 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 0402/1005 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 0603/1608 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | 1003/2508 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Code | Case size (inch/mm) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | 0506/1216 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | 0508/1220 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | 0612/1632 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6 | 1012/2532 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Code | VDC | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 040 | 4 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 050 | 5.5/ 5.6 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 090 | 9 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 120 | 12 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 150 | 15 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 160 | 16 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 180 | 18 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 200 | 20/ 22 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 300 | 30 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 360 | 36 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 480 | 48 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 700 | 70 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 900 | 90 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 201 | 200 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <div style="border: 1px solid black; padding: 5px;"> Type GTA \triangle Standard GTB \triangle LED GTH \triangle High-speed HDMI1 \triangle Capacitance value <1 pF HDMI2 \triangle Capacitance value <1 pF </div> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

CeraDiodes

Standard series

SMD

Ordering code system

| B72590 | D | 0050 | A0 | 60 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|----------|---------------|----|----|-----------------------------|--|------|------------------------|--------|---------------|-----------|----------|-----------|-----------|--------|-----------|-----------|--------|-----------|-----------|--------|-----------|-----------|--------|-----------|-----------|-------|-----------|-----------|-------|-----------|-----------|-------|-----------|------|-----|
| <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="3">Type, case sizes and device</th> </tr> <tr> <th>Chip size (inch/mm)</th> <th>Device</th> <th>Ordering code</th> </tr> </thead> <tbody> <tr><td>0201/0603</td><td>Single</td><td>B72440...</td></tr> <tr><td>0402/1005</td><td>Single</td><td>B72590...</td></tr> <tr><td>0603/1608</td><td>Single</td><td>B72500...</td></tr> <tr><td>1003/2508</td><td>Single</td><td>B72570...</td></tr> <tr><td>0506/1216</td><td>Array</td><td>B72755...</td></tr> <tr><td>0508/1220</td><td>Array</td><td>B72714...</td></tr> <tr><td>0612/1632</td><td>Array</td><td>B72724...</td></tr> <tr><td>1012/2532</td><td>Array</td><td>B72735...</td></tr> </tbody> </table> | | | | | Type, case sizes and device | | | Chip size (inch/mm) | Device | Ordering code | 0201/0603 | Single | B72440... | 0402/1005 | Single | B72590... | 0603/1608 | Single | B72500... | 1003/2508 | Single | B72570... | 0506/1216 | Array | B72755... | 0508/1220 | Array | B72714... | 0612/1632 | Array | B72724... | 1012/2532 | Array | B72735... | | |
| Type, case sizes and device | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Chip size (inch/mm) | Device | Ordering code | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0201/0603 | Single | B72440... | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0402/1005 | Single | B72590... | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0603/1608 | Single | B72500... | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1003/2508 | Single | B72570... | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0506/1216 | Array | B72755... | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0508/1220 | Array | B72714... | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0612/1632 | Array | B72724... | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1012/2532 | Array | B72735... | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <div style="border: 1px solid black; padding: 2px; display: inline-block;">D \triangle CeraDiode</div> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="2">Rated voltage</th> </tr> <tr> <th>Code</th> <th>VDC</th> </tr> </thead> <tbody> <tr><td>0040</td><td>4</td></tr> <tr><td>0050</td><td>5.5/ 5.6</td></tr> <tr><td>0090</td><td>9</td></tr> <tr><td>0120</td><td>12</td></tr> <tr><td>0150</td><td>15</td></tr> <tr><td>0160</td><td>16</td></tr> <tr><td>0180</td><td>18</td></tr> <tr><td>0200</td><td>20/ 22</td></tr> <tr><td>0300</td><td>30</td></tr> <tr><td>0360</td><td>36</td></tr> <tr><td>0480</td><td>48</td></tr> <tr><td>0700</td><td>70</td></tr> <tr><td>0900</td><td>90</td></tr> <tr><td>0201</td><td>200</td></tr> </tbody> </table> | | | | | Rated voltage | | Code | VDC | 0040 | 4 | 0050 | 5.5/ 5.6 | 0090 | 9 | 0120 | 12 | 0150 | 15 | 0160 | 16 | 0180 | 18 | 0200 | 20/ 22 | 0300 | 30 | 0360 | 36 | 0480 | 48 | 0700 | 70 | 0900 | 90 | 0201 | 200 |
| Rated voltage | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Code | VDC | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0040 | 4 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0050 | 5.5/ 5.6 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0090 | 9 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0120 | 12 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0150 | 15 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0160 | 16 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0180 | 18 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0200 | 20/ 22 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0300 | 30 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0360 | 36 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0480 | 48 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0700 | 70 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0900 | 90 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0201 | 200 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <div style="border: 1px solid black; padding: 2px;"> Type A0 \triangle Standard B0 \triangle LED H0 \triangle High-speed H1 \triangle Capacitance value <1 pF H2 \triangle Capacitance value <1 pF </div> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <div style="border: 1px solid black; padding: 2px;"> Packaging 60 \triangle Cardboard tape, 180-mm reel 62 \triangle Blister tape, 180-mm reel 70 \triangle Cardboard tape, 330-mm reel 72 \triangle Blister tape, 330-mm reel </div> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

CeraDiodes

Standard series

SMD

Features

- ESD protection to IEC 61000-4-2, level 4
- Bidirectional ESD protection in one component
- No change in ESD protection performance at temperatures up to 85 °C (temperature derating)
- Use of parasitic capacitance for EMI suppression and high-frequency filtering (replacement of additional MLCC)
- High surge current capability
- Low parasitic inductance
- Low leakage current
- Fast response time <0.5 ns
- Lead-free nickel barrier terminations suitable for lead-free soldering
- RoHS-compatible

Single chip



4-fold array



Applications

- Interfaces, data lines, power lines and audio lines, pushbuttons, serial ports, ICs and I/O ports
- Consumer electronic products (TV, DVD player/recorder, set-top box, game consoles, MP3 player, digital still/video camera, etc.)
- EDP products (desktop and notebook computer, monitor, PDA, printer, memory card, control unit, head set, speaker, HDD, optical drive, etc.)
- Industrial applications

Design

- Multilayer technology
- Nickel barrier termination (Ag/Ni/Sn) for lead-free soldering

Marking

- Due to the symmetrical configuration no marking information is needed.

General technical data

| | | | | |
|----------------------------------|-----------------------|-------------------|-------------|----|
| Maximum DC operating voltage | | $V_{DC,max}$ | 5.5 ... 22 | V |
| Typical capacitance | | C_{typ} | 1.5 ... 470 | pF |
| Air discharge ESD capability | to IEC 61000-4-2 | $V_{ESD,air}$ | 15 | kV |
| Contact discharge ESD capability | to IEC 61000-4-2 | $V_{ESD,contact}$ | 8 | kV |
| Leakage current ¹⁾ | ($V_{leak} = 5.6$ V) | I_{leak} | 1 | μA |
| Operating temperature | (without derating) | T_{op} | −40/+85 | °C |
| Storage temperature | | LCT/UCT | −40/+125 | °C |

1) Except CDS2C05GTA and CDS3C05GTA $V_{leak} = 3.3$ V. Any operating voltage lower than V_{leak} results in lower leakage current.

CeraDiodes

Standard series


SMD

Electrical specifications and ordering codes

Maximum ratings ($T_{op,max} = 85\text{ °C}$) and characteristics ($T_A = 25\text{ °C}$)

| Type | Ordering code | $V_{DC,max}$ V | $V_{BR,min}$ (1 mA) V | $V_{clamp,max}$ (1 A) V | I_{PP} (8/20 μ s) A | P_{PP} (8/20 μ s) W | C_{typ} (1 MHz, 1 V) pF |
|--|-----------------|-------------------|-----------------------------|-------------------------------|---------------------------------|---------------------------------|---------------------------------|
| Array, 4-fold, 0508, no semiconductor diode equivalent | | | | | | | |
| CDA4C20GTA | B72714D0200A060 | 22 | 24 | 60 | 10 | 600 | 33 |
| Array, 4-fold, 0612, no semiconductor diode equivalent | | | | | | | |
| CDA5C20GTA | B72724D0200A062 | 22 | 25 | 50 | 30 | 2200 | 56 |
| Single, 0201, no semiconductor diode equivalent | | | | | | | |
| CDS1C05GTA1 | B72440C0050A160 | 5.5 | 11 | 22 | - | - | 15 |
| Single, 0402, SOD-723 | | | | | | | |
| CDS2C05GTA | B72590D0050A060 | 5.6 | 6.4 | 24 | 10 | 320 | 180 ¹⁾ |
| CDS2C15GTA | B72590D0150A060 | 15 | 20 | 46 | 10 | 670 | 47 |
| Single, 0603, SOD-523 | | | | | | | |
| CDS3C05GTA | B72500D0050A060 | 5.6 | 6.4 | 19 | 30 | 1000 | 470 ¹⁾ |
| CDS3C09GTA | B72500D0090A060 | 9 | 10 | 30 | 30 | 1600 | 220 ¹⁾ |
| CDS3C15GTA | B72500D0150A060 | 15 | 22 | 42 | 30 | 2000 | 160 ¹⁾ |
| CDS3C20GTA | B72500D0200A060 | 22 | 25 | 50 | 30 | 2200 | 56 |
| Single, 1003, SOD-323 | | | | | | | |
| CDS4C12GTA | B72570D0120A060 | 12 | 16 | 46 | 20 | 1000 | 82 |

Typical characteristics

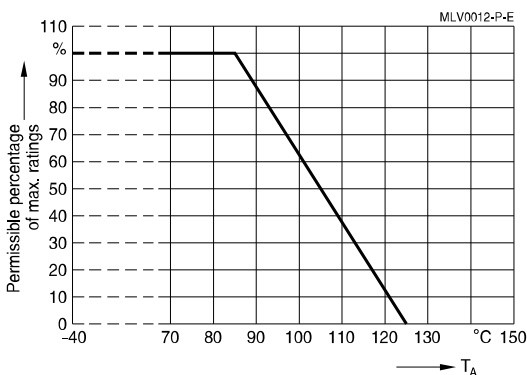

1) C_{typ} measured at $V = 1\text{ V}$, $f = 1\text{ kHz}$.


CeraDiodes

Standard series

SMD

Dimensional drawings


Single device



Dimensions in mm

| Case (inch) size (mm) | 0201 0603 | | 0402 1005 | | 0603 1608 | | 1003 2508 | |
|--------------------------|--------------|------|--------------|------|--------------|------|--------------|------|
| | Min. | Max. | Min. | Max. | Min. | Max. | Min. | Max. |
| l | 0.57 | 0.63 | 0.85 | 1.15 | 1.45 | 1.75 | 2.34 | 2.74 |
| w | 0.27 | 0.33 | 0.4 | 0.6 | 0.7 | 0.9 | 0.7 | 0.9 |
| h | 0.27 | 0.33 | 0.4 | 0.6 | 0.7 | 0.9 | 0.7 | 0.9 |
| k | 0.1 | 0.2 | 0.1 | 0.3 | 0.1 | 0.4 | 0.13 | 0.75 |

Array device



Dimensions in mm

| Case (inch) size (mm) | 0508 1220 | | 0612 1632 | |
|--------------------------|--------------|------|--------------|------|
| | Min. | Max. | Min. | Max. |
| l | 1.8 | 2.2 | 3.0 | 3.4 |
| w | 1.05 | 1.45 | 1.45 | 1.75 |
| h | - | 0.9 | - | 0.9 |
| d | 0.2 | 0.4 | 0.25 | 0.55 |
| e | 0.4 | 0.6 | 0.61 | 0.91 |
| k | - | 0.35 | - | 0.35 |


CeraDiodes

Standard series

SMD

Recommended solder pads


Single device



Dimensions in mm

| Case size | (inch) | 0201 | 0402 | 0603 | 1003 |
|-----------|--------|------|------|------|------|
| | (mm) | 0603 | 1005 | 1608 | 2508 |
| A | | 0.3 | 0.6 | 1.0 | 0.8 |
| B | | 0.25 | 0.6 | 1.0 | 0.8 |
| C | | 0.3 | 0.5 | 1.0 | 1.45 |

Array device



Dimensions in mm

| Case size | (inch) | 0508 | 0612 |
|-----------|--------|------|------|
| | (mm) | 1220 | 1632 |
| A | | 0.35 | 0.5 |
| B | | 0.9 | 0.7 |
| C | | 0.4 | 1.2 |
| E | | 0.5 | 0.76 |


CeraDiodes

Standard series

SMD

Pin configurations


Single device



MLV0152-X

| Pin | Description |
|-----|-------------|
| P1 | GND |
| P2 | I/O line |

Array device



MLV0150-V

| Pin | Description |
|-----|-------------|
| P1 | GND |
| P2 | GND |
| P3 | GND |
| P4 | GND |
| P5 | I/O line 1 |
| P6 | I/O line 2 |
| P7 | I/O line 3 |
| P8 | I/O line 4 |


CeraDiodes

Standard series


SMD

Termination

Single device

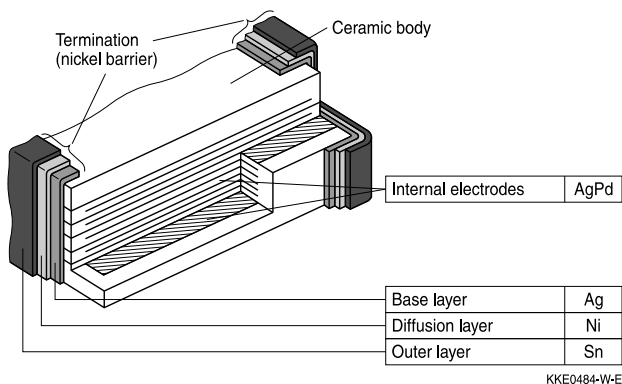

Array device

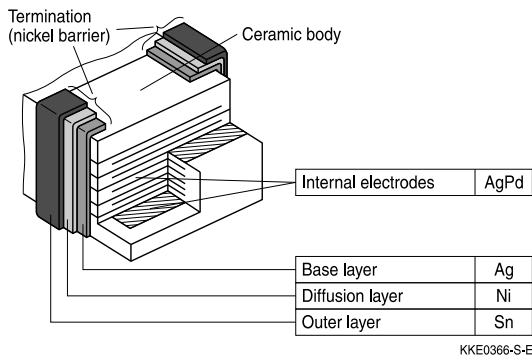

CeraDiodes
Standard series
SMD
Delivery mode

| EIA case size | Taping | Reel size mm | Packing unit pcs. | Type | Ordering code |
|---------------|-----------|-----------------|----------------------|-------------|-----------------|
| 0201 | Cardboard | 180 | 15000 | CDS1C05GTA1 | B72440C0050A160 |
| 0402 | Cardboard | 180 | 10000 | CDS2C05GTA | B72590D0050A060 |
| 0402 | Cardboard | 180 | 10000 | CDS2C15GTA | B72590D0150A060 |
| 0508 | Cardboard | 180 | 4000 | CDA4C20GTA | B72714D0200A060 |
| 0603 | Cardboard | 180 | 4000 | CDS3C05GTA | B72500D0050A060 |
| 0603 | Cardboard | 180 | 4000 | CDS3C09GTA | B72500D0090A060 |
| 0603 | Cardboard | 180 | 4000 | CDS3C15GTA | B72500D0150A060 |
| 0603 | Cardboard | 180 | 4000 | CDS3C20GTA | B72500D0200A060 |
| 0612 | Blister | 180 | 3000 | CDA5C20GTA | B72724D0200A062 |
| 1003 | Cardboard | 180 | 4000 | CDS4C12GTA | B72570D0120A060 |


CeraDiodes

Standard series

SMD

1 Taping and packing for chip and array CeraDiodes



1.1 Cardboard tape (taping to IEC 60286-3)

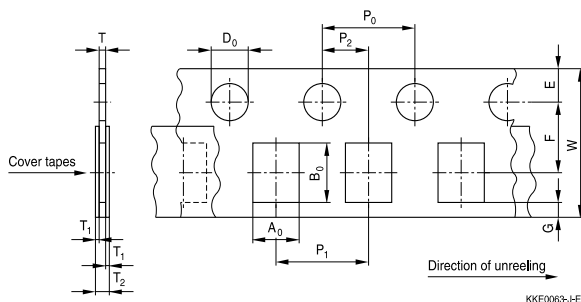

Dimensions in mm


| Case size (inch) (mm) | | 0201 0603 | 0402 1005 | 0603 1608 | 1003 2508 | 0508 1220 | Tolerance |
|--|-------|----------------------|----------------------|----------------------|----------------------|----------------------|------------------|
| Compartment width | A_0 | 0.38 ± 0.05 | 0.6 | 0.95 | 1.0 | 1.6 | ± 0.2 |
| Compartment length | B_0 | 0.68 ± 0.05 | 1.15 | 1.8 | 2.85 | 2.4 | ± 0.2 |
| Sprocket hole diameter | D_0 | 1.5 ± 0.1 | 1.5 | 1.5 | 1.5 | 1.5 | $+0.1/-0$ |
| Sprocket hole pitch | P_0 | $4.0 \pm 0.1^{1)}$ | 4.0 | 4.0 | 4.0 | 4.0 | $\pm 0.1^{1)}$ |
| Distance center hole to center compartment | P_2 | 2.0 ± 0.05 | 2.0 | 2.0 | 2.0 | 2.0 | ± 0.05 |
| Pitch of component compartments | P_1 | 2.0 ± 0.05 | 2.0 | 4.0 | 4.0 | 4.0 | ± 0.1 |
| Tape width | W | 8.0 ± 0.3 | 8.0 | 8.0 | 8.0 | 8.0 | ± 0.3 |
| Distance edge to center of hole | E | 1.75 ± 0.1 | 1.75 | 1.75 | 1.75 | 1.75 | ± 0.1 |
| Distance center hole to center compartment | F | 3.5 ± 0.05 | 3.5 | 3.5 | 3.5 | 3.5 | ± 0.05 |
| Distance compartment to edge | G | 0.75 min. | 0.75 | 0.75 | 0.75 | 0.75 | min. |
| Thickness tape | T | 0.42 ± 0.02 | 0.6 | 0.9 | 0.95 | 0.95 | max. |
| Overall thickness | T_2 | 0.4 min. | 0.7 | 1.1 | 1.1 | 1.10 | max. |

¹⁾ $\leq \pm 0.2$ mm over 10 sprocket holes

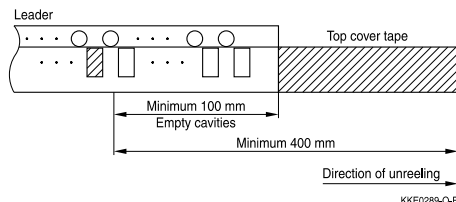

SMD

1.2 Blister tape (taping to IEC 60286-3)

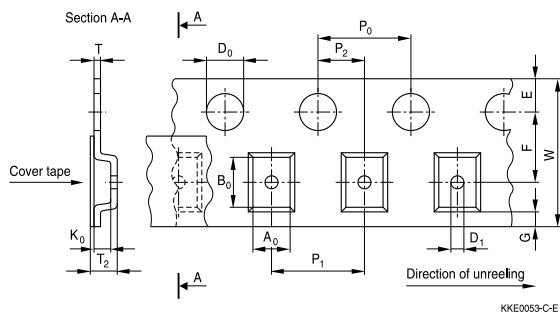


KKE0053-C-E

Dimensions in mm

| Case size (inch) (mm) | | 0506 1216 | 0612 1632 | 1012 2532 | Tolerance |
|--|----------------|--------------|--------------|--------------|--------------------|
| Compartment width | A ₀ | 1.5 | 1.8 | 2.8 | ±0.2 |
| Compartment length | B ₀ | 1.8 | 3.4 | 3.5 | ±0.2 |
| Compartment height | K ₀ | 0.8 | 1.8 | 1.8 | max. |
| Sprocket hole diameter | D ₀ | 1.5 | 1.5 | 1.5 | +0.1/ -0 |
| Compartment hole diameter | D ₁ | 0.3 | 0.3 | 0.3 | min. |
| Sprocket hole pitch | P ₀ | 4.0 | 4.0 | 4.0 | ±0.1 ¹⁾ |
| Distance center hole to center compartment | P ₂ | 2.0 | 2.0 | 2.0 | ±0.05 |
| Pitch of component compartments | P ₁ | 4.0 | 4.0 | 4.0 | ±0.1 |
| Tape width | W | 8.0 | 8.0 | 8.0 | ±0.3 |
| Distance edge to center of hole | E | 1.75 | 1.75 | 1.75 | ±0.1 |
| Distance center hole to center compartment | F | 3.5 | 3.5 | 3.5 | ±0.05 |
| Distance compartment to edge | G | 0.75 | 0.75 | 0.75 | min. |
| Thickness tape | T | 0.3 | 0.3 | 0.3 | max. |
| Overall thickness | T ₂ | 1.3 | 2.5 | 2.5 | max. |


¹⁾ ≤ ±0.2 mm over 10 sprocket holes

Trailer (tape end)



KKE0270-E-E

Leader

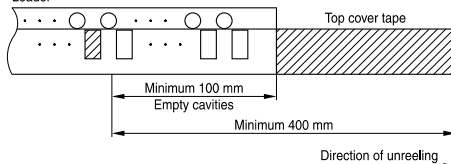


KKE0289-Q-E

CeraDiodes

Standard series

SMD

1.3 Reel packing

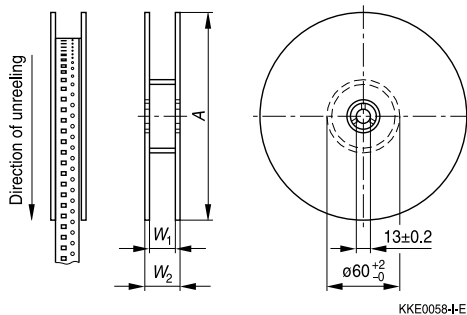

Dimensions in mm

| | | Dimensions | Tolerance | Dimensions | Tolerance |
|----------------------|----------------|------------|-----------|------------|-----------|
| Reel diameter | A | 180 | +0/ -3 | 330 | +0/ -2 |
| Reel width (inside) | W ₁ | 8.4 | +1.5/ -0 | 8.4 | +1.5/ -0 |
| Reel width (outside) | W ₂ | 14.4 | max. | 14.4 | max. |

Package: 8-mm tape

Reel material: Plastic

1.4 Packing units

| Case size (inch) / (mm) | Ø 180-mm reel pieces | Ø 330-mm reel pieces | Tape |
|----------------------------|-------------------------|-------------------------|-----------|
| 0201 / 0603 | 15000 | - | cardboard |
| 0402 / 1005 | 10000 | 50000 | cardboard |
| 0603 / 1608 | 4000 | 16000 | cardboard |
| 1003 / 2508 | 4000 | 16000 | cardboard |
| 0506 / 1216 | 3000 | 12000 | blister |
| 0508 / 1220 | 4000 | 16000 | cardboard |
| 0612 / 1632 | 3000 | 12000 | blister |
| 1012 / 2532 | 2000 | 8000 | blister |

CeraDiodes


Standard series

SMD

Soldering directions

1 Reflow soldering temperature profile

Recommended temperature characteristic for reflow soldering following JEDEC J-STD-020D

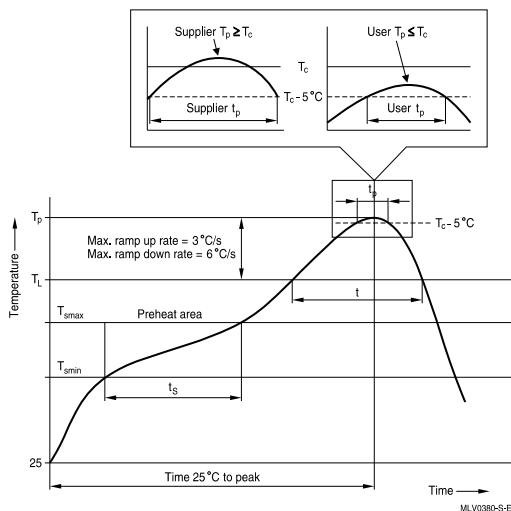

| Profile feature | | Sn-Pb eutectic assembly | Pb-free assembly |
|--|--------------------------|---------------------------------|---------------------------------|
| Preheat and soak | | | |
| - Temperature min | T_{smin} | 100 °C | 150 °C |
| - Temperature max | T_{smax} | 150 °C | 200 °C |
| - Time | t_{smin} to t_{smax} | 60 ... 120 s | 60 ... 180 s |
| Average ramp-up rate | T_{smax} to T_p | 3 °C/ s max. | 3 °C/ s max. |
| Liquidous temperature | T_L | 183 °C | 217 °C |
| Time at liquidous | t_L | 60 ... 150 s | 60 ... 150 s |
| Peak package body temperature | $T_p^{1)}$ | 220 °C ... 235 °C ²⁾ | 245 °C ... 260 °C ²⁾ |
| Time (t_p) ³⁾ within 5 °C of specified classification temperature (T_c) | | 20 s ³⁾ | 30 s ³⁾ |
| Average ramp-down rate | T_p to T_{smax} | 6 °C/ s max. | 6 °C/ s max. |
| Time 25 °C to peak temperature | | maximum 6 min | maximum 8 min |

1) Tolerance for peak profile temperature (T_p) is defined as a supplier minimum and a user maximum.

2) Depending on package thickness. For details please refer to JEDEC J-STD-020D.

3) Tolerance for time at peak profile temperature (t_p) is defined as a supplier minimum and a user maximum.

Note: All temperatures refer to topside of the package, measured on the package body surface.
Number of reflow cycles: 3

CeraDiodes

Standard series

SMD

2 Soldering guidelines

The use of mild, non-activated fluxes for soldering is recommended, as well as proper cleaning of the PCB.

The components are suitable for reflow soldering to JEDEC J-STD-020D.

3 Solder joint profiles / solder quantity

3.1 Cement quantity

The component is fixed onto the circuit board with cement prior to soldering. It must still be able to move slightly. When the board is placed into the reflow oven, excessively rigid fixing can lead to high forces acting on the component and thus to a break. In addition, too much cement can lead to unsymmetrical stressing and thus to mechanical fracture of the component. The cement must also be so soft during mounting that no mechanical stressing occurs.

3.2 Mounting the components on the board

It is best to mount the components on the board before soldering so that one termination does not enter the oven first and the second termination is soldered subsequently. The ideal case is simultaneous wetting of both terminations.




3.3 Solder joint profiles

If the meniscus height is too low, that means the solder quantity is too low, the solder joint may break, i.e. the component becomes detached from the joint. This problem is sometimes interpreted as leaching of the external terminations.

If the solder meniscus is too high, i.e. the solder quantity is too large, the vise effect may occur. As the solder cools down, the solder contracts in the direction of the component. If there is too much solder on the component, it has no leeway to evade the stress and may break, as in a vise.

SMD

3.3.1 Solder joint profiles for nickel barrier termination

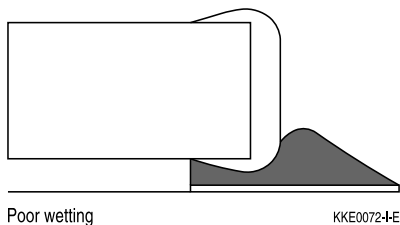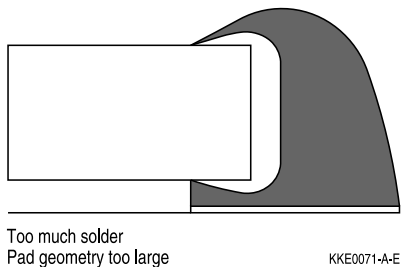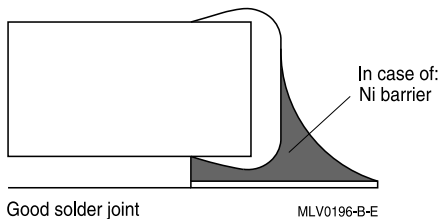

Good and poor solder joints caused by amount of solder in infrared reflow soldering

SMD



4 Solderability tests

| Test | Standard | Test conditions / Sn-Pb soldering | Test conditions / Pb-free soldering | Criteria / test results |
|--|----------------|--|---|--|
| Wettability | IEC 60068-2-58 | Immersion in 60/40 SnPb solder using non-activated flux at 215 ± 3 °C for 3 ± 0.3 s | Immersion in Sn96.5Ag3.0Cu0.5 solder using non- or low activated flux at 245 ± 5 °C for 3 ± 0.3 s | Covering of 95% of end termination, checked by visual inspection |
| Leaching resistance | IEC 60068-2-58 | Immersion in 60/40 SnPb solder using mildly activated flux without preheating at 255 ± 5 °C for 10 ± 1 s | Immersion in Sn96.5Ag3.0Cu0.5 solder using non- or low activated flux without preheating at 255 ± 5 °C for 10 ± 1 s | No leaching of contacts |
| Tests of resistance to soldering heat for SMDs | IEC 60068-2-58 | Immersion in 60/40 SnPb for 10 s at 260 °C | Immersion in Sn96.5Ag3.0Cu0.5 for 10 s at 260 °C | Capacitance change: $-15\% \leq \Delta C \leq 15\%$ |

Note:

Leaching of the termination

Effective area at the termination might be lost if the soldering temperature and/or immersion time are not kept within the recommended conditions. Leaching of the outer electrode should not exceed 25% of the chip end area (full length of the edge A-B-C-D) and 25% of the length A-B, shown below as mounted on the substrate.

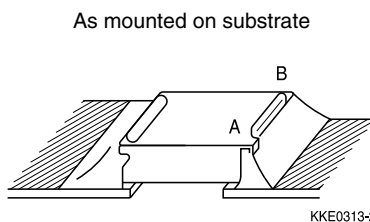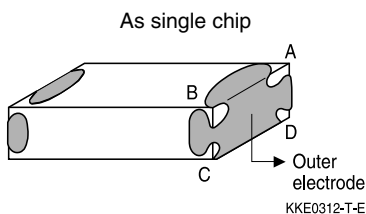

CeraDiodes

Standard series

SMD

5 Notes for proper soldering

5.1 Preheating and cooling

- The average ramp-up rate must not exceed 3 °C/s.
- The cooling rate must not exceed 8 °C/s.

5.2 Repair / rework

Manual soldering with a soldering iron must be avoided, hot-air methods are recommended for making repairs.

5.3 Cleaning

All environmentally compatible agents are suitable for cleaning. Select the appropriate cleaning solution according to the type of flux used. The temperature difference between the components and cleaning liquid must not be greater than 100 °C. Ultrasonic cleaning should be carried out with the utmost caution. Too high ultrasonic power can impair the adhesive strength of the metalized surfaces. Insufficient or excessive cleaning can be detrimental to CeraDiode performance.

5.4 Solder paste printing (reflow soldering)

An excessive application of solder paste results in too high a solder fillet, thus making the chip more susceptible to mechanical and thermal stress. This will lead to the formation of cracks. Too little solder paste reduces the adhesive strength on the outer electrodes and thus weakens the bonding to the PCB. The solder should be applied smoothly to the end surface to a height of min. 0.2 mm.

5.5 Selection of flux

Used flux should have less than or equal to 0.1 wt % of halogenated content, since flux residue after soldering could lead to corrosion of the termination and/or increased leakage current on the surface of the CeraDiode. Strong acidic flux must not be used. The amount of flux applied should be carefully controlled, since an excess may generate flux gas, which in turn is detrimental to solderability.

5.6 Storage

Solderability is guaranteed for one year from date of delivery, provided that components are stored in their original packages.

Storage temperature: –25 °C to +45 °C

Relative humidity: ≤75% annual average, ≤95% on 30 days a year

The solderability of the external electrodes may deteriorate if SMDs are stored where they are exposed to high humidity, dust or harmful gas (hydrogen chloride, sulfurous acid gas or hydrogen sulfide).

Do not store SMDs where they are exposed to heat or direct sunlight. Otherwise the packing material may be deformed or SMDs may stick together, causing problems during mounting.

After opening the factory seals, such as polyvinyl-sealed packages, it is recommended to use the SMDs as soon as possible.

CeraDiodes

Standard series

SMD

5.7 Placement of components on circuit board

It is of advantage to place the components on the board before soldering so that their two terminals do not enter the solder oven at different times. Ideally, both terminals should be wetted simultaneously.

5.8 Soldering caution

- Sudden heating or cooling of the component results in thermal destruction by cracks.
- An excessively long soldering time or high soldering temperature results in leaching of the outer electrodes, causing poor adhesion due to loss of contact between electrodes and termination.
- Avoid manual soldering with a soldering iron.
- Wave soldering must not be applied for CeraDiodes designated for reflow soldering only.
- Keep to the recommended down-cooling rate.

5.9 Standards

CECC 00802

IEC 60068-2-58

IEC 60068-2-20

JEDEC J-STD-020D

CeraDiodes

Standard series

SMD

Symbols and terms

| CeraDiode | Semiconductor diode | |
|--------------------------|---|---|
| C_{\max} | | Maximum capacitance |
| C_{typ} | | Typical capacitance |
| I_{BR} | $I_{\text{R}}, I_{\text{T}}$ | (Reverse) current @ breakdown voltage |
| I_{leak} | I_{RM} | (Reverse) leakage current |
| I_{PP} | $I_{\text{P}}, I_{\text{PP}}$ | Current @ clamping voltage, peak pulse current |
| P_{PP} | P_{PP} | Peak pulse power |
| T_{op} | | Operating temperature |
| T_{stg} | | Storage temperature |
| V_{BR} | V_{BR} | (Reverse) breakdown voltage |
| $V_{\text{BR,min}}$ | | Minimum breakdown voltage |
| V_{clamp} | $V_{\text{cl}}, V_{\text{C}}$ | Clamping voltage |
| $V_{\text{clamp,max}}$ | | Maximum clamping voltage |
| V_{DC} | $V_{\text{RM}}, V_{\text{RWM}}, V_{\text{WM}}, V_{\text{DC}}$ | (Reverse) stand-off voltage, working voltage, operating voltage |
| $V_{\text{DC,max}}$ | | Maximum DC operating voltage |
| $V_{\text{ESD,air}}$ | | Air discharge ESD capability |
| $V_{\text{ESD,contact}}$ | | Contact discharge ESD capability |
| V_{leak} | $V_{\text{RM}}, V_{\text{RWM}}, V_{\text{WM}}, V_{\text{DC}}$ | (Reverse) voltage @ leakage current |
| - *) | I_{F} | Current @ forward voltage |
| - *) | $I_{\text{RM}}, I_{\text{RM,max}} @ V_{\text{RM}}$ | (Reverse) current @ maximum reverse stand-off voltage, working voltage, operating voltage |
| - *) | V_{F} | Forward voltage |

*) Not applicable due to bidirectional characteristics of CeraDiodes

CeraDiodes

Standard series

SMD

Cautions and warnings

General

Some parts of this publication contain statements about the suitability of our CeraDiodes for certain areas of application, including recommendations about incorporation/design-in of these products into customer applications. The statements are based on our knowledge of typical requirements often made of our CeraDiodes in the particular areas. We nevertheless expressly point out that such statements cannot be regarded as binding statements about the suitability of our CeraDiodes for a particular customer application. As a rule, EPCOS is either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always incumbent on the customer to check and decide whether the CeraDiodes with the properties described in the product specification are suitable for use in a particular customer application.

- Do not use EPCOS CeraDiodes for purposes not identified in our specifications, application notes and data books.
- Ensure the suitability of a CeraDiode in particular by testing it for reliability during design-in. Always evaluate a CeraDiode under worst-case conditions.
- Pay special attention to the reliability of CeraDiodes intended for use in safety-critical applications (e.g. medical equipment, automotive, spacecraft, nuclear power plant).

Design notes

- Always connect a CeraDiode in parallel with the electronic circuit to be protected.
- Consider maximum rated power dissipation if a CeraDiode has insufficient time to cool down between a number of pulses occurring within a specified isolated time period. Ensure that electrical characteristics do not degrade.
- Consider derating at higher operating temperatures. Choose the highest voltage class compatible with derating at higher temperatures.
- Surge currents beyond specified values will puncture a CeraDiode. In extreme cases a CeraDiode will burst.
- If steep surge current edges are to be expected, make sure your design is as low-inductance as possible.
- In some cases the malfunctioning of passive electronic components or failure before the end of their service life cannot be completely ruled out in the current state of the art, even if they are operated as specified. Do not use CeraDiodes in applications requiring a very high level of operational safety and especially when the malfunction or failure of a passive electronic component could endanger human life or health (e.g. in accident prevention, life-saving systems, or automotive battery line applications such as clamp 30), ensure by suitable design of the application or other measures (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of such a malfunction or failure.
- Specified values only apply to CeraDiodes that have not been subject to prior electrical, mechanical or thermal damage. The use of CeraDiodes in line-to-ground applications is therefore not advisable, and it is only allowed together with safety countermeasures like thermal fuses.

CeraDiodes

Standard series

SMD

Storage

- Only store CeraDiodes in their original packaging. Do not open the package before storage.
- Storage conditions in original packaging: temperature -25 to +45°C, relative humidity ≤75% annual average, maximum 95%, dew precipitation is inadmissible.
- Do not store CeraDiodes where they are exposed to heat or direct sunlight. Otherwise the packaging material may be deformed or CeraDiodes may stick together, causing problems during mounting.
- Avoid contamination of the CeraDiode surface during storage, handling and processing.
- Avoid storing CeraDiodes in harmful environments where they are exposed to corrosive gases for example (SO_x, Cl).
- Use CeraDiodes as soon as possible after opening factory seals such as polyvinyl-sealed packages.
- Solder CeraDiodes after shipment from EPCOS within the time specified: 12 months.

Handling

- Do not drop CeraDiodes and allow them to be chipped.
- Do not touch CeraDiodes with your bare hands - gloves are recommended.
- Avoid contamination of the CeraDiode surface during handling.
- Washing processes may damage the product due to the possible static or cyclic mechanical loads (e.g. ultrasonic cleaning). They may cause cracks to develop on the product and its parts, which might lead to reduced reliability or lifetime.

Mounting

- When CeraDiodes are encapsulated with sealing material or overmolded with plastic material, be aware that potting, sealing or adhesive compounds can produce chemical reactions in the CeraDiode ceramic that will degrade its electrical characteristics and reduce its lifetime.
- Make sure an electrode is not scratched before, during or after the mounting process.
- Make sure contacts and housings used for assembly with CeraDiodes are clean before mounting.
- The surface temperature of an operating CeraDiode can be higher. Ensure that adjacent components are placed at a sufficient distance from a CeraDiode to allow proper cooling.
- Avoid contamination of the CeraDiode surface during processing.
- Only CeraDiodes with an Ni barrier termination are approved for lead-free soldering.

Soldering

- Complete removal of flux is recommended to avoid surface contamination that can result in an instable and/or high leakage current.
- Use resin-type or non-activated flux.
- Bear in mind that insufficient preheating may cause ceramic cracks.
- Rapid cooling by dipping in solvent is not recommended, otherwise a component may crack.

CeraDiodes

Standard series

SMD

Operation

- Use CeraDiodes only within the specified operating temperature range.
- Use CeraDiodes only within specified voltage and current ranges.
- Environmental conditions must not harm a CeraDiode. Only use them in normal atmospheric conditions. Reducing the atmosphere (e.g. hydrogen or nitrogen atmosphere) is prohibited.
- Prevent a CeraDiode from contacting liquids and solvents. Make sure that no water enters a CeraDiode (e.g. through plug terminals).
- Avoid dewing and condensation.
- EPCOS CeraDiodes are designed for encased applications. Under all circumstances avoid exposure to:
 - direct sunlight
 - rain or condensation
 - steam, saline spray
 - corrosive gases
 - atmosphere with reduced oxygen content
- EPCOS CeraDiodes are not suitable for switching applications or voltage stabilization where static power dissipation is required.

This listing does not claim to be complete, it merely reflects the experience of EPCOS AG.

Display of ordering codes for EPCOS products

The ordering code for one and the same EPCOS product can be represented differently in data sheets, data books, other publications, on the EPCOS website, or in order-related documents such as shipping notes, order confirmations and product labels. **The varying representations of the ordering codes are due to different processes employed and do not affect the specifications of the respective products.** Detailed information can be found on the Internet under www.epcos.com/orderingcodes

Important notes

The following applies to all products named in this publication:

1. Some parts of this publication contain **statements about the suitability of our products for certain areas of application**. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out **that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application**. As a rule we are either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether a product with the properties described in the product specification is suitable for use in a particular customer application.
2. We also point out that **in individual cases, a malfunction of electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified**. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of an electronic component.
3. **The warnings, cautions and product-specific notes must be observed.**
4. In order to satisfy certain technical requirements, **some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classified as hazardous)**. Useful information on this will be found in our Material Data Sheets on the Internet (www.tdk-electronics.tdk.com/material). Should you have any more detailed questions, please contact our sales offices.
5. We constantly strive to improve our products. Consequently, **the products described in this publication may change from time to time**. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order.

We also **reserve the right to discontinue production and delivery of products**. Consequently, we cannot guarantee that all products named in this publication will always be available. The aforementioned does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.
6. Unless otherwise agreed in individual contracts, **all orders are subject to our General Terms and Conditions of Supply**.
7. **Our manufacturing sites serving the automotive business apply the IATF 16949 standard.** The IATF certifications confirm our compliance with requirements regarding the quality management system in the automotive industry. Referring to customer requirements and customer specific requirements ("CSR") TDK always has and will continue to have the policy of respecting individual agreements. Even if IATF 16949 may appear to support the acceptance of unilateral requirements, we hereby like to emphasize that **only requirements mutually agreed upon can and will be implemented in our Quality Management System**. For clarification purposes we like to point out that obligations from IATF 16949 shall only become legally binding if individually agreed upon.

Important notes

8. The trade names EPCOS, CeraCharge, CeraDiode, CeraLink, CeraPad, CeraPlas, CSMP, CTVS, DeltaCap, DigiSiMic, ExoCore, FilterCap, FormFit, LeaXield, MiniBlue, MiniCell, MKD, MKK, MotorCap, PCC, PhaseCap, PhaseCube, PhaseMod, PhiCap, PowerHap, PQSine, PQvar, SIFERRIT, SIFI, SIKOREL, SilverCap, SIMDAD, SiMic, SIMID, SineFormer, SIOV, ThermoFuse, WindCap are **trademarks registered or pending** in Europe and in other countries. Further information will be found on the Internet at www.tdk-electronics.tdk.com/trademarks.

Release 2018-10

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

EPCOS / TDK:

[B72714D200A60](#) [B72724D200A62](#) [B72500D150A60](#) [B72500D200A60](#) [B72500D50A60](#) [B72500D90A60](#)
[B72570D120A60](#) [B72590D150A60](#) [B72590D50A60](#) [B72500D200A60V7](#) [B72500D200A60V9](#) [B72440C50A160](#)

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru