



Typical Applications


The HMC631LP3(E) is ideal for:

- Cellular/3G & WiMAX Systems
- Wireless Infrastructure HPA & MPCA Error Correction
- Pre-Distortion or Feed-Forward Linearization
- Beam Forming & Nulling Circuits

Features

- Continuous Phase Control: 360°
- Continuous Gain Control: 40 dB
- Output Noise Floor: -160 dBm/Hz
- Input IP3: +35 dBm
- 16 Lead 3x3mm SMT Package: 9mm²

Functional Diagram

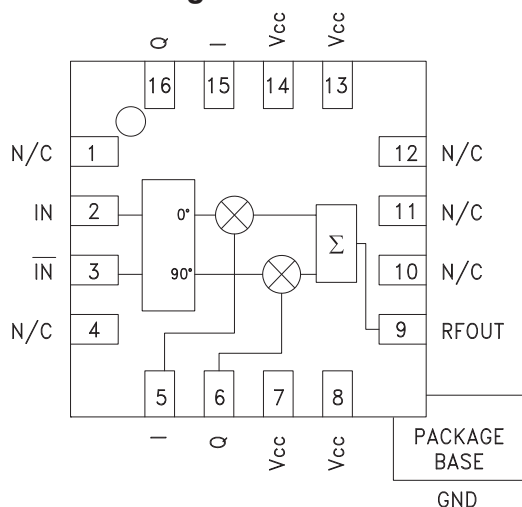

General Description

The HMC631LP3 & HMC631LP3E are high dynamic range Vector Modulator RFICs which are targeted for RF predistortion and feed-forward cancellation circuits, as well as RF cancellation, beam forming and amplitude/phase correction circuits. The I & Q ports of the HMC631LP3(E) can be used to continuously vary the phase and amplitude of RF signals by up to 360 degrees and 40 dB respectively, while supporting a 3 dB modulation bandwidth of 200 MHz. With an output IP3 of +26 dBm and output noise floor of -160 dBm/Hz (at maximum gain setting), the IP3/noise floor ratio is 186 dB.

10

MODULATORS - SMT

Electrical Specifications, $T_A = +25^\circ\text{C}$, $V_{CC} = +8\text{V}$


| Parameter | Min. | Typ. | Max. | Min. | Typ. | Max. | Units |
|---|------|--------------|-------|-----------|--------------|------|---------|
| Frequency Range | | 1.8 - 2.2 | | 2.2 - 2.7 | | | GHz |
| Maximum Gain ⁽¹⁾ | -11 | -9 | | | -11 | | dB |
| Gain Variation Over Temperature | | 0.016 | 0.025 | | 0.016 | | dB / °C |
| Gain Flatness Across Any 60 MHz Bandwidth | | 0.15 | | | 0.4 | | dB |
| Gain Range | | 40 | | | 40 | | dB |
| Input Return Loss | | 9 | | | 9 | | dB |
| Output Return Loss | | 13 | | | 10 | | dB |
| Input Power for 1dB Compression (P1dB) | 15 | 18 | | | 21 | | dBm |
| Input Third Order Intercept (IP3) | | 35 | | | 37 | | dBm |
| Output Noise | | -160 | | | -160 | | dBm/Hz |
| Control Port Bandwidth (-3 dB) | | 200 | | | 200 | | MHz |
| Control Port Impedance | | 1.45k | | | 1.45k | | Ohms |
| Control Port Capacitance | | 0.22 | | | 0.22 | | pF |
| Control Voltage Range | | +0.5 to +2.5 | | | +0.5 to +2.5 | | Vdc |
| Group Delay Variation Over 60 MHz Bandwidth | | 20 | | | 20 | | ps |
| Supply Current (I _{cc}) | | 93 | | | 93 | | mA |

Unless otherwise noted, measurements are made @ max. gain setting and 45° phase setting. See application circuit for details.


⁽¹⁾Includes loss of input balun (0.8 dB typ.)




Maximum Gain vs. Temperature

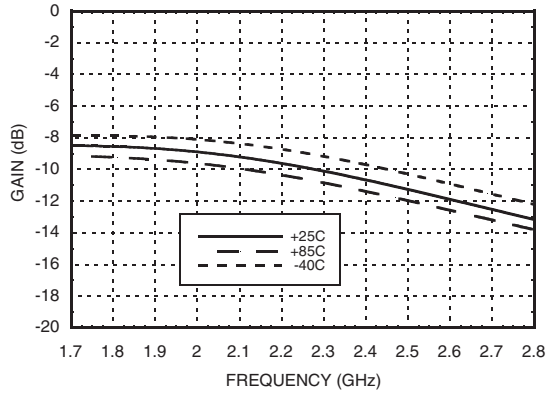


Maximum Gain vs. Supply Voltage

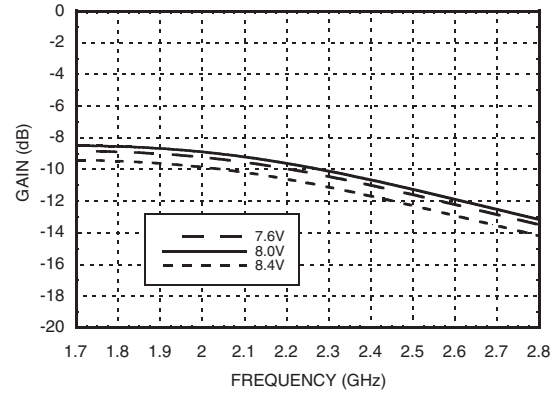


Gain vs. Phase Settings @ F= 2 GHz

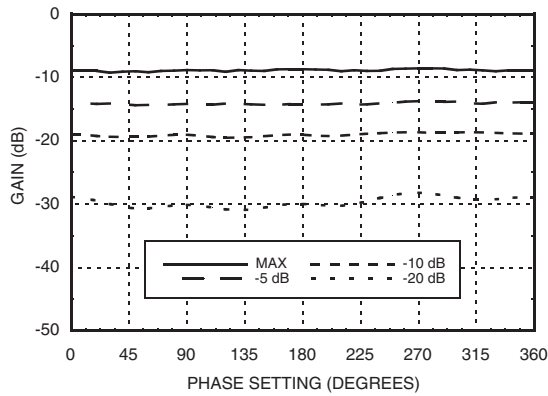


**Phase vs. Phase Settings @ F= 2 GHz
vs. Various Gain Settings**

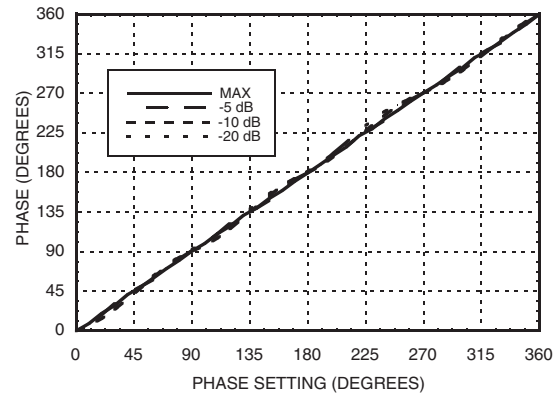

Input Return Loss vs. Temperature

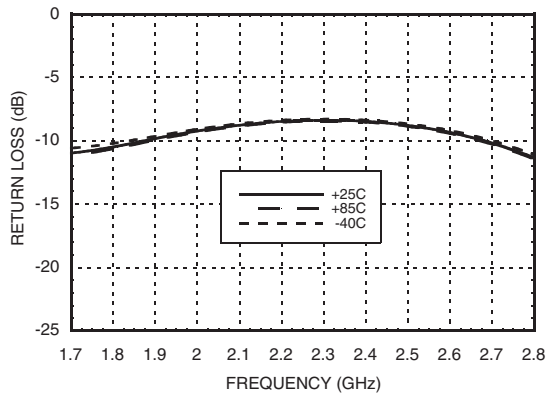

Output Return Loss vs. Temperature

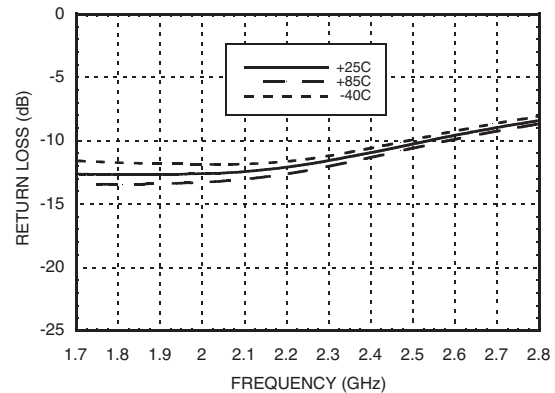


Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

For price, delivery, and to place orders: Analog Devices, Inc., One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106 Phone: 781-329-4700 • Order online at www.analog.com Application Support: Phone: 1-800-ANALOG-D




**GaAs HBT VECTOR
MODULATOR 1.8 - 2.7 MHz**


Output Noise vs. Temperature

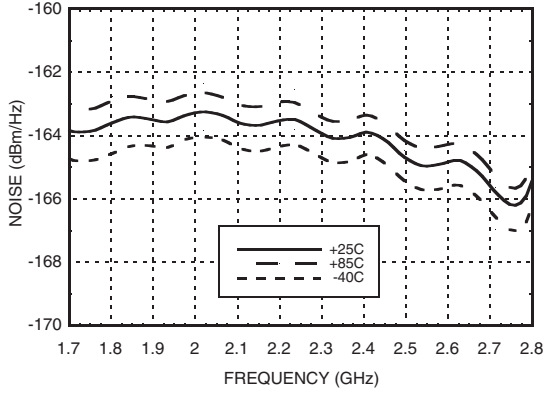


Output Noise vs. Phase Settings @ F= 2 GHz

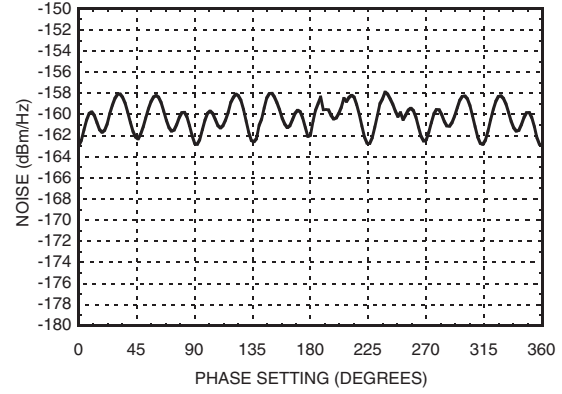


Input P1dB vs. Temperature

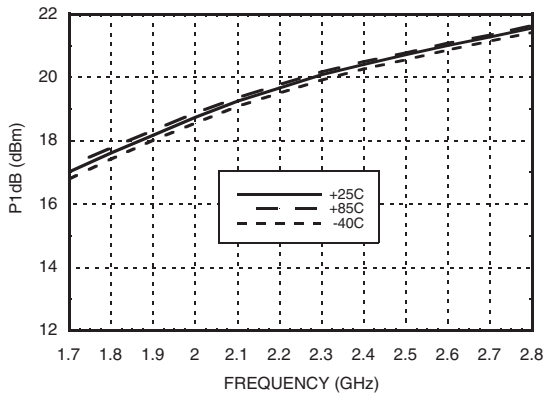


Input IP3 vs. Temperature

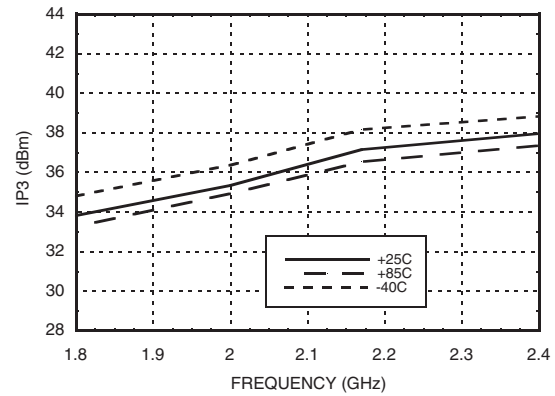

Group Delay

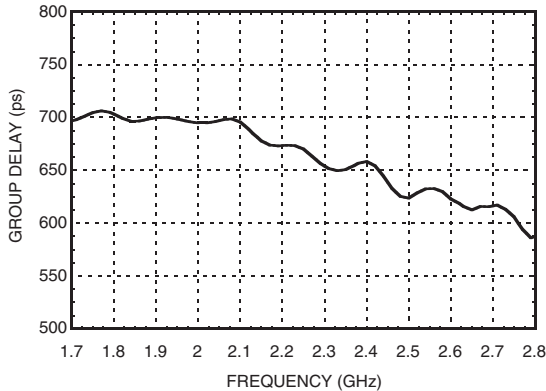

Linear Gain vs. Phase Setting

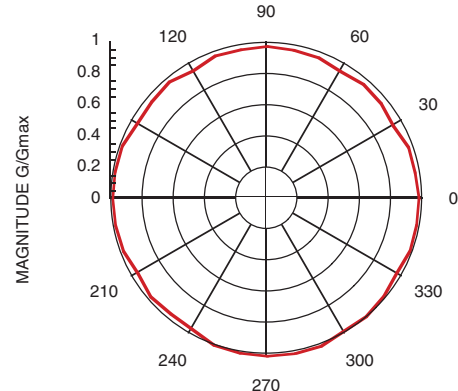

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

For price, delivery, and to place orders: Analog Devices, Inc., One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106 Phone: 781-329-4700 • Order online at www.analog.com Application Support: Phone: 1-800-ANALOG-D



Typical Supply Current vs. Vcc

| Vcc (V) | Icc (mA) |
|---------|----------|
| 7.6 | 88 |
| 8.0 | 93 |
| 8.4 | 99 |

Note:
Modulator will operate over full voltage range shown above.




**ELECTROSTATIC SENSITIVE DEVICE
OBSERVE HANDLING PRECAUTIONS**

Absolute Maximum Ratings

| | |
|---|----------------|
| RF Input (Vcc = +8V) | 27 dBm |
| Supply Voltage (Vcc) | +10V |
| I & Q Input | -0.5V to +5V |
| Junction Temperature (Tc) | 135 °C |
| Continuous P _{diss} (T = 85°C) (Derate 34 mW/°C above 85°C) | 1.7 W |
| Thermal Resistance (R _{th}) (junction to ground paddle) | 29.6 °C/W |
| Storage Temperature | -65 to +150 °C |
| Operating Temperature | -40 to +85 °C |

Outline Drawing

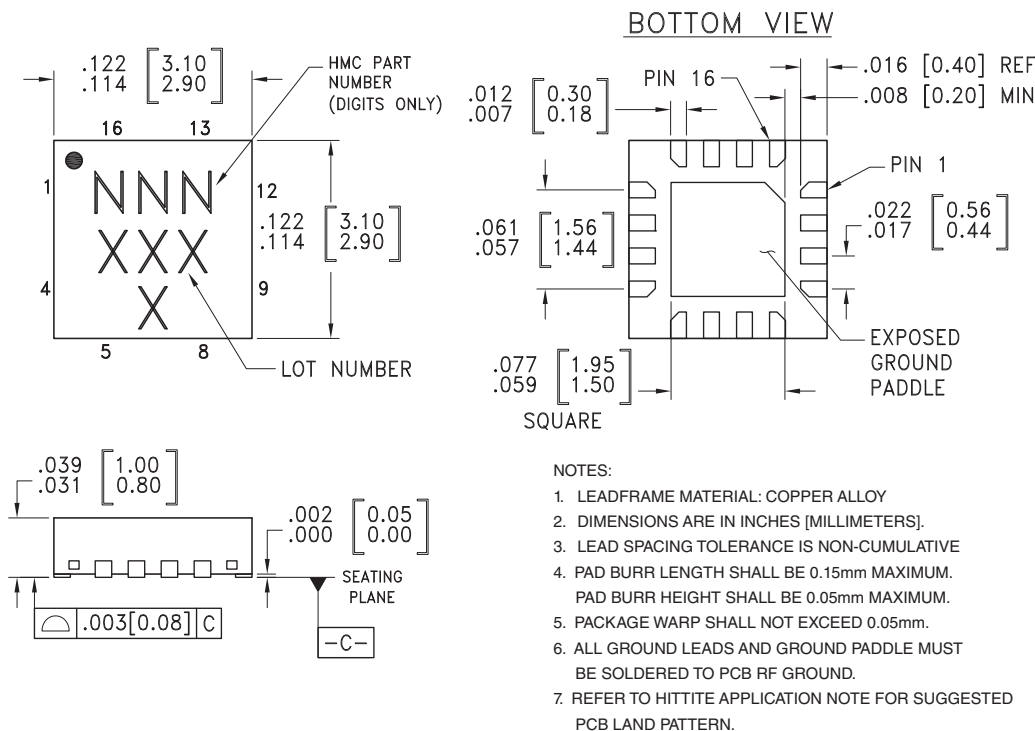

Package Information

| Part Number | Package Body Material | Lead Finish | MSL Rating | Package Marking ^[3] |
|-------------|--|---------------|---------------------|--------------------------------|
| HMC631LP3 | Low Stress Injection Molded Plastic | Sn/Pb Solder | MSL1 ^[1] | 631 XXXX |
| HMC631LP3E | RoHS-compliant Low Stress Injection Molded Plastic | 100% matte Sn | MSL1 ^[2] | 631 XXXX |

[1] Max peak reflow temperature of 235 °C

[2] Max peak reflow temperature of 260 °C

[3] 4-Digit lot number XXXX




Pin Description

| Pin Number | Function | Description | Interface Schematic |
|---------------|----------------|---|---------------------|
| 1, 4, 10 - 12 | N/C | No connection. These pins may be connected to RF ground. Performance will not be affected | |
| 2, 3 | IN, \bar{IN} | Differential RF inputs, 100 Ohms differential impedance. (i.e. each pin is 50 Ohms to ground). Must be DC blocked. | |
| 5, 15 | I | In-phase control input. Pins 5 and 15 are redundant. Either input can be used. | |
| 6, 16 | Q | Quadrature control input. Pins 6 and 16 are redundant. Either input can be used. | |
| 7, 8, 13, 14 | Vcc | Supply Voltage, pins are DC connected on-chip. It is only necessary to supply Vcc to any 1 of the 4 pins, but all 4 pins must be bypassed to ground. (See application circuit). | |
| 9 | RFOUT | RF Output: Must be DC blocked. | |
| | GND | Ground: Backside of package has exposed metal ground paddle which must be connected to RF/DC ground. | |



Application Circuit

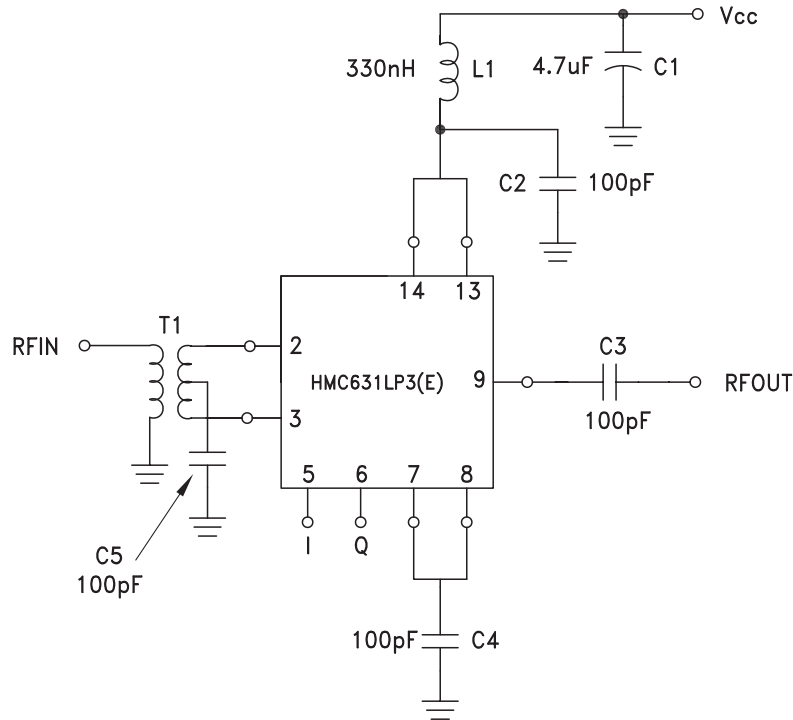

* Pins 15 & 16 are redundant I & Q inputs.

Gain and Phase control are applied through the I and Q control ports. For a given linear gain (G) and phase (θ) setting, the voltages applied to these ports in all measurements are calculated as follows:

$$I(G, \theta) = V_{mi} + 1.0V \frac{G}{G_{max}} \cos(\theta)$$


$$Q(G, \theta) = V_{mq} + 1.0V \frac{G}{G_{max}} \sin(\theta)$$

Where V_{mi} and V_{mq} are the I and Q voltage settings corresponding to maximum isolation at room temperature and $F = 2$ GHz. Note that $G=10^x$ and $G_{max} = 10^y$ where $x = \frac{\text{Gain Setting (dB)}}{20}$ and $y = \frac{\text{Max Gain Setting (dB)}}{20}$. Nominally $V_{mi} = V_{mq} = 1.5V$, $G_{max} = 0.316$.



GaAs HBT VECTOR MODULATOR 1.8 - 2.7 MHz

Evaluation PCB

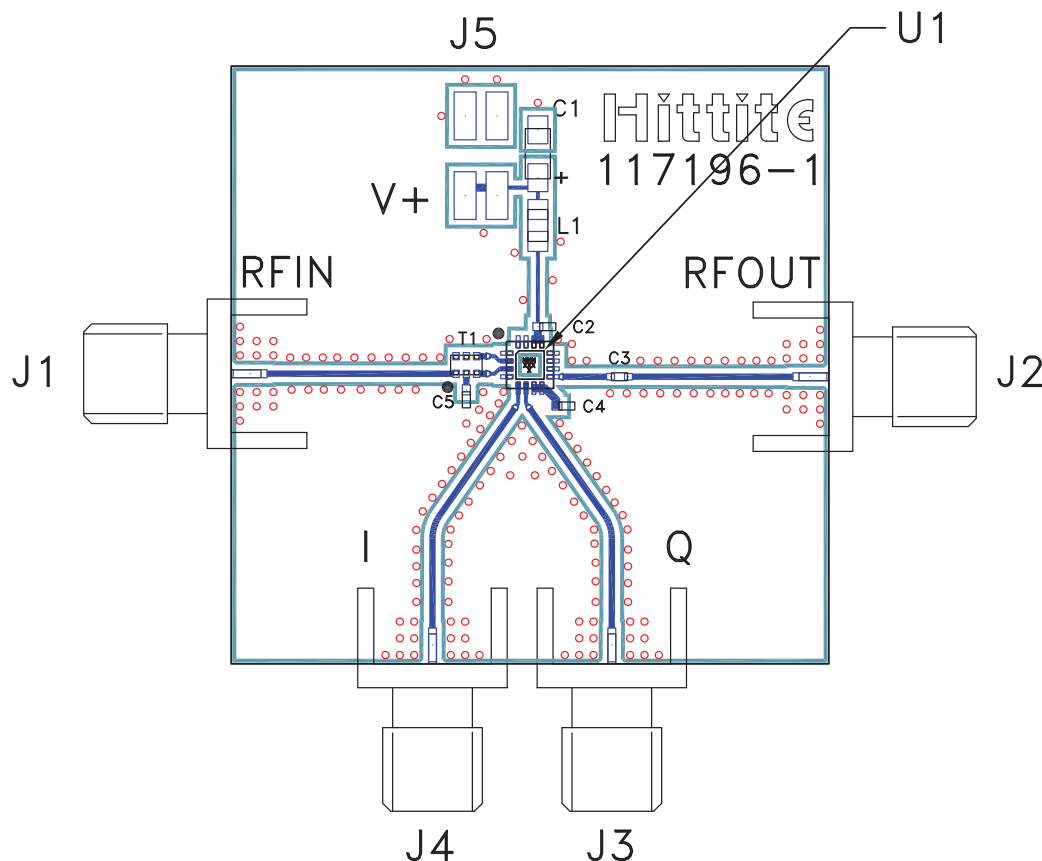

10

MODULATORS - SMT

List of Materials for Evaluation PCB 117201 [1]

| Item | Description |
|---------|--|
| J1 - J4 | PCB Mount SMA Connector |
| J5 | 2 mm DC Header |
| C1 | 4.7 μ F Capacitor, Tantalum |
| C2 - C5 | 100 pF Capacitor, 0402 Pkg. |
| T1 | Balun, 0805 Pkg. ANAREN BD1722J50100A |
| L1 | 330 nH Inductor, 0805 Pkg. |
| U1 | HMC631LP3(E) Vector Modulator |
| PCB [2] | 117196 Evaluation PCB |

[1] Reference this number when ordering complete evaluation PCB

[2] Circuit Board Material: Rogers 4350, Er = 3.48

The circuit board used in the final application should use RF circuit design techniques. Signal lines should have 50 ohm impedance while the package ground leads and exposed paddle should be connected directly to the ground plane similar to that shown. A sufficient number of via holes should be used to connect the top and bottom ground planes. The evaluation board should be mounted to an appropriate heat sink. The evaluation circuit board shown is available from Hittite upon request.



Notes:

HMC631LP3 / 631LP3E

v00.1007

**GaAs HBT VECTOR
MODULATOR 1.8 - 2.7 MHz**

10

MODULATORS - SMT

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

For price, delivery, and to place orders: Analog Devices, Inc.,
One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106
Phone: 781-329-4700 • Order online at www.analog.com
Application Support: Phone: 1-800-ANALOG-D

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru