

# Keysight U8030 Series Triple-Output DC Power Supplies

---



# Introduction

## Higher Power. Better Reliability. Unrivalled Performance.

Keysight Technologies, Inc. extends its family of basic DC power supplies to include a one of a kind power supply that offers up to 375 W power at three outputs. Equipped with output sequencing capability, it allows you to generate output sequences even with minimal programming skills. Each power supply is also built with excellent load regulation and clean output noise for continued stability. With these and many other features, you get a solid and reliable triple-output power supply at an unsurpassed performance.

The U8030 series offers two models – the U8031A and U8032A, each with different voltage and current ratings to cater to your needs. Both models are well-regulated compact bench-tops with total output of 375 W, making it an ideal power source alternative in electronics manufacturing, research and development as well as education sector.

## Generate power supply output sequences – No extensive programming skills necessary

The output sequencing capability is carefully thought out for your convenience and ease when operating. Designed to perform automation function, our U8030 series is well-suited even for those with minimal programming skills. With easy-to-use knob and intuitive keypads, you can now set your desired output sequences for margin test, burn-in test and other general purpose tasks in an industrial setting.

## Key Features

- Provides total power of 375 W for three outputs
- Output sequencing capability
- Excellent load and line regulation (CV: < 0.01% + 2 mV; CC: < 0.02% + 2 mA) ensures stable output
- Provides clean output with  $\leq 1$  mVrms (0.5 mVrms typical) noise
- Fast < 50  $\mu$ s transient response for stable testing
- Dual display shows both voltage and current reading
- Over-voltage and over-current protection
- Security features: keypad lock and physical lock mechanism

## Unrivalled performance— with low output noise and excellent load regulation

The U8030 series provides excellent load and line regulation (CV:  $< 0.01\% + 2 \text{ mV}$ ; CC:  $< 0.02\% + 2 \text{ mA}$ ) to ensure stable output even when load changes. This is crucial especially when dealing with noise-sensitive circuits that demand clean power. At a wide bandwidth of 20 Hz to 20 MHz, our bench power supplies continue to provide clean output at the lowest  $V_{\text{rms}} \leq 1 \text{ mV}_{\text{rms}}$  (0.5  $\text{mV}_{\text{rms}}$  typical), leaving your signals uncontaminated and ensuring minimal interference to your Device-Under-Test (DUT).

## Added safety features— with OVP, OCP and physical lock mechanism

Safety is an important consideration when dealing with power. Users may not only want to protect themselves from exposure to current, but also the additional costs incurred to their investment (DUT). Our U8030 series power supplies are integrated with an array of security features such as over-voltage (OVP) and over-current (OCP) protection to mitigate these risks.

Additionally, security features such as keypad locking capability prevents accidental front panel usage while physical lock mechanism which is strategically located at the rear of the unit provides secure instrument storage.

## Differentiated features— allowing you to work better

Both models of the U8030 series come with a set of features to suit your needs while remaining easy to use. The LCD screen displays both voltage and current readings in a one-view panel while the all ON/OFF button allows multiple outputs to be controlled simultaneously. Additionally, the auto-track feature simplifies setup between output 1 and output 2. With these, you get a solid bench power supply plus a set of convenient and easy to use features.



Figure 1. Output sequencing made easy with intuitive keypads



Figure 2. Backlight on/off feature with dual reading (voltage and current) on an LCD display



Figure 3. Simplifies Output 1 and Output 2 setup with tracking feature

# Front Panel Description

Essential security features:  
Over-voltage protection (OVP)/  
Over-current protection (OCP),  
keypad lock and physical lock  
mechanism




Physical lock mechanism as illustrated

Output sequencing function:  
Generates output sequences  
without a PC

LCD display:  
Allows dual reading  
(voltage and current) in one  
display

Backlight On/Off:  
Switches backlight off  
when not needed

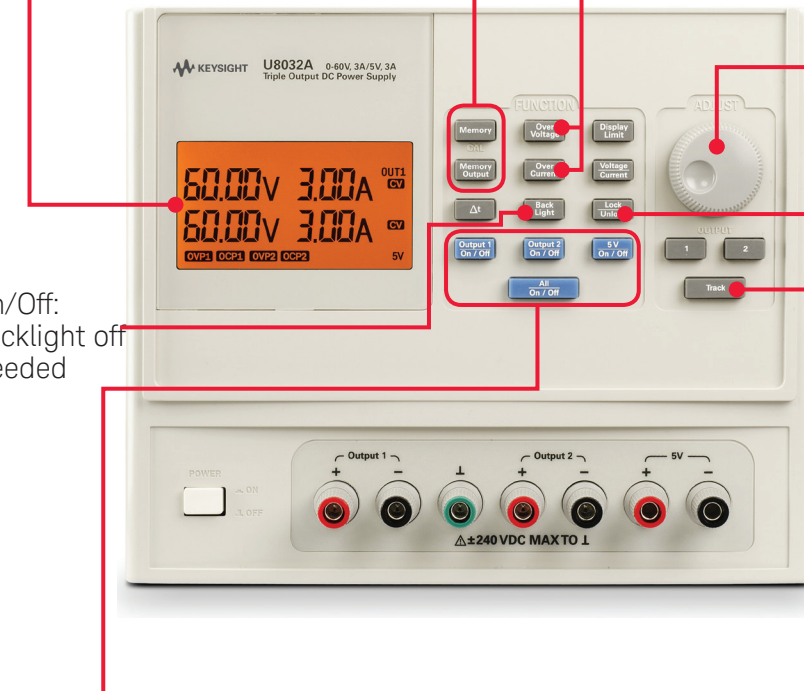

Rotary knob:  
Allows quick and easy  
voltage and current setting

Keypad lock/unlock:  
Locks front panel to  
prevent accidental  
change

Channel control:  
Allows channels to be controlled  
individually/simultaneously (ON/  
OFF)

Tracking:  
Auto-tracking between output 1  
and output 2 with single control

Figure 4. The U8032A as illustrated

# Key Specifications

## Electrical Specifications

Table 1.1 Electrical specifications <sup>1</sup>

Parameter	U8031A	U8032A
Total power output (W)	0 – 375 W	
Voltage output (V) Output Channel 1 & 2 (@ 0 to 40 °C)	0 to 30 V	0 to 60 V
Current output (A) Output Channel 1 & 2 (@ 0 to 40 °C)	0 to 6 A	0 to 3 A
Number of outputs	Three isolated outputs – Two variable: CV and CC operation – One fixed: CV operation only	
5 V fixed output <sup>2</sup> Output Channel 3	– Voltage/Current output: 5 V, 3A – Output accuracy: $\leq 5\%$ or $(5\text{ V} \pm 0.25\text{ V})$ – $V_{\text{rms}}$ : $< 2\text{ mV}_{\text{rms}}$ , or $V_{\text{pp}}$ : $< 50\text{ mV}_{\text{pp}}$ – Load and line regulation: $\leq 5\text{ mV}$ – Overload condition: 3 A + 20% (typical)	
Line & load regulation (for variable output)	CV: $< 0.01\% + 2\text{ mV}$ CC: $< 0.02\% + 2\text{ mA}$	
Ripple & noise Based on calculation at temp 18 - 28 °C and bandwidth at 20 Hz to 20 MHz	CV: $\leq 1\text{ mV}_{\text{rms}}$ , $0.5\text{ mV}_{\text{rms}}$ (typical) or $\leq 10\text{ mV}_{\text{pp}}$ , $5\text{ mV}_{\text{pp}}$ (typical) CC: $\leq 1\text{ mA}_{\text{rms}}$	
Load transient response time Within 15 mV from full load to half load and from half load to full load	$< 50\text{ us}$	
Stability (output drift) Following a 30-minute warm-up, with the output in the ON state according to the operating mode (CC with load or CV), and with a change in the output over 8 hours under constant load, line, and ambient temperature.	Voltage: $< 0.02\%$ Current: $< 0.1\%$	
Programming accuracy (23 °C $\pm$ 5 °C)	CV: $\leq 0.25\% + 15\text{ mV}$ CC: $\leq 0.30\% + 15\text{ mA}$	
Meter readback accuracy (23 °C $\pm$ 5 °C)	CV: $\leq 0.25\% + 10\text{ mV}$ CC: $\leq 0.25\% + 10\text{ mA}$	
Programming/meter resolution	Voltage: 10 mV (4 digits) Current: 10 mA (3 digits)	
Maximum output float voltage	$\pm 240\text{ V}_{\text{dc}}$	

1. The specifications stated are based on a 1 hour warm-up period.

2. The specifications referenced in this row are for Output Channel 3 (5 V fixed output). All other specifications listed in this table are intended for Output Channel 1 and 2, unless otherwise stated. .

## Physical characteristics

Table 1.2 Physical characteristics

Parameter	U8031A/U8032A
Display	LCD with amber backlight
Rotary knob for reading adjustment	Yes
Size	4U, half rack
Dimensions (H x W x D)	179.0 x 212.3 x 379.0 mm
Weight	8.2 kg

## Supplemental characteristics

Table 1.3 Supplemental characteristics

Parameter	U8031A	U8032A
Temperature coefficient (for 12 months) ±(% of output + offset)	Output – CV: (0.01% + 1 mV)/°C – CC: (0.01% + 1 mA)/°C  OVP, OCP – CV: < 0.05%/°C – CC: < 0.05%/°C	
Output voltage overshoot During turn-on or turn-off of AC power, if output control is set less than 1 V	< 1 V	
Voltage programming speed to within 1 % of total excursion	30 V	60 V
Up	Full load No load	200 ms 100 ms
Down	Full load No load	30 ms 300 ms
Over temperature protection	Yes	
Last memory setting enabled	Yes	
Three memory storage locations for voltage and current settings	Yes	
Erasing non-volatile memory	Yes, erasable through front panel	
Rack mount capability	Yes, front panel and rear have rack-mountable support	

## AC power input specifications

Table 1.4 AC power input specifications

Parameter	U8031A/U8032A
Input power option (selectable)	100 V <sub>ac</sub> ± 10%, 47 to 63 Hz 115 V <sub>ac</sub> ± 10%, 47 to 63 Hz 230 V <sub>ac</sub> ± 10%, 47 to 63 Hz
Maximum input power	600 VA
Fuse	External, located at the rear panel

## Environmental specifications

Table 1.5 Environmental specifications

Parameter	U8031A/U8032A
Operating temperature	0 to 40 °C
Storage temperature	-40 to 70 °C
Humidity	15% RH (relative humidity) to 85% RH at 40 °C (non condensing)
Altitude	Up to 2000 m
Fan acoustic noise	< 60 dB sound power
Environment of use	- Installation category II - Pollution Degree 2

## Connection specifications

Table 1.6 Connection specifications

Parameter	U8031A/U8032A
Output connections	+Out, -Out, and chassis ground on the front panel. (Either positive or negative output terminal may be grounded or can be operated floating at up to a maximum of 240 V off ground. Total output voltage to ground must not exceed 240 V <sub>dc</sub> .)
Binding posts	Output binding post located horizontally and side by side
I/O connections	N/A
AC input	3 pins standard IEC AC power connector with fuse and line selection at the rear

## Protection Features

Table 1.7 Protection features

Parameter	U8031A	U8032A
Oversvoltage protection accuracy $\pm$ (% of output + offset)	< 0.5% +0.5 V	
Oversvoltage protection programmable range	0.1 to 33.0 V	0.1 to 66.0 V
Oversvoltage protection response time	< 10 ms	
Overcurrent protection accuracy $\pm$ (% of output + offset)	< 0.5% + 0.5 A	
Overcurrent protection programmable range	0.1 to 6.6 A	0.1 to 3.3 A
Overcurrent protection response time	< 10 ms	

## Ordering Information

### Included documentation:

U8030 Series Product Reference CD-ROM

### Additional documentation:

U8031A-ACF Japanese language user guide, printed  
U8031A-ABA English language user guide, printed  
U8032A-ACF Japanese language user guide, printed  
U8032A-ABA English language user guide, printed

### Calibration document:

U8031A-UK6 Commercial calibration with test result data  
U8032A-UK6 Commercial calibration with test result data

### Other Options:

E3600A-100 Test lead kit  
Option 1CM Rack-mount kit

### Rack-mount kits:

To rack-mount a single instrument:  
Adapter kit (P/N 5063-9245)

Learn more at: [www.keysight.com](http://www.keysight.com)

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: [www.keysight.com/find/contactus](http://www.keysight.com/find/contactus)





Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)  
Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)