


**Description**

- Voltage controlled crystal oscillator in a ceramic package with a hermetically sealed metal lid
- Model IQXV-50
- Model Issue number 1

**Frequency Parameters**

- Frequency 18.0MHz
- Frequency Stability  $\pm 25.00\text{ppm}$
- Operating Temperature Range 0.00 to 70.00°C
- Ageing (@ 25°C):  $\pm 3\text{ppm max}$

**Electrical Parameters**

- Supply Voltage 5.0V  $\pm 5\%$
- Current Draw 10.00mA

**Frequency Adjustment**

- Pulling  $\pm 100\text{ppm min}$
- Control Voltage 2.5V  $\pm 2.0\text{V}$
- Input Impedance 100k $\Omega$  min
- Linearity:  $\pm 10\%$  max

**Output Details**

- Output Compatibility HCMOS
- Drive Capability 15pF max
- Rise and Fall Time 10.0ns max
- Duty Cycle 45/55%
- Start Up Time: 10ms max

**Output Control**

- Standby Operation:  
Logic '1' (>70% Vs) to pad 2 enables oscillator output  
Logic '0' (<30% Vs) to pad 2 disables oscillator output: when disabled the oscillator output goes to the high impedance state  
No connection pad 2 enables oscillator output

**Output Levels**

- VoH: >90% of Vs
- VoL: <10% of Vs

**Noise Parameters**

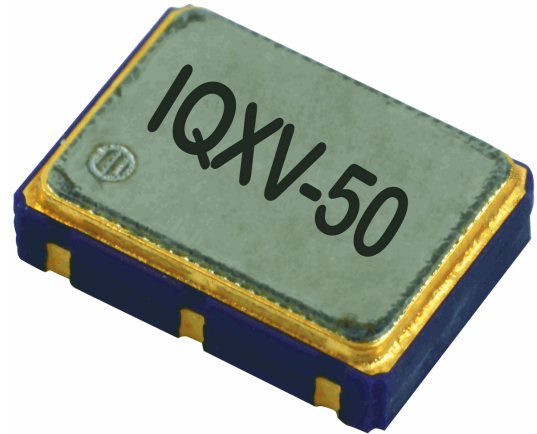


- Period Jitter (pk-pk): 100ps max
- Period Jitter (one sigma): 25ps max

**Environmental Parameters**

- Storage Temperature Range: -55 to 125°C
- Vibration: 1.5mm amplitude, 10-55-10Hz, full sine wave, 2mins in 3 mutually perpendicular planes, duration 2hrs in each plane
- Drop: 1.2m drop (3 times) onto a hard surface


**Compliance**

- RoHS Status (2011/65/EU) Compliant
- REACH Status Compliant
- MSL Rating (JDEC-STD-033): Not Applicable


**Outline (mm)**


Underside View

Pad Connections  
 1. Voltage Control  
 2. Standby Operation  
 3. GND  
 4. Output  
 5. N/C  
 6. +Vs


**Sales Office Contact Details:**

UK: +44 (0)1460 270200  
 Germany: 0800 1808 443

France: 0800 901 383  
 USA: +1.760.318.2824

Email: [info@iqdfrequencyproducts.com](mailto:info@iqdfrequencyproducts.com)  
 Web: [www.iqdfrequencyproducts.com](http://www.iqdfrequencyproducts.com)

**Packaging Details**

- Pack Style: Bulk      Loose in bulk pack  
Pack Size: 1
- *Alternative packing option available*

---

**Sales Office Contact Details:**

UK: +44 (0)1460 270200  
Germany: 0800 1808 443

France: 0800 901 383  
USA: +1.760.318.2824

Email: [info@iqdfrequencyproducts.com](mailto:info@iqdfrequencyproducts.com)  
Web: [www.iqdfrequencyproducts.com](http://www.iqdfrequencyproducts.com)

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)