






RECOMMENDED PANEL CUTOUTS																			
CURRENT RATING		FREQUENCY MHz					CURRENT RATING		FREQUENCY MHz					STYLE		DIMENSION 'A'		DIMENSION B	
		0.15	0.5	1	3	5			10	30	0.15	0.5	1			3	5		
MINIMUM INSERTION LOSS IN dB																			
LINE TO GROUND IN 50 OHM CIRCUIT																			
MINIMUM INSERTION LOSS IN dB																			
LINE TO LINE IN 50 OHM CIRCUIT																			
H MODELS																			
3 AMP	21	27	30	29	26	23	15	3 AMP	4	12	18	31	40	48	41	PSL	1.12	2.201 *	
6 AMP	11	15	17	19	18	16	13	6 AMP	4	12	16	26	35	40	35	PE	1.12	2.201 *	
10 AMP	5	8	10	12	11	11	10	10 AMP	4	12	16	26	33	40	32	PM	1.06	2.13	
S MODELS																			
3 AMP	21	27	33	40	44	50	32	3 AMP	4	12	15	30	48	50	45	PSC	1.06	2.52	
6 AMP	12	17	23	32	36	44	30	6 AMP	4	12	15	22	42	55	45	PSJ	1.06	2.6	
10 AMP	5	10	13	23	27	35	27	10 AMP	4	12	15	22	42	55	45	* FOR PANEL THICKNESS OF 0.031" - 0.079" ONLY. USE 2.213 FOR PANEL THICKNESS OF 0.083" - 0.114".			

C-SERIES EXTENDER



I-SERIES EXTENDED



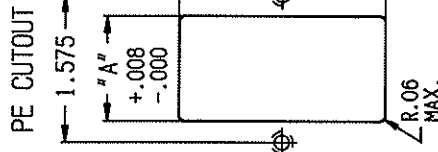


PM CUTOUT


Technical drawing of a mechanical part showing dimensions and tolerances:

- Overall Width:** Dimensioned as B_H .
- Top Surface Tolerance:** Indicated by a feature control frame containing the tolerance values $+0.008$ and -0.000 .
- Bottom Surface Tolerance:** Indicated by a feature control frame containing the tolerance value $R.06$.
- Internal Hole:** A hole is shown with a diameter dimension of $\phi .135$.
- Feature Control Frame:** A feature control frame is present, indicating a surface texture or finish requirement.

NOTE: FOR SWAP-IN APPLICATIONS, THE A SIDES MUST HAVE A .020 R. ON INSTALLATION SIDE.

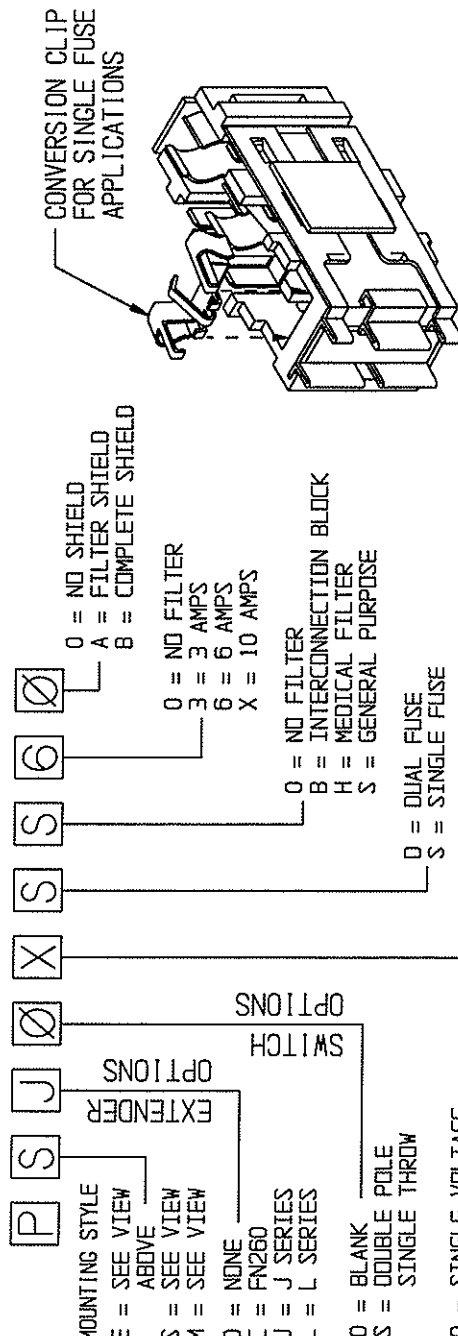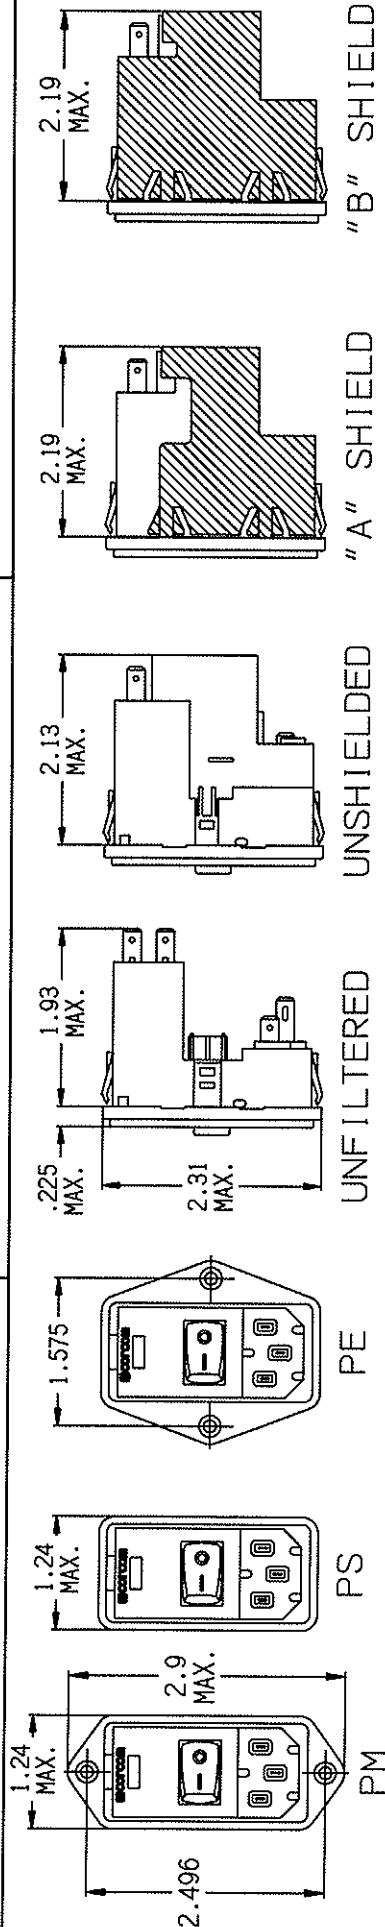

FILTERED



UNFILTERED

REAR VIEW



Tyco Electronics

CORCOM PRODUCTS, 620 S. BUTTERFIELD RD., MUNDELEIN IL 60060

CUSTOMER DRAWING

p-SERIES


TYCO ELECTRONICS PART NO.

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TYCO ELECTRONICS CORPORATION AND ITS WORLDWIDE SUBSIDIARIES AND AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE OTHER THAN TYCO ELECTRONICS PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM TYCO ELECTRONICS CORPORATION.


SHEET SIZE	THIRD ANGLE PROJECTION
A	

X = DUAL VOLT, SELECT
(SERIES/PARALLEL)

1.) DUAL PRIMARY TRANSFORMER TYPE:

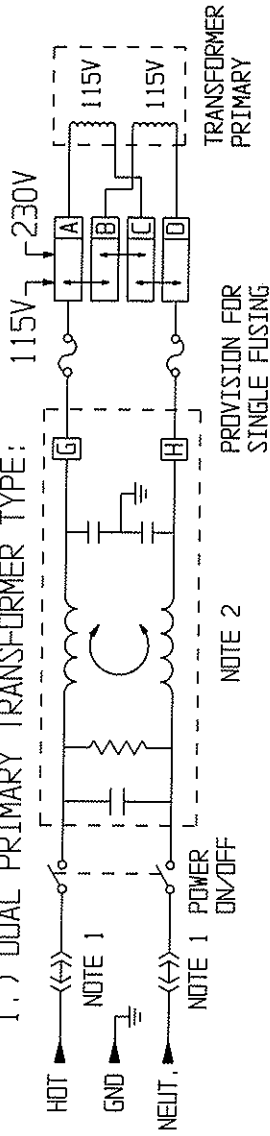

2.) JUMPER TYPE:

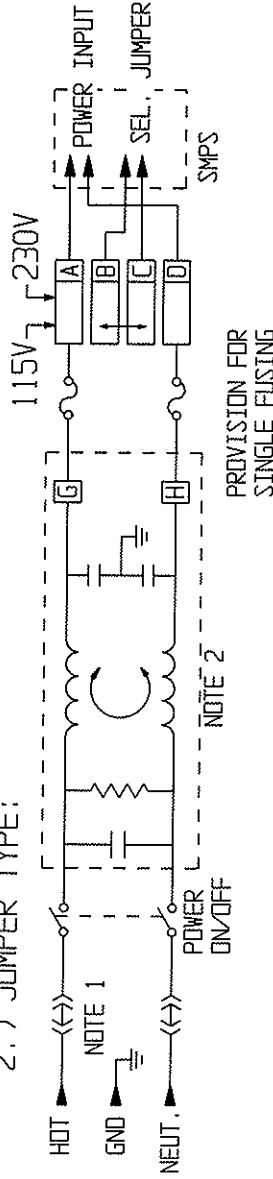

NOTE 1: JUMPERS ARE REQUIRED IF A FILTER OR INTERCONNECTION MODULE IS NOT USED.

NOTE 2: LOCATION OF OPTIONAL FILTER, JUMPERS ARE REQUIRED IF A FILTER OR INTERCONNECTION MODULE IS NOT USED.

GENERAL NOTES:

CONVERSION CLIP PROVIDED ON FUSEHOLDER FOR SINGLE FUSE MODELS.


SWITCH: DOUBLE INSULATED RATED FOR 10,000 OPERATIONS AT FULL LOAD.

51 AMP INRUSH CAPABILITY.

TERMINALS: 0.187" x 0.032" FASTON TABS

SAFETY ORGANIZATIONS

THIS FILTER HAS BEEN FORMALLY RECOGNIZED, CERTIFIED OR APPROVED BY THE LISTED AGENCY. THEREFORE, ALL TEST/REQUIREMENTS SPECIFIED IN THE LATEST REVISION OF THE FOLLOWING AGENCY STANDARDS HAVE BEEN MET:

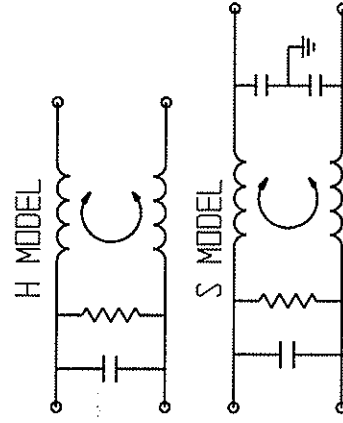

SPECIFICATIONS - NONFILTERED MODELS

HIPOT RATING (ONE MINUTE)

LINE TO GROUND: 1500 VAC

LINE TO LINE: 1450 VDC

OPERATING FREQUENCY: 50/60 Hz

RATED VOLTAGE: 120/250 VAC

RATED CURRENT: 10A @ 120 VAC

10A @ 250 VAC

OPERATING VOLTAGES:

SELECTABLE OR FIXED: 115/230 VAC

FUSEHOLDER: ACCEPTS 1 OR 2 FUSES

1/4" x 1-1/4" OR 5 x 20mm

SPECIFICATIONS - FILTERED MODELS

MAXIMUM LEAKAGE CURRENT, EACH LINE TO GROUND

@ 120 VAC 60Hz: H MODELS 2µA

S MODELS 0.25mA

@ 250 VAC 50Hz: H MODELS 5µA

S MODELS 0.50mA

HIPOT RATING (ONE MINUTE)

LINE TO GROUND: 1500 VAC

LINE TO LINE: 1450 VDC

OPERATING FREQUENCY: 50/60 Hz

RATED VOLTAGE: 120/250 VAC

RATED CURRENT: 3, 6 & 10 AMP

MODELS AVAILABLE

OPERATING VOLTAGES:

SELECTABLE OR FIXED: 115/230 VAC

FUSEHOLDER: ACCEPTS 1 OR 2 FUSES

1/4" x 1-1/4" OR 5 x 20mm



CORCOR PRODUCTS, 620 S. BUTTERFIELD RD. MUNDELIN IL 60090

CUSTOMER DRAWING

P-SERIES

TYCO ELECTRONICS PART NO.

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TYCO ELECTRONICS CORPORATION AND ITS WORLDWIDE SUBSIDIARIES AND AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE OTHER THAN TYCO ELECTRONICS PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM TYCO ELECTRONICS CORPORATION, HARRISBURG, PENNSYLVANIA USA.



SHEET SIZE
THIRD ANGLE PROJECTION
A

PSERIES-A.cld
B-KeyCreator Directories\03

SCALE: NA
DATE: 2/4/97
DRAW. BY: LJO
ORIG: MAC
DRAWING NUMBER: P-SERIES
REV. A

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru