


# CGH40006P

## 6 W, RF Power GaN HEMT

Cree's CGH40006P is an unmatched, gallium nitride (GaN) high electron mobility transistor (HEMT). The CGH40006P, operating from a 28 volt rail, offers a general purpose, broadband solution to a variety of RF and microwave applications. GaN HEMTs offer high efficiency, high gain and wide bandwidth capabilities making the CGH40006P ideal for linear and compressed amplifier circuits. The transistor is available in a solder-down, pill package.

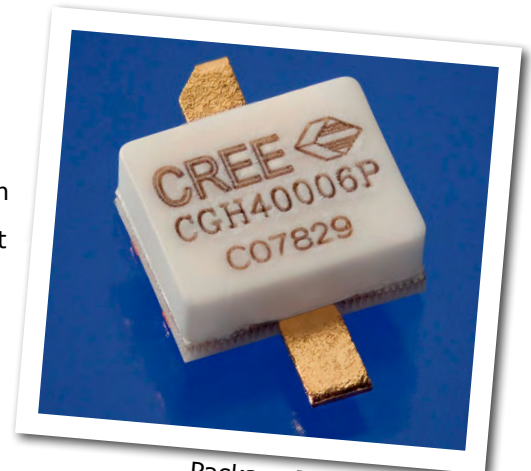

Package Types: 440109  
PN's: CGH40006P

### FEATURES

- Up to 6 GHz Operation
- 13 dB Small Signal Gain at 2.0 GHz
- 11 dB Small Signal Gain at 6.0 GHz
- 8 W typical at  $P_{IN} = 32$  dBm
- 65 % Efficiency at  $P_{IN} = 32$  dBm
- 28 V Operation

### APPLICATIONS

- 2-Way Private Radio
- Broadband Amplifiers
- Cellular Infrastructure
- Test Instrumentation
- Class A, AB, Linear amplifiers suitable for OFDM, W-CDMA, EDGE, CDMA waveforms



Large Signal Models Available for SiC & GaN



## Absolute Maximum Ratings (not simultaneous) at 25 °C Case Temperature

| Parameter   | Symbol          | Rating    | Units | Conditions |
|---|-----------------|-----------|-------|------------|
| Drain-Source Voltage                              | $V_{DS}$        | 84        | Volts | 25 °C      |
| Gate-to-Source Voltage                            | $V_{GS}$        | -10, +2   | Volts | 25 °C      |
| Storage Temperature                               | $T_{STG}$       | -65, +150 | °C    |            |
| Operating Junction Temperature                    | $T_J$           | 225       | °C    |            |
| Maximum Forward Gate Current                      | $I_{GMAX}$      | 2.1       | mA    | 25 °C      |
| Maximum Drain Current <sup>1</sup>                | $I_{DMAX}$      | 0.75      | A     | 25 °C      |
| Soldering Temperature <sup>2</sup>                | $T_S$           | 245       | °C    |            |
| Thermal Resistance, Junction to Case <sup>3</sup> | $R_{\theta JC}$ | 9.5       | °C/W  | 85 °C      |
| Case Operating Temperature <sup>3</sup>           | $T_C$           | -40, +150 | °C    | 30 seconds |

Note:

<sup>1</sup> Current limit for long term, reliable operation

<sup>2</sup> Refer to the Application Note on soldering at [www.cree.com/products/wireless\\_appnotes.asp](http://www.cree.com/products/wireless_appnotes.asp)

<sup>3</sup> Measured for the CGH40006P at  $P_{DISS} = 8$  W.

## Electrical Characteristics ( $T_C = 25$ °C)

| Characteristics   | Symbol       | Min. | Typ. | Max.   | Units    | Conditions   |
|---|--------------|------|------|--------|----------|--|
| <b>DC Characteristics<sup>1</sup></b>   |              |      |      |        |          |  |
| Gate Threshold Voltage  | $V_{GS(th)}$ | -3.8 | -3.0 | -2.3   | $V_{DC}$ | $V_{DS} = 10$ V, $I_D = 2.1$ mA  |
| Gate Quiescent Voltage  | $V_{GS(Q)}$  | -    | -2.7 | -      | $V_{DC}$ | $V_{DS} = 28$ V, $I_D = 100$ mA  |
| Saturated Drain Current   | $I_{DS}$     | 1.7  | 2.1  | -      | A        | $V_{DS} = 6.0$ V, $V_{GS} = 2.0$ V   |
| Drain-Source Breakdown Voltage  | $V_{BR}$     | 120  | -    | -      | $V_{DC}$ | $V_{GS} = -8$ V, $I_D = 2.1$ mA  |
| <b>RF Characteristics<sup>2</sup> (<math>T_C = 25</math> °C, <math>F_0 = 2.0</math> GHz unless otherwise noted)</b> |              |      |      |        |          |  |
| Small Signal Gain   | $G_{SS}$     | 11.5 | 13   | -      | dB       | $V_{DD} = 28$ V, $I_{DQ} = 100$ mA   |
| Power Output at $P_{IN} = 32$ dBm   | $P_{OUT}$    | 7.0  | 9    | -      | W        | $V_{DD} = 28$ V, $I_{DQ} = 100$ mA   |
| Drain Efficiency <sup>3</sup>   | $\eta$       | 53   | 65   | -      | %        | $V_{DD} = 28$ V, $I_{DQ} = 100$ mA, $P_{IN} = 32$ dBm                                      |
| Output Mismatch Stress  | VSWR         | -    | -    | 10 : 1 | $\Psi$   | No damage at all phase angles,<br>$V_{DD} = 28$ V, $I_{DQ} = 100$ mA,<br>$P_{IN} = 32$ dBm |
| <b>Dynamic Characteristics</b>  |              |      |      |        |          |  |
| Input Capacitance   | $C_{GS}$     | -    | 3.0  | -      | pF       | $V_{DS} = 28$ V, $V_{GS} = -8$ V, $f = 1$ MHz  |
| Output Capacitance  | $C_{DS}$     | -    | 1.1  | -      | pF       | $V_{DS} = 28$ V, $V_{GS} = -8$ V, $f = 1$ MHz  |
| Feedback Capacitance  | $C_{GD}$     | -    | 0.1  | -      | pF       | $V_{DS} = 28$ V, $V_{GS} = -8$ V, $f = 1$ MHz  |

Notes:

<sup>1</sup> Measured on wafer prior to packaging.


<sup>2</sup> Measured in CGH40006P-TB.

<sup>3</sup> Drain Efficiency =  $P_{OUT} / P_{DC}$




## Typical Performance


**Small Signal Gain vs Frequency at 28 V of the CGH40006P in the CGH40006P-TB**

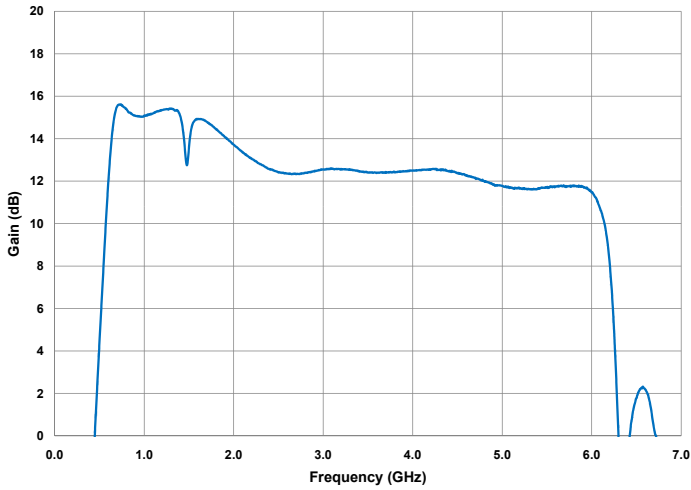


**Input & Output Return Losses vs Frequency at 28 V of the CGH40006P in the CGH40006P-TB**

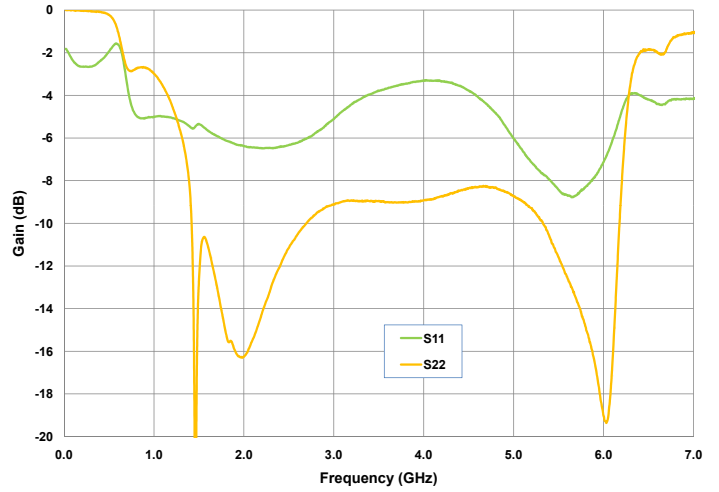

**Small Signal Gain vs Frequency at 20 V of the CGH40006P in the CGH40006P-TB**

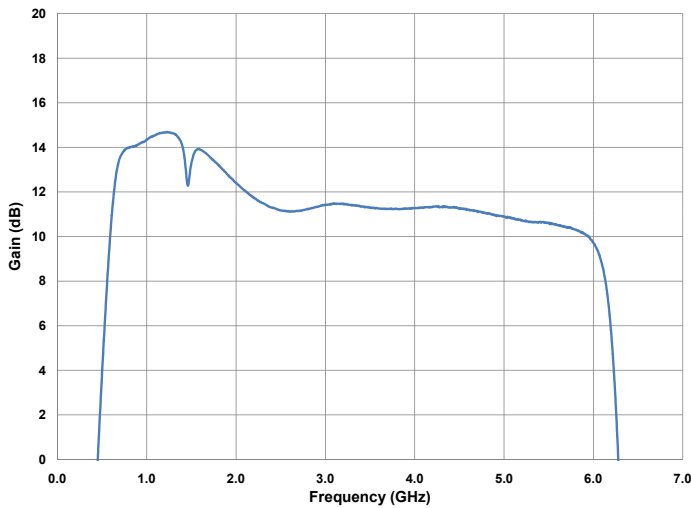


**Input & Output Return Losses vs Frequency at 20 V of the CGH40006P in the CGH40006P-TB**

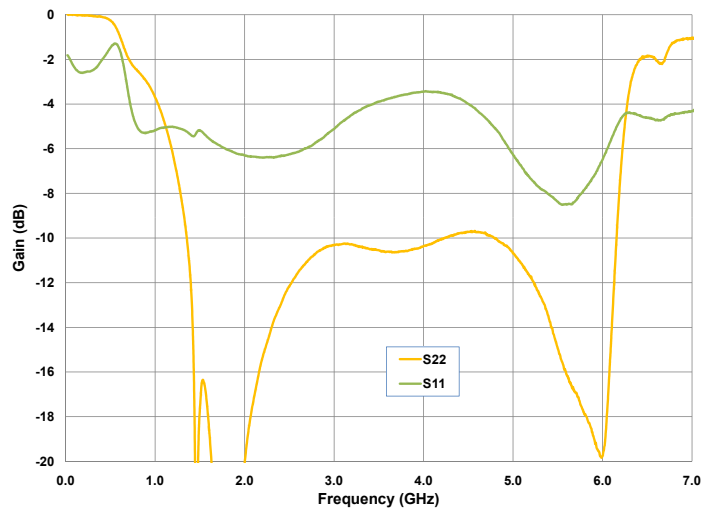


## Typical Performance

**Power Gain vs Output Power as a Function of Frequency  
of the CGH40006P in the CGH40006P-TB**  
 $V_{DD} = 28\text{ V}, I_{DQ} = 100\text{ mA}$

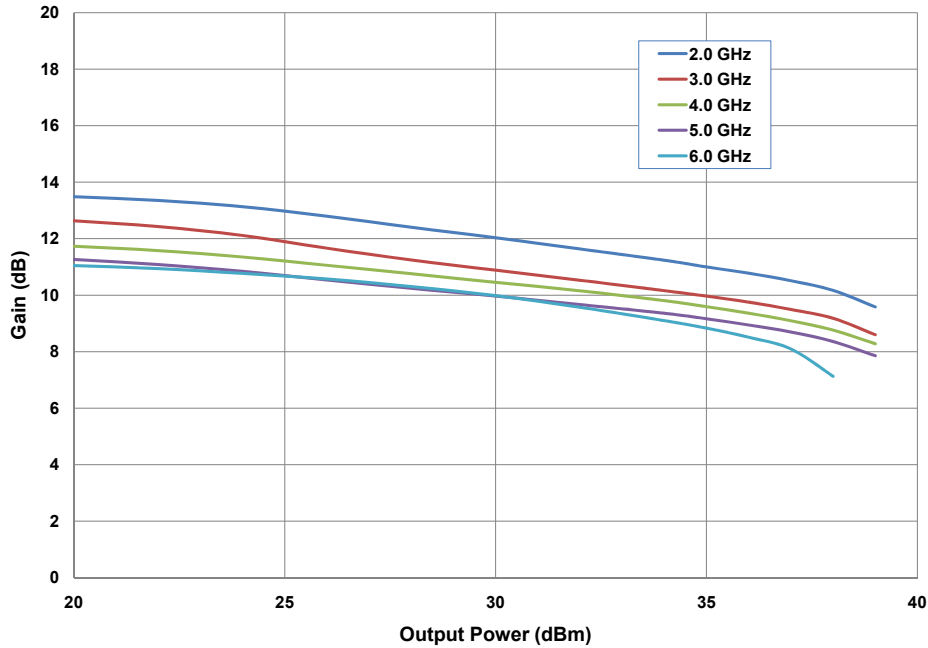


**Drain Efficiency vs Output Power as a Function of Frequency  
of the CGH40006P in the CGH40006P-TB**  
 $V_{DD} = 28\text{ V}, I_{DQ} = 100\text{ mA}$

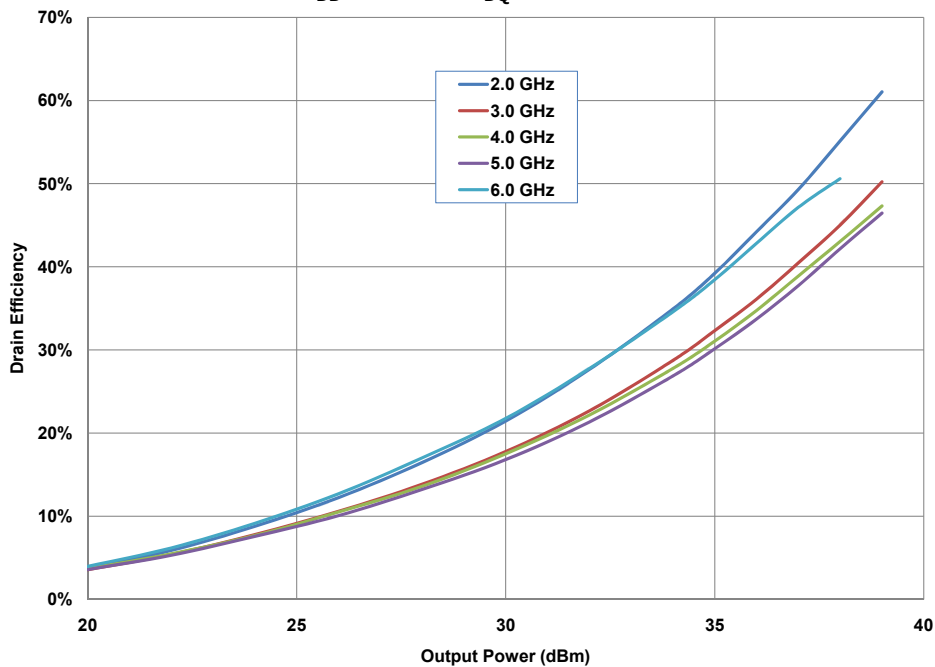




## Typical Performance


**Power Gain vs Frequency of the CGH40006P in the CGH40006P-TB at  $P_{IN} = 32$  dBm,  $V_{DD} = 28$  V**

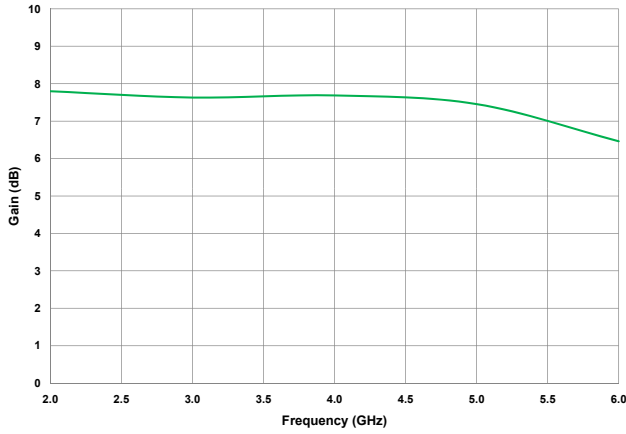


**Power Gain vs Frequency of the CGH40006P in the CGH40006P-TB at  $P_{IN} = 30$  dBm,  $V_{DD} = 20$  V**

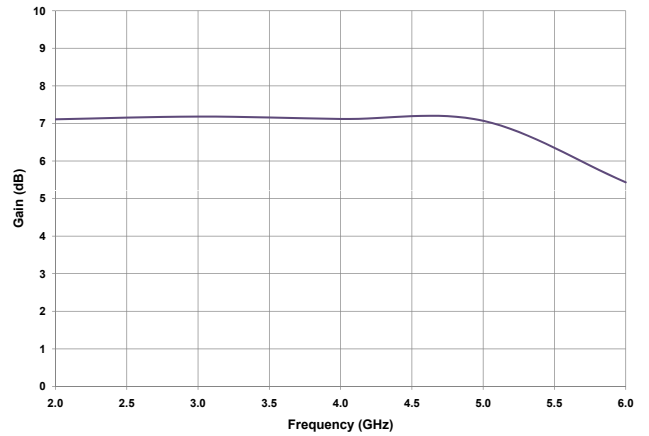


**Output Power vs Frequency of the CGH40006P in the CGH40006P-TB at  $P_{IN} = 32$  dBm,  $V_{DD} = 28$  V**

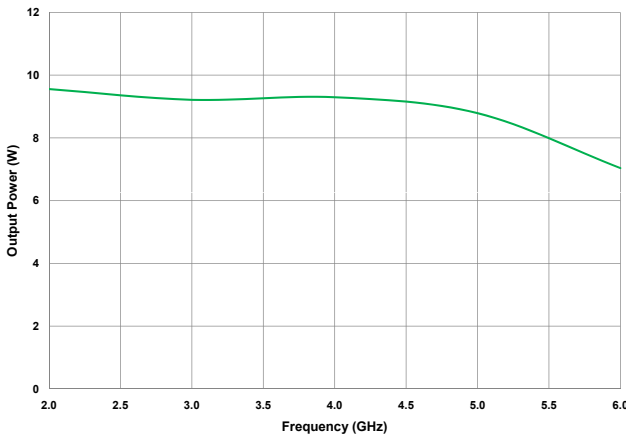


**Output Power vs Frequency of the CGH40006P in the CGH40006P-TB at  $P_{IN} = 30$  dBm,  $V_{DD} = 20$  V**

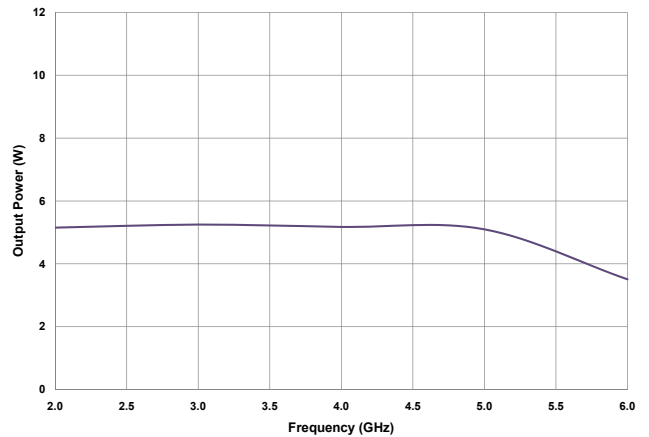

**Drain Efficiency vs Frequency of the CGH40006P in the CGH40006P-TB at  $P_{IN} = 32$  dBm,  $V_{DD} = 28$  V**

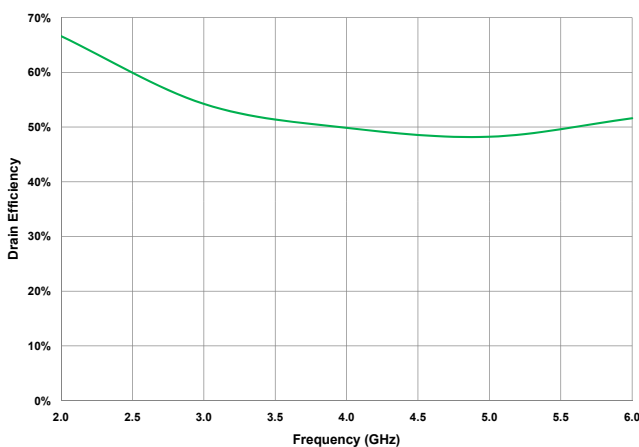


**Drain Efficiency vs Frequency of the CGH40006P in the CGH40006P-TB at  $P_{IN} = 30$  dBm,  $V_{DD} = 20$  V**

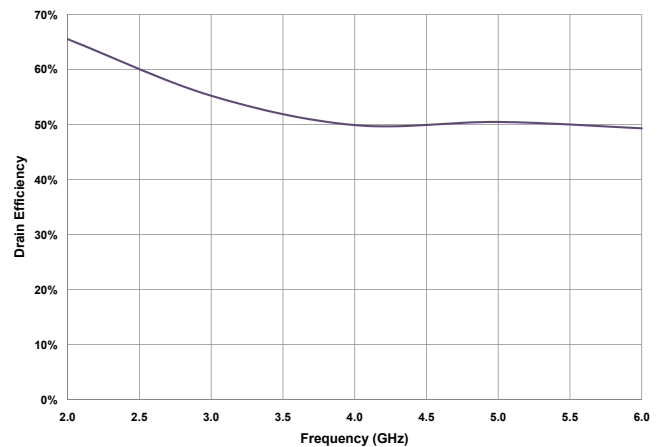


## Typical Performance

**Third Order Intermodulation Distortion vs Average Output Power as a Function of Frequency of the CGH40006P in the CGH40006P-TB**  
 $V_{DD} = 28\text{ V}$ ,  $I_{DQ} = 60\text{ mA}$

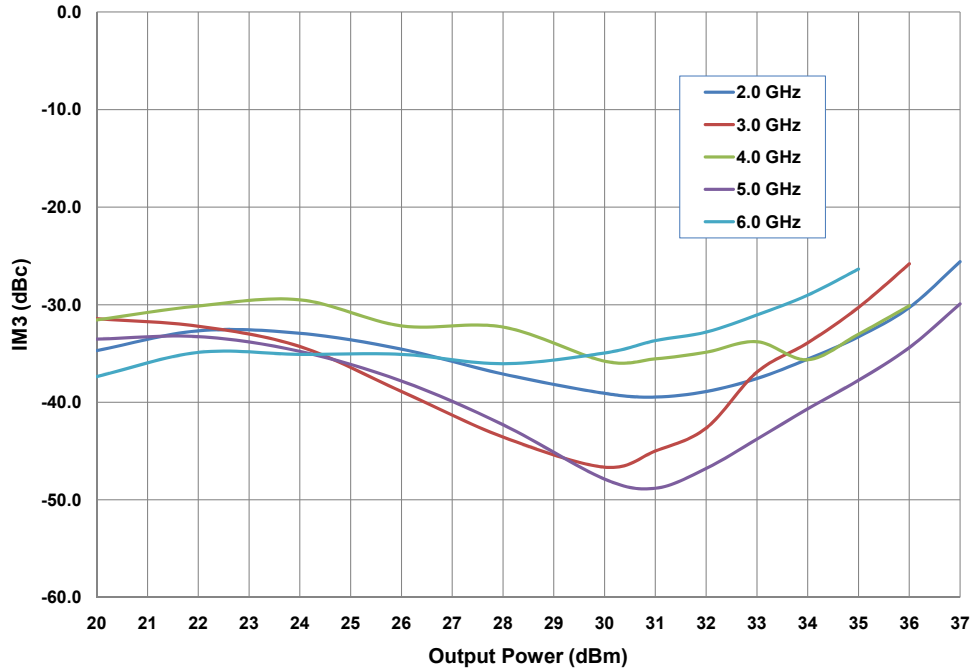


**Simulated Maximum Available Gain and K Factor of the CGH40006P**  
 $V_{DD} = 28\text{ V}$ ,  $I_{DQ} = 100\text{ mA}$

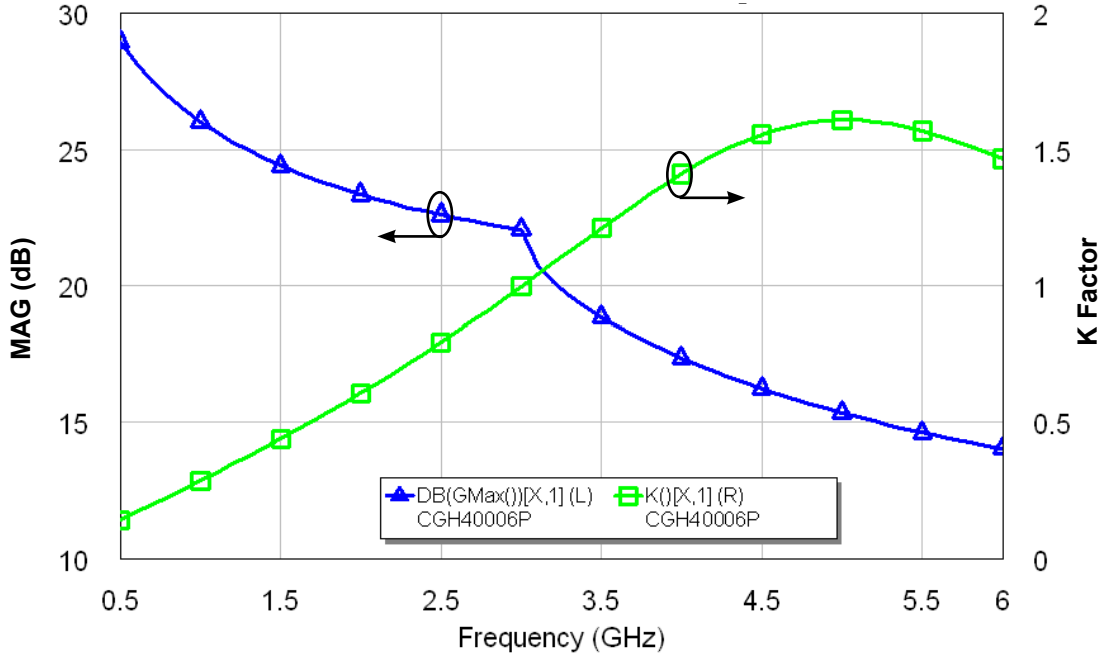

## Typical Noise Performance


**Simulated Minimum Noise Figure and Noise Resistance vs Frequency of the CGH40006P**  
 $V_{DD} = 28\text{ V}$ ,  $I_{DQ} = 100\text{ mA}$

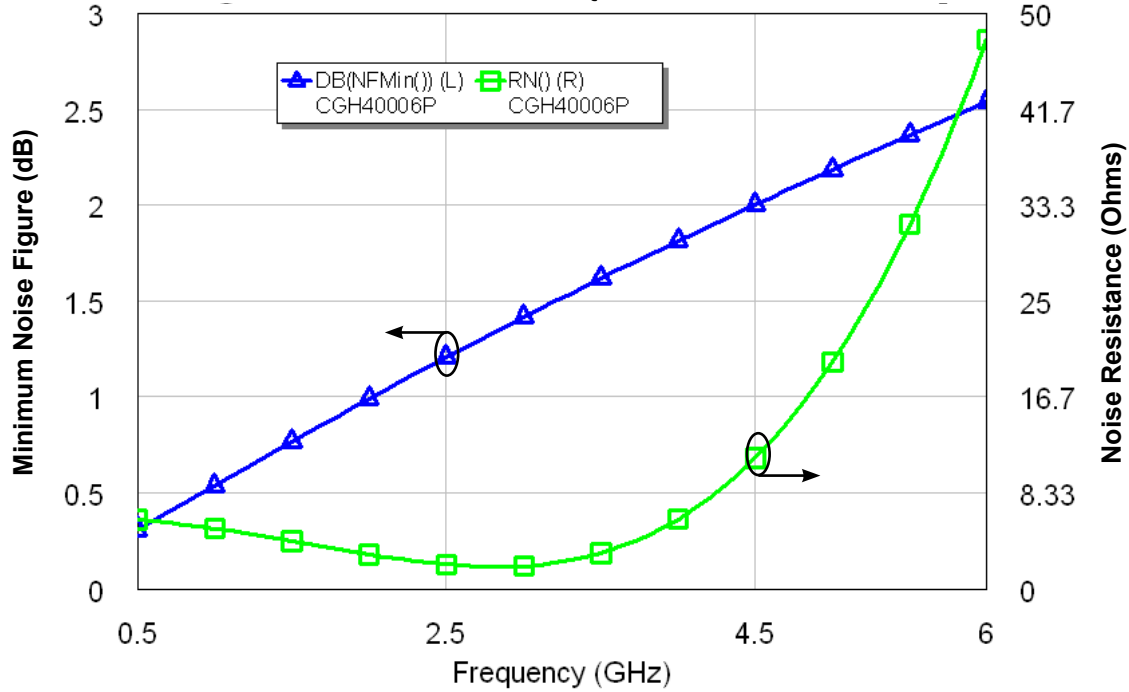

## Electrostatic Discharge (ESD) Classifications

| Parameter           | Symbol | Class      | Test Methodology    |
|---------------------|--------|------------|---------------------|
| Human Body Model    | HBM    | 1A > 250 V | JEDEC JESD22 A114-D |
| Charge Device Model | CDM    | 1 < 200 V  | JEDEC JESD22 C101-C |

## Source and Load Impedances

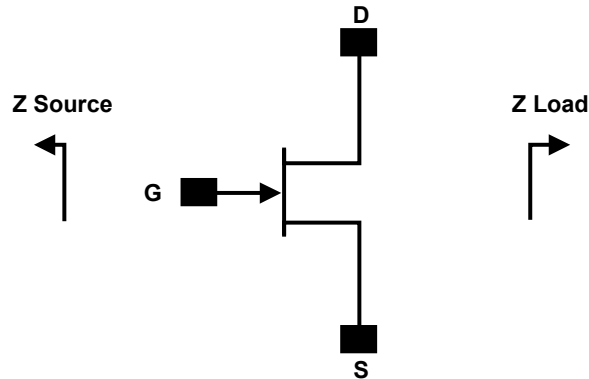


| Frequency (MHz) | Z Source      | Z Load        |
|-----------------|---------------|---------------|
| 1000            | 13.78 + j6.9  | 61.5 + j47.4  |
| 2000            | 4.78 + j1.78  | 19.4 + j39.9  |
| 3000            | 2.57 - j6.94  | 12.57 + j23.1 |
| 4000            | 3.54 - j14.86 | 9.44 + j11.68 |
| 5000            | 4.42 - j25.8  | 9.78 + j4.85  |
| 6000            | 7.1 - j42.7   | 9.96 - j4.38  |

Note 1.  $V_{DD} = 28V$ ,  $I_{DQ} = 100mA$  in the 440109 package.

Note 2. Optimized for power gain,  $P_{SAT}$  and PAE.

Note 3. When using this device at low frequency, series resistors should be used to maintain amplifier stability.

## CGH40006P Power Dissipation De-rating Curve

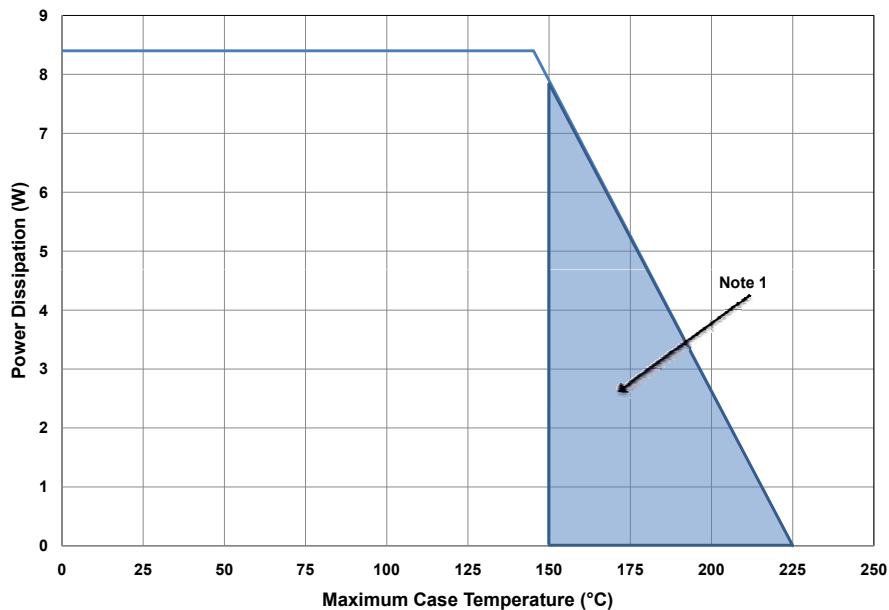


Note 1. Area exceeds Maximum Case Operating Temperature (See Page 2).




## CGH40006P-TB Demonstration Amplifier Circuit Bill of Materials

| Designator | Description                                      | Qty |
|------------|--|-----|
| R1         | RES, AIN, 0505, 470 Ohms ( $\leq 5\%$ tolerance) | 1   |
| R2         | RES, AIN, 0505, 10 Ohms ( $\leq 5\%$ tolerance)  | 1   |
| R3         | RES, AIN, 0505, 150 Ohms ( $\leq 5\%$ tolerance) | 1   |
| C1         | CAP, 2.0 pF +/-0.1 pF, 0603, ATC 600S            | 1   |
| C2         | CAP, 4.7 pF +/-0.1 pF, 0603, ATC 600S            | 1   |
| C10        | CAP, 3.6 pF +/-0.1 pF, 0603, ATC 600S            | 1   |
| C4,C11     | CAP, 8.2 pF +/-0.25, 0603, ATC 600S              | 2   |
| C6,C13     | CAP, 470 pF +/-5%, 0603, 100 V                   | 2   |
| C7,C14     | CAP, 33000 pF, CER, 100V, X7R, 0805              | 2   |
| C8         | CAP, 10 uf, 16V, SMT, TANTALUM                   | 1   |
| C15        | CAP, 1.0 uF +/-10%, CER, 100V, X7R, 1210         | 1   |
| C16        | CAP, 33 uF, 100V, ELECT, FK, SMD                 | 1   |
| J3,J4      | CONN, SMA, STR, PANEL, JACK, RECP                | 2   |
| J1         | HEADER RT>PLZ .1CEN LK 5POS                      | 1   |
| -          | PCB, RO5880, 20 MIL                              | 1   |
| Q1         | CGH40006P  | 1   |


## CGH40006P-TB Demonstration Amplifier Circuit

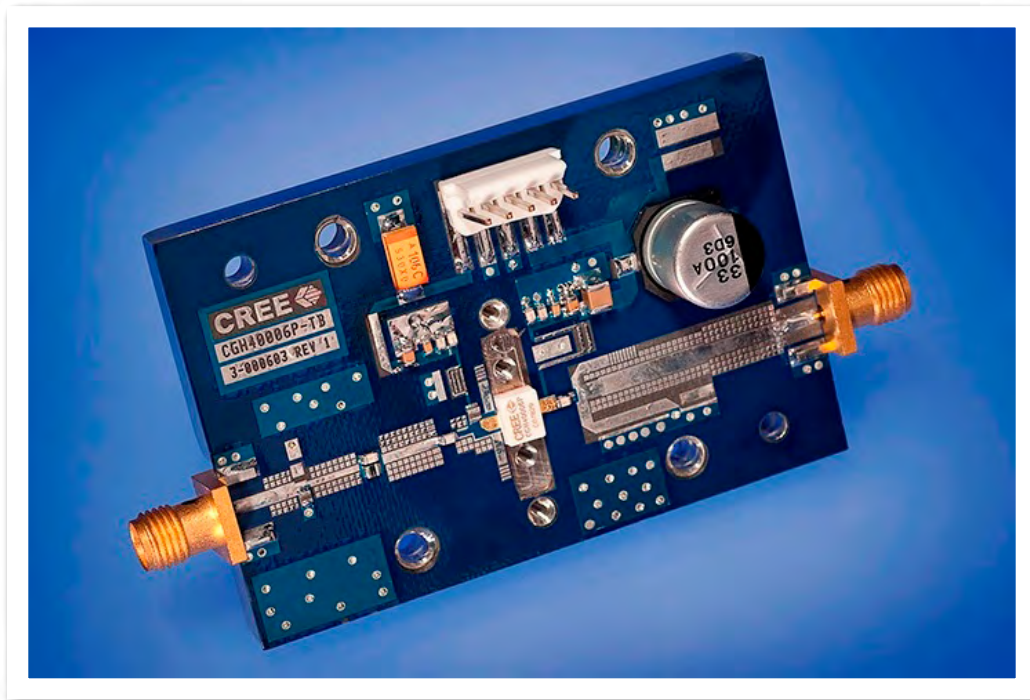

## CGH40006P-TB Demonstration Amplifier Circuit Schematic

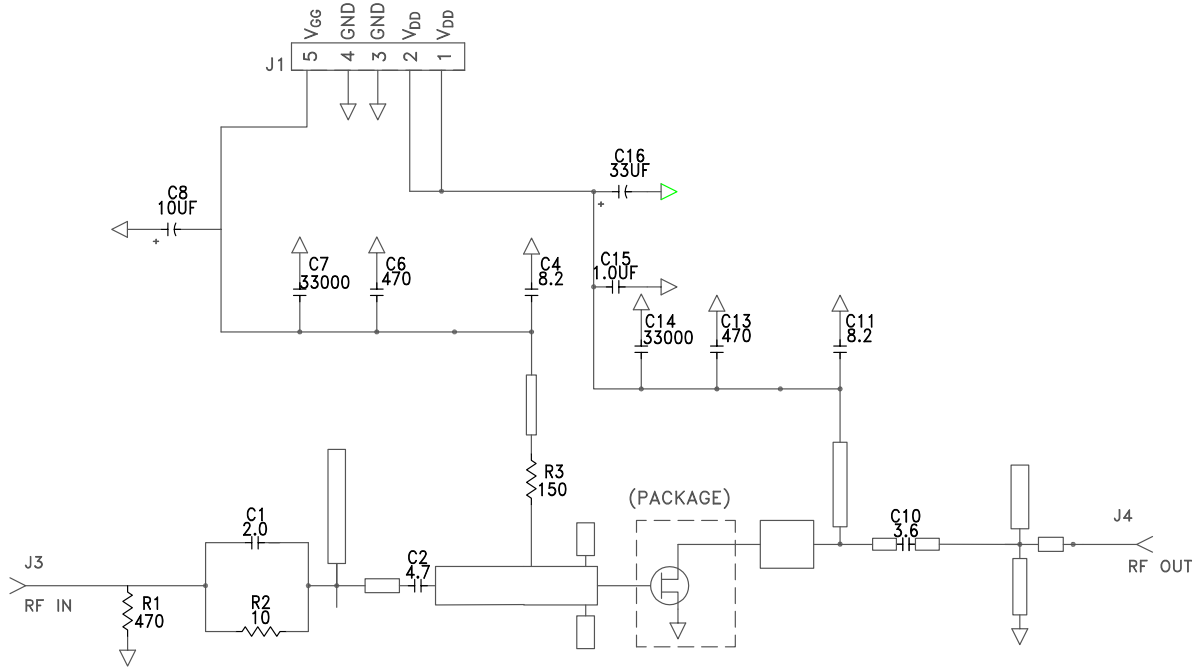

## CGH40006P-TB Demonstration Amplifier Circuit Outline

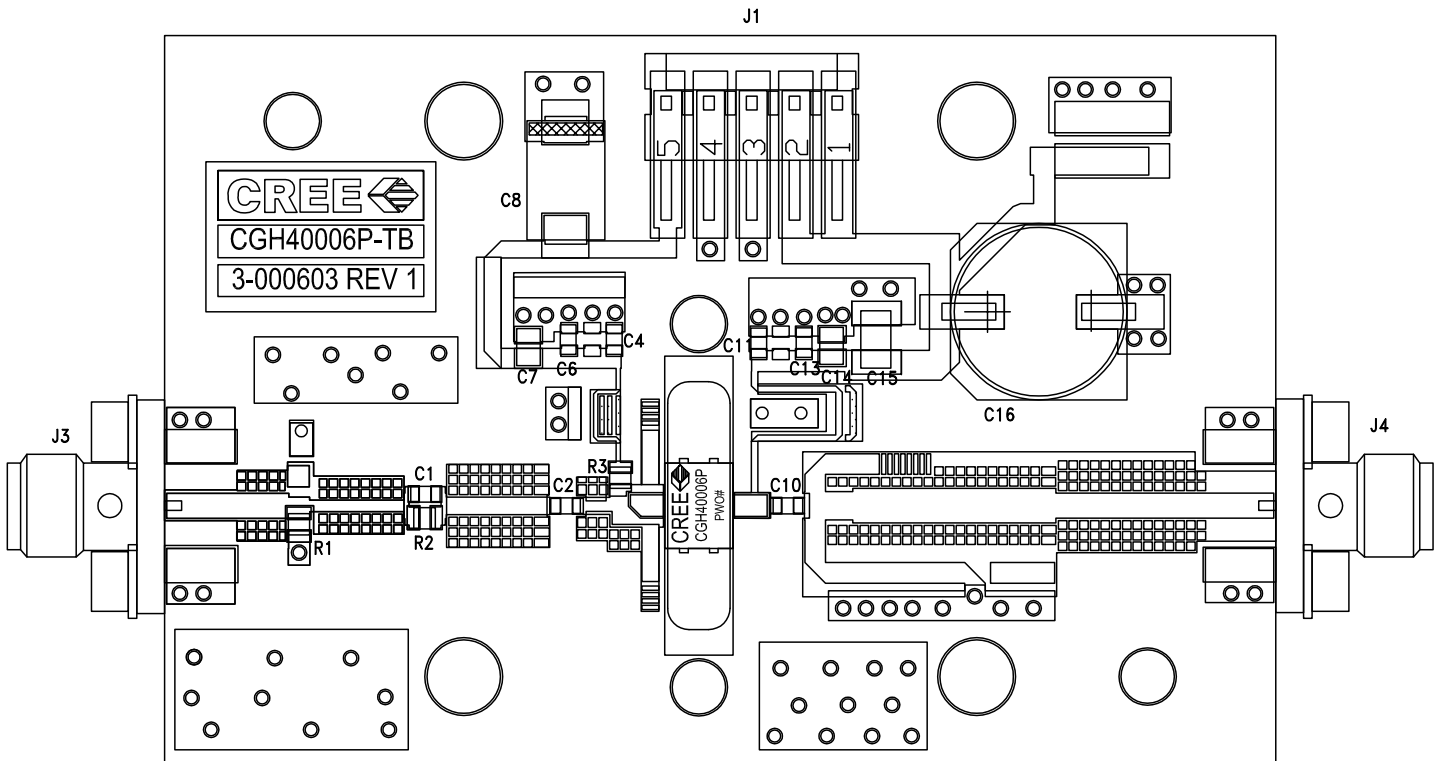




**Typical Package S-Parameters for CGH40006P**  
**(Small Signal,  $V_{DS} = 28\text{ V}$ ,  $I_{DQ} = 100\text{ mA}$ , angle in degrees)**

| Frequency | Mag S11 | Ang S11 | Mag S21 | Ang S21 | Mag S12 | Ang S12 | Mag S22 | Ang S22 |
|-----------|---------|---------|---------|---------|---------|---------|---------|---------|
| 500 MHz   | 0.905   | -96.56  | 18.30   | 120.62  | 0.023   | 35.87   | 0.456   | -52.76  |
| 600 MHz   | 0.889   | -107.98 | 16.39   | 113.31  | 0.025   | 29.63   | 0.429   | -58.98  |
| 700 MHz   | 0.877   | -117.55 | 14.76   | 106.99  | 0.026   | 24.39   | 0.408   | -64.31  |
| 800 MHz   | 0.867   | -125.66 | 13.37   | 101.43  | 0.027   | 19.92   | 0.393   | -68.96  |
| 900 MHz   | 0.860   | -132.61 | 12.19   | 96.46   | 0.028   | 16.05   | 0.381   | -73.11  |
| 1.0 GHz   | 0.854   | -138.66 | 11.18   | 91.94   | 0.028   | 12.66   | 0.374   | -76.87  |
| 1.1 GHz   | 0.849   | -143.98 | 10.31   | 87.79   | 0.028   | 9.64    | 0.368   | -80.34  |
| 1.2 GHz   | 0.845   | -148.73 | 9.56    | 83.92   | 0.028   | 6.92    | 0.366   | -83.57  |
| 1.3 GHz   | 0.842   | -153.01 | 8.90    | 80.29   | 0.028   | 4.46    | 0.365   | -86.61  |
| 1.4 GHz   | 0.839   | -156.90 | 8.33    | 76.84   | 0.028   | 2.22    | 0.365   | -89.49  |
| 1.5 GHz   | 0.837   | -160.49 | 7.82    | 73.56   | 0.028   | 0.15    | 0.367   | -92.24  |
| 1.6 GHz   | 0.835   | -163.81 | 7.37    | 70.40   | 0.028   | -1.75   | 0.369   | -94.88  |
| 1.7 GHz   | 0.833   | -166.92 | 6.96    | 67.36   | 0.028   | -3.51   | 0.373   | -97.43  |
| 1.8 GHz   | 0.832   | -169.85 | 6.60    | 64.41   | 0.028   | -5.15   | 0.376   | -99.88  |
| 1.9 GHz   | 0.830   | -172.62 | 6.27    | 61.54   | 0.028   | -6.67   | 0.381   | -102.27 |
| 2.0 GHz   | 0.829   | -175.27 | 5.98    | 58.74   | 0.028   | -8.08   | 0.386   | -104.58 |
| 2.1 GHz   | 0.828   | -177.81 | 5.71    | 56.00   | 0.028   | -9.40   | 0.391   | -106.84 |
| 2.2 GHz   | 0.827   | 179.75  | 5.46    | 53.32   | 0.027   | -10.61  | 0.396   | -109.04 |
| 2.3 GHz   | 0.826   | 177.38  | 5.24    | 50.68   | 0.027   | -11.73  | 0.401   | -111.19 |
| 2.4 GHz   | 0.825   | 175.07  | 5.03    | 48.09   | 0.027   | -12.77  | 0.407   | -113.29 |
| 2.5 GHz   | 0.824   | 172.82  | 4.84    | 45.53   | 0.027   | -13.71  | 0.412   | -115.36 |
| 2.6 GHz   | 0.823   | 170.61  | 4.67    | 43.00   | 0.026   | -14.57  | 0.418   | -117.38 |
| 2.7 GHz   | 0.821   | 168.44  | 4.51    | 40.50   | 0.026   | -15.34  | 0.423   | -119.36 |
| 2.8 GHz   | 0.820   | 166.30  | 4.36    | 38.02   | 0.026   | -16.02  | 0.428   | -121.32 |
| 2.9 GHz   | 0.819   | 164.18  | 4.22    | 35.57   | 0.026   | -16.62  | 0.434   | -123.24 |
| 3.0 GHz   | 0.818   | 162.08  | 4.09    | 33.13   | 0.026   | -17.13  | 0.439   | -125.13 |
| 3.2 GHz   | 0.816   | 157.91  | 3.85    | 28.31   | 0.025   | -17.89  | 0.449   | -128.84 |
| 3.4 GHz   | 0.813   | 153.76  | 3.65    | 23.53   | 0.025   | -18.30  | 0.458   | -132.46 |
| 3.6 GHz   | 0.810   | 149.58  | 3.47    | 18.78   | 0.025   | -18.38  | 0.467   | -136.00 |
| 3.8 GHz   | 0.807   | 145.35  | 3.31    | 14.05   | 0.024   | -18.13  | 0.474   | -139.48 |
| 4.0 GHz   | 0.804   | 141.05  | 3.18    | 9.32    | 0.024   | -17.60  | 0.481   | -142.91 |
| 4.2 GHz   | 0.801   | 136.66  | 3.05    | 4.57    | 0.024   | -16.82  | 0.488   | -146.30 |
| 4.4 GHz   | 0.797   | 132.15  | 2.94    | -0.20   | 0.025   | -15.89  | 0.493   | -149.67 |
| 4.6 GHz   | 0.793   | 127.50  | 2.85    | -5.01   | 0.025   | -14.87  | 0.497   | -153.02 |
| 4.8 GHz   | 0.789   | 122.70  | 2.76    | -9.86   | 0.026   | -13.89  | 0.500   | -156.37 |
| 5.0 GHz   | 0.785   | 117.72  | 2.68    | -14.79  | 0.027   | -13.04  | 0.503   | -159.74 |
| 5.2 GHz   | 0.780   | 112.55  | 2.62    | -19.78  | 0.029   | -12.42  | 0.504   | -163.14 |
| 5.4 GHz   | 0.776   | 107.17  | 2.55    | -24.86  | 0.030   | -12.13  | 0.505   | -166.59 |
| 5.6 GHz   | 0.772   | 101.58  | 2.50    | -30.03  | 0.032   | -12.22  | 0.504   | -170.10 |
| 5.8 GHz   | 0.768   | 95.76   | 2.44    | -35.30  | 0.035   | -12.75  | 0.503   | -173.70 |
| 6.0 GHz   | 0.764   | 89.70   | 2.40    | -40.69  | 0.037   | -13.73  | 0.501   | -177.41 |

Download this s-parameter file in ".s2p" format at [http://www.cree.com/products/wireless\\_s-parameters.asp](http://www.cree.com/products/wireless_s-parameters.asp)

## Product Dimensions CGH40006P (Package Type — 440109)

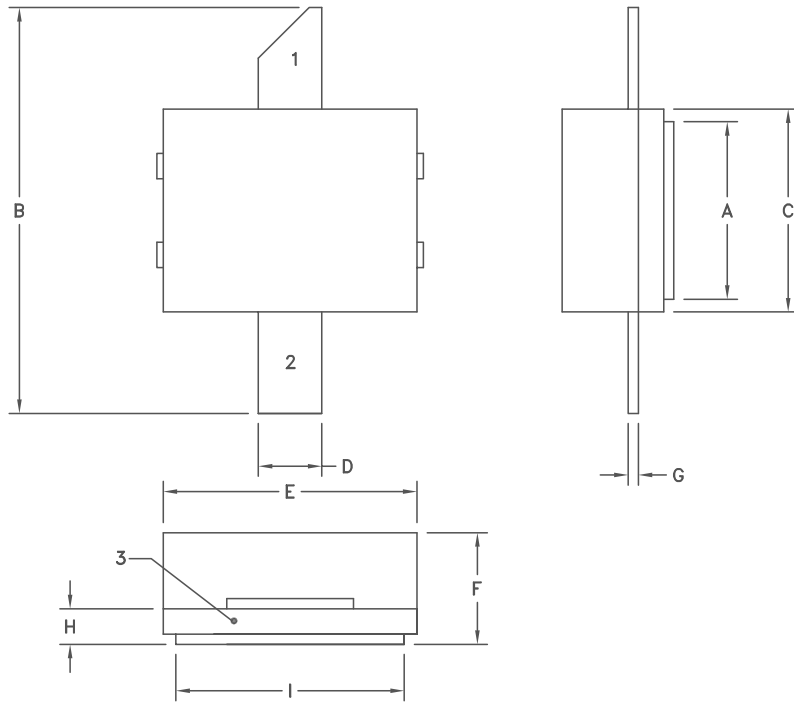

NOTES: (UNLESS OTHERWISE SPECIFIED)

1. INTERPRET DRAWING IN ACCORDANCE WITH ANSI Y14.5M-1982 DIMENSIONING AND TOLERANCING.
2. CONTROLLING DIMENSION: INCH.

| DIM | INCHES |      | MILLIMETERS |      |
|-----|--------|------|-------------|------|
|     | MIN    | MAX  | MIN         | MAX  |
| A   | .135   | .145 | 3.43        | 3.68 |
| B   | .315   | .325 | 8.00        | 8.26 |
| C   | .155   | .165 | 3.94        | 4.19 |
| D   | .045   | .055 | 1.14        | 1.40 |
| E   | .195   | .205 | 4.95        | 5.21 |
| F   | .090   | .110 | 2.29        | 2.79 |
| G   | .007   | .009 | .178        | 0.23 |
| H   | .026   | .030 | .660        | .762 |
| I   | .175   | .185 | 4.45        | 4.70 |

PIN 1. GATE  
 PIN 2. DRAIN  
 PIN 3. SOURCE



## Disclaimer

Specifications are subject to change without notice. Cree, Inc. believes the information contained within this data sheet to be accurate and reliable. However, no responsibility is assumed by Cree for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Cree. Cree makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. "Typical" parameters are the average values expected by Cree in large quantities and are provided for information purposes only. These values can and do vary in different applications and actual performance can vary over time. All operating parameters should be validated by customer's technical experts for each application. Cree products are not designed, intended or authorized for use as components in applications intended for surgical implant into the body or to support or sustain life, in applications in which the failure of the Cree product could result in personal injury or death or in applications for planning, construction, maintenance or direct operation of a nuclear facility.

For more information, please contact:

Cree, Inc.  
4600 Silicon Drive  
Durham, North Carolina, USA 27703  
[www.cree.com/wireless](http://www.cree.com/wireless)

Sarah Miller  
Marketing & Export  
Cree, RF Components  
1.919.407.5302

Ryan Baker  
Marketing  
Cree, Wireless Devices  
1.919.287.7816

Tom Dekker  
Sales Director  
Cree, Wireless Devices  
1.919.313.5639

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)