

Code Reader/OCR

Tracing Products Group Catalog

▶▶ High-accuracy, Multifunctional Readers




LOT. NO. S4153 2013

12 packs 2013.01.15




▶▶ Ultra-compact, High-speed Readers



Code Reader

You can select the optimum products from
We provide Readers for everything from Bar Codes and 2D Codes
The lineup also includes Readers that

Ultra Compact and Fast

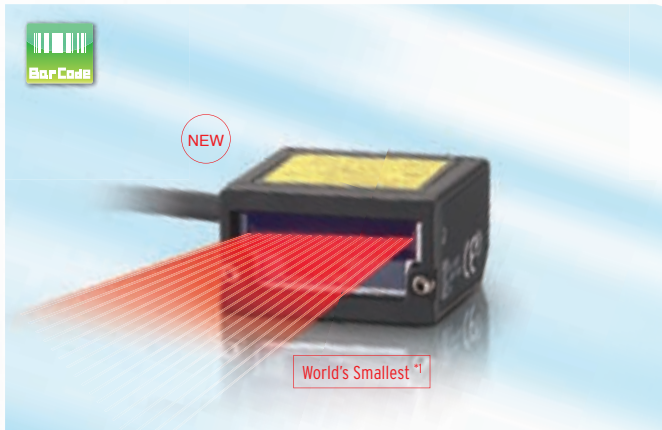

Laser-type Bar Code Reader

V500-R2 Series

- High speed: 1,000 scans/s
- Long distance: 270 mm
- World's Smallest



Multi Code Reader

V400-R2 Series

- Fastest reading in the class:
Reads moving objects at up to 500 m/min *2
- Long distance: 125 mm
- Ultra compact

▶▶ P4



Conveyors

- Ultra compact for possible mounting in rail gaps.
- Stable reading of high-speed moving objects.

▶▶ P8



Semiconductor Manufacturing Equipment

- World's smallest reader handles 300-mm wafer loading ports.



Cartoners

- Prevention of mixing of different cartons by reading bar codes.



Labeler

- Reading to check printing conditions.

*1.According to OMRON investigation in January 2013.

*2.Performance may depend on the code that is read and the printing conditions.

and OCR Lineup

OMRON's wide lineup of tracing products.

printed on paper or labels to DPM directly printed on workpieces.

can read expiration dates and other text.

High-accuracy and Multifunctional



Multi Code Reader
FQ-CR1 Series

- HDR function to cut out ambient light interference.
- Polarizing filter to cut specular reflections.
- Verification with master data.

▶▶ P 12



2D Code Reader for DPM
FQ-CR2 Series

- Reads direct part marking codes.
- Cuts halation from metallic surfaces.
- High-power LED that is effective for low contrast.

▶▶ P 12



Optical Character Recognition Sensor
FQ2-CH Series

- New OCR algorithm.
- Easy application with no dictionary registration.
- Handles dot characters, stamped characters, and more.

▶▶ P 16



Smart Camera
FQ2-S4 Series

- Code reader, OCR, and inspections.
- Lineup includes Integrated Sensors and C-mounts.
- High resolution of 760,000 or 1,300,000 pixels.

▶▶ P 20



Case Packers

- Lineup of models with many installation distances from 38 to 970 mm.
- Stable reading of low-contrast codes.



Automotive Processing Machines


- High-performance filters that cut specular reflections from metallic or glossy surfaces.




Cartoners

- Multi-processing of everything needed for cartoners: character verification, code reading, and inspections.


Reading 2D Codes




Reading Bar Codes




Reading DPM 2D Codes




Reading Bar Codes



Hot-melt Detection



Date Verification





The World's Smallest^{*} Bar Code Reader That Fits Essentially Anywhere

*According to OMRON investigation in January 2013.

Laser-type Bar Code Reader V500-R2 Series

NEW




High-speed Reading at 1,000 Scans/Second

A high-speed motor and new algorithm gives surprising performance for the size to achieve stable reading even in high-speed takt machines of around 66,000 items/hour.

Enables Reading Imperfect Codes

Even though it is small, the V500-R2 with its new algorithm is adept at reading even the most imperfect codes. Raster scanning enables reading Bar Codes even if they are partially dirty or missing.

Dirt



Wear



Blurring




Shiny background



Inconsistent background



Dots



Resists Ambient Light Interference

Operation is possible with ambient illumination of up to 80,000 lx (sunlight), so the Code Reader can stably read even near Photoelectric Sensors with little influence from ambient light.


Ambient Light Interference Guidelines

| | |
|------------------|----------------|
| Florescent light | 4,000 lx max. |
| Sunlight | 80,000 lx max. |




Long Range Up to 270 mm

The wide reading distance from 60 to 270 mm lets you handle variations in conveying and workpiece height without changing the installation.

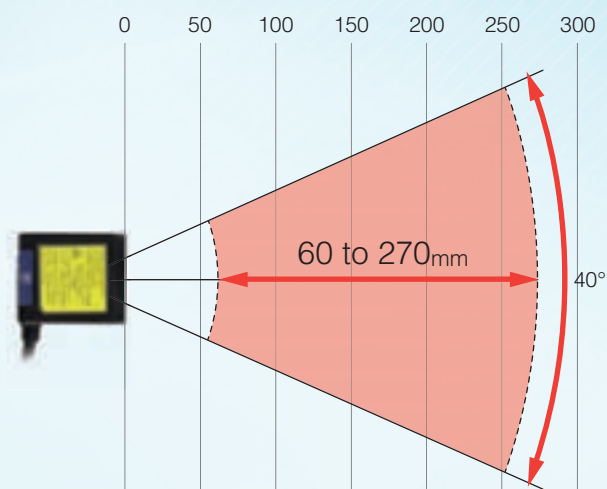


Reading Test Switch Provided

Just press the Scan button on the Reader to perform a read test. The results are provided with the Read OK indicator and buzzer. We achieved an operation that is simple enough for essentially anyone to increase mounting efficiency.

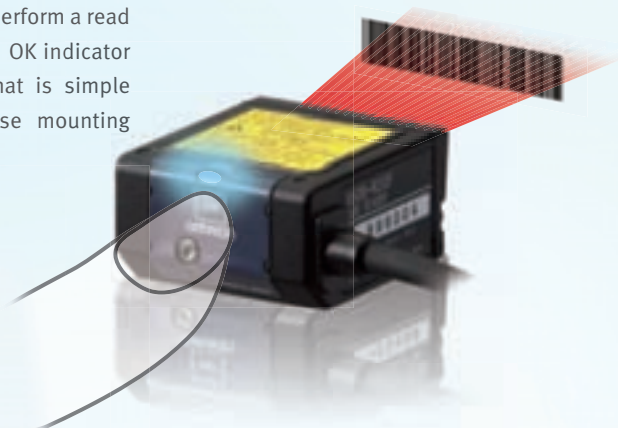

Minimum Readable Narrow Bar Width: 0.15 mm

Reading is even possible for Bar Codes with narrow bars of 0.15 mm.

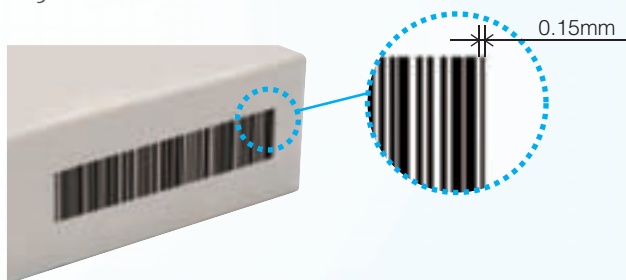


GS1-Databar (RSS) Supported

The data-rich GS1-Databar (RSS code) Bar Codes can also be read.



Verification with Master Data

You can verify character strings to see if they match preset master data without a special device.

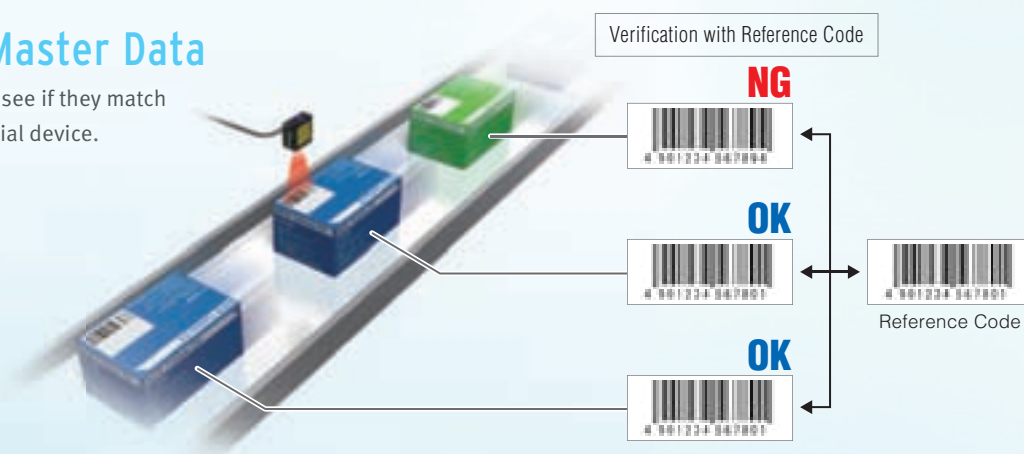

Ordering Information

| Type | | Model |
|----------------------------|-------------------|------------|
| Laser-type Bar Code Reader | | V500-R2CF |
| OMRON PLC connecting cable | D-sub 9-pin, 0.8M | V509-W011 |
| | D-sub 9-pin, 5M | V509-W016 |
| PC/AT Connecting cable | D-sub 9-pin, 0.8M | V509-W011D |
| | D-sub 9-pin, 5M | V509-W016D |

Ratings and Performance



| Model | | V500-R2CF |
|--------------------------------|--|---|
| Direction of view | | Front view |
| Applicable codes | Bar code | WPC(JAN/EAN/UPC), Codabar(NW-7), ITF, Industrial 2 of 5(STF), Code39, Code93, Code128, GS1-128(EAN-128), GS1-Databar(RSS-14), GS1-Databar Limited(RSS Limited), GS1-Databar Expanded(RSSExpanded) |
| | Number of reading digits | No upper limit (depends on bar width and reading distance) |
| Reading performance(*) | Minimum resolution | Bar code: 0.15 mm |
| | Contrast (PCS) | 0.45 or more (white reflectance 70 % or more) |
| | Reading distance | 60 to 270 mm (At narrow bar: 0.5 mm) |
| | Reading angle | Within 40° (Including margins at left and right sides) |
| | Pitch angle (α) | $\pm 30^\circ$ |
| | Skew angle (β) | $\pm 60^\circ$ (However, exclude from 10° upper side to 8° lower side) |
| | Tilt angle (γ) | $\pm 25^\circ$ |
| | Reading of bar codes on curved surfaces (R) | $R \geq 20\text{mm}$ (UPC 12 digit) |
| | Light source | Red laser diode (Wave length: 650 nm) |
| | Light output | 1.0m W or less (Correspond to JIS class 2) |
| | Scan type | Raster scan |
| Interface | Number of scan | 1000 scan/sec. |
| | Communication specification | RS-232C |
| Function setting method | OK/NG outputs | NPN open collector output (cable work required) |
| | Menu sheet reading method or host command method | |
| Functional specifications | Reading trigger | External trigger (Transistor input), Trigger by command (RS-232C), Trigger a test reading by pressing the SCAN button on the product |
| | OK/NG signals | OK signal is turned on to indicate a successful read NG signal is turned on to indicate a successful read of a non-registered label |
| | Indication LED | OK LED (green) illuminates to indicate a successful read |
| | Buzzer | Notifies a successful reading with a buzzer sound (Muting available) |
| Power supply specification | Power voltage | 4.5 to 5.5 VDC |
| | Consumption current | During operation: 500 mA or less; during standby: 150 mA or less |
| | Inrush current | 2.0 A MAX |
| Environmental specifications | Ambient temperature range | At operation: 0 to + 45°C At storage: -20 to + 60°C |
| | Ambient humidity range | At operation and storage: 20 to 85% RH (with no icing or condensation) |
| | Ambient atmosphere | No corrosive gases |
| | Ambient light | Fluorescent lamp: 4,000lx or less, Sunlight: 80,000lx or less |
| | Vibration resistance | 10 to 150 Hz, half amplitude 0.35 mm, 3 directions (X/Y/Z), 8 minutes each 10 times |
| Degree of protection | | IP54 (IEC60529) |
| Weight | Main unit only | Approximately 80 g |
| | Including accessories | Approximately 190 g (including mounting bracket, insulation plate and screws) |
| | Packaged weight | Approximately 270 g (including packing carton) |
| Dimensions | Main unit | Approximately 29(W) × 34.5(D) × 17(H)mm |
| | Packing carton | Approximately 245(W) × 110(D) × 40(H)mm |
| Input/output connector | | Round DIN connector |
| Code length | | Approximately 1.5 m |
| Minimum bending radius of cord | | Approximately 23 mm |
| Accessories | | Operation manual, menu sheet, mounting bracket, insulation plate, M3 × 6 screw (two), M3 × 8 screws (one), M5 × 10 screws (two) |
| Material, Color | Upper case | Magnesium diecast, black |
| | Front panel | PC, black |
| | Labels | PET |
| | Reading window | PMMA, transparent |
| | Cable | Polyvinyl chloride (PVC), black |
| | Insulation plate | ABS, black |
| | Mounting bracket | SUS304, silver |

* Unless otherwise specified, use a JAN x1, MRD 63% or higher (PCS = 0.9 or higher) bar code with a pitch angle $\alpha = 0^\circ$, a skew angle $\beta = 15^\circ$, a tilt angle $\gamma = 0^\circ$, and a curvature $R = \infty$.

Reading range performance (typical example)

Explained with examples of following conditions:


- Contrast: MRD 63 % (PCS = 0.9)
- Bar code: CODE39
- Installation condition:
Pitch angle $\alpha = 0^\circ$, skew angle $\beta = 15^\circ$
Tilt angle $\gamma = 0^\circ$, curvature $R = \infty$

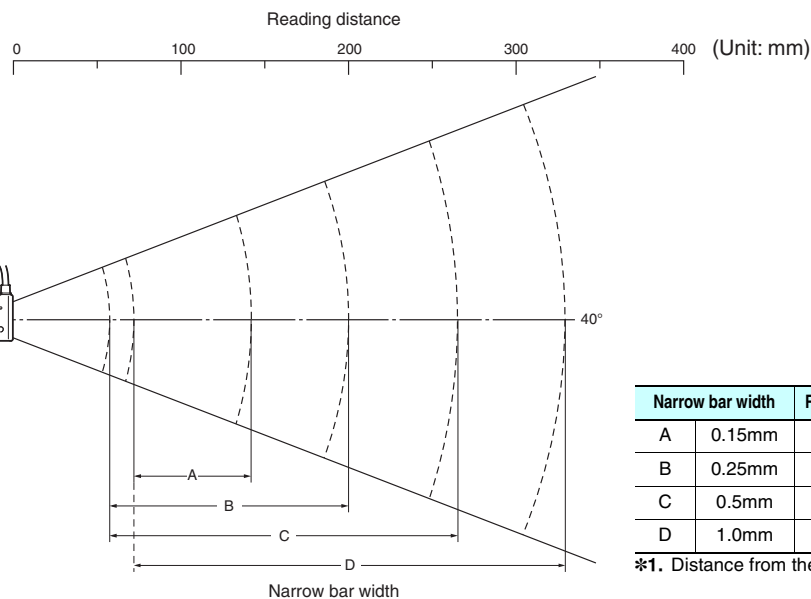

Dimensions

(Unit: mm)

Bar Code Reader V500-R2CF

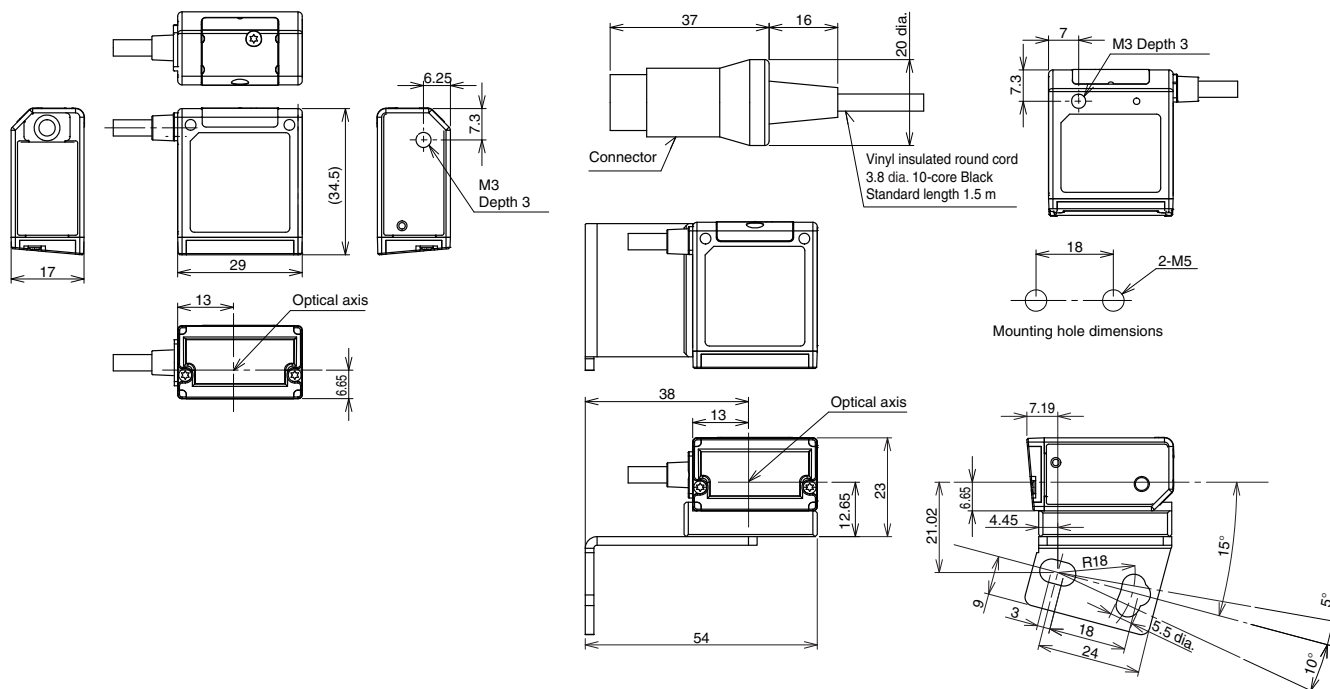

Safety Precautions for Laser Equipment

⚠ WARNING

Avoid eye exposure to direct or scattered radiation reflected by a mirror surface.
Laser beam emitted from a laser has high power density and may become blind when the beam is directed into eyes.



Laser Label Indications

This warning label is attached to the Bar Code Reader.
Never remove this label or place objects in front of it.



Related Manuals

| Man.No. | Model number | Manual |
|---------|--------------|---|
| Z334 | V500-R2 | Laser-Type Bar Code Reader V500-R2 Series User's Manual |



The Ultra-small Multi-code Reader That Can Handle Speed

Multi Code Reader
V400-R2 Series

NEW



Improves Machine Takt Time with the
Fastest Reading in the Class:
Reads Moving Objects at Up to 500 m/min*


It is not just the size that makes this Reader easy to build into equipment. It enables stable reading of moving objects on high-speed lines. Build it into equipment to read moving objects, which is achieved with a new algorithm.

* Performance may depend on the code that is read and the printing conditions.




Stable Reading of Imperfect Codes

The V400-R2 with its new algorithm is adept even the most imperfect codes. Even for codes that were previously difficult to read, you can change the exposure time and gain to achieve the optimum settings to enable reading.

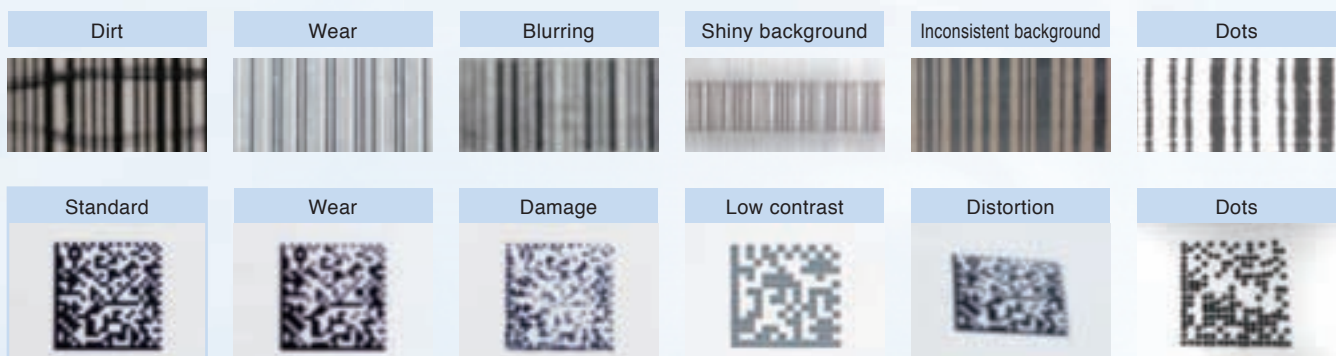

Distance Variations

There are two models in the lineup to let you select the field of view or installation distance that is best for the equipment type. Both models are the same size, so additional design work is not necessary to change the model.

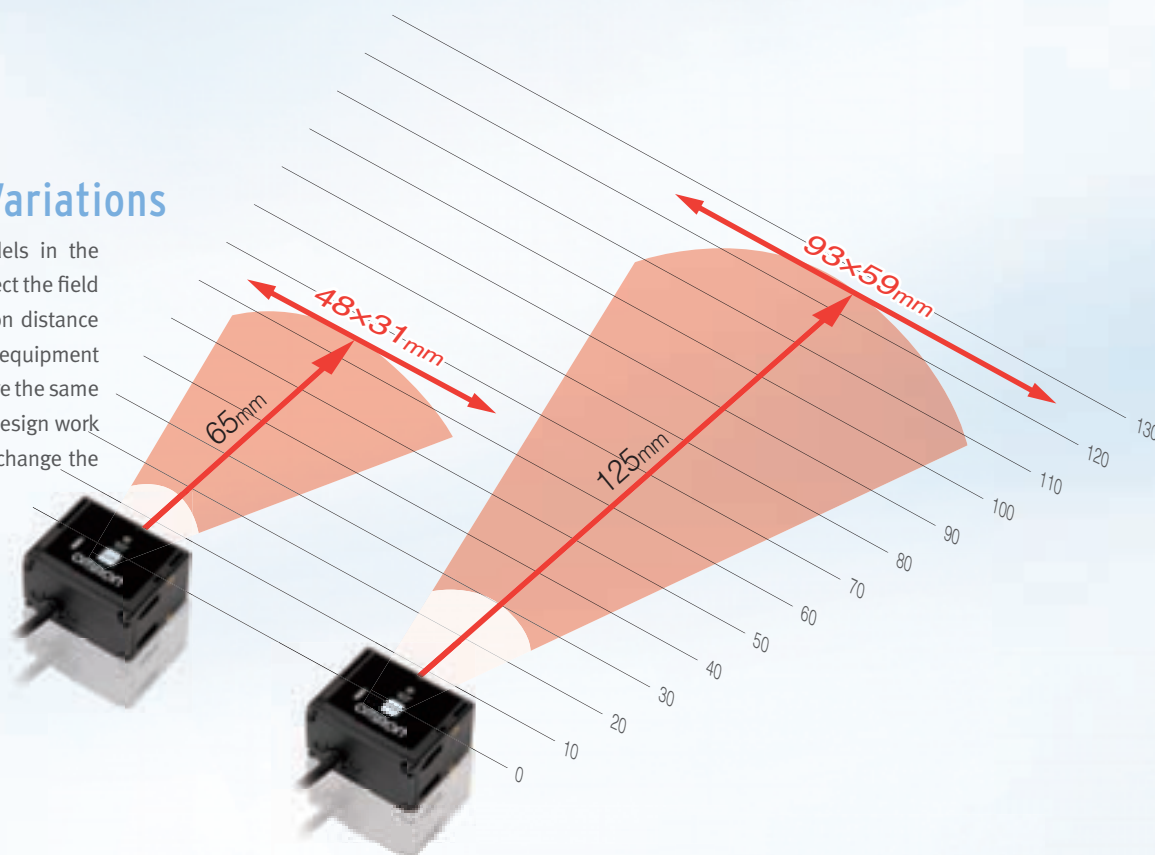


Reading Test Switch Provided

We achieved an operation that is simple enough for essentially anyone. Just press the Scan button on the Reader to perform a read test. The results are provided with the Read OK indicator and buzzer.



Aiming Positioning Function

A guide light lets you easily find the ideal installation position. You can easily and quickly position the codes with the aiming function.

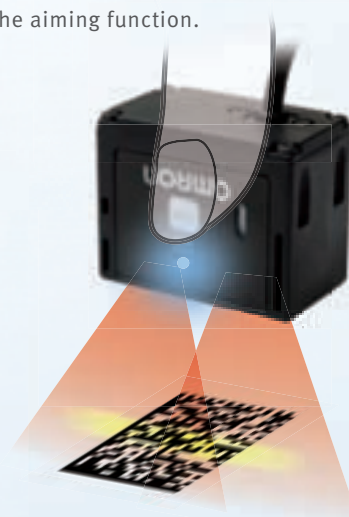

Body Resists Environments to IP65

IP65 protection is provided because that is generally the level that is required to build devices into equipment. That enables reliable application in harsh environments subject to water and mist.

Verification with Master Data

You can verify character strings to see if they match preset master data without a special device.

GS1-Databar (RSS) Supported

The data-rich GS1-Databar (RSS code) Bar Codes can also be read. This enables reliable applications in the pharmaceutical industry, where GS1-Databar (RSS code) Bar Codes are becoming popular.



Ordering Information

| Type | | Model |
|----------------------------|------------------------|--------------|
| Multi Code Reader | Working distance 65mm | V400-R2CF65 |
| | Working distance 125mm | V400-R2CF125 |
| OMRON PLC connecting cable | D-sub 9-pin, 0.8M | V509-W011 |
| | D-sub 9-pin, 5M | V509-W016 |
| PC/AT Connecting cable | D-sub 9-pin, 0.8M | V509-W011D |
| | D-sub 9-pin, 5M | V509-W016D |


Ratings and Performance

| Model | | V400-R2CF65 | V400-R2CF125 |
|--------------------------------|---|--|---|
| Direction of view | | Front view | |
| Applicable codes | Bar code | WPC(JAN/EAN/UPC), Codabar(NW-7), ITF, Industrial 2 of 5, Code39, Code93, Code128, GS1-128(EAN-128), GS1-Databar(RSS-14), GS1-Databar Limited(RSS Limited), GS1-Databar Expanded (RSS Expanded), GS1-Databar Composite(RSS Composite) | |
| | 2D code | QR code, DataMatrix(ECC200), MicroQR code, PDF417, MicroPDF417, AztecCode, MaxiCode, Codablock-F | |
| Reading performance (*) | Number of reading digits | No upper limit (depends on bar width and reading distance) | |
| | Light source | Two red LEDs (wave length: 617 nm) | |
| | Aiming light | One green LED (wave length: 528 nm) | |
| | Minimum resolution | Bar code: 0.076 mm 2D code: 0.169 mm | Bar code: 0.127 mm 2D code: 0.212 mm |
| | Image capture device | Monochrome CMOS | |
| | Effective number of pixels | 754 × 480 pixels | |
| | Working distance (WD) | 65mm | 125mm |
| | Field of view | Approximately 48 × 31(for WD = 65 mm) | Approximately 93 × 59(for WD = 125 mm) |
| | Pitch angle (α) | ±50° | |
| | Skew angle (β) | ±50° | |
| | Tilt angle (γ) | ±180° | |
| | Reading of bar codes on curved surfaces (R) | R ≥ 20mm (UPC 12 line) | |
| Interface | Communication specification | RS-232C | |
| | OK/NG outputs | NPN open collector output (cable work required) | |
| Function setting method | | Menu sheet reading method or host command method | |
| Functional specifications | Reading trigger | External trigger (Transistor input) Trigger by command (RS-232C) Trigger a test reading by pressing the SCAN button on the product | |
| | OK/NG signals | OK signal is turned on to indicate a successful read OK signal is turned on to indicate a successful read of registered label NG signal is turned on to indicate a successful read of a non-registered label | |
| | Indication LED | OK LED (green) illuminates to indicate a successful read | |
| | Buzzer | Notifies a successful reading with a buzzer sound (Muting available) | |
| Power supply specification | Power voltage | 4.5 to 5.5 VDC | |
| | Consumption current | During operation: 265 mA or less; during standby: 70 mA or less | |
| Environmental specifications | Ambient temperature range | At operation: 0 to + 45°C; At storage: -10 to + 60°C | |
| | Ambient humidity range | At operation and storage: 20 to 85% RH (with no icing or condensation) | |
| | Ambient atmosphere | No corrosive gases | |
| | Ambient light | Fluorescent lamp: 10,000lx or less, Sunlight: 100,000lx or less | |
| | Vibration resistance | 10 to 150 Hz, half amplitude 0.35 mm, 3 directions (X/Y/Z), 8 minutes each 10 times | |
| Degree of protection | | IP54 (IEC60529) | |
| Weight | Main unit only | Approximately 90 g | |
| | Including accessories | Approximately 200 g (including mounting bracket and screws) | |
| | Packaged weight | Approximately 280 g (including packing carton) | |
| Dimensions | Main unit | Approximately 41(W) × 33(D) × 24(H) mm | |
| | Packing carton | Approximately 240(W) × 110(D) × 40(H) mm | |
| Input/output connector | | Round DIN connector | |
| Code length | | Approximately 1.5 m | |
| Minimum bending radius of cord | | Approximately 23 mm | |
| Accessories | | Operation manual, menu sheet, mounting bracket, M2 × 6 screws (two), M5 × 10 screws (two) | |
| Material, Color | Case | PC, PET, black | |
| | Reading window | PMMA, transparent | |
| | Cable | Polyvinyl chloride (PVC), black | |
| | Mounting bracket | SUS304, silver | |

* Unless otherwise specified, the reading performance is defined with angle $\alpha = 0^\circ$, $\beta = +15^\circ$, $\gamma = 0^\circ$, $R = \infty$; illuminance: 100 to 2001x, reading rate: 90% or more.


●QR code is the registered trademark of DENSO WAVE.

Reading range performance (typical example)

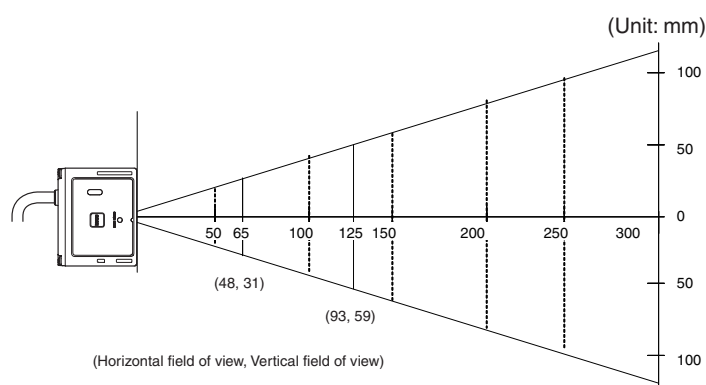

Explained with examples of following conditions:

- Contrast: MRD 63% (PCS = 0.9)
- Installation condition:
Pitch angle $\alpha = 0^\circ$, skew angle $\beta = 15^\circ$
Tilt angle $\gamma = 0^\circ$, curvature $R = \infty$
- Reading rate: 90% or more in 10 tries

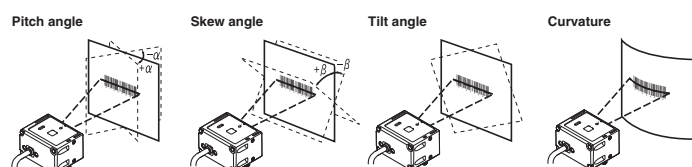

V400-R2CF125 2D code (typical example)

| Code types | Resolution | Reading distance | Field-of-view size at reading distance |
|-------------|------------|------------------|--|
| QR Code | 0.212 | 90 to 115 | 67×42 to 85×54 |
| | 0.381 | 55 to 195 | 41×26 to 144×91 |
| Data Matrix | 0.254 | 75 to 145 | 55×33 to 107×68 |
| | 0.169 | 80 to 140 | 59×38 to 104×66 |
| PDF417 | 0.254 | 60 to 195 | 44×28 to 144×91 |

Bar code (typical example)

| Code types | Resolution | Reading distance | Field-of-view size at reading distance |
|------------|------------|------------------|--|
| Code39 | 0.127 | 85 to 125 | 63×47 to 92×59 |
| | 0.254 | 65 to 205 | 48×31 to 152×96 |
| | 0.508 | 60 to 295 | 44×28 to 218×138 |
| Code128 | 0.2 | 75 to 185 | 55×35 to 137×87 |
| | 0.33 | 50 to 220 | 37×23 to 163×103 |

V400-R2CF65 2D code (typical example)

| Code types | Resolution | Reading distance | Field-of-view size at reading distance |
|-------------|------------|------------------|--|
| QR Code | 0.169 | 60 to 80 | 44×28 to 59×38 |
| | 0.381 | 35 to 115 | 26×16 to 85×54 |
| Data Matrix | 0.212 | 55 to 90 | 41×26 to 67×42 |
| | 0.127 | 55 to 80 | 41×26 to 59×38 |
| PDF417 | 0.254 | 55 to 115 | 41×26 to 85×54 |



Bar code (typical example)

| Code types | Resolution | Reading distance | Field-of-view size at reading distance |
|------------|------------|------------------|--|
| Code39 | 0.076 | 60 to 65 | 44×28 to 48×31 |
| | 0.127 | 55 to 85 | 41×26 to 63×40 |
| | 0.254 | 50 to 115 | 37×23 to 85×54 |
| Code128 | 0.18 | 45 to 100 | 33×21 to 74×47 |
| | 0.33 | 45 to 120 | 33×21 to 89×56 |

Dimensions

(Unit: mm)

Multi Code Reader V400-R2CF65/R2CF125

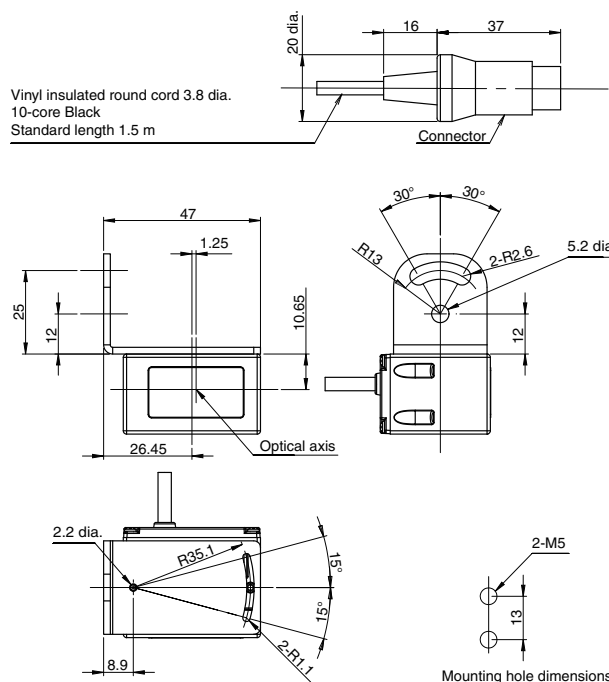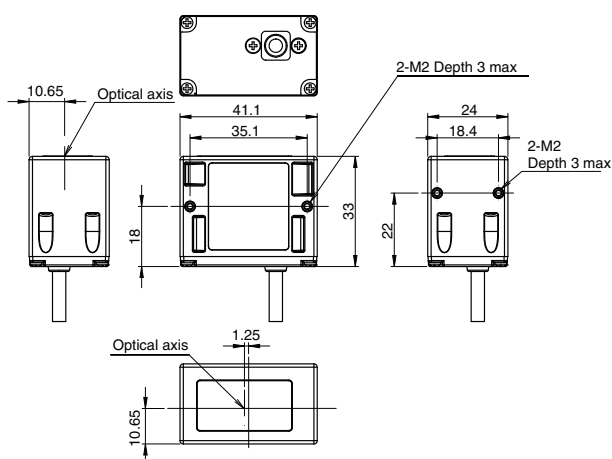

Related Manuals

| Man.No. | Model number | Manual |
|---------|--------------|--|
| Z333 | V400-R2 | Multi Code Reader V400-R2 Series User's Manual |

Multi Code Reader FQ-CR1 series



2D Code Reader for DPM FQ-CR2 series



Highly Advanced, Multi-functional Code Reader That Can Handle Low-contrast and Glossy Surfaces

Multi Code Reader FQ-CR1 Series



2D Code Reader for Direct Part Marking codes FQ-CR2 Series



FQ-CR1

FQ-CR2

High-power LEDs

The wider the field of view, the more difficult it is to maintain consistent lighting within the field, causing errors in reading. The built-in LEDs of the FQ-CR Series use a unique OMRON DR optical system for effective light usage to maintain consistent lighting within the field of view at a brightness that is four times that of previous models.



Previous Lighting



High-power Lighting

HDR Function to Cut Out Ambient Light Interference

The HDR (high dynamic range) function minimizes the influence of changes in lighting conditions and light reflection. This enables stable inspections even for materials that are difficult to light evenly, such as metal parts or glossy films, or in locations subject to external light interference.



Halation

Stable Detection for
Metal Surfaces Subject to
Gloss and Inconsistent
Lighting

Polarizing Filter to Cut Specular Reflections

A polarizing filter is included to cut specular reflection from glossy surfaces. This enables stable code reading even for metallic or other glossy surfaces.



Without Polarizing Filter




With Polarizing Filter

Connection of Up to 32 Readers

Up to 32 Code Readers can be controlled from the Touch Finder setup console. Expansion of required processes is simple.

Connect up to 32 readers

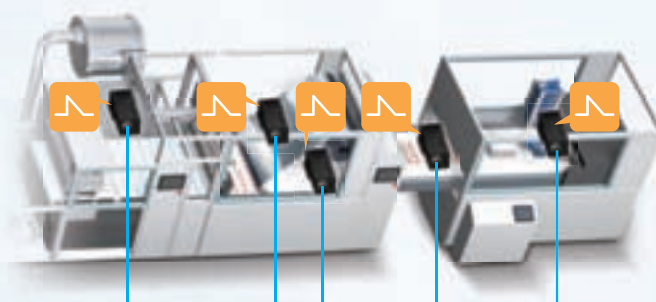

FQ-CR2

Removing Printing Irregularities or Noise

You can apply up to three of the four unique filters developed by OMRON in the desired order to remove printing irregularities and noise, in order to achieve a stable reading.

Combining Filtering

Erosion and dilation can be combined to connect dots without changing the dot thickness.



Types of Filtering

| | | | |
|--------|--|---------|--|
| Smooth | Smooths the image. | Erosion | For white codes, reduces the cell size. Effective for reading separated dot codes. |
| Dilate | For white codes, increases the cell size. Effective for reading codes with cell spreading. | Median | Removes noise. |

Retry Reading Until Successful

Code Readers must be able to read codes even for poor printing conditions. You can automatically retry reading while changing the exposure time and other reading conditions, even for changing workpieces or environments, to enable a stable reading.

The following retry functions are provided.

- 1 Retrying the Specified Number of Times with the Same Conditions**
 Reading is performed the specified number of times for the same scene.
- 2 Retrying While External Trigger Is Input**
 Reading is performed until successful, as long as an external level trigger is input.
- 3 Retrying While Changing the Shutter Speed**
 Reading is performed for the same scene while changing the exposure time in stages.
- 4 Retrying While Changing the Reading Conditions**
 When reading DPM codes, inconsistencies in printing conditions can result in NGs if reading is performed with only one set of reading settings. The FQ-CR allows you to register up to 32 sets of reading conditions as scenes and retry reading while changing the scenes in order. The system automatically determines the scenes with the highest usage rates and changes the order to start with them to flexibly handle changes in reading conditions. Of course you can specify a fixed order if required.


Register 32 sets of reading conditions.
Rapidly switch to the optimum reading conditions.



FQ-CR1

Verification with Master Data

You can verify character strings to see if they match preset master data without a special device.

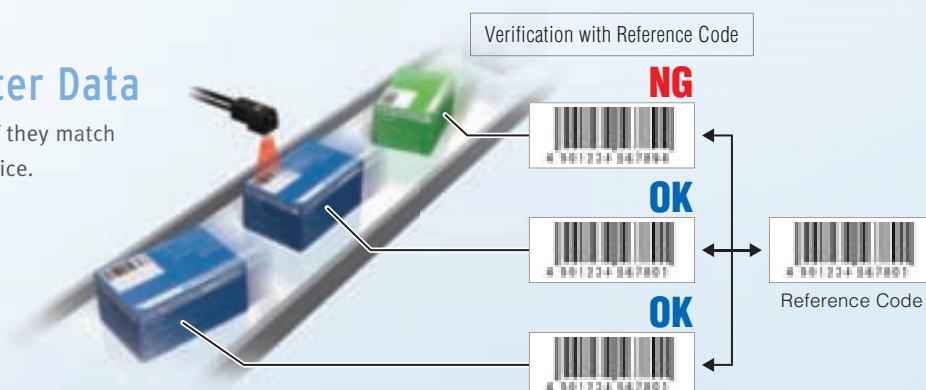


Ordering Information


Code Reader

(Unit: mm)


Narrow View




Standard



Wide View(Long-distance)



(Short-distance)



| | 2D CodeReader | Multi Code Reader |
|-----|------------------|----------------------|
| NPN | FQ-CR20010F-M | FQ-CR10010F-M |
| PNP | FQ-CR25010F-M | FQ-CR15010F-M |

| | 2D CodeReader | Multi Code Reader |
|-----|------------------|----------------------|
| NPN | FQ-CR20050F-M | FQ-CR10050F-M |
| PNP | FQ-CR25050F-M | FQ-CR15050F-M |

| | 2D CodeReader | Multi Code Reader |
|-----|------------------|----------------------|
| NPN | FQ-CR20100F-M | FQ-CR10100F-M |
| PNP | FQ-CR25100F-M | FQ-CR15100F-M |

| | 2D CodeReader | Multi Code Reader |
|-----|------------------|----------------------|
| NPN | FQ-CR20100N-M | FQ-CR10100N-M |
| PNP | FQ-CR25100N-M | FQ-CR15100N-M |

Note: Tolerance (field of view): $\pm 10\%$ max.

Touch Finder

| Type | Model |
|-----------------|---------|
| DC power supply | FQ2-D30 |
| AC/DC/battery | FQ2-D31 |

Cables

| Type | Cable length | Model |
|---|--------------|----------|
| FQ Ethernet Cables (connect Sensor to Touch Finder, Sensor to PC) | 2m | FQ-WN002 |
| | 5m | FQ-WN005 |
| | 10m | FQ-WN010 |
| | 20m | FQ-WN020 |
| I/O Cables | 2m | FQ-WD002 |
| | 5m | FQ-WD005 |
| | 10m | FQ-WD010 |
| | 20m | FQ-WD020 |


Refer to the FQ2 Smart Camera Catalog (Cat. No. Q193) for other devices.

Dimensions

(Unit: mm)

Code Reader

FQ-CR

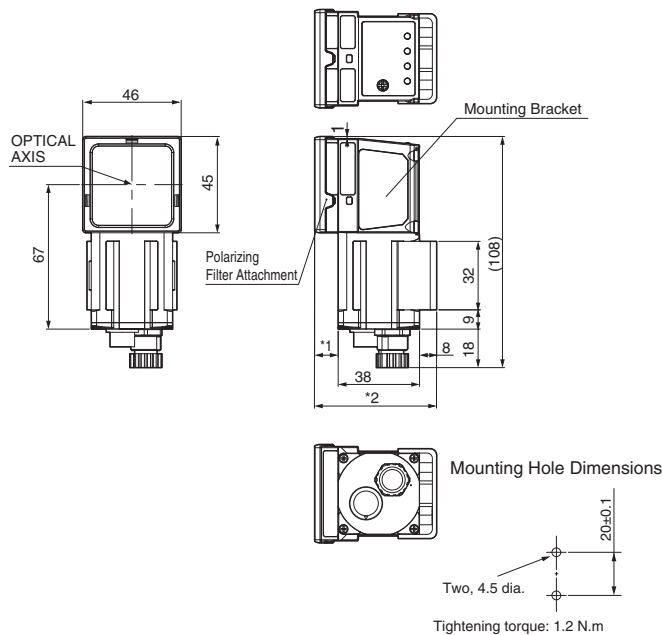

| Type | Model | Note 1. | Note 2. |
|--------------------------|--|---------|---------|
| Narrow View, Standard | FQ-CR1□010F-M/-CR2□010F-M/ -CR1□050F-M/-CR2□050F-M | 11 | 57 |
| Wide View | FQ-CR1□100F-M/-CR2□0100F-M/ -CR1□100N-M/-CR2□100N-M | 3 | 49 |

Ratings and Performance

Code Reader

| Item | | Type | 2D Code Reader | Multi Code Reader |
|-----------------------------|------------------------------------|--|---|---|
| Model | NPN | | FQ-CR20□□□□-M | FQ-CR10□□□□-M |
| | PNP | | FQ-CR25□□□□-M | FQ-CR15□□□□-M |
| Field of view | | | Refer to Ordering Information on p.14 (Tolerance (field of view): ±10% max.) | |
| Installation distance | | | | |
| Minimum resolution | | | FQ-CR2□□010F-M/-CR1□□010F-M: 0.040mm FQ-CR2□□050F-M/-CR1□□050F-M: 0.070mm FQ-CR2□□100F-M/-CR1□□100F-M: 0.282mm FQ-CR2□□100N-M/-CR1□□100N-M: 0.155mm | |
| Main functions | Code | | 2D Code (DataMatrix (EC200), QR Code) | 2D Code (DataMatrix (EC200), QR Code, MicroQR Code, PDF417, MicroPDF417, GS1-Data Matrix Bar code (JAN/EAN/UPC, Code39, Codabar (NW-7), ITF (Interleaved 2 of 5), Code 93, Code128/GS1-128, GS1 DataBar* (Truncated, Stacked, Omni-directional, Stacked Omni-directional, Limited, Expanded and Expanded Stacked), Pharmacode and GS1-128 Composite Code (CC-A, CC-B, CC-C)) |
| | | | | |
| | Image filter | Filter function (Smooth, Dilate, Erosion, Median), Retry function, Code Error Correction Position Display | None | |
| | Verification function | None | Supported | |
| | Number of simultaneous inspections | 32 | | |
| Number of registered scenes | 32 | | | |
| Image input | Image filter | High dynamic range (HDR), polarizing filter (attachment) | | |
| | Image elements | 1/3-inch monochrome CMOS | | |
| | Shutter | 1/250 to 1/32,258 s | 1/250 to 1/30,000 s | |
| | Processing resolution | 752 × 480 | | |
| Lighting | Lighting method | Pulse | | |
| | Lighting color | White | | |
| Data logging | Measurement data | In Code Reader:1,000 items (If a Touch Finder is used, results can be saved up to the capacity of an SD card.) | | |
| | Images | In Code Reader:20 images (If a Touch Finder is used, images can be saved up to the capacity of an SD card.) | | |
| Measurement trigger | | | External trigger (single or continuous), Communications trigger (Ethernet TCP no-protocol) | |
| I/O specifications | Input signals | 7 signals • Single measurement input (TRIG) • Control command inputs (IN0 to IN5) | | |
| | Output signals | 3 signals • Control output (BUSY) • Overall judgement output (OR) • Error output (ERROR) Note: The three output signals can be allocated for the judgements of individual inspection items. | | |
| | Ethernet specification | 100BASE-TX/10BASE-T | | |
| | Communications | Ethernet TCP no-protocol | | |
| Ratings | Power supply voltage | 21.6 to 26.4 VDC (including ripple) | | |
| | Current consumption | 2.4 A max. | | |
| Environmental immunity | Ambient temperature range | Operating: 0 to 50°C Storage: -25 to 65°C (with no icing or condensation) | | |
| | Ambient humidity range | Operating and storage: 35% to 85% (with no condensation) | | |
| | Ambient atmosphere | No corrosive gas | | |
| | Vibration resistance (destruction) | 10 to 150 Hz, single amplitude: 0.35 mm, X/Y/Z directions 8 min each, 10 times | | |
| | Shock resistance (destruction) | 150 m/s² 3 times each in 6 direction (up, down, right, left, forward, and backward) Degree of protection | | |
| Degree of protection | | | IEC 60529 IP67 (Except when Polarizing Filter Attachment is mounted.) | |
| Materials | | | Code Reader: PBT, PC, SUS Mounting Bracket: PBT Polarizing Filter Attachment: PBT, PC Ethernet connector: Oil-resistance vinyl compound I/O connector: Lead-free heat-resistant PVC | |
| Weight | | | Narrow View/Standard View:Approx.160 g Wide View:Approx.150 g | |
| Accessories | | | • Mounting Bracket (FQ-XL) (1) • Polarizing Filter Attachment (FQ-XF1) (1) • Instruction Manual • Member registration sheet | |
| LED class | | | Risk Group 2 (IEC62471-2) | |
| Applicable standards | | | EC Directive No.2004/108/EC and EN standard EN 61326-1 | |

Related Manuals

| Man.No. | Model number | Manual |
|---------|--------------|--|
| Z329 | FQ-CR1-M | Fixed Mount Multi Code Reader FQ-CR1-M User's manual |
| Z316 | FQ-CR2-M | Fixed Mount 2D Code Reader FQ-CR2-M User's manual |



An OCR Sensor with Built-in Dictionary for Reading Expiration Dates and Lot Numbers

Optical Character Recognition Sensor
FQ-CH Series




Approx. 80 Built-in Fonts

The large amount of data in the built-in dictionary contains approximately 80 different fonts that are used on FA sites. Variations for worn characters, blurring, distortion, different backgrounds, and size changes have been included to enable stable and highly accurate reading with the built-in dictionary even for some variations in the characters. It is not necessary to set parameters to compensate for character contrast or positional offsetting.

Time is required for character registration in the dictionary.

① Draw boxes around characters.




Up to four lines can be read. The following characters can be read.

- Letters of the alphabet: A to Z (uppercase)
- Numbers: 0 to 9
- Symbols: ' - . : /

② Set the character formats.

Top: Tentatively read character string



Bottom: Character format

The character format is displayed from the read results. Set the character format according to the format of the characters to read.


- Letter: \$
- Number: #
- Symbol: @
- Not read: *
- Number or letter: ?

③ Press the TEACH Button.







The character extraction conditions are automatically adjusted according to the conditions of the printed characters.

Reading is started.



Different printers use different printing devices.


Characters from most printers can be read, including dot and impact printers. **Handles Approx. 80 Fonts**




Worn and inclined characters cannot be read.

Unique recognition technology enables stable recognition of worn or distorted characters.


Worn Characters



Inclined Characters



Small Characters



Utilities That Make Everyday Operation Easier


Verification to Reduce Setup Work

You can verify the read character data against the character data registered in the master data. Master data registration is easy. A character string is read and the result is registered in the master data. This reduces setting time and mistakes in setting character strings. You can register up to 32 character strings in the master data and easily change the current master data with an external signal.


| | | |
|-----------------|---------|---|
| 0.Master data 0 | SL1028 | ^ |
| 1.Master data 1 | 201211 | |
| 2.Master data 2 | 28L | |
| 3.Master data 3 | WP31:06 | |
| 4.Master data 4 | ???:?? | |
| 5.Master data 5 | HP/2013 | v |

Registration in Model Dictionary

You can add characters to the dictionary. You can achieve reliable operation when reading special fonts even if reading was not stable with the default settings.



Registered

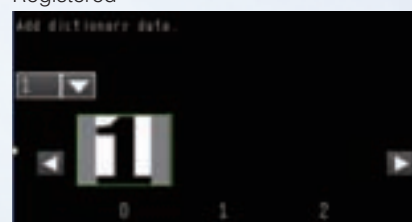

Logging Images and Reading Data

The read images and reading results can be temporarily saved in the sensor, and up to 10,000 images and 10,000,000 reading results can be saved in a 4-GB SD card. You can select logging both OK and NG results or only NG results to aid in traceability.

Sensor



Images: 20
Reading results: 1,000 max.

Touch Finder




Images: Approx. 10,000
Reading results: Approx. 10,000,000
(with 4-GB SD card)

New OCR Algorithm: Matching with Structural Models

Even in cases like the following one, where character registration is required for image matching methods, no character registration is required to read the characters with this new method, which matches structural models of characteristic points.

Structural models record the characteristics of each character in approximately 80 fonts.




The position and structure of characteristic points are used to recognize characters.

Background Changes



Size and Font Changes



Worn Characters



Inclined Characters



Ordering Information

Optical Character Recognition Sensor





(Unit: mm)

Narrow View

Standard

Wide View(Long-distance)

(Short-distance)



| Field of view | | Narrow View | Standard View | Wide View (Long-distance) | Wide View (Short-distance) |
|---------------|-----|----------------|----------------|---------------------------|----------------------------|
| Monochrome | NPN | FQ2-CH10010F-M | FQ2-CH10050F-M | FQ2-CH10100F-M | FQ2-CH10100N-M |
| | PNP | FQ2-CH15010F-M | FQ2-CH15050F-M | FQ2-CH15100F-M | FQ2-CH15100N-M |

Touch Finder

| Type | Model |
|-----------------|---------|
| DC power supply | FQ2-D30 |
| AC/DC/battery | FQ2-D31 |

Cables


| Type | Cable length | Model |
|--|--------------|----------|
| FQ Ethernet Cables (connect Sensor to Touch Finder, Sensor to PC) | 2m | FQ-WN002 |
| | 5m | FQ-WN005 |
| | 10m | FQ-WN010 |
| | 20m | FQ-WN020 |
| I/O Cables | 2m | FQ-WD002 |
| | 5m | FQ-WD005 |
| | 10m | FQ-WD010 |
| | 20m | FQ-WD020 |

Refer to the FQ2 Smart Camera Catalog (Cat. No. Q193) for other devices.

Dimensions

Optical Character Recognition Sensor

FQ2-CH

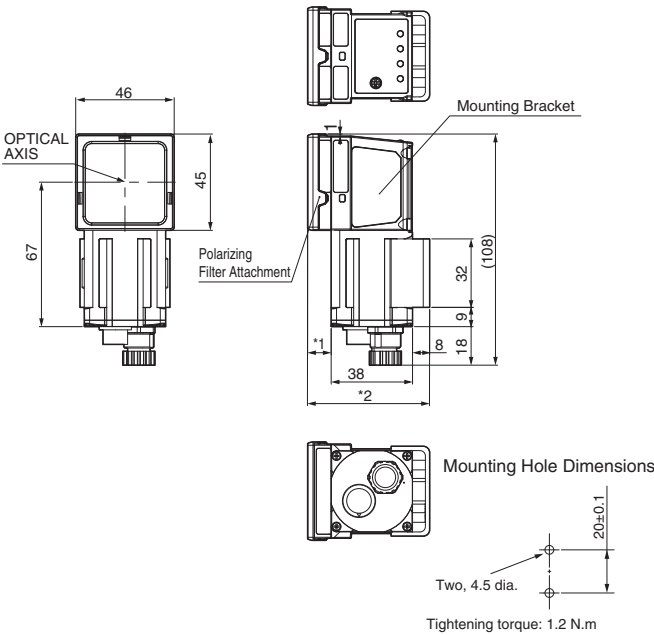

| Type | Model | Note 1. | Note 2. |
|-----------------------|----------------------------|---------|---------|
| Narrow View, Standard | FQ2-CH1□010F-M/-CH1□050F-M | 11 | 57 |
| Wide View | FQ2-CH1□100F-M/-CH1□100N-M | 3 | 49 |

Ratings and Performance

| Item | | Optical Character Recognition Sensor |
|----------------------------------|-------------------------------------|--|
| Model | NPN | FQ2-CH10□□□□-M |
| | PNP | FQ2-CH15□□□□-M |
| Field of view | | Refer to Ordering Information on p.18. (Tolerance (field of view): ±10% max.) |
| Installation distance | | |
| Main functions | Inspection items | OCR <ul style="list-style-type: none"> • Alphabet A to Z • Number 0 to 9 • Symbol ' - . : / Model dictionary |
| | Image filter | Weak smoothing, Strong smoothing, Dilate, Erosion, Median, Extract edges, Extract horizontal edges, Extract vertical edges, Enhance edges, Background suppression |
| | Verification function | Supported |
| | Retry function | Normal retry, Exposure retry, Scene retry, Trigger retry |
| | Number of simultaneous measurements | 32 |
| | Position compensation | Supported (360° Model position compensation, Edge position compensation) |
| | Number of registered scenes | 32 |
| Image input | Image processing method | Monochrome |
| | Image filter | High dynamic range (HDR) and polarizing filter (attachment) |
| | Image elements | 1/3-inch Monochrome CMOS |
| | Shutter | Built-in lighting ON: 1/250 to 1/50,000 s Built-in lighting OFF: 1/1 to 1/50,000 s |
| | Processing resolution | 752 × 480 |
| | Partial input function | Supported horizontally only |
| Lighting | Lighting method | Pulse |
| | Lighting color | White |
| Data logging | Measurement data | In Sensor: 1,000 items (If a Touch Finder is used, results can be saved up to the capacity of an SD card.) |
| | Images | In Sensor: 20 images (If a Touch Finder is used, images can be saved up to the capacity of an SD card.) |
| Auxiliary function | | Math (arithmetic, calculation functions, trigonometric functions, and logic functions) |
| Measurement trigger | | External trigger (single or continuous) Communications trigger (Ethernet TCP no-protocol, Ethernet UDP no-protocol, Ethernet FINS/TCP no-protocol, EtherNet/IP, PLC Link, or PROFINET) |
| I/O specifications | Input signals | 7 signals <ul style="list-style-type: none"> • Single measurement input (TRIG) • Control command input (IN0 to IN5) |
| | Output signals | 3 signals <ul style="list-style-type: none"> • Control output (BUSY) • Overall judgement output (OR) • Error output (ERROR) Note: The assignments of the three output signals (OUT0 to OUT2) can be changed to the individual judgements of the inspection items, the image input ready output (READY), or the external lighting timing output (STGOUT). |
| | Ethernet specifications | 100Base-TX/10Base-T |
| | Communications | Ethernet TCP no-protocol, Ethernet UDP no-protocol, Ethernet FINS/TCP no-protocol, EtherNet/IP, PLC Link, or PROFINET |
| | I/O expansion | Possible by connecting FQ-SDU1_ Sensor Data Unit. 11 inputs and 24 outputs |
| | RS-232C | Possible by connecting FQ-SDU2_ Sensor Data Unit. 8 inputs and 7 outputs |
| Ratings | Power supply voltage | 21.6 to 26.4 VDC (including ripple) |
| | Current consumption | 2.4 A max. |
| Environmental immunity | Ambient temperature range | Operating: 0 to 40°C, Storage: -25 to 65°C (with no icing or condensation) |
| | Ambient humidity range | Operating and storage: 35% to 85% (with no condensation) |
| | Ambient atmosphere | No corrosive gas |
| | Vibration resistance(destruction) | 10 to 150 Hz, single amplitude: 0.35 mm, X/Y/Z directions 8 min each, 10 times |
| | Shock resistance(destruction) | 150 m/s ² 3 times each in 6 direction (up, down, right, left, forward, and backward) |
| | Degree of protection | IEC 60529 IP67 (Except when Polarizing Filter Attachment is mounted or connector cap is removed.) |
| Materials | | Sensor: PBT, PC, SUS, Mounting Bracket: PBT, Polarizing Filter Attachment: PBT, PC Ethernet connector: Oil-resistance vinyl compound, I/O connector: Lead-free heat-resistant PVC |
| Weight | | Narrow View/Standard View: Approx. 160 g Wide View: Approx. 150 g |
| Accessories included with sensor | | Mounting Bracket (FQ-XL) (1), Polarizing Filter Attachment (FQ-XF1) (1), Instruction Manual, Member Registration Sheet |
| LED class | | Risk Group 2 (IEC 62471) |
| Applicable standards | | EC Directive No.2004/108/EC and EN standard EN 61326-1 |

Related Manuals

| Man.No. | Model number | Manual |
|---------|--------------------|---|
| Z337 | FQ2-S1/S2/S3/S4/CH | Smart Camera FQ2-S/CH Series User's manual |
| Z338 | FQ2-S1/S2/S3/S4/CH | Smart Camera FQ2-S/CH Series User's manual (Communication Settings) |

* EtherNet/IP™ is the trademark of ODVA.

Smart Camera



The High End of OMRON Tracing Products That Operates as a Code Reader or OCR and Also Performs Inspections

Smart Camera FQ2-S4 Series



A Complete Range of Top-end Functions

A complete set of functions for stable reading even with low contrast or shiny surfaces along with high-demand communications interfaces. Printed character checking, Bar Code checking, packaging condition inspections, and much more with just one Smart Camera.

| | | | | | | | | | | | |
|--------------------|--------------------------------------|----------------------|---------------------|-------------|--------------------|------------------------------|----------------------------|--------------------------------|--------------------------------------|------------------------------------|-----------------------------|
| Code Reader | High-speed image processor | Megapixel capacity | Real color | Monochrome | C -mount | 9 inspection items | 11 image filters | 32 -camera expansion | 360° position compensation | Ultra-wide field of view | DAP partial input |
| OCR | HDR | Sub-pixel processing | High-power lighting | IP67 | E-IP | PLC Link | FINS | 34 I/O points | RS-232C | Password | Image inversion |

Reads both Codes and Characters in One View with 1.3 Megapixels

It is generally said that a resolution of 700,000 pixels or higher is required to read both codes and characters in one field of view. The FQ2-S4 Series includes 760,000-pixel models with built-in lighting as well as 1,300,000-pixel models with C-mounts for a flexible selection of fields of view so you can stably read information-heavy codes with one read image.

Megapixel CMOS Sensor



| | |
|---------------------|-------------------|
| 1.3 Megapixels | 760,000 Pixels |
| Color | Monochrome |
| Color | Monochrome |
| Sensor with C-mount | Integrated Sensor |

350,000-pixel Image





1,300,000-pixel Image





Code and Character Verification

OCR and Code Reading inspection items can be combined to read codes and verify them against character strings all within the FQ2. No programming of external devices is required.

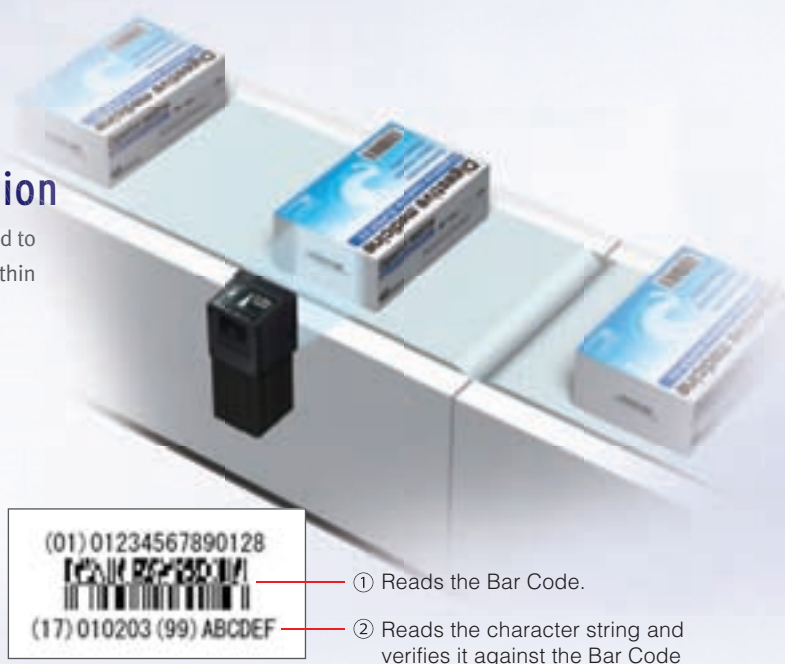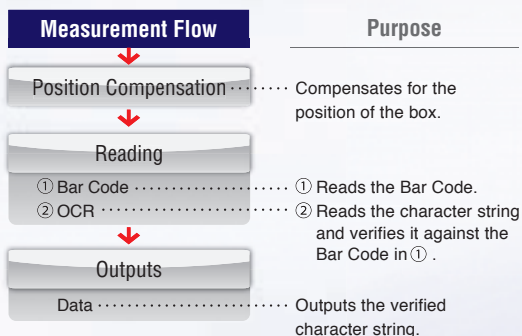



Character Verification and Label Position Inspection

Although previously performed as separate processes, character verification and inspections can now both be performed with one FQ2 Sensor. This helps you reduce costs and save space.

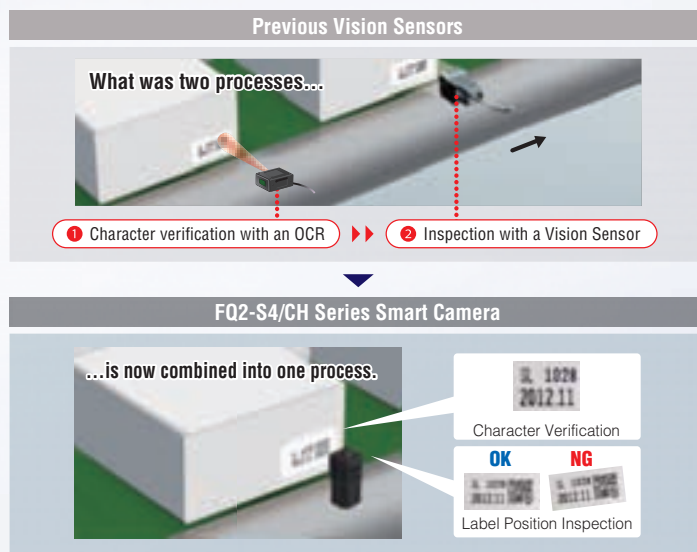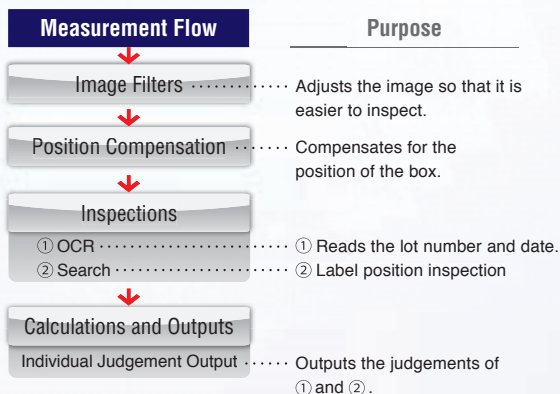

Code Reading and Component Positioning

The Sensor can measure angles of rotation and other position information, so it can also be used for positioning. Inspections can also be performed for the number and size of holes along with the position information.

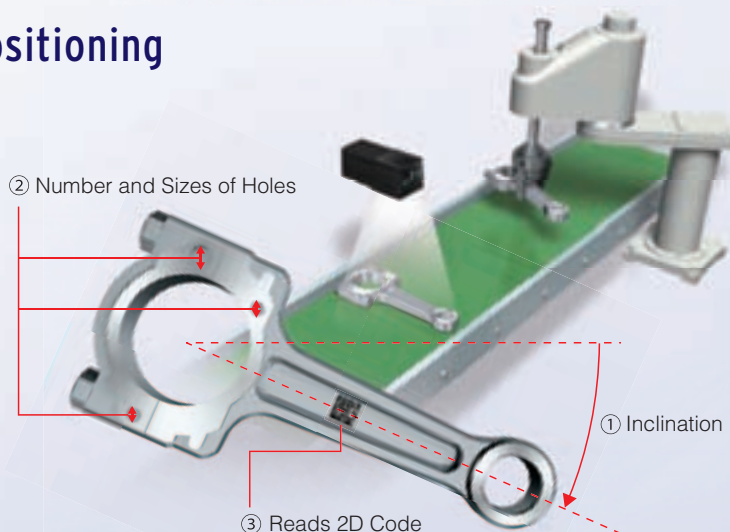
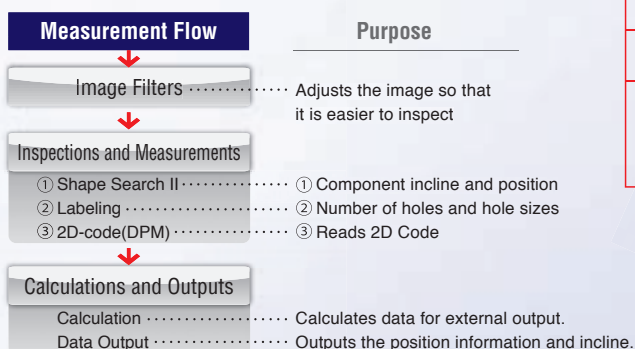


Ordering Information

Smart Camera

[Standard Type]


(Unit: mm)

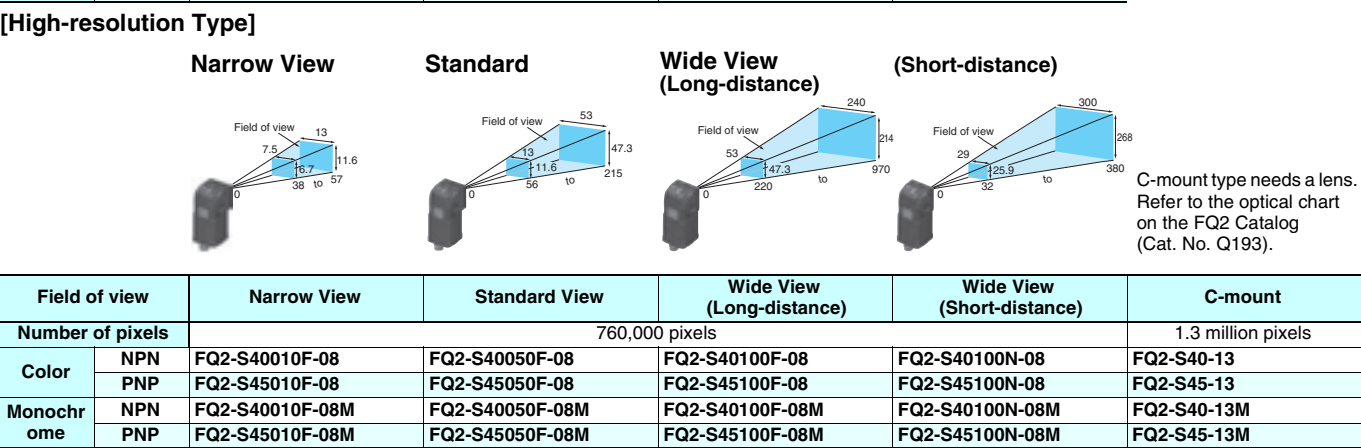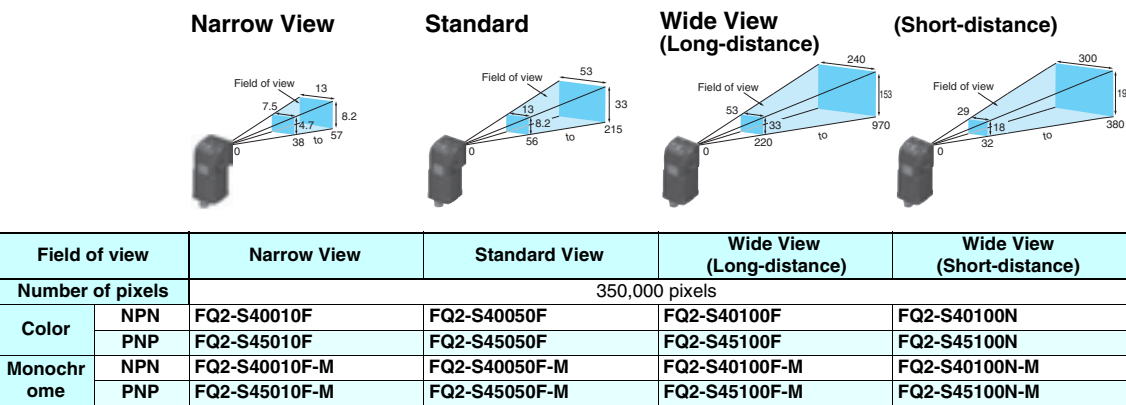

Refer to the FQ2 Smart Camera Catalog (Cat. No. Q193) for other devices.

Dimensions

(Unit: mm)

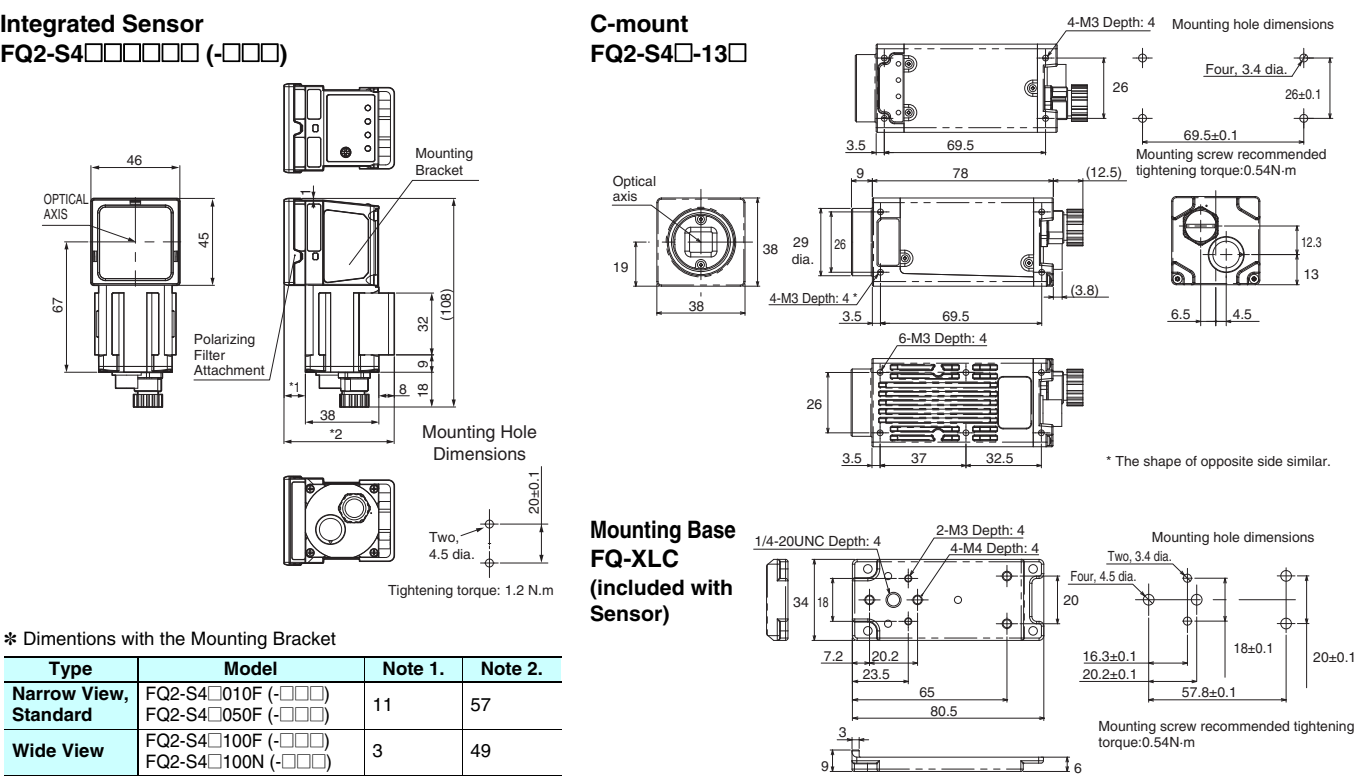

Ratings and Performance

Sensor [Inspection/ID Model FQ2-S4 Series]

| Item | | Inspection/ID Model | | | | | |
|----------------------------------|-------------------------------------|--|--------------------------|---------------------|--|---|--------------------------|
| Model | NPN | FQ2-S40□□□□ | FQ2-S40□□□□-M | FQ2-S40□□□□-08 | FQ2-S40□□□□-08M | FQ2-S40□□□□-13 | FQ2-S40□□□□-13M |
| | PNP | FQ2-S45□□□□ | FQ2-S45□□□□-M | FQ2-S45□□□□-08 | FQ2-S45□□□□-08M | FQ2-S45□□□□-13 | FQ2-S45□□□□-13M |
| Field of view | | Refer to Ordering Information on p.22. (Tolerance (field of view): ±10% max.) | | | | Select a lens according to the field of view and installation distance. Refer to the optical chart on the FQ2 Catalog (Cat. No. Q193). | |
| Installation distance | | | | | | | |
| Main functions | Inspection items | Search, shape search II, sensitive search, area, color data, edge position, edge pitch, edge width, labeling, OCR *1, Bar code *2, 2D-code *2, 2D-code(DMP) *3, and Model dictionary | | | | | |
| | Number of simultaneous measurements | 32 | | | | | |
| | Position compensation | Supported (360° Model position compensation, Edge position compensation) | | | | | |
| | Number of registered scenes | 32 *4 | | | | | |
| | Calibration | Supported | | | | | |
| | Retry function | Normal retry, Exposure retry, Scene retry, Trigger retry | | | | | |
| Image input | Image processing method | Real color | Monochrome | Real color | Monochrome | Real color | Monochrome |
| | Image filter | High dynamic range (HDR), image adjustment(Color Gray Filter, Weak smoothing, Strong smoothing, Dilate, Erosion, Median, Extract edges, Extract horizontal edges, Extract vertical edges, Enhance edges, Background suppression), polarizing filter (attachment), and white balance (Sensors with Color Cameras only) | | | | | |
| | Image elements | 1/3-inch color CMOS | 1/3-inch Monochrome CMOS | 1/2-inch color CMOS | 1/2-inch Monochrome CMOS | 1/2-inch color CMOS | 1/2-inch Monochrome CMOS |
| | Shutter | Built-in lighting ON: 1/250 to 1/50,000 s Built-in lighting OFF: 1/1 to 1/50,000 s | | | Built-in lighting ON: 1/250 to 1/60,000 s Built-in lighting OFF: 1/1 to 1/4,155 s | | 1/1 to 1/4,155 s |
| | Processing resolution | 752 × 480 | | | 928 × 828 | | 1280 × 1024 |
| | Partial input function | Supported horizontally only. | | | Supported horizontally and vertically | | |
| | Lens mounts | --- | | | | C-mount | |
| Lighting | Lighting method | Pulse | | | | --- | |
| | Lighting color | White | | | | --- | |
| Data logging | Measurement data | In Sensor: 1,000 items (If a Touch Finder is used, results can be saved up to the capacity of an SD card.) | | | | | |
| | Images | In Sensor: 20 images (If a Touch Finder is used, images can be saved up to the capacity of an SD card.) | | | | | |
| Auxiliary function | | Math (arithmetic, calculation functions, trigonometric functions, and logic functions) | | | | | |
| Measurement trigger | | External trigger (single or continuous) Communications trigger (Ethernet TCP no-protocol, Ethernet UDP no-protocol, Ethernet FINS/TCP no-protocol, EtherNet/IP, PLC Link, or PROFINET) | | | | | |
| I/O specifications | Input signals | 7 signals • Single measurement input (TRIG) • Control command input (IN0 to IN5) | | | | | |
| | Output signals | 3 signals • Control output (BUSY) • Overall judgement output (OR) • Error output (ERROR) Note: The assignments of the three output signals (OUT0 to OUT2) can be changed to the individual judgements of the inspection items, the image input ready output (READY), or the external lighting timing output (STGOUT). | | | | | |
| | Ethernet specifications | 100Base-TX/10Base-T | | | | | |
| | Communications | Ethernet TCP no-protocol, Ethernet UDP no-protocol, Ethernet FINS/TCP no-protocol, EtherNet/IP, PLC Link, or PROFINET | | | | | |
| | I/O expansion | Possible by connecting FQ-SDU1_ Sensor Data Unit. 11 inputs and 24 outputs | | | | | |
| | RS-232C | Possible by connecting FQ-SDU2_ Sensor Data Unit. 8 inputs and 7 outputs | | | | | |
| Ratings | Power supply voltage | 21.6 to 26.4 VDC (including ripple) | | | | | 0.3 A max. |
| | Current consumption | 2.4 A max. | | | | | |
| Environmental immunity | Ambient temperature range | Operating: 0 to 40°C, Storage: -25 to 65°C (with no icing or condensation) | | | | | |
| | Ambient humidity range | Operating and storage: 35% to 85% (with no condensation) | | | | | |
| | Ambient atmosphere | No corrosive gas | | | | | |
| | Vibration resistance (destruction) | 10 to 150 Hz, single amplitude: 0.35 mm, X/Y/Z directions 8 min each, 10 times | | | | | |
| | Shock resistance (destruction) | 150 m/s ² 3 times each in 6 direction (up, down, right, left, forward, and backward) | | | | | |
| | Degree of protection | IEC 60529 IP67 (Except when Polarizing Filter Attachment is mounted or connector cap is removed.) | | | | | IEC 60529 IP40 |
| Materials | | Sensor: PBT, PC, SUS Mounting Bracket: PBT Polarizing Filter Attachment: PBT, PC Ethernet connector: Oil-resistance vinyl compound I/O connector: Lead-free heat-resistant PVC | | | | Cover: Zinc-plated steel, Thickness: 0.6 mm Case: Aluminum diecast alloy (ADC-12) Mounting base: Polycarbonate ABS | |
| Weight | | Narrow View/Standard View:Approx.160 g Wide View:Approx.150 g | | | | Approx. 160 g without base, Approx. 185 g with base | |
| Accessories included with sensor | | Mounting Bracket (FQ-XL)(1) Polarizing Filter Attachment (FQ-XF1) (1) Instruction Manual, Member Registration Sheet | | | | Mounting Base (FQ-XLC) (1) Mounting Screw (M3 × 8mm)(4) Instruction Manual, Member Registration Sheet | |
| LED class | | Risk Group 2 (IEC 62471) | | | | --- | |
| Applicable standards | | EC Directive No.2004/108/EC and EN standard EN 61326-1 | | | | | |

*1. The types of characters to be read are the same as those of FQ2-CH Optical Character Recognition Sensor (p.19).

*2. The types of cedes to be read are the same as those of FQ-CR1 Multi Code Reader (p.15).

*3. The types of cedes to be read are the same as those of FQ-CR2 2D Code Reader (p.15).

*4. Depending on the settings, the number of scenes that can be registered is reduced due to memory restrictions.

Related Manuals

| Man.No. | Model number | Manual |
|---------|--------------------|---|
| Z337 | FQ2-S1/S2/S3/S4/CH | Smart Camera FQ2-S/CH Series User's manual |
| Z338 | FQ2-S1/S2/S3/S4/CH | Smart Camera FQ2-S/CH Series User's manual (Communication Settings) |

READ AND UNDERSTAND THIS CATALOG

Please read and understand this catalog before purchasing the products. Please consult your OMRON representative if you have any questions or comments.

WARRANTY

OMRON's exclusive warranty is that the products are free from defects in materials and workmanship for a period of one year (or other period if specified) from date of sale by OMRON.

OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, REGARDING NON-INFRINGEMENT, MERCHANTABILITY, OR FITNESS FOR PARTICULAR PURPOSE OF THE PRODUCTS. ANY BUYER OR USER ACKNOWLEDGES THAT THE BUYER OR USER ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE. OMRON DISCLAIMS ALL OTHER WARRANTIES, EXPRESS OR IMPLIED.

LIMITATIONS OF LIABILITY

OMRON SHALL NOT BE RESPONSIBLE FOR SPECIAL, INDIRECT, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED ON CONTRACT, WARRANTY, NEGLIGENCE, OR STRICT LIABILITY.

In no event shall responsibility of OMRON for any act exceed the individual price of the product on which liability is asserted.

IN NO EVENT SHALL OMRON BE RESPONSIBLE FOR WARRANTY, REPAIR, OR OTHER CLAIMS REGARDING THE PRODUCTS UNLESS OMRON'S ANALYSIS CONFIRMS THAT THE PRODUCTS WERE PROPERLY HANDLED, STORED, INSTALLED, AND MAINTAINED AND NOT SUBJECT TO CONTAMINATION, ABUSE, MISUSE, OR INAPPROPRIATE MODIFICATION OR REPAIR.

SUITABILITY FOR USE

THE PRODUCTS CONTAINED IN THIS CATALOG ARE NOT SAFETY RATED. THEY ARE NOT DESIGNED OR RATED FOR ENSURING SAFETY OF PERSONS, AND SHOULD NOT BE RELIED UPON AS A SAFETY COMPONENT OR PROTECTIVE DEVICE FOR SUCH PURPOSES. Please refer to separate catalogs for OMRON's safety rated products.

OMRON shall not be responsible for conformity with any standards, codes, or regulations that apply to the combination of products in the customer's application or use of the product.

At the customer's request, OMRON will provide applicable third party certification documents identifying ratings and limitations of use that apply to the products. This information by itself is not sufficient for a complete determination of the suitability of the products in combination with the end product, machine, system, or other application or use.

The following are some examples of applications for which particular attention must be given. This is not intended to be an exhaustive list of all possible uses of the products, nor is it intended to imply that the uses listed may be suitable for the products:

- Outdoor use, uses involving potential chemical contamination or electrical interference, or conditions or uses not described in this document.
- Nuclear energy control systems, combustion systems, railroad systems, aviation systems, medical equipment, amusement machines, vehicles, safety equipment, and installations subject to separate industry or government regulations.
- Systems, machines, and equipment that could present a risk to life or property.

Please know and observe all prohibitions of use applicable to the products.

NEVER USE THE PRODUCTS FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCT IS PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

PERFORMANCE DATA

Performance data given in this document is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of OMRON's test conditions, and the users must correlate it to actual application requirements. Actual performance is subject to the OMRON Warranty and Limitations of Liability.

CHANGE IN SPECIFICATIONS

Product specifications and accessories may be changed at any time based on improvements and other reasons.

It is our practice to change model numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the product may be changed without any notice. When in doubt, special model numbers may be assigned to fix or establish key specifications for your application on your request. Please consult with your OMRON representative at any time to confirm actual specifications of purchased products.

DIMENSIONS AND WEIGHTS

Dimensions and weights are nominal and are not to be used for manufacturing purposes, even when tolerances are shown.

ERRORS AND OMISSIONS

The information in this document has been carefully checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical, or proofreading errors, or omissions.

PROGRAMMABLE PRODUCTS

OMRON shall not be responsible for the user's programming of a programmable product, or any consequence thereof.

COPYRIGHT AND COPY PERMISSION

This document shall not be copied for sales or promotions without permission.

This document is protected by copyright and is intended solely for use in conjunction with the product. Please notify us before copying or reproducing this document in any manner, for any other purpose. If copying or transmitting this document to another, please copy or transmit it in its entirety.

Note: Do not use this document to operate the Unit.

OMRON Corporation **Industrial Automation Company**
Tokyo, JAPAN

Contact: www.ia.omron.com

Regional Headquarters

OMRON EUROPE B.V.

Wegalaan 67-69-2132 JD Hoofddorp
The Netherlands
Tel: (31)2356-81-300/Fax: (31)2356-81-388

OMRON ELECTRONICS LLC

One Commerce Drive Schaumburg,
IL 60173-5302 U.S.A.
Tel: (1) 847-843-7900/Fax: (1) 847-843-7787

OMRON ASIA PACIFIC PTE. LTD.

No. 438A Alexandra Road # 05-05/08 (Lobby 2),
Alexandra Technopark,
Singapore 119967
Tel: (65) 6835-3011/Fax: (65) 6835-2711

OMRON (CHINA) CO., LTD.

Room 2211, Bank of China Tower,
200 Yin Cheng Zhong Road,
PuDong New Area, Shanghai, 200120, China
Tel: (86) 21-5037-2222/Fax: (86) 21-5037-2200

Authorized Distributor:

© OMRON Corporation 2013 All Rights Reserved.
In the interest of product improvement,
specifications are subject to change without notice.

CSM_9_1_1114
Cat. No. Q195-E1-01

Printed in Japan
0313(0313)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Omron:

[V400-R2CF65](#) [V500-R2CF](#) [V400-R2CF125](#)

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru