

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:


0670689001

Status:

Active

Description:

Universal Serial Bus (USB) Shielded I/O Type B Receptacle, Right Angle, with Kinked Solder Tabs, Color White, 0.76µm (30µ") Gold(Au)Plating, Tray Pack, Lead Free

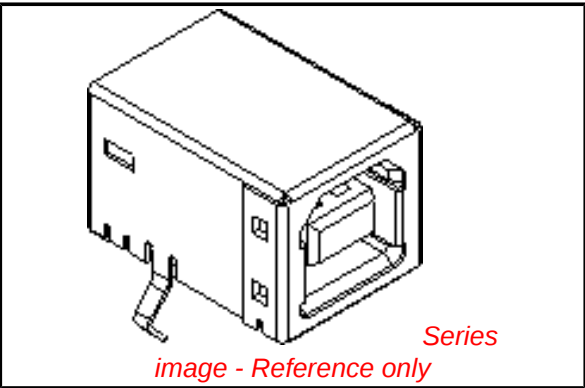

Documents:	
3D Model	Product Specification PS-67998-0000 (PDF)
Drawing (PDF)	RoHS Certificate of Compliance (PDF)

General	
Product Family	I/O Connectors
Series	67068
Application	Wire-to-Board
Comments	Single
Component Type	Receptacle
Product Name	USB
Type	B
Physical	
Boot Color	N/A
Circuits (Loaded)	4
Circuits (maximum)	4
Gender	Receptacle
Lock to Mating Part	Yes
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Number of Rows	2
Orientation	Right Angle
PC Tail Length (in)	0.110 In
PC Tail Length (mm)	2.80 mm
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness Recommended (in)	0.063 In
PCB Thickness Recommended (mm)	1.60 mm
Packaging Type	Tray
Panel Mount	No
Pitch - Mating Interface (in)	0.098 In
Pitch - Mating Interface (mm)	2.50 mm
Pitch - Term. Interface (in)	0.098 In
Pitch - Term. Interface (mm)	2.50 mm
Plating min: Mating (µin)	30
Plating min: Mating (µm)	0.76
Plating min: Termination (µin)	75
Plating min: Termination (µm)	1.90
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Ports	1
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	0°C to +50°C
Termination Interface: Style	Through Hole
Waterproof / Dustproof	No
Wire Size AWG	N/A
Electrical	
Current - Maximum per Contact	1.5A
Shield Type	Full Shield

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Contains SVHC: No

Halogen-Free

Status

Not Halogen-Free

Need more information on product environmental compliance?

Email productcompliance@molex.com

For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

China RoHS

Search Parts in this Series

67068Series

Mates With

USB Type B Plug

Shielded	Yes
Voltage - Maximum	30V (RMS)
Material Info	
Old Part Number	67068-1001
Reference - Drawing Numbers	
Product Specification	PS-67998-0000
Sales Drawing	SD-67068-003, SD-67068-004

This document was generated on 03/31/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

10 9 8 7 6 5 4 3 2 1

NOTES :

1. MATERIAL :

HOUSING : (a) HIGH TEMP. NYLON ,GLASS FIBER FILLED,UL94V-O, COLOR: BLACK,
(b) POLYESTER , GLASS FIBER FILLED,UL94V-O, COLOR: WHITE,

TERMINAL : PHOSPHOR BRONZE
METAL SHELL : COPPER ALLOY

2. PLATING :

TERMINAL :

CONTACT AREA : (a) GOLD FLASH.

(b) GLOD (Au), THICKNESS = 30 MICROINCH MINIMUM.
/0.76 MICROMETER MINIMUM.

SOLDER TAIL :

PURE TIN(Sn) THICKNESS= 75 MICROINCH MINIMUM .
/1.9 MICROMETER MINIMUM.

UNDER PLATE : NICKEL (Ni), THICKNESS= 50 MICROINCH MINIMUM.

METAL SHELL :

PURE TIN(Sn) , THICKNESS= 50 MICROINCH MINIMUM.
/1.27 MICROMETER MINIMUM.

UNDER PLATE : NICKEL (Ni) , THICKNESS= 50 MICROINCH MINIMUM.



/1.27 MICROMETER MINIMUM.

3 DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER

RECOMMENDED PCB THICKNESS : 1.60±0.05

4 PRODUCT SPECIFICATION : REFER TO PS-67998-0000

MOLEX ID OF MFG PLANT CODE

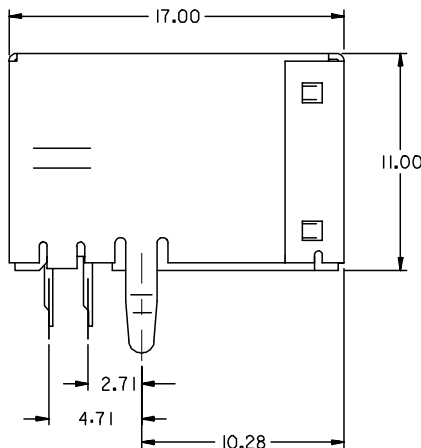

PART NUMBER LEGEND:

67068-

8 : BLACK HOUSING
9 : WHITE HOUSING

0 : TRAY PACKAGING
1 : TUBE PACKAGING

0

0 : GOLD FLASH
1 : 0.76 MICROMETER/30
MICROINCH GOLD

KINK TYPE BOARD LOCK

NEW RELEASE
EC NO: SH2005-0142
DRWN: DAVID HU 2004/11/5
CHKD:HARVEY 2004/11/25
APPR:YTYAP 2004/11/25

QUALITY SYMBOLS

▽=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± 0.25	± ---
1 PLACE	± 0.25	± ---
ANGULAR ± 3 °		

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE
MM ONLY

DRAWN BY	DATE
DAVID HU	2004/11/05
CHECKED BY	DATE
HARVEY	2004/11/05
APPROVED BY	DATE

MATERIAL NO.

SEE NOTES

SCALE
4:1

DESIGN UNITS
METRIC


THIRD ANGLE
PROJECTION

TITLE
USB B TYPE CONNECTOR
KINK TYPE BOARD LOCK
(LEAD-FREE)


MOLEX INCORPORATED


DOCUMENT NO.
SD-67068-003

SHEET NO.
1 OF 4

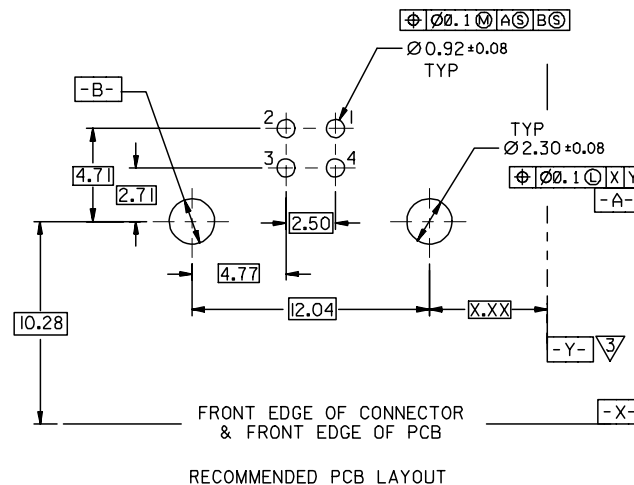

RECOMMENDED PCB LAYOUT

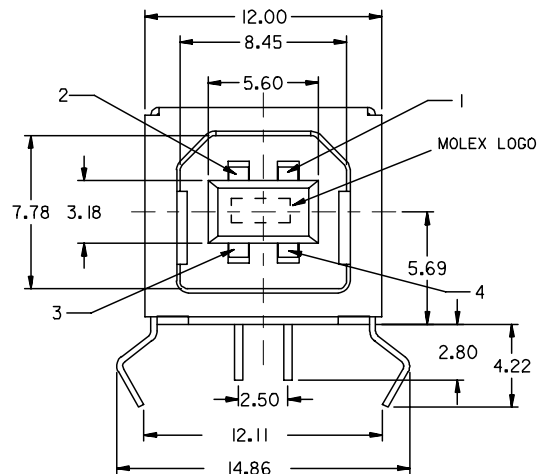

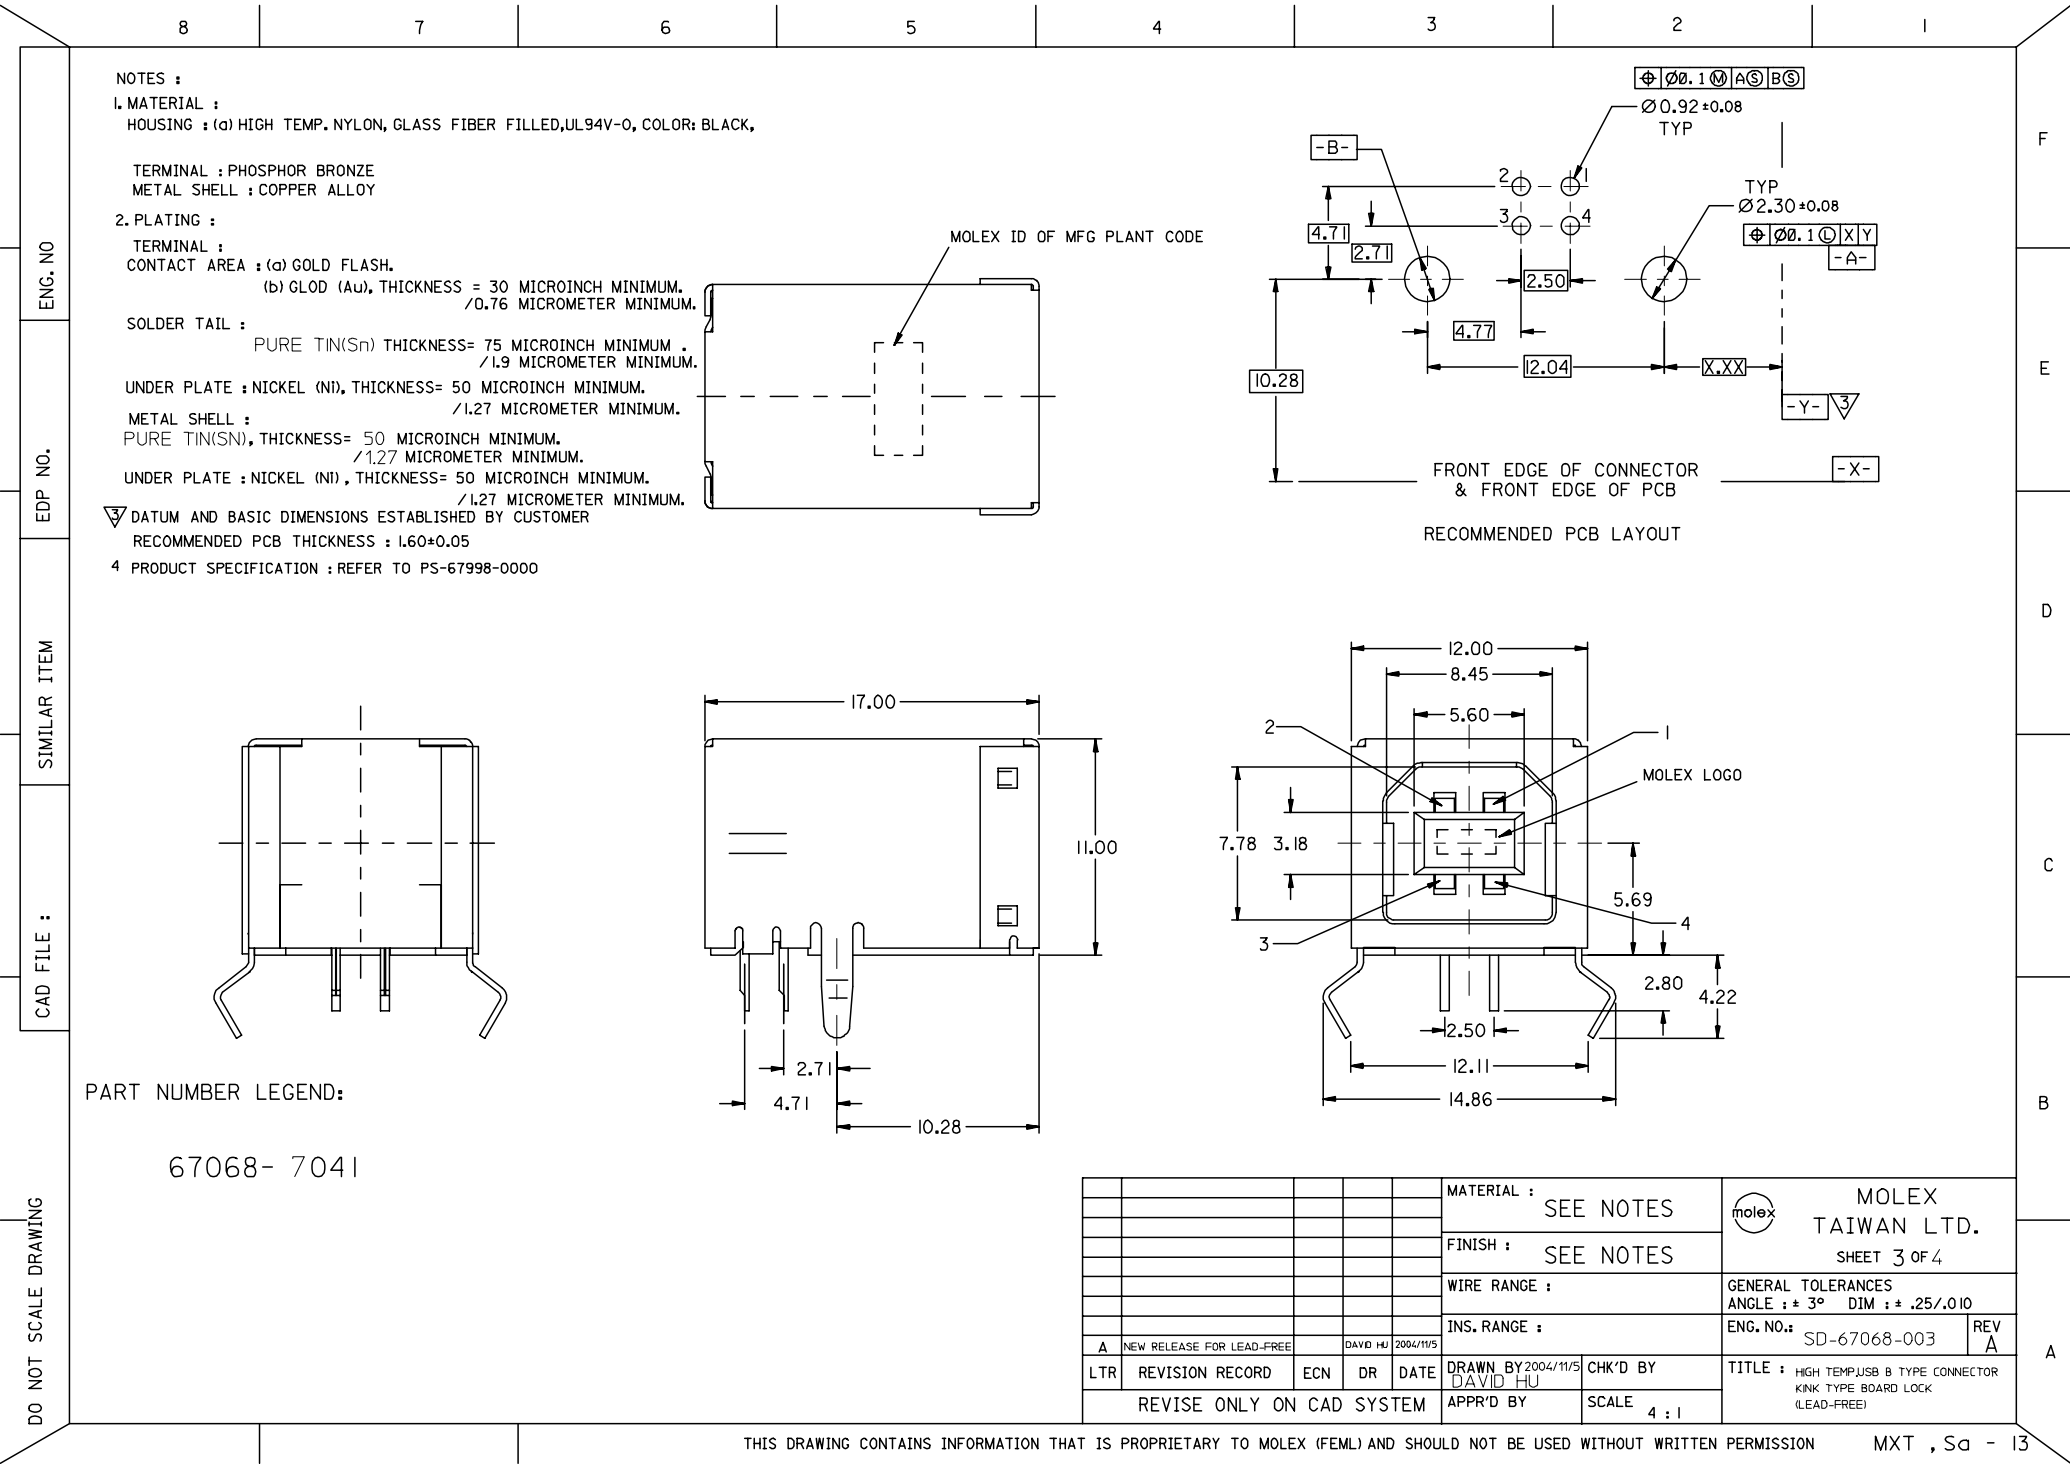

NOTES :
1. MATERIAL :
HOUSING : (a) HIGH TEMP. NYLON, GLASS FIBER FILLED, UL94V-0, COLOR: BLACK,

TERMINAL : PHOSPHOR BRONZE
METAL SHELL : COPPER ALLOY

2. PLATING :
TERMINAL :
CONTACT AREA : (a) GOLD FLASH.
(b) GLOD (Au), THICKNESS = 30 MICROINCH MINIMUM.
/0.76 MICROMETER MINIMUM.

SOLDER TAIL :
PURE TIN(Sn) THICKNESS= 75 MICROINCH MINIMUM .
/1.9 MICROMETER MINIMUM.
UNDER PLATE : NICKEL (Ni), THICKNESS= 50 MICROINCH MINIMUM.
/1.27 MICROMETER MINIMUM.

METAL SHELL :
PURE TIN(SN), THICKNESS= 50 MICROINCH MINIMUM.
/1.27 MICROMETER MINIMUM.
UNDER PLATE : NICKEL (Ni), THICKNESS= 50 MICROINCH MINIMUM.
/1.27 MICROMETER MINIMUM.

3. DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
RECOMMENDED PCB THICKNESS : 1.60±0.05

4. PRODUCT SPECIFICATION : REFER TO PS-67998-0000

PART NUMBER LEGEND:

67068-7041




						MATERIAL : SEE NOTES	 MOLEX TAIWAN LTD. SHEET 3 OF 4
						FINISH : SEE NOTES	
						WIRE RANGE :	GENERAL TOLERANCES ANGLE : ± 3° DIM : ± .25/.010
						INS. RANGE :	ENG. NO.: SD-67068-003
A	NEW RELEASE FOR LEAD-FREE			DAVID HU	2004/11/5		REV A
LTR	REVISION RECORD	ECN	DR	DATE	DRAWN BY 2004/11/5 DAVID HU	CHK'D BY	TITLE : HIGH TEMP./USB B TYPE CONNECTOR KINK TYPE BOARD LOCK (LEAD-FREE)
REVISE ONLY ON CAD SYSTEM					APPR'D BY	SCALE 4 : 1	

DO NOT SCALE DRAWING

1

4 PRODUCT SPECIFICATION : REFER TO PS-67998-0000

RECOMMENDED PCB LAYOUT

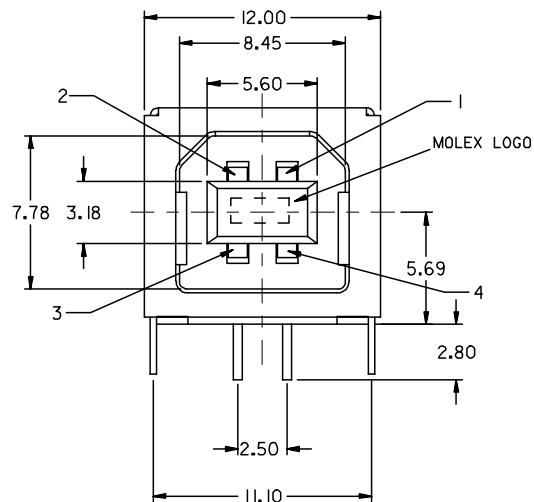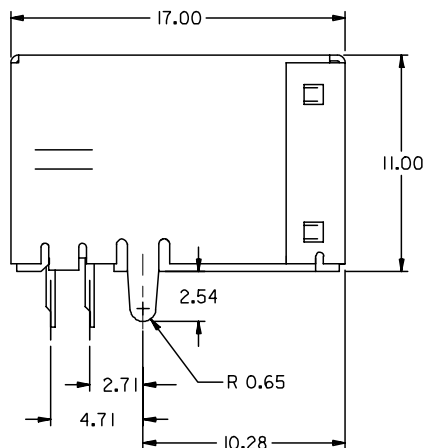

PART NUMBER LEGEND:

67068- 7051

						MATERIAL : SEE NOTES		 MOLEX TAIWAN LTD. SHEET 4 OF 4	
						FINISH : SEE NOTES			
						WIRE RANGE :			
						INS. RANGE :			
A	NEW RELEASE FOR LEAD-FREE			DAVID HU	2004/11/5	ENG. NO.:		SD-67068-003	REV A
LTR	REVISION RECORD		ECN	DR	DATE	DRAWN BY 2004/11/5 DAVID HU	CHK'D BY	TITLE : HIGH TEMP./USB B TYPE CONNECTOR WITH STRAIGHT TAB (LEAD-FREE)	
REVISE ONLY ON CAD SYSTEM						APPR'D BY		SCALE 4 : 1	

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX (FEMLE) AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

MXT , Sa - 13

NOTES:

1.MATERIAL:

HOUSING:

- (a)HIGH TEMP,NYLON,GLASS FIBRE FILLED,UL94V-0,COLOR: 88BLACK
(b)POLYESTER(PBT),30% GLASS FIBER FILLED,UL94V-0,COLOR: 9:WHITE
TERMINAL: PHOSPHOR BRONZE
METAL SHELL: COPPER ALLOY

2.PLATING:

TERMINAL:

- (c)GOLD FLASH ON CONTACT AREA,75 MICROINCH MINIMUM PURE TIN(Sn)
ON SOLDER TAIL,UNDER 50 MICROINCH MINIMUM NICKEL(Ni) PLATE.
(d)30 MICROINCH MINIMUM GOLD(Au) ON CONTACT AREA,75 MICROINCH
MINIMUM PURE TIN(Sn) ON SOLDER TAIL,UNDER 50 MICROINCH
MINIMUM NICKEL(Ni) PLATE.
(e)GOLD FLASH ON CONTACT AREA,75 MICROINCH MINIMUM MATTE TIN(Sn)
ON SOLDER TAIL,UNDER 50 MICROINCH MINIMUM NICKEL(Ni) PLATE.
(f)30 MICROINCH MINIMUM GOLD(Au) ON CONTACT AREA,75 MICROINCH
MINIMUM MATTE TIN(Sn) ON SOLDER TAIL,UNDER 50 MICROINCH
MINIMUM NICKEL(Ni) PLATE.

METAL SHELL:


- (g)50 MICROINCH MINIMUM PURE TIN(Sn),UNDER 50 MICROINCH MINIMUM
NICKEL(Ni) PLATE.
(h)50 MICROINCH MINIMUM MATTE TIN(Sn),UNDER 50 MICROINCH MINIMUM
NICKEL(Ni) PLATE.

3.DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.

RECOMMENDED PCB THICKNESS : 1.60±0.05




4.PRODUCT SPECIFICATION : REFER TO PS-67998-0000

MOLEX ID OF MFG PLANT CODE

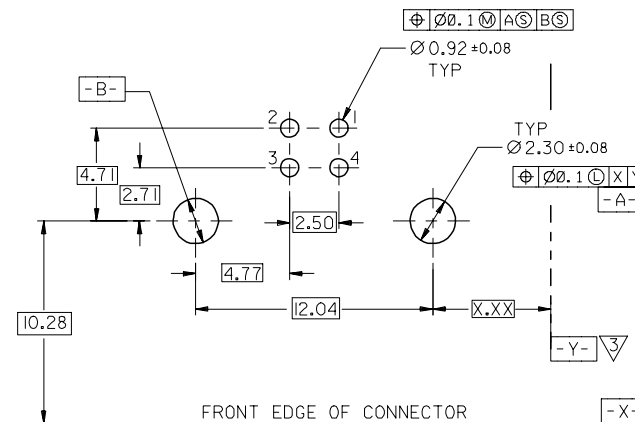

FRONT EDGE OF CONNECTOR
& FRONT EDGE OF PCB

RECOMMENDED PCB LAYOUT

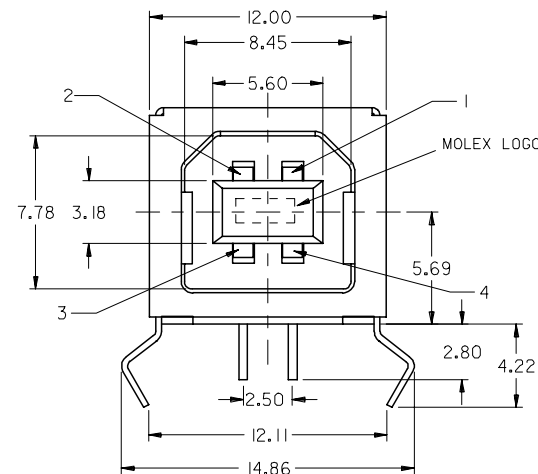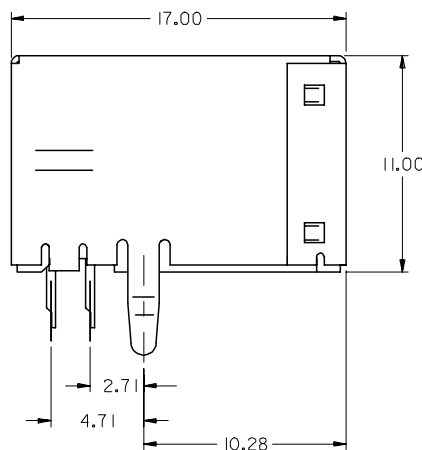

P/N	HOUSING COLOR	PLATING
67068-8000	BLACK	GOLD FLASH SEE NOTES[2-(c),2-(g)]
67068-8001	BLACK	30MICROINCH Au SEE NOTES[2-(d),2-(g)]
67068-9000	WHITE	GOLD FLASH SEE NOTES[2-(c),2-(g)]
67068-9001	WHITE	30MICROINCH Au SEE NOTES[2-(d),2-(g)]
67068-8012	BLACK	30MICROINCH Au SEE NOTES[2-(f),2-(h)]
67068-8013	BLACK	GOLD FLASH SEE NOTES[2-(e),2-(h)]

REV	DESCRIPTION	DATE	BY	APP
1	REVISED	2007/01/19	SH2007-0468	
2	DRWN:HYE01	2007/01/19		
3	CHKD:WANG	2007/01/19		
4	APPR:JNCHEN	2007/01/26		

QUALITY
SYMBOLS
▽=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± 0.25	± .010
1 PLACE	± 0.25	± .010
ANGULAR ± 3 °		

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE MM ONLY

DRAWN BY	DATE
DAVID HU	2004/11/05
CHECKED BY	DATE
HARVEY	2004/11/05
APPROVED BY	DATE

MATERIAL NO.

SEE NOTES

SIZE
A3

SCALE
4:1

DESIGN UNITS
METRIC

THIRD ANGLE
PROJECTION

USB B TYPE CONNECTOR
LEAD-FREE

MOLEX INCORPORATED

DOCUMENT NO. SD-67068-004

SHEET NO.
1 OF 1

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru