



FEATURES

- High resolution module, 20cm
- Fast conversion down to 1 ms
- Low power, 1 μA (standby < 0.15 μA)
- Integrated digital pressure sensor (24 bit ΔΣ ADC)
- Supply voltage 1.8 to 3.6 V
- Operating range: 300 to 1100 mbar, -40 to +85 °C
- Extended pressure range: 10 to 2000mbar
- I2C and SPI interface (Mode 0, 3)
- No external components (Internal oscillator)
- Excellent long term stability
- Hermetically sealable for outdoor devices

APPLICATIONS

- Mobile altimeter / barometer systems
- Bike computers
- Adventure or multi-mode watches
- Variometers
- Dataloggers

MS5803-02BA

Miniature Altimeter Module

SPECIFICATIONS


- High resolution module, 20cm
- Fast conversion down to 1 ms
- Low power, 1 μA (standby < 0.15 μA)
- Integrated digital pressure sensor (24 bit ΔΣ ADC)
- Supply voltage 1.8 to 3.6 V
- Operating range: 300 to 1100 mbar, -40 to +85 °C
- Extended Pressure Range: 10 to 2000mbar
- I²C and SPI interface (Mode 0, 3)
- No external components (Internal oscillator)
- Excellent long term stability
- Hermetically sealable for outdoor devices

The MS5803-02BA is a new generation of high resolution altimeter sensors from TE Connectivity with SPI and I2C bus interface. It is optimized for altimeters and variometers with an altitude resolution of 20 cm. The sensor module includes a high linearity pressure sensor and an ultra-low power 24 bit $\Delta\Sigma$ ADC with internal factory calibrated coefficients. It provides a precise digital 24 Bit pressure and temperature value and different operation modes that allow the user to optimize for conversion speed and current consumption. A high resolution temperature output allows the implementation of an altimeter/thermometer function without any additional sensor. The MS5803-02BA can be interfaced to virtually any microcontroller. The communication protocol is simple, without the need of programming internal registers in the device. The gel protection and antimagnetic stainless steel cap allows the use in 100m water resistant altimeter/compass watches. This new sensor module generation is based on leading MEMS technology and latest benefits from TE proven experience and know-how in high volume manufacturing of altimeter modules, which have been widely used for over a decade. The sensing principle employed leads to very low hysteresis and high stability of both pressure and temperature signal.

TECHNICAL DATA

Sensor Performances (VDD	= 3 V)						
Pressure	Min	Тур	Max	Unit			
Range	10		1100	mbar			
ADC		24		bit			
Resolution (1)		0.13 / 0.084 / 0.054 / 0.036 / 0.024					
Accuracy 25°C, 750 to 1100 mbar	-1.5		+1.5	mbar			
Accuracy -20°C to + 85°C, 300 to 1100 mbar (2)	-2.5		+2.5	mbar			
Response time	0.5 /	1.1 / 2.1 8.22	/ 4.1 /	ms			
Long term stability		+/-1		mbar/yr			
Temperature	Min	Тур	Max	Unit			
Range	-40		+85	°C			
Resolution		<0.01		°C			
Accuracy	-0.8		+0.8	°C			
Notes: (1) Oversampling Ratio: (2) With autozero at one			2048 / 4	1096			

FUNCTIONAL BLOCK DIAGRAM



PERFORMANCE SPECIFICATIONS

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Conditions	Min.	Тур.	Max	Unit
Supply voltage	V_{DD}		-0.3		+4.0	V
Storage temperature (3)	Ts		-40		+125	°C
Overpressure	P _{max}	ISO 22810 ⁽¹⁾			10	bar
Maximum Soldering Temperature (2)	T _{max}	40 sec max			250	°C
ESD rating		Human Body Model	-4		+4	kV
Latch up		JEDEC standard No 78	-100		+100	mA

 $^{^{(1)}}$ Qualified referring to ISO 22810, pressure ramp up/down min 60s

ELECTRICAL CHARACTERISTICS

Parameter	Symbol	Conditions	Min.	Тур.	Max	Unit
Operating Supply voltage	V_{DD}		1.8	3.0	3.6	V
Operating Temperature	Т		-40	+25	+85	°C
Supply current (1 sample per sec.)	I _{DD}	OSR 4096 2048 1024 512 256		12.5 6.3 3.2 1.7 0.9		μΑ
Peak supply current		during conversion		1.4		mA
Standby supply current		at 25°c		0.02	0.14	μΑ
VDD Capacitor		From VDD to GND	100			nF

ANALOG DIGITAL CONVERTER (ADC)

Parameter	Symbol	Conditions	Min.	Тур.	Max	Unit
Output Word				24		bit
Conversion time (4)	te	OSR 4096 2048 1024 512 256	7.40 3.72 1.88 0.95 0.48	8.22 4.13 2.08 1.06 0.54	9.04 4.54 2.28 1.17 0.60	ms

⁽⁴⁾ Maximum values must be used to determine waiting times in I2C communication

⁽²⁾ Refer to application note 808

⁽³⁾ Storage in an environment of dry and non-corrosive gases

PERFORMANCE SPECIFICATIONS (CONTINUED)

PRESSURE OUTPUT CHARACTERISTICS ($V_{DD} = 3 \text{ V}, T = 25^{\circ}\text{C}$ UNLESS OTHERWISE NOTED)

Parameter	Condition	ns	Min.	Тур.	Max	Unit
Operating Pressure Range	Prange	Full Accuracy	300		1100	mbar
Extended Pressure Range	P _{ext} Linear Range of ADC		10		2000	mbar
	at 25°C, 7	'001100 mbar	-1.5		+1.5	
Absolute Accuracy, no autozero	at 050°C	, 3001100 mbar	-2.0		+2.0	mbar
(1)	at -2085	°C, 3001100 mbar	-3.5		+3.5	IIIDai
	at -4085	°C, 3001100 mbar	-6.0		+6.0	
	at 25°C, 7	'001100 mbar	-0.5		+0.5	
Absolute Accuracy, autozero at	at 050°C	, 3001100 mbar	-1.0		+1.0	mbar
one pressure point (1)	at -2085	°C, 3001100 mbar	-2.5		+2.5	IIIDai
	at -4085	°C, 3001100 mbar	-5.0		+5.0	
Maximum error with supply voltage (3)	V _{DD} = 1.8	V 3.6 V		+/- 2.5		mbar
Long-term stability (2)				+/-1		mbar/yr
	OSR	4096		0.024		
		2048		0.036		
Resolution RMS		1024		0.054		mbar
		512		0.084		
		256		0.130		

TEMPERATURE OUTPUT CHARACTERISTICS (V_{DD} = 3 V, T = 25°C UNLESS OTHERWISE NOTED)

Parameter	Conditions		Min.	Тур.	Max	Unit
	at 25°C		-0.8		+0.8	
Absolute Accuracy	-2085°C		-2.0		+2.0	°C
	-4085°C		-4.0		+4.0	
Maximum error with supply voltage (4)	V _{DD} = 1.8 V 3.6 V			+/- 0.5		°C
	OSR	4096		0.002		
		2048		0.003		
Resolution RMS		1024		0.005		°C
		512		0.008		
		256		0.012		

With autozero at 3V point

⁽¹⁾ Wet/dry cycle: sensor must be dried typically once a day.(2) The long-term stability is measured with non-soldered devices.

⁽³⁾ With autozero at 3V point

PERFORMANCE SPECIFICATIONS (CONTINUED)

DIGITAL INPUTS (PS, CSB, DIN, SCLK, SDA, SCL)


Parameter	Symbol	Conditions	Min.	Тур.	Max	Unit
Serial data clock	SCLK	SPI protocol			20	MHz
Serial data clock	SCL	I2C protocol			400	kHz
Input high voltage	V _{IH}	Pins CSB	80% V _{DD}		100% V _{DD}	V
Input low voltage	VIL		0% V _{DD}		20% V _{DD}	V
Input leakage current	I _{leak25°C} I _{leak85°C}	at 25°c			0.15	μΑ
CS low to first SCLK rising	tCSL		21			ns
CS low from last SCLK falling	tCSH		21			ns


PRESSURE OUTPUTS (DOUT, SDA, SCL)

Parameter	Symbol	Conditions	Min.	Тур.	Max	Unit
Output high voltage	Vон	I _{source} = 0.6 mA	80% V _{DD}		100% V _{DD}	V
Output low voltage	V _{OL}	$I_{sink} = 0.6 \text{ mA}$	0% V _{DD}		20% V _{DD}	V
Load capacitance	C _{LOAD}			16		pF


PERFORMANCE CHARACTERISTICS


PRESSURE ERROR VS PRESSURE AND TEMPERATURE







TEMPERATURE ERROR VS TEMPERATURE AND EXTENDED PRESSURE RANGE (TYPICAL ERROR)





PRESSURE AND TEMPERATURE ERROR VS SUPPLY VOLTAGE





FUNCTIONAL DESCRIPTION

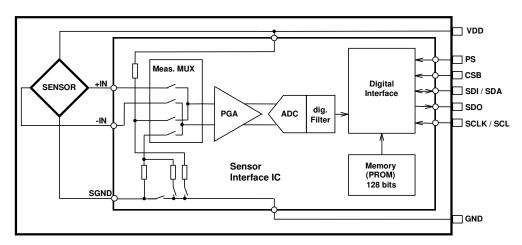


Figure 1: Block diagram of MS5803-02BA

GENERAL

The MS5803-02BA consists of a piezo-resistive sensor and a sensor interface IC. The main function of the MS5803-02BA is to convert the uncompensated analogue output voltage from the piezo-resistive pressure sensor to a 24-bit digital value, as well as providing a 24-bit digital value for the temperature of the sensor.

FACTORY CALIBRATION

Every module is individually factory calibrated at two temperatures and two pressures. As a result, 6 coefficients necessary to compensate for process variations and temperature variations are calculated and stored in the 128-bit PROM of each module. These bits (partitioned into 6 coefficients W1 to W6) must be read by the microcontroller software and used in the program converting D1 and D2 into compensated pressure and temperature values. The 2 coefficients W0 and W7 are for factory configuration and CRC.

SERIAL INTERFACE

The MS5803-02BA has built in two types of serial interfaces: SPI and I²C. Pulling the Protocol Select pin PS to low selects the SPI protocol, pulling PS to high activates the I²C bus protocol.

Pin PS	Mode	Pins used
High	I ² C	SDA, SCL, CSB
Low	SPI	SDI, SDO, SCLK, CSB

SPI MODE

The external microcontroller clocks in the data through the input SCLK (Serial CLocK) and SDI (Serial Data In). In the SPI mode module can accept both mode 0 and mode 3 for the clock polarity and phase. The sensor responds on the output SDO (Serial Data Out). The pin CSB (Chip Select) is used to enable/disable the interface, so that other devices can talk on the same SPI bus. The CSB pin can be pulled high after the command is sent or after the end of the command execution (for example end of conversion). The best noise performance from the module is obtained when the SPI bus is quiet and without communication to other devices during the ADC conversion in progress.

I²C MODE

The external microcontroller clocks in the data through the input SCLK (Serial CLocK) and SDA (Serial DAta). The sensor responds on the same pin SDA which is bidirectional for the I²C bus interface. So this interface type uses only 2 signal lines and does not require a chip select, which can be favorable to reduce board space. In I²C-Mode the complement of the pin CSB (Chip Select) represents the LSB of the I²C address. It is possible to use two sensors with two different addresses on the I²C bus. The pin CSB shall be connected to VDD or GND (do not leave unconnected!).

Pin CSB	Address (7 bits)						
High	0x76 (1110110 b)						
Low	0x77 (1110111 b)						

COMMANDS

The MS5803-02BA has only five basic commands:

- 1. Reset
- 2. Read PROM (128 bit of calibration words)
- 3. D1 conversion
- 4. D2 conversion
- 5. Read ADC result (24 bit pressure / temperature)

Size of each command is 1 byte (8 bits) as described in the table below. After ADC read commands the device will return 24 bit result and after the PROM read 16bit result. The address of the PROM is embedded inside of the PROM read command using the a2, a1 and a0 bits.

	Com	mand l	byte						hex value
Bit number	0	1	2	3	4	5	6	7	
Bit name	PR M	COV	-	Тур	Ad2/ Os2	Ad1/ Os1	Ad0/ Os0	Stop	
Command									
Reset	0	0	0	1	1	1	1	0	0x1E
Convert D1 (OSR=256)	0	1	0	0	0	0	0	0	0x40
Convert D1 (OSR=512)	0	1	0	0	0	0	1	0	0x42
Convert D1 (OSR=1024)	0	1	0	0	0	1	0	0	0x44
Convert D1 (OSR=2048)	0	1	0	0	0	1	1	0	0x46
Convert D1 (OSR=4096)	0	1	0	0	1	0	0	0	0x48
Convert D2 (OSR=256)	0	1	0	1	0	0	0	0	0x50
Convert D2 (OSR=512)	0	1	0	1	0	0	1	0	0x52
Convert D2 (OSR=1024)	0	1	0	1	0	1	0	0	0x54
Convert D2 (OSR=2048)	0	1	0	1	0	1	1	0	0x56
Convert D2 (OSR=4096)	0	1	0	1	1	0	0	0	0x58
ADC Read	0	0	0	0	0	0	0	0	0x00
PROM Read	1	0	1	0	Ad2	Ad1	Ad0	0	0xA0 to 0xAE

Figure 2: Command structure

I²C INTERFACE

COMMANDS

Each I²C communication message starts with the start condition and it is ended with the stop condition. The MS5803-01BA address is 111011Cx, where C is the complementary value of the pin CSB. Since the IC does not have a microcontroller inside, the commands for I²C and SPI are quite similar.

RESET SEQUENCE

The reset can be sent at any time. In the event that there is not a successful power on reset this may be caused by the SDA being blocked by the module in the acknowledge state. The only way to get the MS5803-02BA to function is to send several SCLKs followed by a reset sequence or to repeat power on reset.


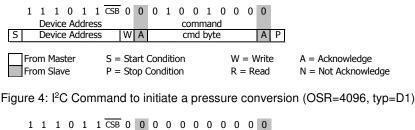


Figure 3: I²C Reset Command

CONVERSION SEQUENCE

A conversion can be started by sending the command to MS5803-02BA. When command is sent to the system it stays busy until conversion is done. When conversion is finished, the data can be accessed by sending a Read command, when an acknowledge appears from the MS5803-02BA, 24 SCLK cycles may be sent to receive all result bits. Every 8 bit the system waits for an acknowledge signal.






Figure 5: I²C ADC read sequence




Figure 6: I²C pressure response (D1) on 24 bit from MS5803-02BA

PROM READ SEQUENCE

The PROM Read command consists of two parts. First command sets up the system into PROM read mode. The second part gets the data from the system.




Figure 7: I²C Command to read memory address= 011 (Coefficient 3)




Figure 8: I²C answer from MS5803-02BA

SPI INTERFACE

RESET SEQUENCE

The Reset sequence shall be sent once after power-on to make sure that the calibration PROM gets loaded into the internal register. It can be also used to reset the device ROM from an unknown condition

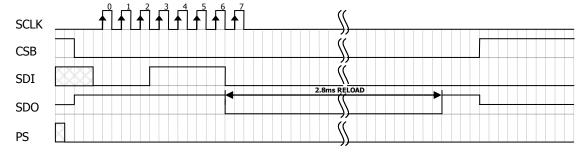


Figure 9: Reset command sequence SPI mode 0

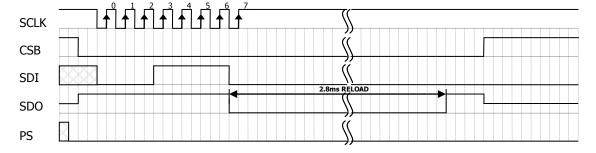


Figure 10: Reset command sequence SPI mode 3

CONVERSION SEQUENCE

The conversion command is used to initiate uncompensated pressure (D1) or uncompensated temperature (D2) conversion. The chip select can be disabled during this time to communicate with other devices.

After the conversion, using ADC read command the result is clocked out with the MSB first. If the conversion is not executed before the ADC read command, or the ADC read command is repeated, it will give 0 as the output result. If the ADC read command is sent during conversion the result will be 0, the conversion will not stop and the final result will be wrong. Conversion sequence sent during the already started conversion process will yield incorrect result as well.

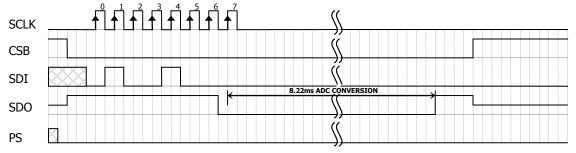


Figure 11: Conversion out sequence, Typ=d1, OSR = 4096

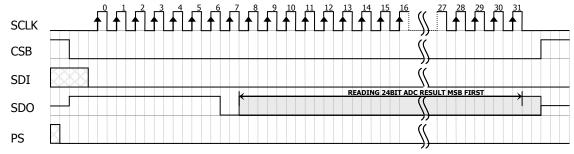


Figure 12: ADC Read sequence

PROM READ SEQUENCE

The read command for PROM shall be executed once after reset by the user to read the content of the calibration PROM and to calculate the calibration coefficients. There are in total 8 addresses resulting in a total memory of 128 bit. Address 0 contains factory data and the setup, addresses 1-6 calibration coefficients and address 7 contains the serial code and CRC. The command sequence is 8 bits long with a 16 bit result which is clocked with the MSB first.

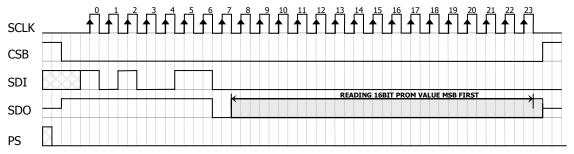


Figure 13: PROM Read sequence, address = 011 (Coefficient 3).


CYCLIC REDUNDANCY CHECK (CRC)

MS5803-02BA contains a PROM memory with 128-Bit. A 4-bit CRC has been implemented to check the data validity in memory. The application note AN520 describes in detail CRC-4 code used.

A d d	D B 1 5	D B 1 4	D B 1 3	D B 1 2	D B 1	D B 1 0	D B 9	D B 8	D B 7	D B 6	D B 5	D B 4	D B 3	D B 2	D B 1	D B 0
0	16 bit reserved for manufacturer															
1	Coefficient 1 (16 bit unsigned)															
2			(Co	effi	ciei	nt 2	2 (1	6 b	it ι	ıns	ign	ed))		
3			(Co	effi	ciei	nt 3	3 (1	6 b	it ι	ıns	ign	ed))		
4			(Co	effi	ciei	nt 4	ŀ (1	6 b	it ι	ıns	ign	ed))		
5			(Co	effi	cie	nt 5	5 (1	6 b	it ι	ıns	ign	ed))		
6			(Co	effi	cie	nt 6	3 (1	6 b	it ι	ıns	ign	ed))		
7														CF	ЗC	

Figure 14: Memory PROM mapping

PRESSURE AND TEMPERATURE CALCULATION



	Description Equation	Recommended variable type	Size [1]	Value		Example /
Variable			[bit]	min	max	Typical
C1	Pressure sensitivity SENS _{T1}	unsigned int 16	16	0	65535	46372
C2	Pressure offset OFF _{T1}	unsigned int 16	16	0	65535	43981
СЗ	Temperature coefficient of pressure sensitivity TCS	unsigned int 16	16	0	65535	29059
C4	Temperature coefficient of pressure offset TCO	unsigned int 16	16	0	65535	27842
C5	Reference temperature T _{REF}	unsigned int 16	16	0	65535	31553
C6	Temperature coefficient of the temperature TEMPSENS	unsigned int 16	16	0	65535	28165

Read digital pressure and temperature data						
D1	Digital pressure value	unsigned int 32	24	0	16777216	6465444
D2	Digital temperature value	unsigned int 32	24	0	16777216	8077636
	,	Į.				
	Calcu	ılate temperatuı	re			
dΤ	Difference between actual and reference temperature $^{[2]}$ $dT = D2 - T_{REF} = D2 - C5 * 2^8$	signed int 32	25	-16776960	16777216	68
TEMP	Actual temperature (-4085°C with 0.01°C resolution) $TEMP = 20$ °C + dT * TEMPSENS = $2000 + dT$ * $C6 / 2^{23}$	signed int 32	41	-4000	8500	2000 = 20.00 °C
	,	<u> </u>				
Calculate temperature compensated pressure						
OFF	Offset at actual temperature ^[3] $OFF = OFF_{T1} + TCO * dT = C2 * 2^{17} + (C4 * dT) / 2^{6}$	signed int 64	41	-17179344900	25769410560	5764707214
SENS	Sensitivity at actual temperature [4] SENS = SENS _{T1} + TCS*dT = $C1 * 2^{16} + (C3 * dT)/2^7$	signed int 64	41	-8589672450	12884705280	3039050829
P	Temperature compensated pressure (101200mbar with 0.01mbar resolution) $P = D1 * SENS - OFF = (D1 * SENS / 2^{21} - OFF) / 2^{15}$	signed int 32	58	1000	120000	110002 = 1100.02 mbar

Maximal size of intermediate result during evaluation of variable min and max have to be defined

[1] Maximal size of intermediate resi [2] min and max have to be defined [3] min and max have to be defined [4] min and max have to be defined

Notes

Figure 15: Flow chart for pressure and temperature reading and software compensation.

Display pressure and temperature value

SECOND ORDER TEMPERATURE COMPENSATION

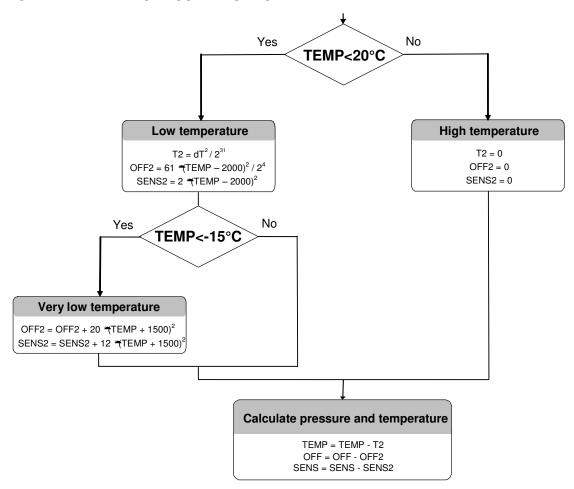


Figure 16: Flow chart for pressure and temperature to the optimum accuracy.

APPLICATION CIRCUIT

The MS5803-02BA is a circuit that can be used in conjunction with a microcontroller in mobile altimeter applications. It is designed for low-voltage systems with a supply voltage of 3 V.




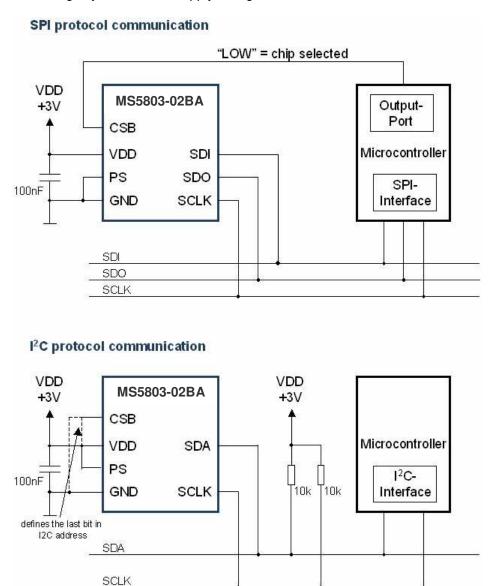


Figure 17: Typical application circuit with SPI / I^2C protocol communication

PACKAGE OUTLINE AND PIN CONFIGURATION








Pin	Name	Туре	Function
1	SCLK	I	Serial data clock
2	GND	G	Ground
3	CSB	I	Chip Select (active low)
4	NC	NC	-
5	VDD	Р	Positive supply voltage
6	PS	I	Communication protocol select SPI / I2C
7	SDI/SDA	I	Serial data input
8	SDO	0	Serial data output

Figure 18: MS5803-02BA package outlines, pin configuration and description


Notes:


- (1) Dimensions in mm
- (2) General tolerance ±0.1
- (3) Cap centering ± 0.15 from center of the ceramic


RECOMMENDED PAD LAYOUT



SHIPPING PACKAGE

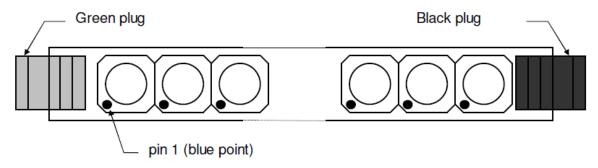

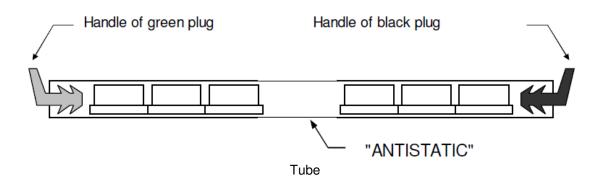

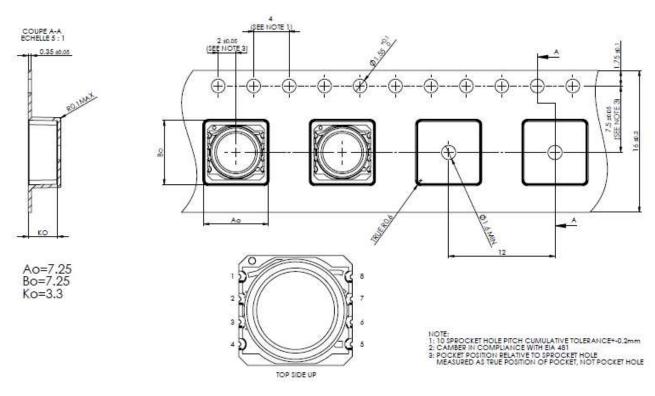

Tape & reel

MOUNTING AND ASSEMBLY CONSIDERATIONS

SOLDERING

Please refer to the application note AN808 available on our website for all soldering issues.

MOUNTING

The MS5803-02BA can be placed with automatic Pick & Place equipment using vacuum nozzles. It will not be damaged by the vacuum. Due to the low stress assembly the sensor does not show pressure hysteresis effects. It is important to solder all contact pads.

CONNECTION TO PCB

The package outline of the module allows the use of a flexible PCB for interconnection. This can be important for applications in watches and other special devices.

SEALING WITH O-RINGS

In products like outdoor watches the electronics must be protected against direct water or humidity. For those products the MS5803-02BA provides the possibility to seal with an O-ring. The protective cap of the MS5803-02BA is made of special anticorrosive stainless steel with a polished surface. In addition to this the MS5803-02BA is filled with silicone gel covering the sensor and the bonding wires. The O-ring (or O-rings) shall be placed at the outer diameter of the metal cap. This method avoids mechanical stress because the sensor can move in vertical direction.

CLEANING

The MS5803-02BA has been manufactured under cleanroom conditions. It is therefore recommended to assemble the sensor under class 10'000 or better conditions. Should this not be possible, it is recommended to protect the sensor opening during assembly from entering particles and dust. To avoid cleaning of the PCB, solder paste of type "no-clean" shall be used. Cleaning might damage the sensor!

ESD PRECAUTIONS


The electrical contact pads are protected against ESD up to 4 kV HBM (human body model). It is therefore essential to ground machines and personnel properly during assembly and handling of the device. The MS5803-02BA is shipped in antistatic transport boxes. Any test adapters or production transport boxes used during the assembly of the sensor shall be of an equivalent antistatic material.

DECOUPLING CAPACITOR

Particular care must be taken when connecting the device to the power supply. A 100 nF ceramic capacitor must be placed as close as possible to the MS5803-02BA VDD pin. This capacitor will stabilize the power supply during data conversion and thus, provide the highest possible accuracy.

ORDERING INFORMATION

PART NUMBER	DESCRIPTION	Delivery Form
MS580302BA01-00	MS5803-02BA 2BAR White Gel	Tube
MS580302BA01-50	MS5803-02BA 2BAR White Gel T&R	Tape & Reel TOP -UP
MS580302BA01-10	MS5803-02BA 2BAR White Gel P-Caps (Protective cap)	Tray
MS580302BA01-60	MS5803-02BA 2BAR White Gel HE T&R P-Caps (Protective cap)	Tape & Reel TOP-UP
MS580302BA05-00	MS5803-02BA 2BAR Fluoro Gel	Tray
MS580302BA05-50	MS5803-02BA 2BAR Fluoro Gel T&R	Tape & Reel TOP-UP

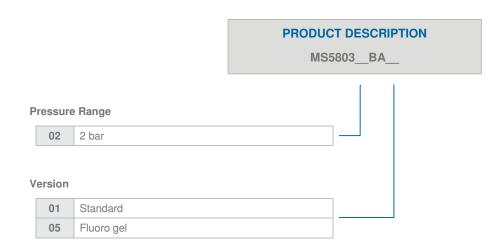

NORTH AMERICA

Measurement Specialties, Inc., a TE Connectivity company Tel: 800-522-6752

Email: customercare.frmt@te.com

EUROPE

Measurement Specialties (Europe), Ltd., a TE Connectivity Company Tel: 800-440-5100

Email: customercare.bevx@te.com

ASIA

Measurement Specialties (China) Ltd., a TE Connectivity company Tel: 0400-820-6015

Email: customercare.shzn@te.com

TE.com/sensorsolutions

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2015 TE Connectivity Ltd. family of companies All Rights Reserved.



OOO «ЛайфЭлектроникс" "LifeElectronics" LLC

ИНН 7805602321 КПП 780501001 P/C 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 3010181090000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный) Email: org@lifeelectronics.ru