


PSR – Phoenix Safety Relay PSR-THC4

- Two-hand and safety door control module according to EN 574 Type IIIC
- Safety Category 4, EN 954-1
- Plug-in screw-cage or spring-cage terminal blocks
- Two-channel circuit
- Safe isolation
- Cross-circuit detection
- Housing width 22.5 mm (0.886 in.)
- Two enable contacts
- One signaling contact
- Approvals:  US Listed;




1. Short Description

The PSR-...-24UC/THC4/2x1/1x2 safety relays can be used to monitor two-hand control systems according to EN 574 Type IIIC and safety doors.

The module monitors the simultaneity of both inputs in < 0.5 seconds. In this way, up to Safety Category 4 can be achieved in safety circuits according to VDE 0113 Part 1 and EN 954-1. External contactors or expansion modules can be monitored. The module has two enable current paths and one signaling current path with Stop Category 0 according to EN 60204-1/ VDE 0113 Part 1.

2. Technical Data

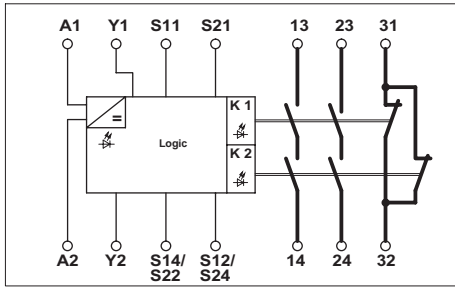

PSR-THC4



Connection data:	0.2 - 2.5	0.2 - 2.5	25 - 14
Stripping length:	Screw-cage version	7 mm (0.28 in.)	Spring-cage version
		10 mm (0.39 in.)	

Description	Type
Safety relay, Category 4	Screw-cage Spring-cage

Technical Data

Input Data	Output Data
Nominal input voltage U_N	Contact version
Permissible range	Contact material
Typical current consumption at U_N	Maximum switching voltage
Voltage at input, start, and feedback circuit	Minimum switching voltage
Typical response time (K1, K2) at U_N	Limiting continuous current
Typical release time (K1, K2) at U_N	Maximum inrush current
Simultaneity input 1/2	Minimum switching current
Recovery time	Maximum shutdown power
	Minimum switching power
	Mechanical life
	Breaking capacity according to
	DIN EN 60947-5-1/VDE 0660 Part 20
	Short-circuit protection of the output circuits,
	external

Housing width 22.5 mm (0.886 in.)

Type	Order No.	Pcs. Pkt.
PSR-SCP-24UC/THC4/2X1/1X2	29 63 72 1	1
PSR-SPP-24UC/THC4/2X1/1X2	29 63 98 3	1

24 V AC/DC	2 enable current paths,
0.85 - 1.1 x U_N	1 signaling current path
125 mA AC, 60 mA DC	Silver stannic oxide, gold-flashed (AgSnO ₂ 0.2 μm Au)
24 V DC, approximately	250 V AC/DC
50 ms	15 V AC/DC
20 ms	6 A (Form A contact/Form B contact)
< 0.5 s	6 A
< 1 s	25 mA
	Ohmic load
	$\tau = 0$ ms
	Inductive load
	$\tau = 40$ ms
	144 W
	48 V DC
	288 W
	110 V DC
	110 W
	220 V DC
	88 W
	250 V AC
	1500 VA
	0.4 W
	10 ⁷ cycles, approximately
	24 V (DC 13) 4 A
	24 V (DC 13) 2.5 A
	6 A fast-blow

General Data

Permissible ambient operating temperature	-20°C to +55°C (-4°F to +131°F)
Nominal operating mode	100% ED
Degree of protection	According to DIN EN 60529/VDE 0470 Part 1
- Housing	IP 40
- Connection terminal blocks	IP 20
- Mounting location	IP 54, minimum
Mounting position	Any
Mounting	Can be mounted without spacing
Air and creepance distances between circuits	According to DIN EN 50 178:1998-04, safe isolation, reinforced insulation
Impulse voltage withstand level	6 kV
Degree of pollution	2
Surge Voltage Category	III
Dimensions (W x H x D)	22.5 mm x 99 mm x 114.5 mm (0.886 x 3.898 x 4.508 in.)
Cable cross section	0.2 - 2.5 mm ² (25 - 14 AWG)
Housing material	Polyamide PA, not reinforced

Note: When operating relay modules the operator must meet the requirements for emitted interference for electrical and electronic equipment (EN 50081-2) on the contact side and, if required, take appropriate measures.



3. Connection Notes and Safety Instructions

3.1. Safety Instructions

- Please observe the safety regulations of electrical engineering and industrial safety and liability associations.
- Disregarding these safety regulations may result in death or serious damage to persons or property.
- Before working on the device, disconnect the power.
- Startup, mounting, modifications, and upgrades should only be carried out by a skilled electrical engineer.
- Protective covers must not be removed when operating electrical switching devices.
- During operation, parts of electrical switching devices carry hazardous voltages.
- Keep the instruction sheet in a safe place.
- In the event of an error, replace the device immediately.


3.2. Connection Notes

To maintain the UL, use copper cables, which are designed for operating temperatures of 75°C (167°F). For reliable and safe contacts, strip the connector ends accordingly.

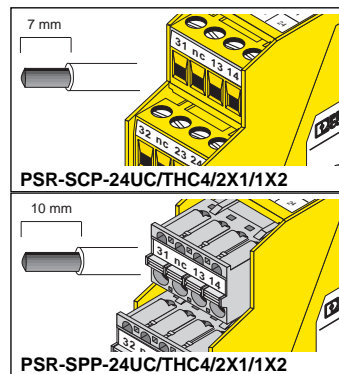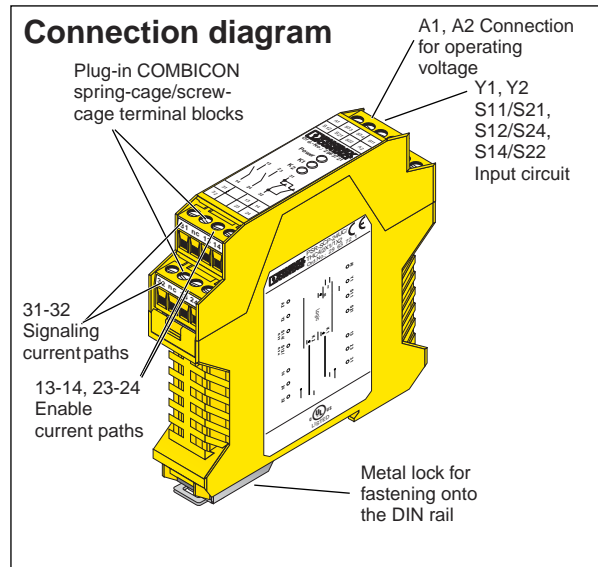


4. Connection Examples


Two-hand control system with equality monitoring < 0.5 s, corresponds to EN 574 Type IIIC, suitable for up to Safety Category 4.

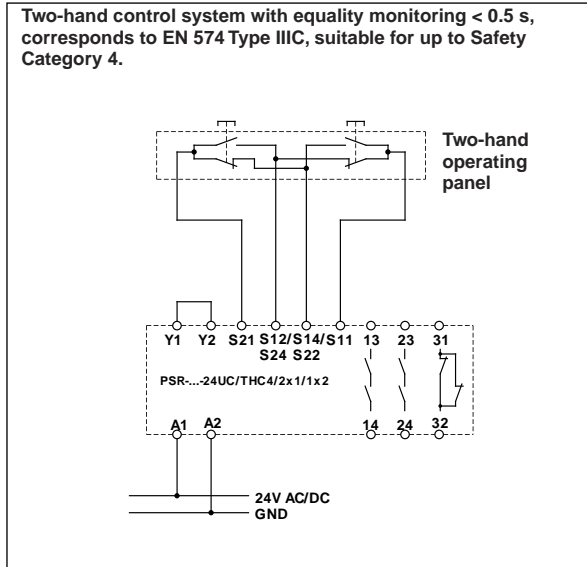

Monitoring of controlling isolating safety devices according to EN 1088 with equality monitoring < 0.5 s, suitable for up to Safety Category 4.

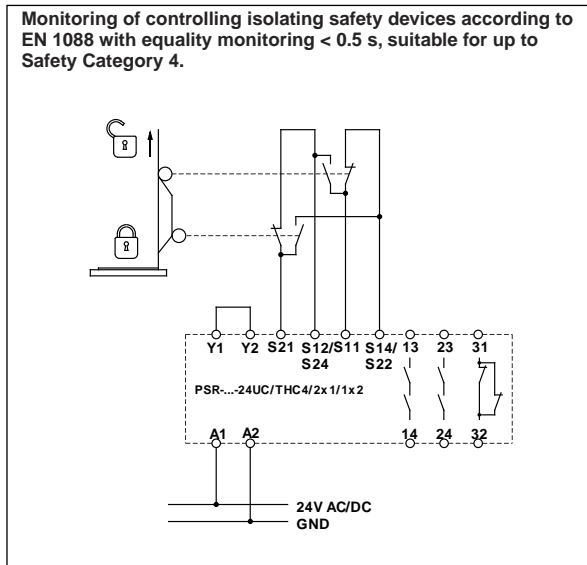

Two-hand control system with equality monitoring < 0.5 s and monitored contact expansion, corresponds to EN 574 Type IIIC, suitable for up to Safety Category 4.

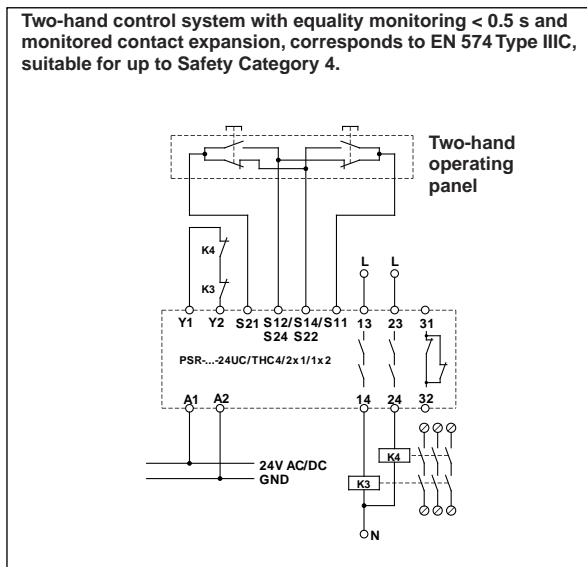

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)
Email: org@lifeelectronics.ru