

# Quad High Side Micropower MOSFET Driver with Internal Charge Pump

## FEATURES

- No External Charge Pump Components
- Fully Enhances N-Channel Power MOSFETs
- 16 Microamps Standby Current
- 95 Microamps ON Current
- Wide Power Supply Range 4.5V to 18V
- Controlled Switching ON and OFF Times
- Replaces P-Channel High Side Switches
- Compatible with Standard Logic Families
- Available in 16-pin SOL Package

## APPLICATIONS

- Laptop Computer Power Switching
- SCSI Termination Power Switching
- Cellular Telephone Power Management
- P-Channel Switch Replacement
- Battery Charging and Management
- Low Frequency H-Bridge Driver
- Stepper Motor and DC Motor Control

## DESCRIPTION

The LTC1156 quad High side gate driver allows using low cost N-channel FETs for high side switching applications. An internal charge pump boosts the gate drive voltage above the positive rail, fully enhancing an N-channel MOS switch with no external components. Micropower operation, with 16 $\mu$ A standby current and 95 $\mu$ A operating current, allows use in virtually all systems with maximum efficiency.


Included on chip is independent over-current sensing to provide automatic shutdown in case of short circuits. A time delay can be added to the current sense to prevent false triggering on high in-rush current loads.

The LTC1156 operates off of a 4.5V to 18V supply and is well suited for battery-powered applications, particularly where micropower "sleep" operation is required.


The LTC1156 is available in both 16-pin DIP and 16-pin SOL packages.

## TYPICAL APPLICATION

Laptop Computer Power Management

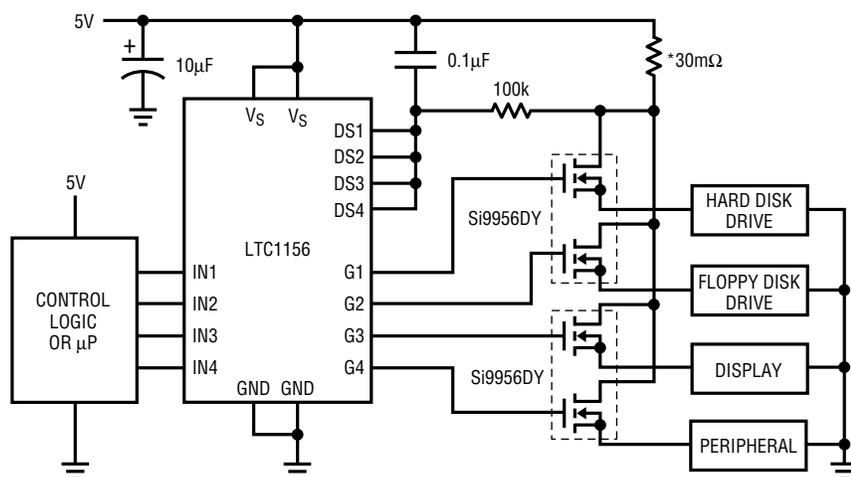

Standby Supply Current

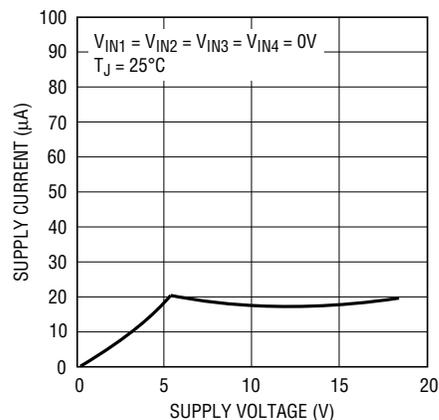

ALL COMPONENTS SHOWN ARE SURFACE MOUNT. MINIMUM PARTS COUNT SHOWN. CURRENT LIMITS CAN BE SET SEPARATELY AND TAILORED TO INDIVIDUAL LOAD CHARACTERISTICS.

\* IMS026 INTERNATIONAL MANUFACTURING SERVICES, INC. (401) 683-9700

1156 TA01

## ABSOLUTE MAXIMUM RATINGS

Supply Voltage .....	22V	Operating Temperature Range	
Input Voltage .....	( $V_S + 0.3V$ ) to ( $GND - 0.3V$ )	LTC1156C .....	0°C to 70°C
Gate Voltage .....	( $V_S + 24V$ ) to ( $GND - 0.3V$ )	Storage Temperature Range .....	-65°C to 150°C
Current (Any Pin) .....	50mA	Lead Temperature (Soldering, 10 sec.) .....	300°C

## PACKAGE/ORDER INFORMATION

<p>TOP VIEW</p> <p>N PACKAGE 16-LEAD PLASTIC DIP <math>T_{JMAX} = 110^{\circ}C, \theta_{JA} = 120^{\circ}C/W</math></p>	<p>ORDER PART NUMBER</p> <p>LTC1156CN</p>	<p>TOP VIEW</p> <p>S PACKAGE 16-LEAD PLASTIC SOL <math>T_{JMAX} = 110^{\circ}C, \theta_{JA} = 130^{\circ}C/W</math></p>	<p>ORDER PART NUMBER</p> <p>LTC1156CS</p>
---	---	---	---

Consult factory for Industrial and Military grade parts.

## ELECTRICAL CHARACTERISTICS $V_S = 4.5V$ to $18V, T_A = 25^{\circ}C$ , unless otherwise noted.

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS	
$V_S$	Supply Voltage	(Note 1)	●	4.5	18	V	
$I_Q$	Quiescent Current OFF	$V_S = 5V, V_{IN} = 0V$ (Note 2)		16	40	$\mu A$	
$I_Q$	Quiescent Current ON	$V_S = 5V, V_{IN} = 5V$ (Note 3)		95	125	$\mu A$	
$I_Q$	Quiescent Current ON	$V_S = 12V, V_{IN} = 5V$ (Note 3)		180	400	$\mu A$	
$V_{INH}$	Input High Voltage		●	2.0		V	
$V_{INL}$	Input Low Voltage		●		0.8	V	
$I_{IN}$	Input Current	$0V < V_{IN} < V_S$	●		$\pm 1.0$	$\mu A$	
$C_{IN}$	Input Capacitance			5		pF	
$V_{SEN}$	Drain Sense Threshold Voltage		●	80 75	100 100	120 125	mV mV
$I_{SEN}$	Drain Sense Input Current	$0V < V_{SEN} < V_S$	●		$\pm 0.1$	$\mu A$	
$V_{GATE} - V_S$	Gate Voltage Above Supply	$V_S = 5V$ $V_S = 6V$ $V_S = 12V$	● ● ●	6.0 7.5 15	7.0 8.3 18	9.0 15.0 25	V V V
$t_{ON}$	Turn-ON Time	$V_S = 5V, C_{GATE} = 1000pF$ Time for $V_{GATE} > V_S + 2V$ Time for $V_{GATE} > V_S + 5V$		50 200	250 1100	750 2000	$\mu s$ $\mu s$
		$V_S = 12V, C_{GATE} = 1000pF$ Time for $V_{GATE} > V_S + 5V$ Time for $V_{GATE} > V_S + 10V$		50 120	180 450	500 1200	$\mu s$ $\mu s$

# ELECTRICAL CHARACTERISTICS $V_S = 4.5V$ to $18V$ , $T_A = 25^\circ C$ , unless otherwise noted.

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
$t_{OFF}$	Turn-OFF Time	$V_S = 5V$ , $C_{GATE} = 1000pF$ Time for $V_{GATE} < 1V$	10	36	60	$\mu s$
		$V_S = 12V$ , $C_{GATE} = 1000pF$ Time for $V_{GATE} < 1V$	10	26	60	$\mu s$
$t_{SC}$	Short Circuit Turn-OFF Time	$V_S = 5V$ , $C_{GATE} = 1000pF$ Time for $V_{GATE} < 1V$	5	16	30	$\mu s$
		$V_S = 12V$ , $C_{GATE} = 1000pF$ Time for $V_{GATE} < 1V$	5	16	30	$\mu s$

The ● denotes specifications which apply over the full operating temperature range.


**Note 1:** Both  $V_S$  pins (3 and 8) must be connected together, and both ground pins (1 and 6) must be connected together.

**Note 2:** Quiescent current OFF is for all channels in OFF condition.

**Note 3:** Quiescent current ON is per driver and is measured independently.


## TYPICAL PERFORMANCE CHARACTERISTICS

Standby Supply Current

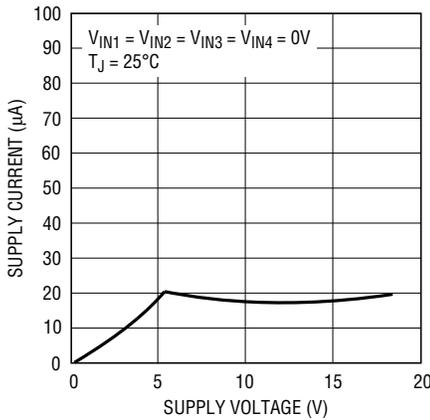


LTC1156 G01

Supply Current per Channel ON

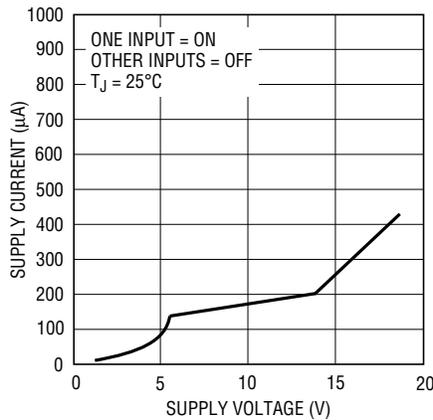


1156 G02

High Side Gate Voltage

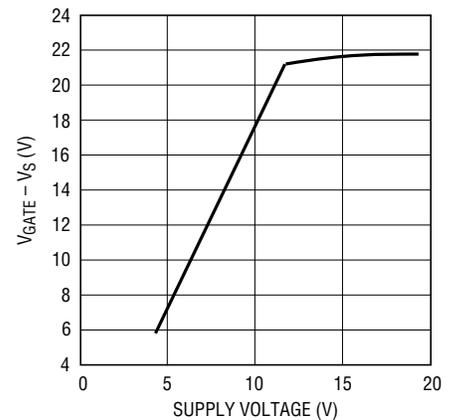


LTC1156 G03

Standby Supply Current

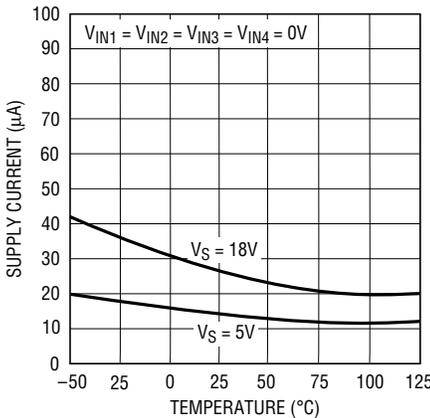


1156 G04

Supply Current per Channel ON

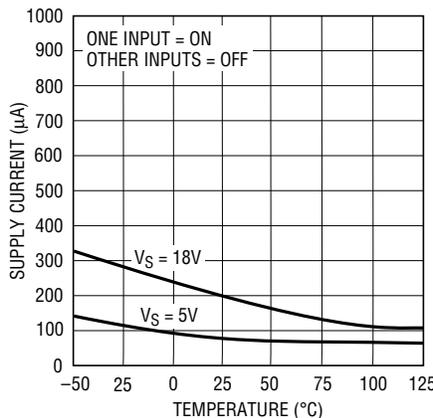




1156 G05

Low Side Gate Voltage

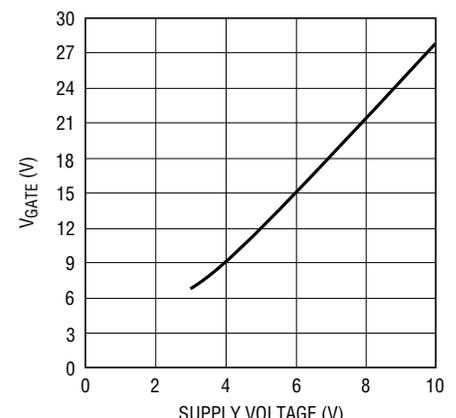


1156 G06

## TYPICAL PERFORMANCE CHARACTERISTICS

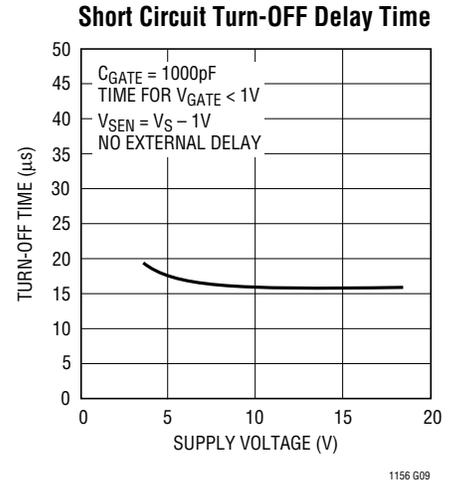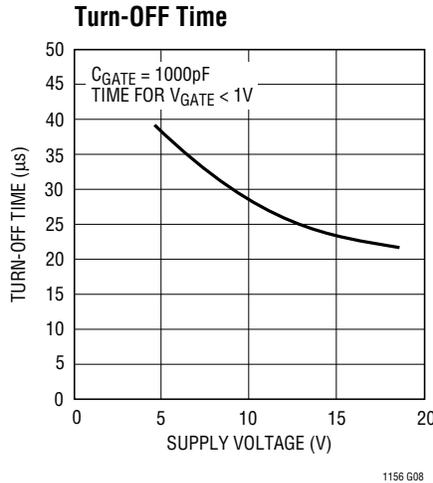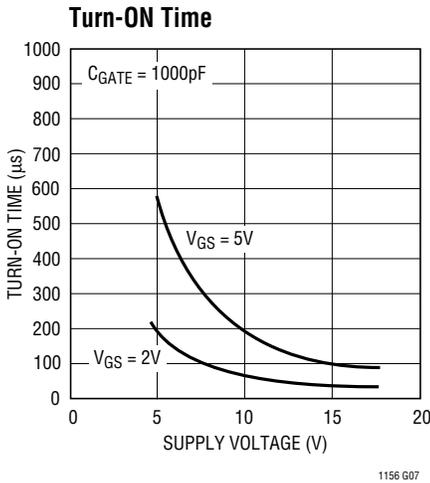

## BLOCK DIAGRAM

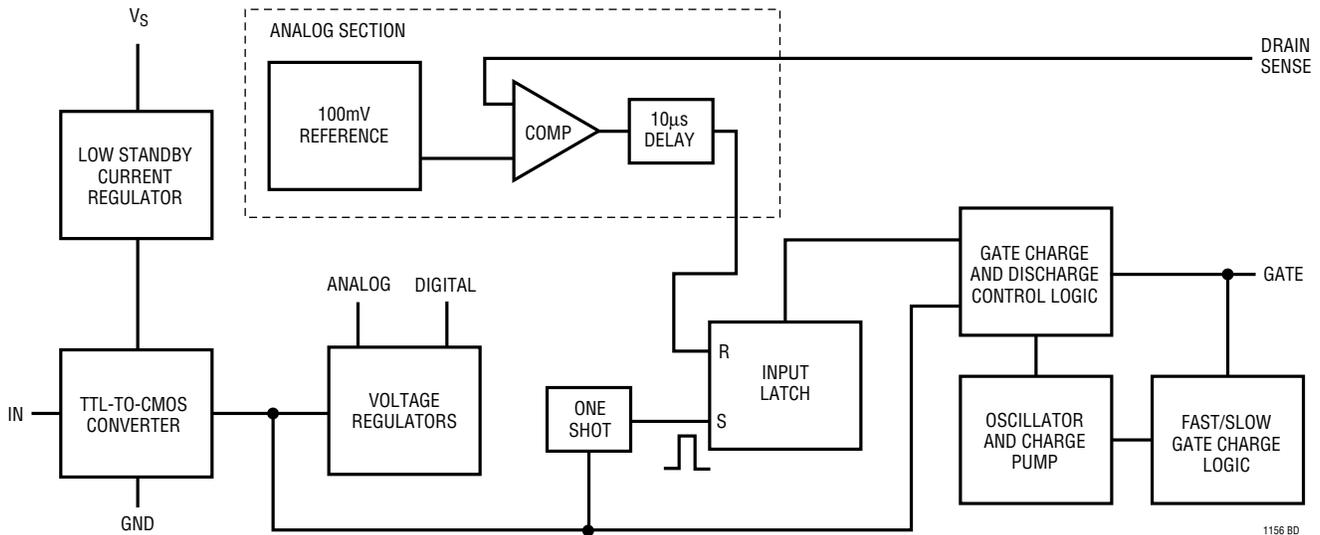

## OPERATION

The LTC1156 contains four independent power MOSFET gate drivers and protection circuits (refer to the Block Diagram for detail). Each section of LTC1156 consists of the following functional blocks:


### TTL and CMOS Compatible Inputs

Each driver input has been designed to accommodate a wide range of logic families. The input threshold is set at 1.3V with approximately 100mV of hysteresis.



TYPICAL APPLICATIONS


24V to 30V Quad Industrial Switch with Thermal Shutdown

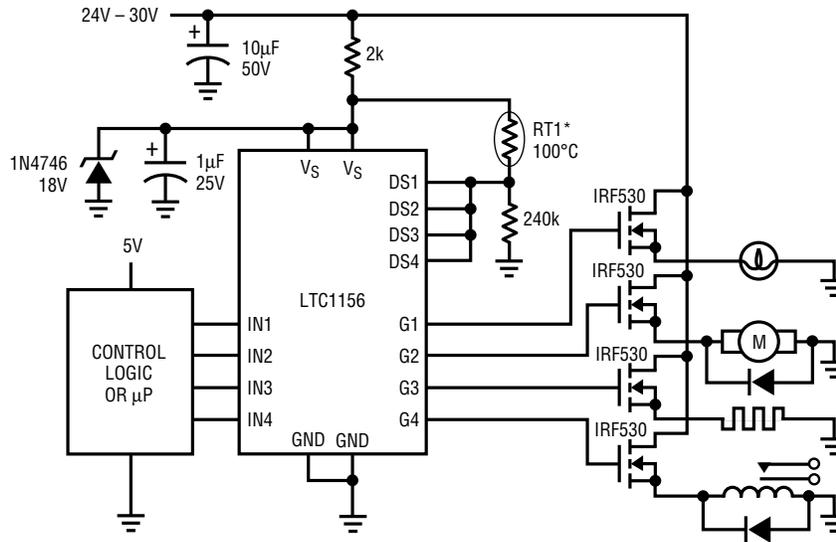

\* KEYSTONE RL2006-100-100-30-PT MOUNT ON HEATSINK.

1156 TA03


Automotive Triple High Side Switch with Reverse Battery Interrupt, Short-Circuit and High-Voltage Transient Protection (20µA Standby Current)

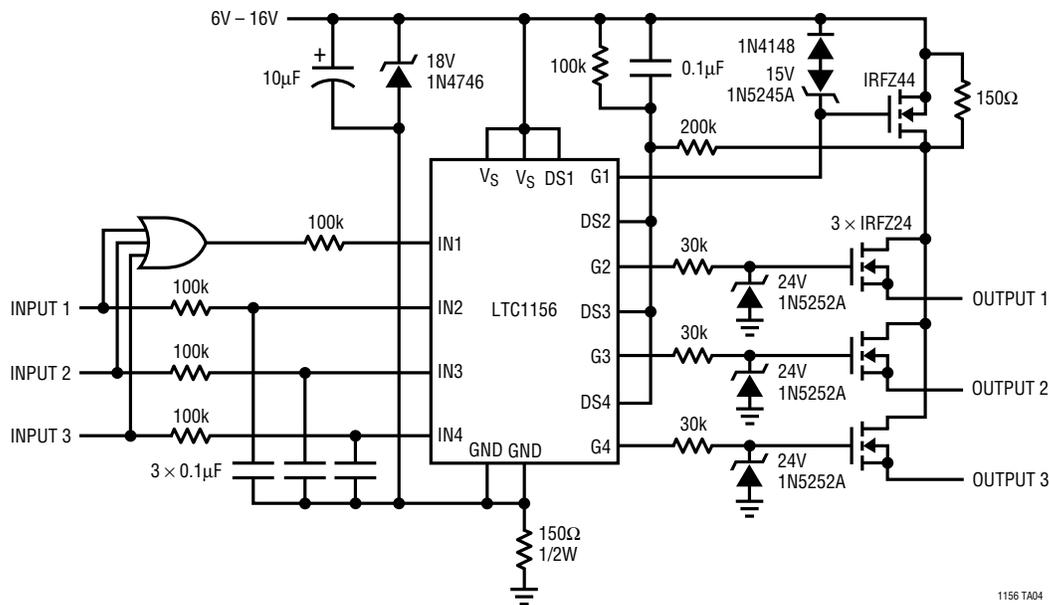


1156 TA04

# TYPICAL APPLICATIONS

## 4-Phase Stepper Motor Driver with Short-Circuit Protection

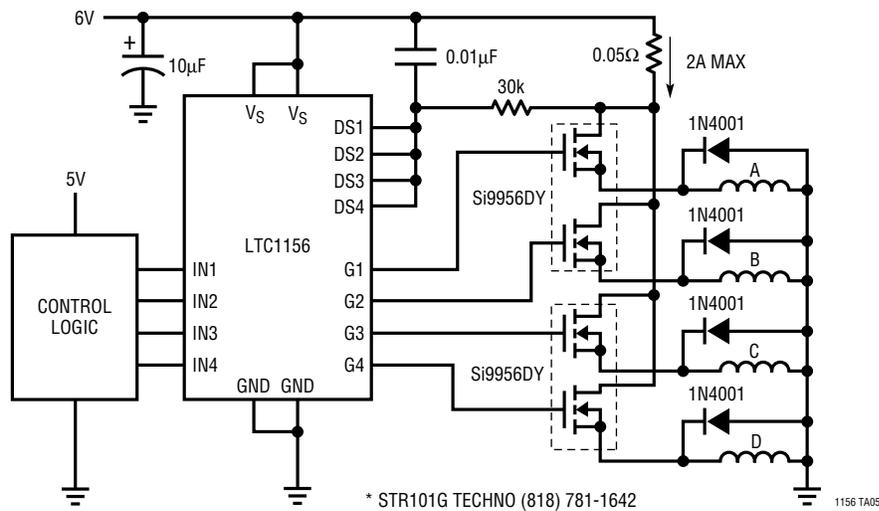

## Full H-Bridge Driver with Short-Circuit Protection and 16µA Standby Current Low Frequency Operation (<100Hz)

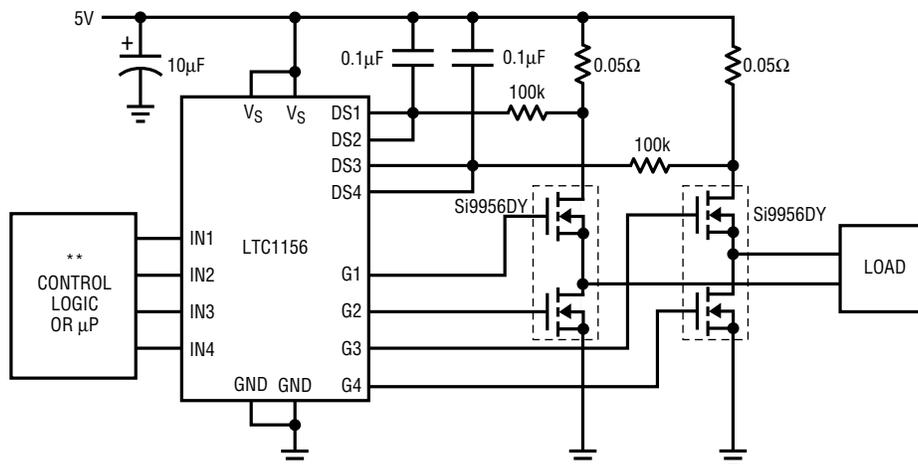


\* STR101G TECHNO (818) 781-1642  
 \*\* SOFTWARE (OR HARDWARE) DELAYS SHOULD BE PROVIDED TO AVOID CROSS-CONDUCTION. ALL COMPONENTS SHOWN ARE SURFACE MOUNT.

1156 TA06

For more Typical Applications, see LTC1155 data sheet.


**PACKAGE DESCRIPTION** Dimensions in inches (millimeters) unless otherwise noted.

**N Package  
16-Lead Plastic DIP**

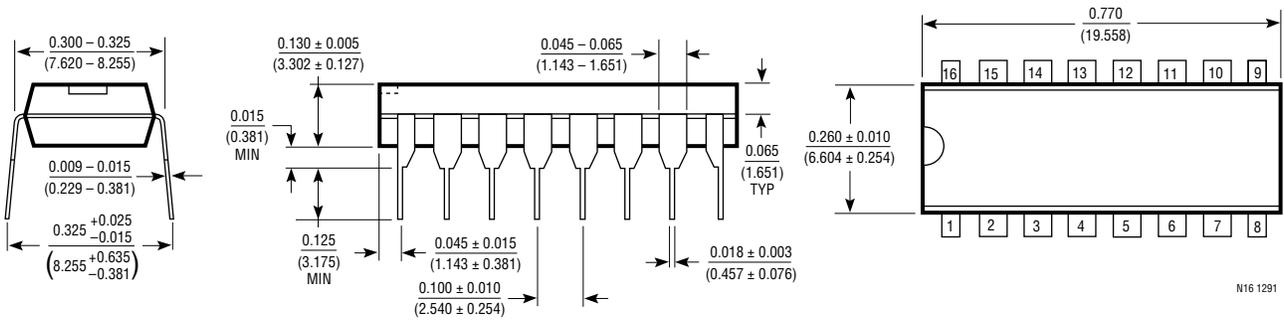

N16 1291

**S Package  
16-Lead Plastic SOL**

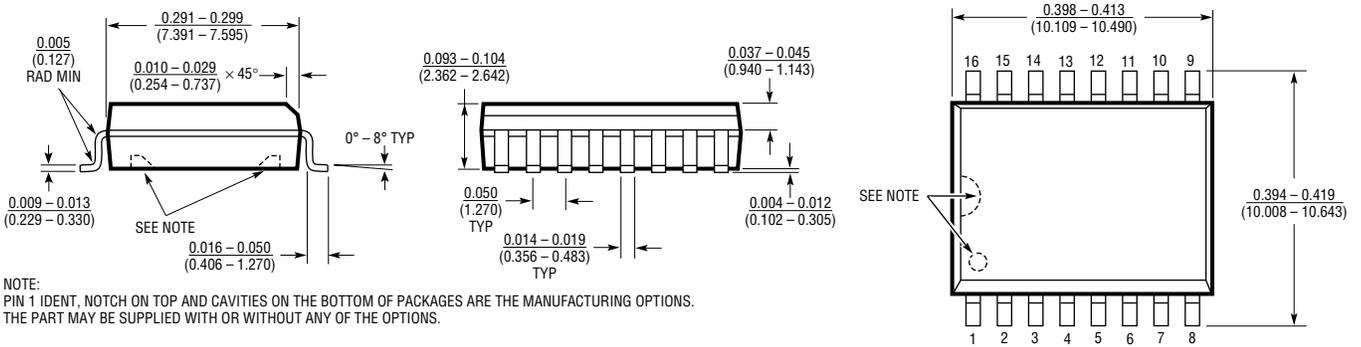

NOTE:  
PIN 1 IDENT, NOTCH ON TOP AND CAVITIES ON THE BOTTOM OF PACKAGES ARE THE MANUFACTURING OPTIONS.  
THE PART MAY BE SUPPLIED WITH OR WITHOUT ANY OF THE OPTIONS.

SOL16 12/91

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкуренеспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)