16-bit transceiver with direction pin; 3-state Rev. 4 — 21 November 2017

Product data sheet

### **1** General description

The 74ALVC16245; 74ALVCH16245 is a 16-bit transceiver featuring non-inverting 3-state bus compatible outputs in both send and receive directions.

The 74ALVC16245; 74ALVCH16245 features two output enable inputs (pins  $n\overline{OE}$ ) for easy cascading and two send or receive inputs (pins nDIR) for direction control. Pins  $n\overline{OE}$  control the outputs so that the buses are effectively isolated. This device can be used as two 8-bit transceivers or one 16-bit transceiver.

The 74ALVCH16245 has an active bushold circuitry which is provided to hold unused or floating data inputs at a valid logic level. This feature eliminates the need for external pull-up or pull-down resistors.

### 2 Features and benefits

- Wide supply voltage range from 1.2 V to 3.6 V
- CMOS low power consumption
- MULTIBYTE flow-through standard pin-out architecture
- Low inductance multiple  $V_{CC}$  and GND pins for minimize noise and ground bounce
- Direct interface with TTL levels
- All data inputs have bushold (74ALVCH16245 only)
- Output drive capability 50 Ω transmission lines at 85 °C
- Current drive  $\pm 24$  mA at V<sub>CC</sub> = 3.0 V.
- Complies with JEDEC standards:
  - JESD8-5 (2.3 V to 2.7 V)
  - JESD8B/JESD36 (2.7 V to 3.6 V)
- ESD protection:
  - HBM ANSI/ESDA/JEDEC JS-001 exceeds 2000 V
  - CDM JESD22-C101E exceeds 1000 V

### **3** Ordering information


#### Table 1. Ordering information

Type number	Package					
	Temperature range	Name	Description	Version		
74ALVC16245DL	-40 °C to +85 °C		plastic shrink small outline package; 48 leads;	SOT370-1		
74ALVCH16245DL			body width 7.5 mm			
74ALVC16245DGG	-40 °C to +85 °C	TSSOP48	plastic thin shrink small outline package;	SOT362-1		
74ALVCH16245DGG			48 leads; body width 6.1 mm			

# ne<mark>x</mark>peria

16-bit transceiver with direction pin; 3-state


### 4 Functional diagram

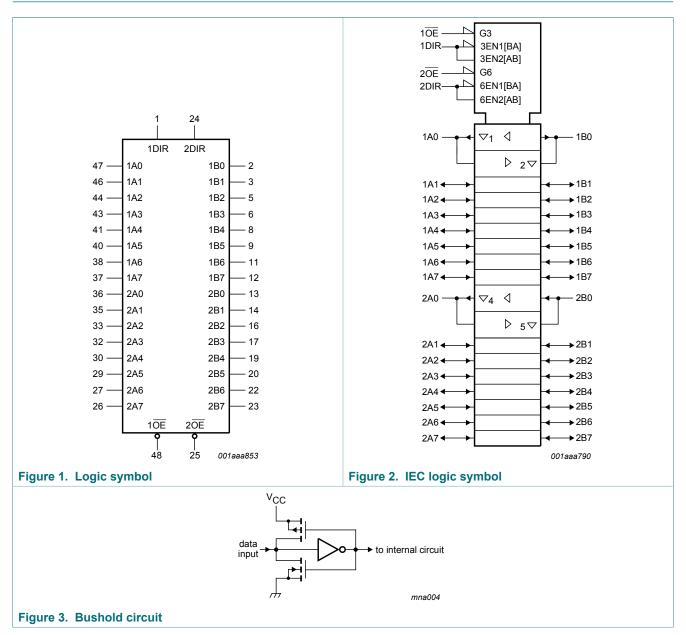

#### Nexperia

# 74ALVC16245; 74ALVCH16245


16-bit transceiver with direction pin; 3-state

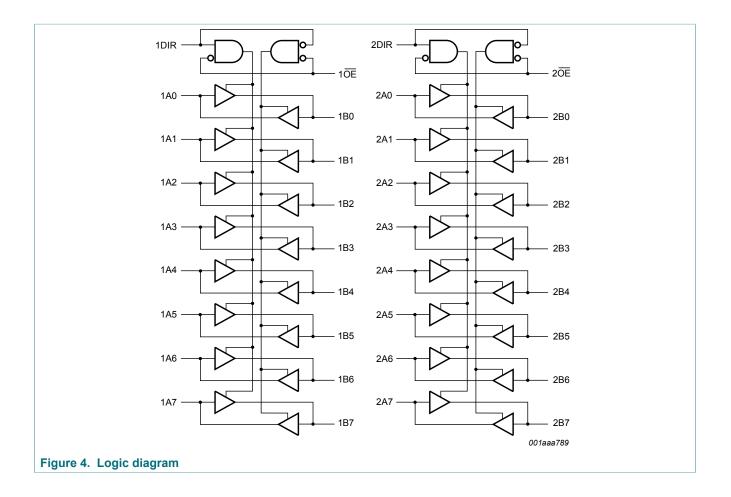

16-bit transceiver with direction pin; 3-state

### 5 Pinning information

#### 5.1 Pinning

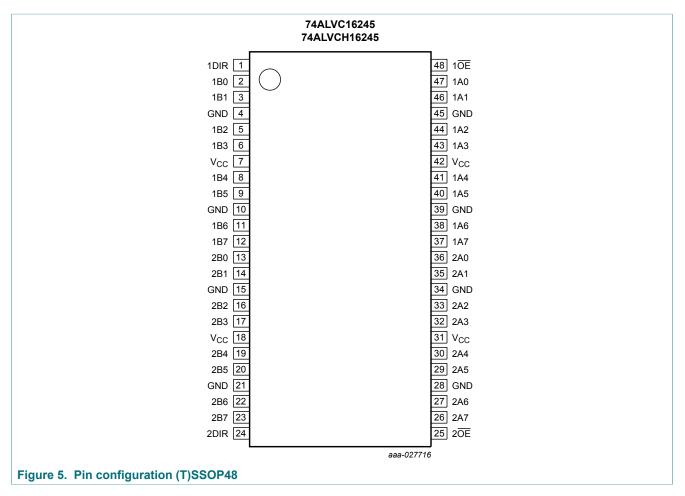

#### 5.2 Pin description

#### Table 2. Pin description

Pin	Symbol	Description
1, 24	1DIR, 2DIR	direction control inputs
2, 3, 5, 6, 8, 9, 11, 12	1B0, 1B1, 1B2, 1B3, 1B4, 1B5, 1B6, 1B7	data output or input
4, 10, 15, 21, 28, 34, 39, 45	GND	ground (0 V)
7, 18, 31, 42	V <sub>cc</sub>	positive supply voltage
13, 14, 16, 17, 19, 20, 22, 23	2B0, 2B1, 2B2, 2B3, 2B4, 2B5, 2B6, 2B7	data output or input
48, 25	10E, 20E	output enable input (active LOW)
36, 35, 33, 32, 30, 29, 27, 26	2A0, 2A1, 2A2, 2A3, 2A4, 2A5, 2A6, 2A7	data input or output
47, 46, 44, 43, 41, 40, 38, 37	1A0, 1A1, 1A2, 1A3, 1A4, 1A5, 1A6, 1A7	data input or output

74ALVC\_ALVCH16245
Product data sheet

© Nexperia B.V. 2017. All rights reserved.

16-bit transceiver with direction pin; 3-state

#### **Functional description** 6

#### Table 3. Function table <sup>[1]</sup>

Input		Input or output		
nOE	nDIR	nAn	nBn	
L	L	output nAn = nBn	input	
L	Н	input	output nBn = nAn	
Н	X	Z	Z	

[1] H = HIGH voltage level

L = LOW voltage level

X = don't care

Z = high-impedance OFF-state.

#### **Limiting values** 7

#### Table 4. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134). Voltages are referenced to GND (ground = 0 V).

Symbol	Parameter	Conditions	Min	Max	Unit
V <sub>CC</sub>	supply voltage		-0.5	+4.6	V
VI	input voltage	data inputs with bushold [1]	-0.5	V <sub>CC</sub> + 0.5	V
		data inputs without bushold [1]	-0.5	+4.6	V
		control pins [1]	-0.5	+4.6	V
Vo	output voltage	[1]	-0.5	V <sub>CC</sub> + 0.5	V
I <sub>IK</sub>	input clamping current	V <sub>I</sub> < 0 V	-50	-	mA
I <sub>OK</sub>	output clamping current	$V_{\rm O}$ > $V_{\rm CC}$ or $V_{\rm O}$ < 0 V	-	±50	mA
I <sub>O</sub>	output current	$V_{O}$ = 0 V to $V_{CC}$	-	±50	mA
I <sub>CC</sub>	supply current		-	100	mA
I <sub>GND</sub>	ground current		-100	-	mA
T <sub>stg</sub>	storage temperature		-65	+150	°C
P <sub>tot</sub>	total power dissipation	T <sub>amb</sub> = -40 °C to +85 °C			
		SSOP package <sup>[2]</sup>	-	850	mW
		TSSOP package <sup>[3]</sup>	-	600	mW

[1] The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

[2] Above 55 °C the value of  $P_{tot}$  derates linearly with 11.3 mW/K. [3] Above 55 °C the value of  $P_{tot}$  derates linearly with 8 mW/K.

16-bit transceiver with direction pin; 3-state

### 8 Recommended operating conditions

Symbol	Parameter	Conditions	Min	Тур	Max	Unit
V <sub>CC</sub>	supply voltage	maximum speed performance				
		C <sub>L</sub> = 30 pF	2.3	-	2.7	V
		C <sub>L</sub> = 50 pF	3.0	-	3.6	V
		low-voltage applications	1.2	-	3.6	V
VI	input voltage		0	-	V <sub>CC</sub>	V
Vo	output voltage		0	-	V <sub>CC</sub>	V
T <sub>amb</sub>	ambient temperature		-40	-	+85	°C
Δt/ΔV	input transition rise and fall rate	V <sub>CC</sub> = 2.3 V to 3.0 V	-	-	20	ns/V
		V <sub>CC</sub> = 3.0 V to 3.6 V	-	-	10	ns/V

### 9 Static characteristics

#### Table 6. Static characteristics

At recommended operating conditions; voltages are referenced to GND (ground = 0 V).

Symbol	Parameter	Conditions	Min	Typ <sup>[1]</sup>	Мах	Unit
T <sub>amb</sub> = -4	10 °C to +85 °C			1		
V <sub>IH</sub> HIGH-level input voltage		V <sub>CC</sub> = 2.3 V to 2.7 V	1.7	1.2	-	V
		V <sub>CC</sub> = 2.7 V to 3.6 V	2.0	1.5	-	V
V <sub>IL</sub>	LOW-level	$V_{CC}$ = 2.3 V to 2.7 V	-	1.2	0.7	V
	input voltage	V <sub>CC</sub> = 2.7 V to 3.6 V	-	1.5	0.8	V
V <sub>OH</sub>	HIGH-level	$V_{I} = V_{IH} \text{ or } V_{IL}$				
	output voltage	$I_{O}$ = -100 µA; $V_{CC}$ = 2.3 V to 3.6 V	V <sub>CC</sub> - 0.2	V <sub>CC</sub>	-	V
		I <sub>O</sub> = -6 mA; V <sub>CC</sub> = 2.3 V	V <sub>CC</sub> - 0.3	V <sub>CC</sub> - 0.08	-	V
		I <sub>O</sub> = -12 mA; V <sub>CC</sub> = 2.3 V	V <sub>CC</sub> - 0.6	V <sub>CC</sub> - 0.26	-	V
		I <sub>O</sub> = -12 mA; V <sub>CC</sub> = 2.7 V	V <sub>CC</sub> - 0.5	V <sub>CC</sub> - 0.14	-	V
		I <sub>O</sub> = -12 mA; V <sub>CC</sub> = 3.0 V	V <sub>CC</sub> - 0.6	V <sub>CC</sub> - 0.09	-	V
		I <sub>O</sub> = -24 mA; V <sub>CC</sub> = 3.0 V	V <sub>CC</sub> - 1.0	V <sub>CC</sub> - 0.28	-	V
V <sub>OL</sub>	LOW-level	$V_{I} = V_{IH} \text{ or } V_{IL}$				
	output voltage	$I_{O}$ = 100 µA; $V_{CC}$ = 2.3 V to 3.6 V	-	GND	0.20	V
		$I_{O}$ = 6 mA; $V_{CC}$ = 2.3 V	-	0.07	0.40	V
		I <sub>O</sub> = 12 mA; V <sub>CC</sub> = 2.3 V	-	0.15	0.70	V
		I <sub>O</sub> = 12 mA; V <sub>CC</sub> = 2.7 V	-	0.14	0.40	V
		$I_{O}$ = 24 mA; $V_{CC}$ = 3.0 V	-	0.27	0.55	V
lı	input leakage current	$V_{CC}$ = 2.3 V to 3.6 V; $V_{I}$ = $V_{CC}$ or GND	-	0.1	5	μA
I <sub>OZ</sub>	$\begin{array}{llllllllllllllllllllllllllllllllllll$		-	0.1	10	μA

16-bit transceiver with direction pin; 3-state

Symbol	Parameter	Conditions		Min	Typ <sup>[1]</sup>	Мах	Unit
I <sub>CC</sub>	supply current	$V_{CC}$ = 2.3 V to 3.6 V; V <sub>I</sub> = V <sub>CC</sub> or GND; I <sub>O</sub> = 0 A		-	0.2	40	μA
ΔI <sub>CC</sub>	additional supply current	74ALVCH16245; per data I/O pin; V <sub>CC</sub> = 2.3 V to 3.6 V; V <sub>I</sub> = V <sub>CC</sub> - 0.6 V; V <sub>O</sub> = 0 A		-	150	750	μA
I <sub>BHL</sub>	bus hold LOW	V <sub>CC</sub> = 2.3 V; V <sub>I</sub> = 0.7 V	[2]	45	-	-	μA
	current	V <sub>CC</sub> = 3.0 V; V <sub>I</sub> = 0.8 V	[2]	75	150	-	μA
I <sub>BHH</sub>	bus hold HIGH	V <sub>CC</sub> = 2.3 V; V <sub>I</sub> = 1.7 V	[2]	-45	-	-	μA
	current	$V_{CC}$ = 3.0 V; V <sub>I</sub> = 2.0 V	[2]	-75	-175	-	μA
I <sub>BHLO</sub>	bus hold LOW overdrive current	V <sub>CC</sub> = 3.6 V	[2]	500	-	-	μA
I <sub>BHHO</sub>	bus hold HIGH overdrive current	V <sub>CC</sub> = 3.6 V	[2]	-500	-	-	μA
Cı	input capacitance			-	4.0	-	pF
C <sub>I/O</sub>	input/output capacitance			-	8.0	-	pF

[1] All typical values are measured at  $T_{amb}$  = 25 °C. [2] Valid for data inputs of bushold parts.

16-bit transceiver with direction pin; 3-state

### **10** Dynamic characteristics

#### Table 7. Dynamic characteristics

At recommended operating conditions; voltages are referenced to GND (ground = 0 V); for test circuit see Figure 8.

Symbol	Parameter	Conditions		Typ <sup>[1]</sup>	Max	Unit
T <sub>amb</sub> = -4	0 °C to +85 °C					
t <sub>pd</sub>	propagation delay	nAn to nBn; nBn to nAn; see Figure 6	[2]			
		V <sub>CC</sub> = 2.3 V to 2.7 V	1.0	2.0	3.7	ns
		V <sub>CC</sub> = 2.7 V	1.0	2.1	3.6	ns
		V <sub>CC</sub> = 3.0 V to 3.6 V	1.0	1.9	3.0	ns
t <sub>en</sub>	enable time	nOE to nAn; nOE to nBn; see Figure 7	[3]			
		V <sub>CC</sub> = 2.3 V to 2.7 V	1.0	2.7	5.7	ns
		V <sub>CC</sub> = 2.7 V	1.0	3.0	5.4	ns
		V <sub>CC</sub> = 3.0 V to 3.6 V	1.0	2.3	4.4	ns
t <sub>dis</sub>	disable time	nOE to nAn; nOE to nBn; see Figure 7	[4]			
		V <sub>CC</sub> = 2.3 V to 2.7 V	1.0	2.2	5.2	ns
		V <sub>CC</sub> = 2.7 V	1.0	3.1	4.6	ns
		V <sub>CC</sub> = 3.0 V to 3.6 V	1.0	2.8	4.1	ns
C <sub>PD</sub>	power dissipation	per buffer; $V_I$ = GND to $V_{CC}$	[5]			
	capacitance	outputs enabled	-	29	-	pF
		outputs disabled	-	5	-	pF

[1] Typical values are measured at  $T_{amb}$  = 25 °C Typical values for V<sub>CC</sub> = 2.3 V to 2.7 V are measured at V<sub>CC</sub> = 2.5 V. Typical values for V<sub>CC</sub> = 3.0 V to 3.6 V are measured at V<sub>CC</sub> = 3.3 V.

[2]  $t_{pd}$  is the same as  $t_{PLH}$  and  $t_{PHL}$ .

[3] ten is the same as tPZL and tPZH.

[4]  $t_{dis}$  is the same as  $t_{PLZ}$  and  $t_{PHZ}$ .

- [5]  $C_{PD}$  is used to determine the dynamic power dissipation (P<sub>D</sub> in  $\mu$ W).  $P_D = C_{PD} \times V_{CC}^2 \times f_i \times N + \sum (C_L \times V_{CC}^2 \times f_o)$  where:

 $f_i$  = input frequency in MHz;  $f_o =$  output frequency in MHz;

C<sub>L</sub> = output load capacitance in pF;


V<sub>CC</sub> = supply voltage in Volts;

N = total load switching outputs;


 $\Sigma(C_L \times V_{CC}^2 \times f_0) = \text{sum of outputs.}$ 

16-bit transceiver with direction pin; 3-state

### 10.1 Waveforms and test circuit

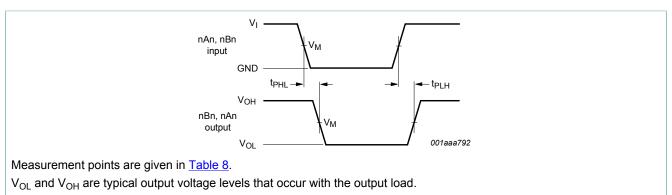

#### Figure 6. Input (nAn, nBn) to output (nBn, nAn) propagation delay times

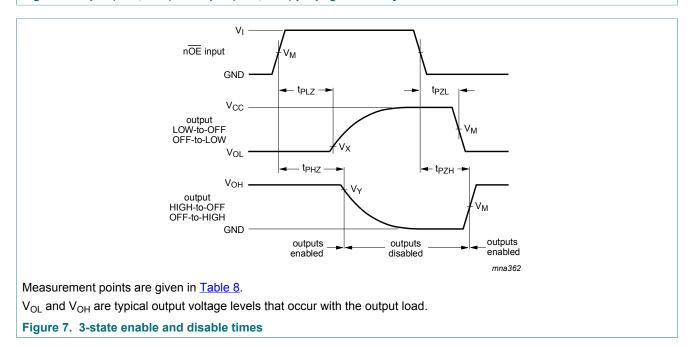


#### Table 8. Measurement points

Supply voltage	Input	Output			
V <sub>cc</sub>	V <sub>M</sub>	V <sub>M</sub>	V <sub>X</sub>	V <sub>Y</sub>	
< 2.7 V	0.5 × V <sub>CC</sub>	0.5 × V <sub>CC</sub>	V <sub>OL</sub> + 0.15 V	V <sub>OH</sub> - 0.15 V	
≥ 2.7 V	1.5 V	1.5 V	V <sub>OL</sub> + 0.3 V	V <sub>OH</sub> - 0.3 V	

#### Nexperia

### 74ALVC16245; 74ALVCH16245

16-bit transceiver with direction pin; 3-state

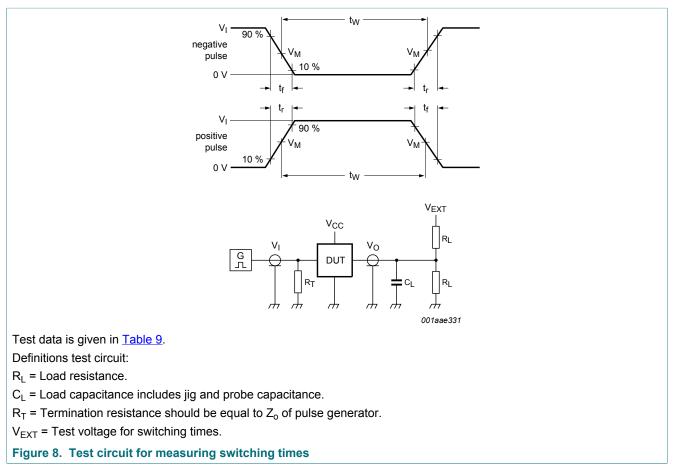


#### Table 9. Test data

Supply voltage	pply voltage Input		Load	Load		V <sub>EXT</sub>		
V <sub>cc</sub>	VI	t <sub>r</sub> , t <sub>f</sub>	CL	RL	t <sub>PLH</sub> , t <sub>PHL</sub>	t <sub>PHZ</sub> , t <sub>PZH</sub>	t <sub>PLZ</sub> , t <sub>PZL</sub>	
< 2.7 V	V <sub>CC</sub>	≤2.0 ns	30 pF	500 Ω	open	GND	$2 \times V_{CC}$	
2.7 V to 3.6 V	2.7 V	≤2.5 ns	50 pF	500 Ω	open	GND	$2 \times V_{CC}$	


16-bit transceiver with direction pin; 3-state

### 11 Package outline

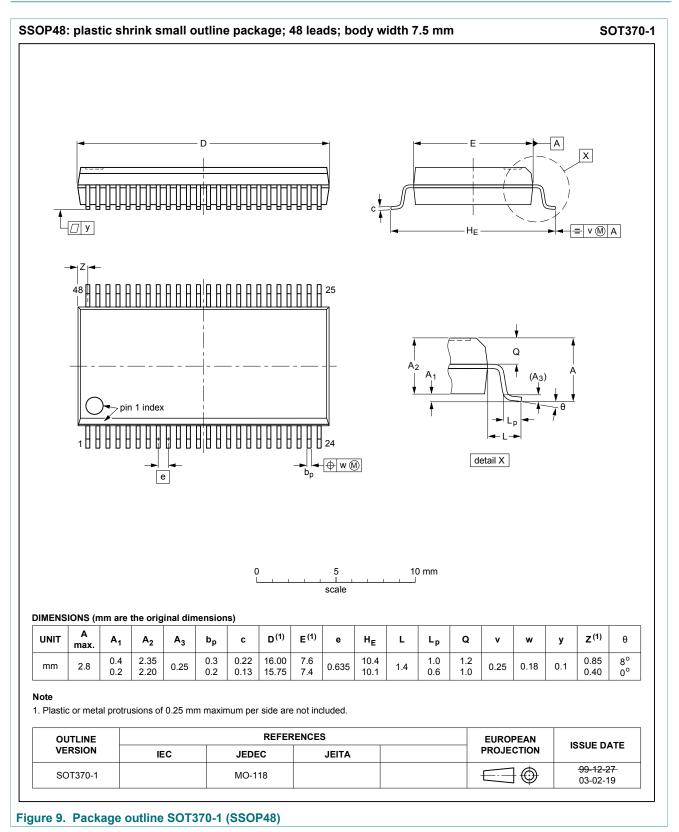

74ALVC\_ALVCH16245
Product data sheet

16-bit transceiver with direction pin; 3-state

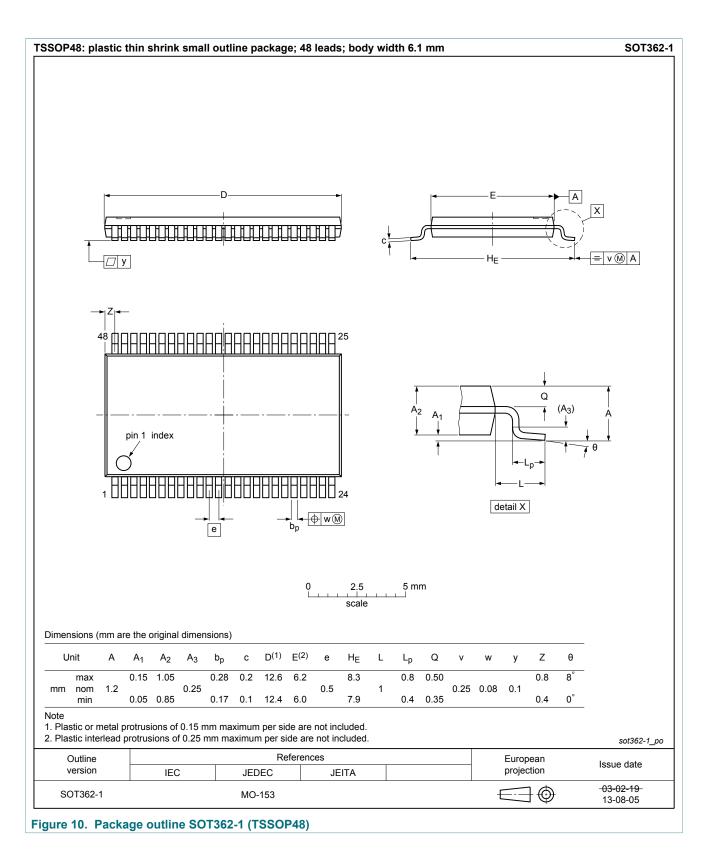

74ALVC\_ALVCH16245
Product data sheet

16-bit transceiver with direction pin; 3-state

### **12 Abbreviations**

Table 10. Abbreviations					
Acronym	Description				
CDM	Charged Device Model				
CMOS	Complementary Metal-Oxide Semiconductor				
DUT	Device Under Test				
ESD	ElectroStatic Discharge				
НВМ	Human Body Model				
TTL	Transistor-Transistor Logic				

### **13 Revision history**

Table 11. Revision history								
Document ID	Release date	Data sheet status	Change notice	Supersedes				
74ALVC_ALVCH16245 v.4	20171121	Product data sheet	-	74ALVC_ALVCH16245 v.3				
Modifications:	<ul> <li>The format of this data sheet has been redesigned to comply with the identity guidelines Nexperia.</li> <li>Legal texts have been adapted to the new company name where appropriate.</li> </ul>							
74ALVC_ALVCH16245 v.3	20040512	Product data sheet	-	74ALVCH16245 v.2				
				74ALVC16245_ 74ALVCH16245 v.1				
Modifications:	and informatio	this data sheet has been re n standard of Philips Semic neral description updated.		with the current presentation				
74ALVCH16245 v.2	19980629	Product specification	-	74ALVCH16245 v.1				
74ALVC16245_ 74ALVCH16245 v.1	19980325	Product specification	-	-				
74ALVCH16245 v.1	19950102	Preliminary specification	-	-				

16-bit transceiver with direction pin; 3-state

### 14 Legal information

#### 14.1 Data sheet status

Document status <sup>[1][2]</sup>	Product status <sup>[3]</sup>	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

Please consult the most recently issued document before initiating or completing a design. [1]

The term 'short data sheet' is explained in section "Definitions".

[2] [3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL http://www.nexperia.com.

#### 14.2 Definitions

Draft — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. Nexperia does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local Nexperia sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

Product specification — The information and data provided in a Product data sheet shall define the specification of the product as agreed between Nexperia and its customer, unless Nexperia and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the Nexperia product is deemed to offer functions and qualities beyond those described in the Product data sheet.

#### 14.3 Disclaimers

Limited warranty and liability - Information in this document is believed to be accurate and reliable. However, Nexperia does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. Nexperia takes no responsibility for the content in this document if provided by an information source outside of Nexperia. In no event shall Nexperia be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory. Notwithstanding any damages that customer might incur for any reason whatsoever, Nexperia's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Terms and conditions of commercial sale of Nexperia

Right to make changes - Nexperia reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use - Nexperia products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an Nexperia product can reasonably be expected to result in personal injury, death or severe property or environmental damage. Nexperia and its suppliers accept no liability for inclusion and/or use of Nexperia products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Applications — Applications that are described herein for any of these products are for illustrative purposes only. Nexperia makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification. Customers are responsible for the design and operation of their applications and products using Nexperia products, and Nexperia accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the Nexperia product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products. Nexperia does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using Nexperia products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). Nexperia does not accept any liability in this respect.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

Terms and conditions of commercial sale - Nexperia products are sold subject to the general terms and conditions of commercial sale, as published at http://www.nexperia.com/profile/terms, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Nexperia hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of Nexperia products by customer

No offer to sell or license - Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

Export control — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

74ALVC ALVCH16245 Product data sheet

#### 16-bit transceiver with direction pin; 3-state

Non-automotive qualified products — Unless this data sheet expressly states that this specific Nexperia product is automotive qualified, the product is not suitable for automotive use. It is neither qualified nor tested in accordance with automotive testing or application requirements. Nexperia accepts no liability for inclusion and/or use of non-automotive qualified products in automotive equipment or applications. In the event that customer uses the product for design-in and use in automotive applications to automotive specifications and standards, customer (a) shall use the product without Nexperia's warranty of the product for such automotive applications, use and specifications beyond Nexperia's specifications such uses the product for automotive applications beyond Nexperia's specifications such use shall be solely at customer's own risk, and (c) customer fully indemnifies Nexperia for any liability, damages or failed product claims resulting from customer

design and use of the product for automotive applications beyond Nexperia's standard warranty and Nexperia's product specifications.

**Translations** — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

#### 14.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

16-bit transceiver with direction pin; 3-state

#### Contents

1	General description	1
2	Features and benefits	1
3	Ordering information	1
4	Functional diagram	2
5	Pinning information	4
5.1	Pinning	
5.2	Pin description	4
6	Functional description	
7	Limiting values	
8	Recommended operating conditions	6
9	Static characteristics	6
10	Dynamic characteristics	8
10.1	Waveforms and test circuit	9
11	Package outline	
12	Abbreviations	13
13	Revision history	13
14	Legal information	

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.

© Nexperia B.V. 2017.

All rights reserved.

For more information, please visit: http://www.nexperia.com For sales office addresses, please send an email to: salesaddresses@nexperia.com

Date of release: 21 November 2017 Document identifier: 74ALVC\_ALVCH16245



#### ООО "ЛайфЭлектроникс"

ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 3010181090000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный) Email: org@lifeelectronics.ru

#### www.lifeelectronics.ru