



TAOGLAS®



Datasheet

2.4/5.8GHz 5dBi Terminal Mount Dipole Antenna

Part No:
GW.51.5153

Description:

Wi-Fi 2.4/5.8GHz 5dBi Dipole Terminal Mount Antenna RP-SMA(M) Hinged

Features:

- 2.4/5.8GHz Band Operation
- 5dBi Gain
- High Efficiency up to 80%
- Hinged RP-SMA (M) Connector
- Height: 198mm
- Diameter: 13mm
- RoHS & Reach Compliant

1.	Introduction	3
2.	Specifications	4
3.	Antenna Characteristics	5
4.	Radiation Patterns	7
5.	Mechanical Drawing	12
6.	Packaging	13
	Changelog	14

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.



1. Introduction



The Taoglas GW.51 is a 2.4 & 5.8GHz Wi-Fi terminal mount dipole antenna. At just 198mm in height and 13mm in diameter, the robust TPEE enclosure can be mounted straight or at right angle to the device with its hinged RP-SMA(M) connector. It is ideal for applications such as Bluetooth, BLE, ZigBee and Wireless LAN. The GW.82, designed for superior performance and reliability, has an omnidirectional radiation pattern and extremely high efficiency and gain on both the 2.4 & 5.8GHz bands.

Typical applications include:

- Smart Home - Gateways/Routers - Connected Agriculture

The GW.51 has up to 5dBi Peak making it a cost-effective, high-performing choice for any indoor or outdoor application. Many module manufacturers specify peak gain limits for any antennas that are to be connected to that module. Those peak gain limits are based on free-space conditions. In practice, the peak gain of an antenna tested in free-space can degrade by at least 1 or 2dBi when installed. So ideally you should go for a slightly higher peak gain antenna than mentioned on the module specification to compensate for this effect. This provides you with improved performance. Upon testing of any of our antennas with your device and appropriate layout, integration technique, or cable, we can work with you to make any of our antennas' perform below the peak gain limits. Taoglas can then issue a specification and/or report for the selected antenna in your device that will clearly show it complying with the peak gain limits. You can be assured that you are meeting the regulatory requirements for that module whilst getting the best performance possible, without exceeding the peak gain limits.


For further information, or support to test and integrate this product please contact your regional Taoglas customer support team.

2. Specifications


Electrical		
Frequency (MHz)	2400~2500	4900~5850
Efficiency (%)		
Straight	71.56	71.84
Bent	80.73	79.80
Average Gain (dB)		
Straight	-1.45	-1.44
Bent	-0.93	-0.98
Peak Gain (dBi)		
Straight	3.14	3.08
Bent	6.12	3.98
Impedance	50Ω	
Polarization	Linear	
Radiation Pattern	Omni	
Max. input power	1W	
Mechanical		
Height	198 ±3.3 mm	
Planner Dimension	198*Ø13 mm	
Casing	TPEE	
Connector	RP-SMA(M)	
Weight	22.5 g	
Environmental		
Temperature Range	-40°C to 85°C	
Humidity	Non-condensing 65°C 95% RH	

3. Antenna Characteristics


3.1 Return Loss

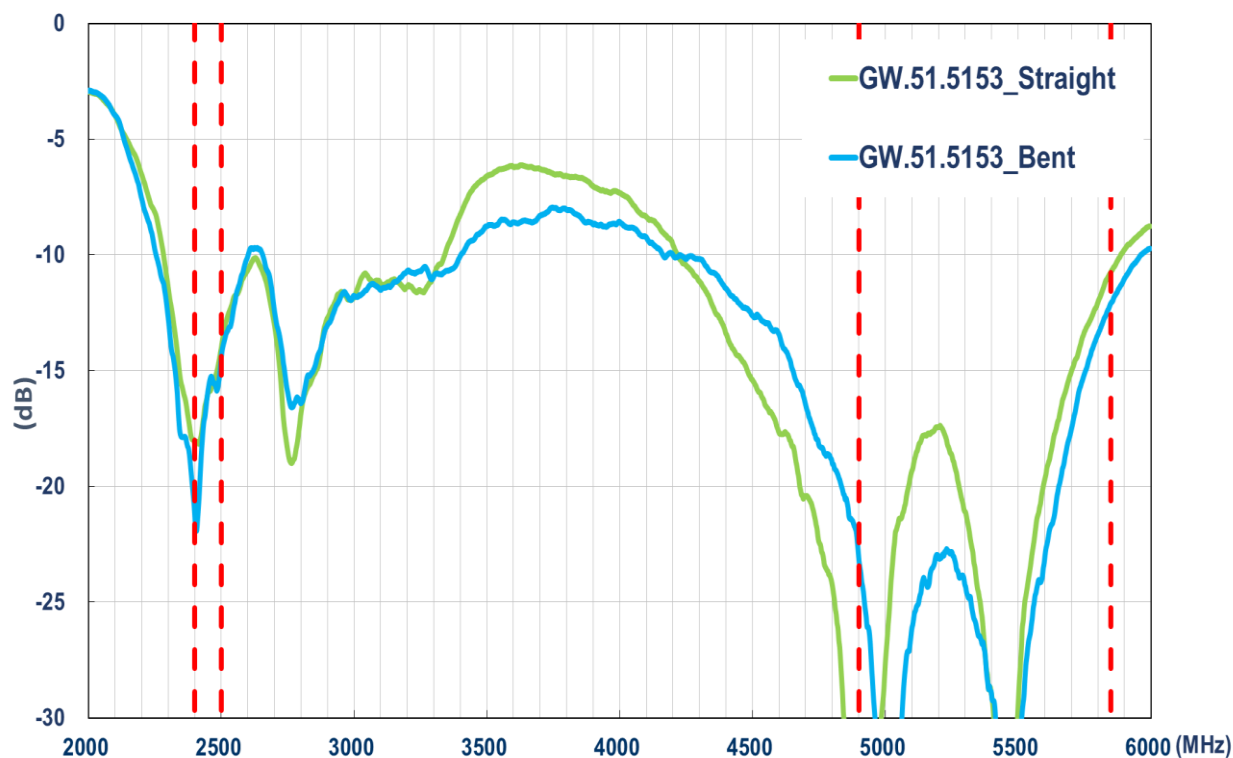


3.2 Efficiency

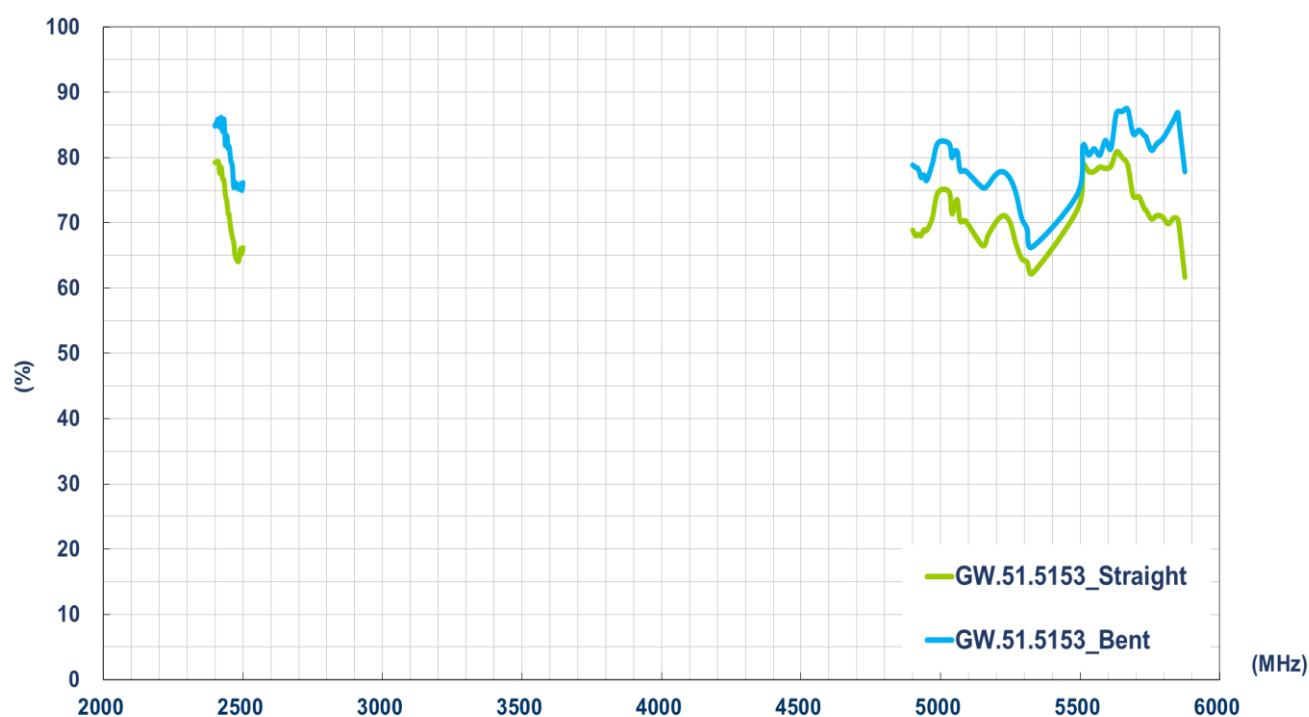

3.3 Average Gain

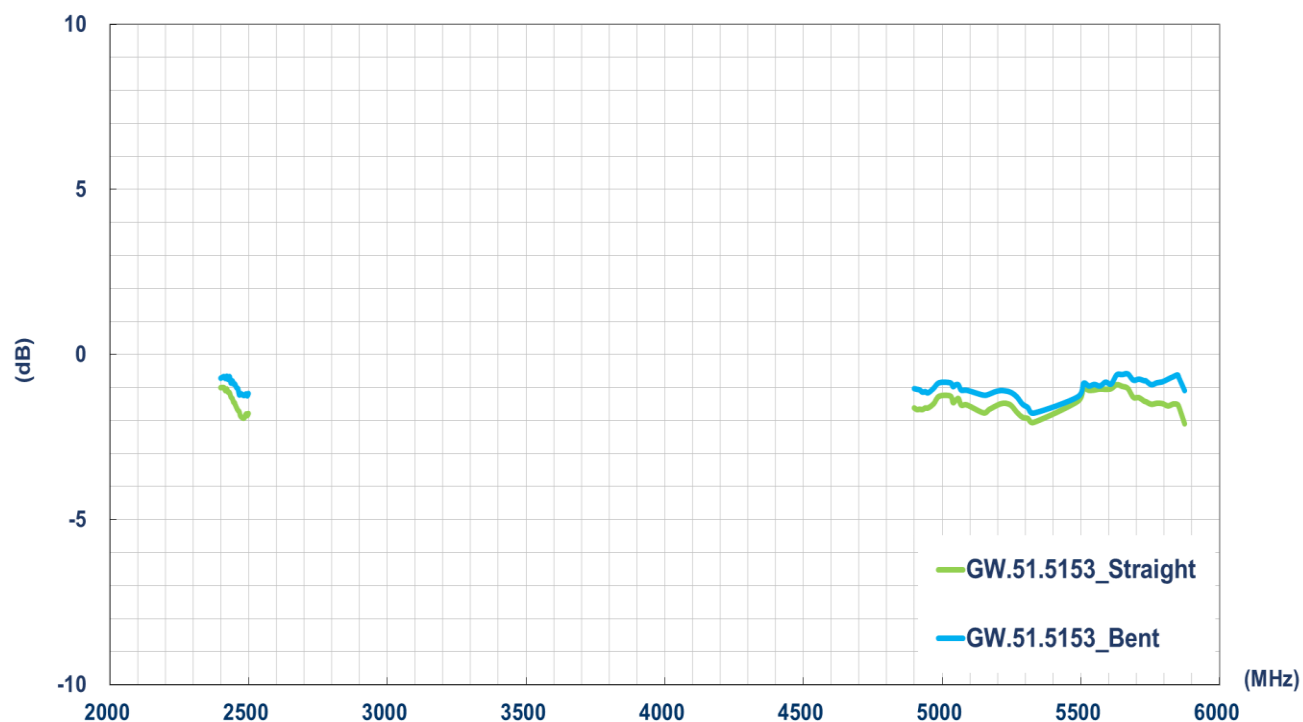

3.4 Peak Gain

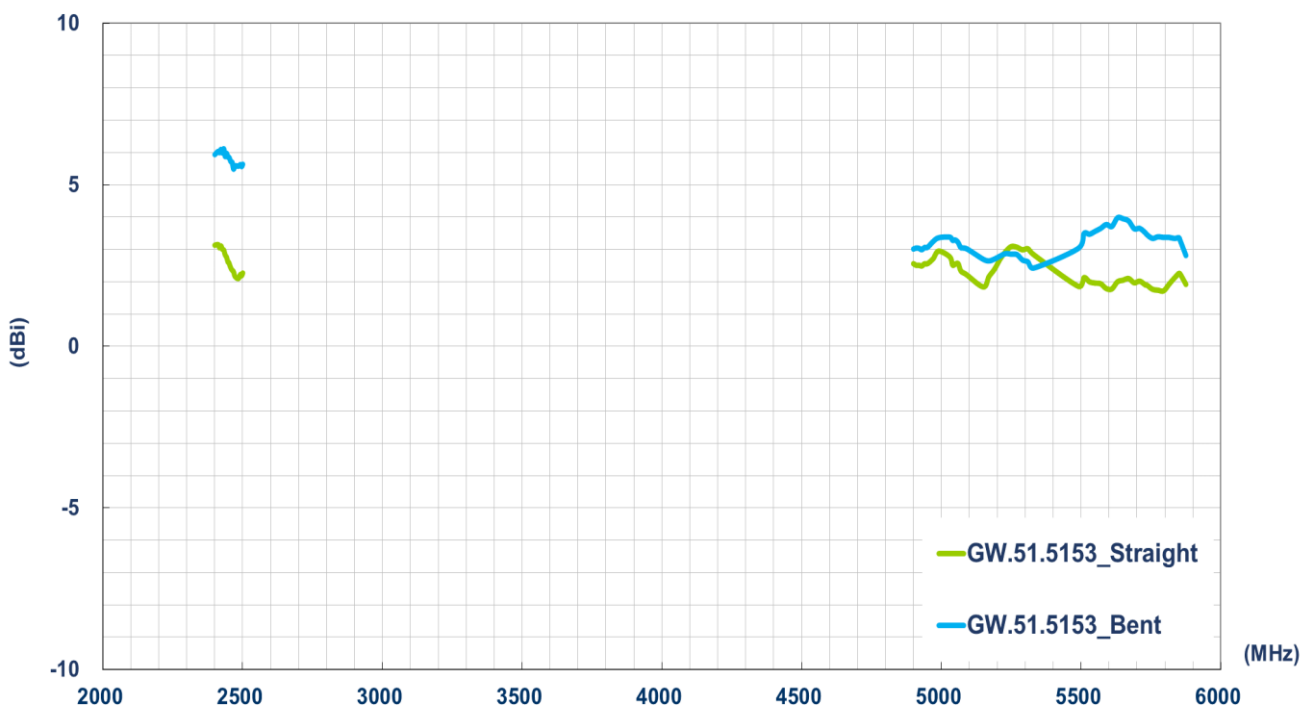

4. Radiation Patterns

4.1 Test Setup




Free space - Straight




Free space - Bent


4.2 2450MHz 3D and 2D Radiation Patterns - Straight

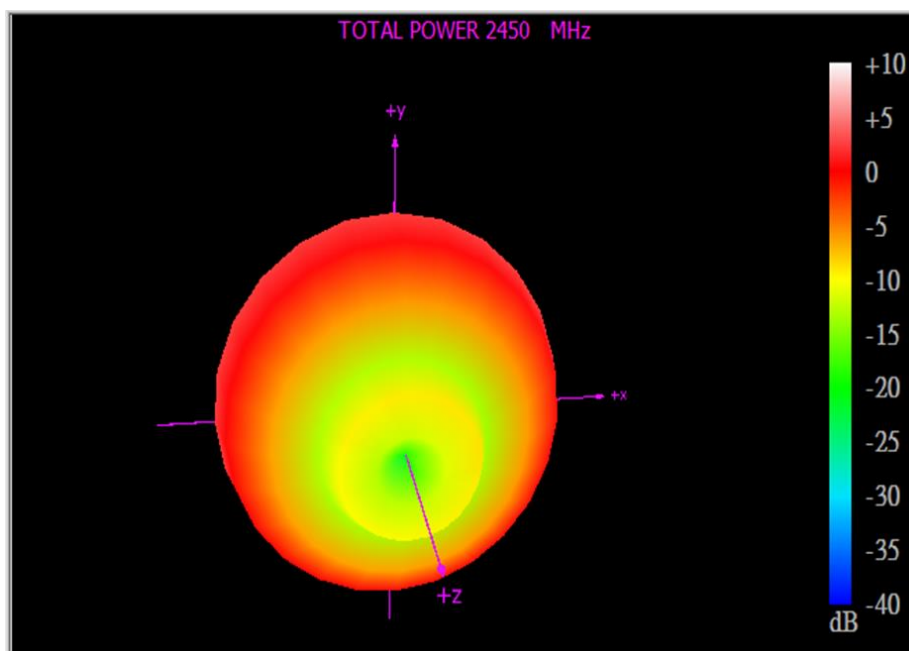


XY Plane

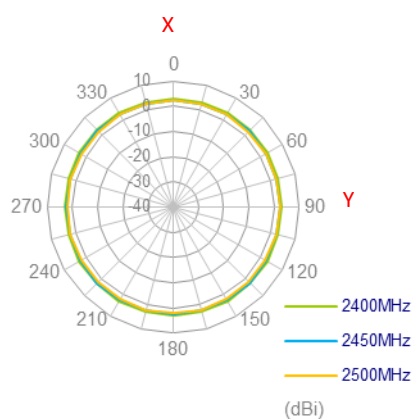


XZ Plane

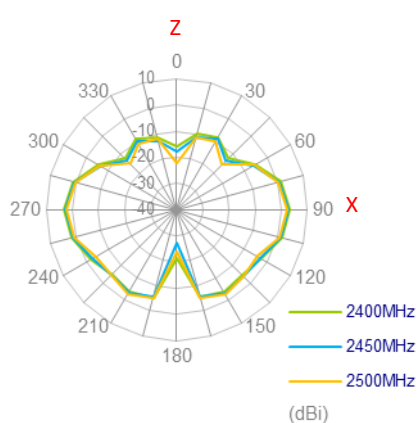


YZ Plane

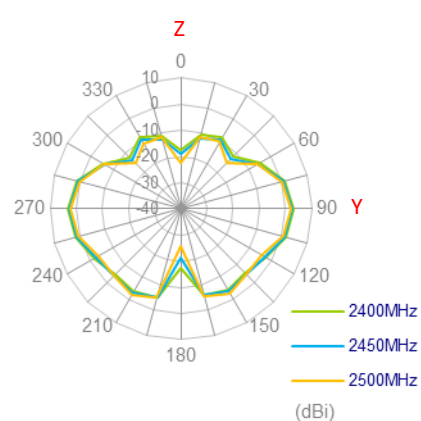


4.3 5550MHz 3D and 2D Radiation Patterns - Straight

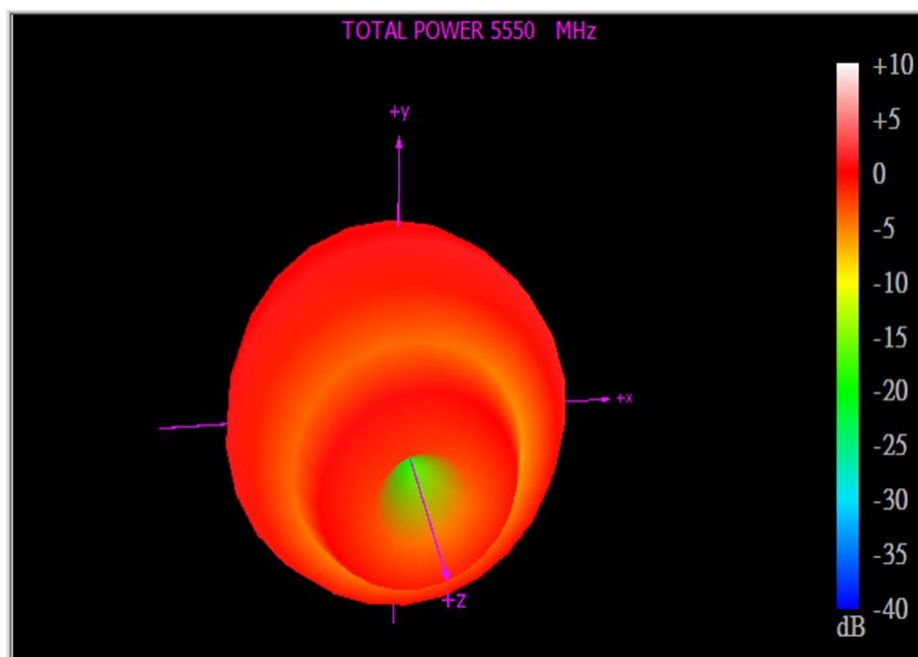


XY Plane

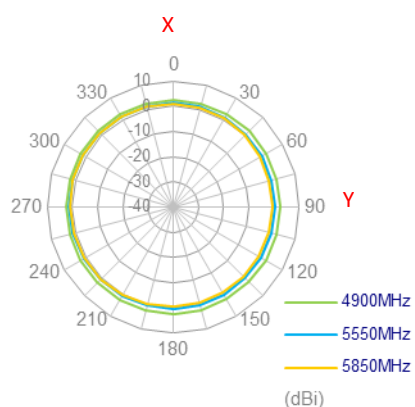


XZ Plane

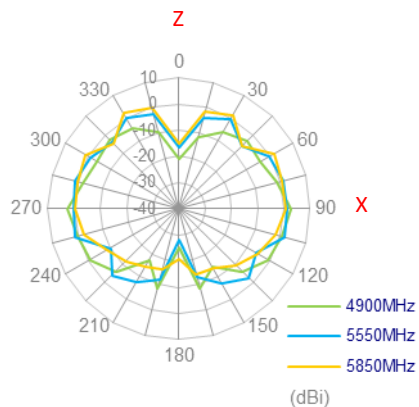


YZ Plane

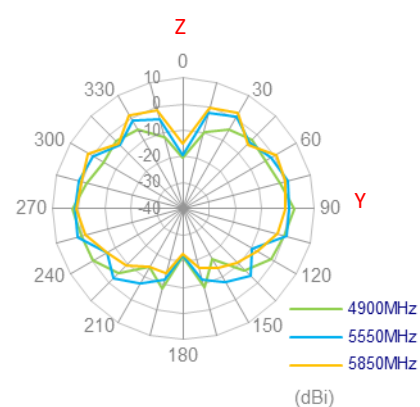


4.4 2450MHz 3D and 2D Radiation Patterns - Bent

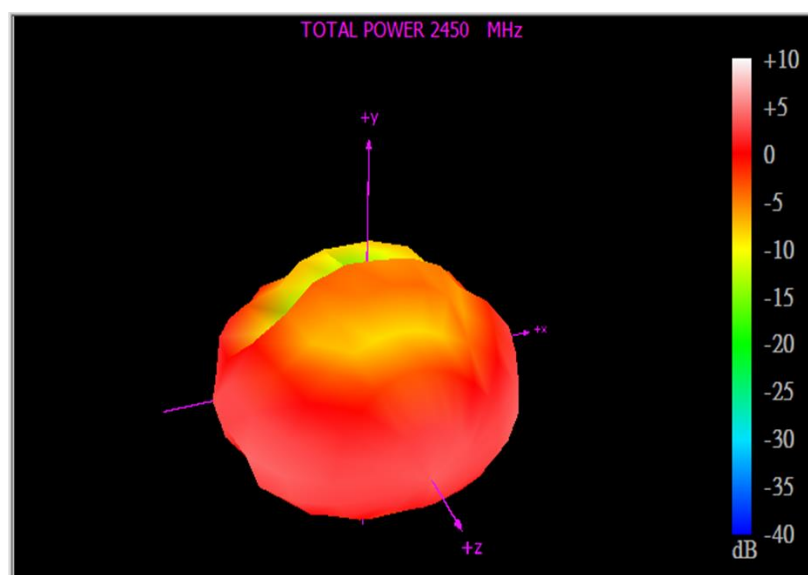


XY Plane

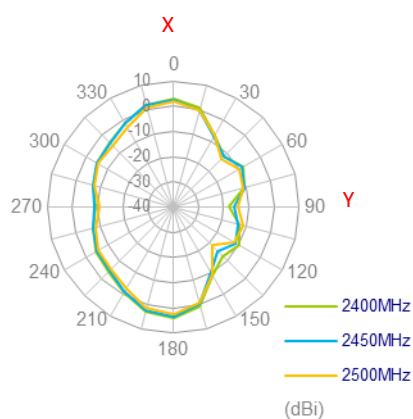


XZ Plane

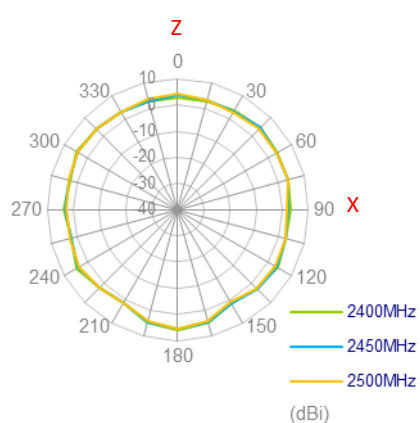


YZ Plane

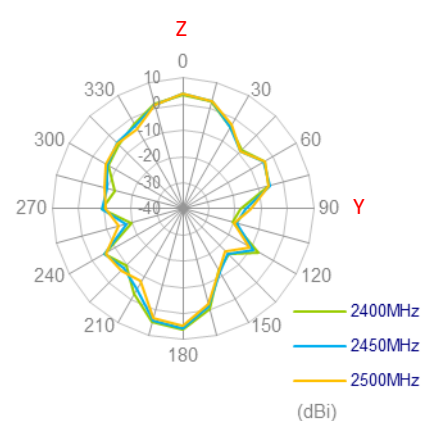


4.5 5550MHz 3D and 2D Radiation Patterns - Bent

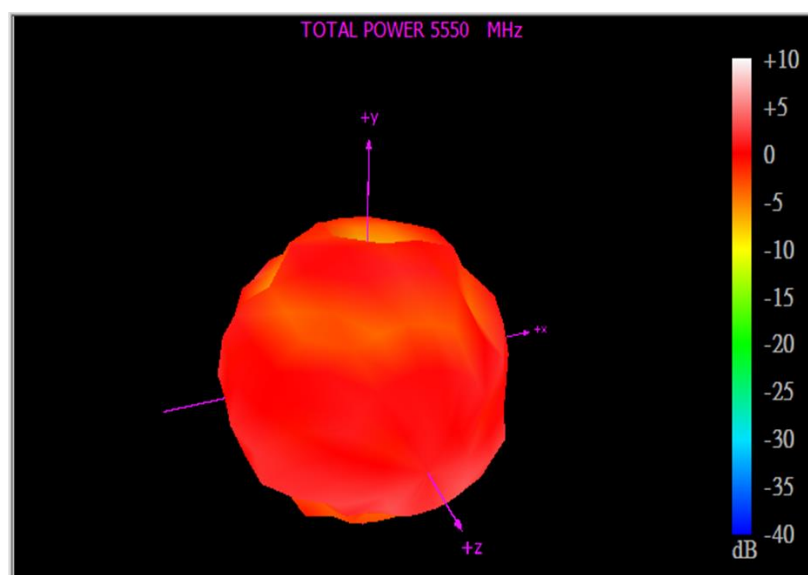


XY Plane

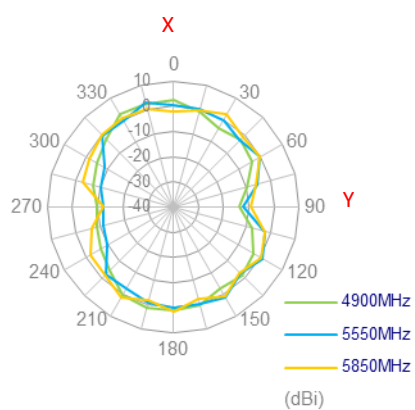


XZ Plane

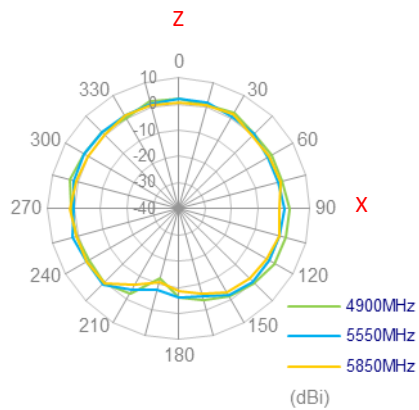

YZ Plane

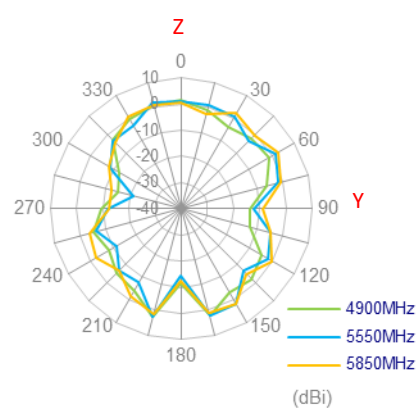


5. Mechanical Drawing (Units: mm)

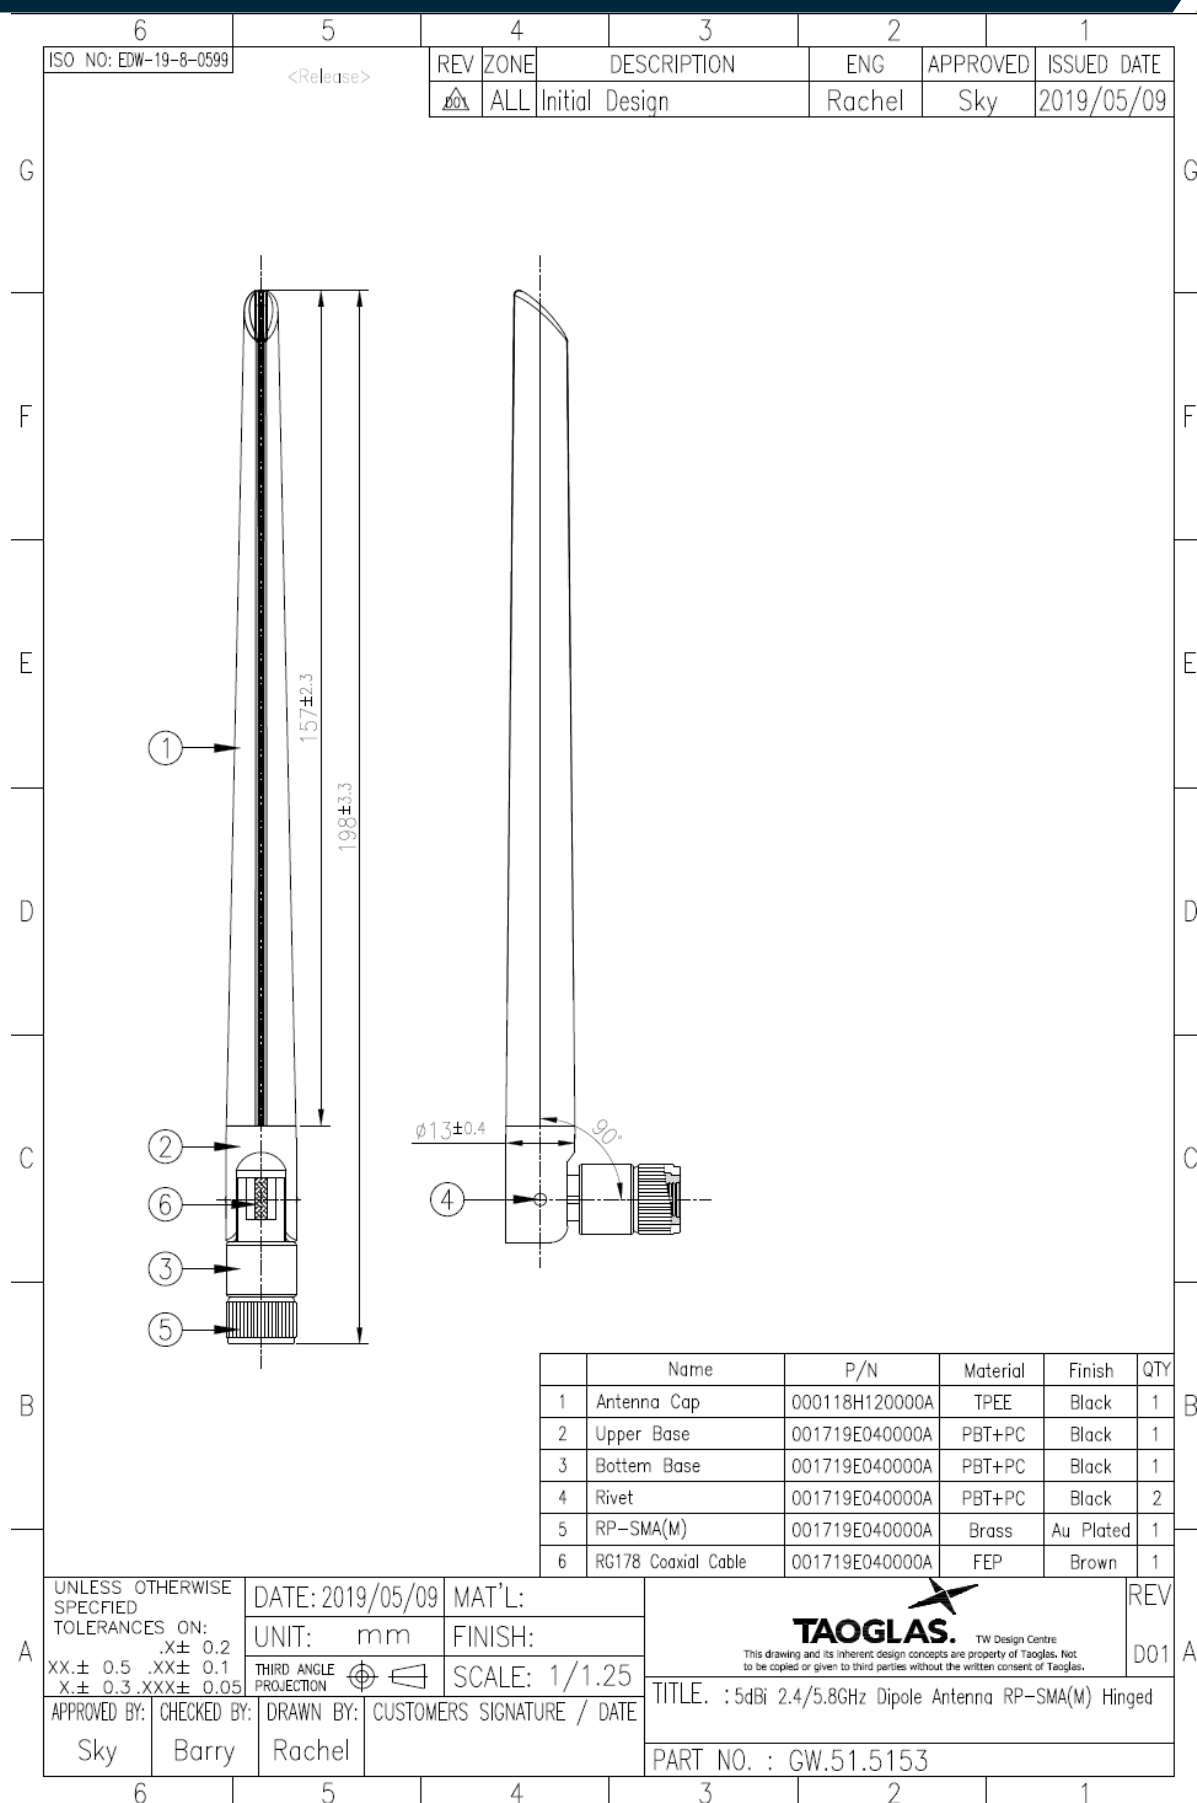


6. Packaging


1pc GW.51.5153 per PE Bag
Bag Dimension: 245*30mm
Weight: 22.5g

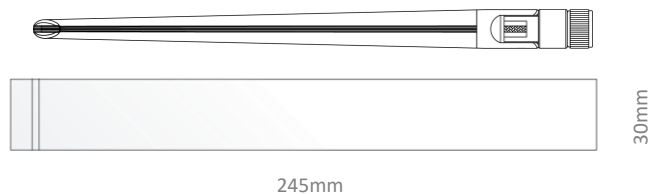


40pcs GW.51.5153 per Large PE Bag
Bag Dimensions: 320*205mm
Weight: 0.9Kg

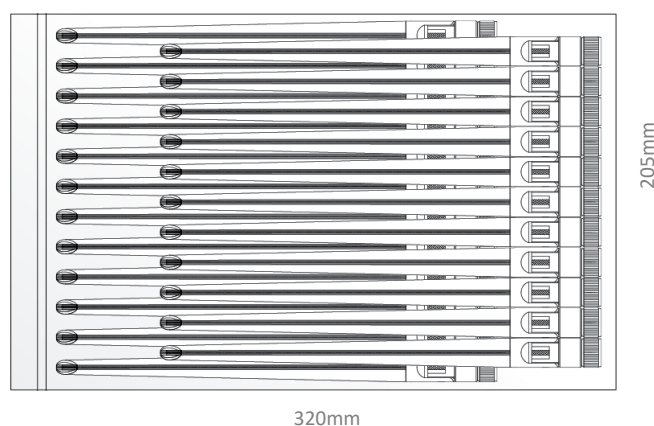

400pcs GW.51.5153 per Carton
Dimensions: 320*250*230mm
Weight: 10Kg

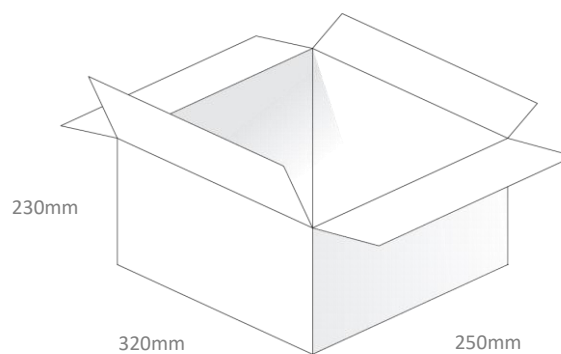

Pallet Dimensions:
1200*1000*1350mm
60 Cartons Per Pallet
12 Cartons Per Layer, 5 Layers

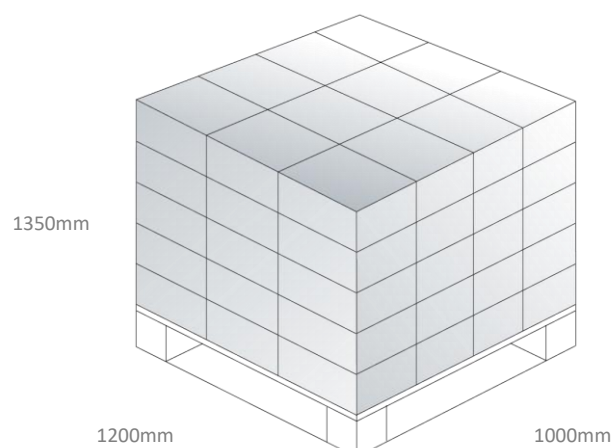

Changelog for the datasheet

SPE-19-8-087 – GW.51.5153

Revision: A (Original First Release)	
Date:	2019-06-24
Notes:	
Author:	Jack Conroy

Previous Revisions



www.taoglas.com



Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru