

## Product Overview


Qorvo’s QPC1006 is a Single-Pole, Triple-Throw (SP3T) switch fabricated on Qorvo’s QGaN25 0.25um GaN on SiC production process.

Operating from 0.15 to 2.8 GHz, the QPC1006 typically supports 50 W input power handling at control voltages of 0/-40 V for both CW and pulsed RF operations. This switch maintains low insertion loss less than 1.0 dB and greater than 30 dB isolation, making it ideal for high power switching applications across both defense and commercial platforms.

QPC1006 is offered in a 4 x 4 mm plastic overmolded QFN package.

Lead-free and RoHS compliant

Evaluation Boards are available upon request.

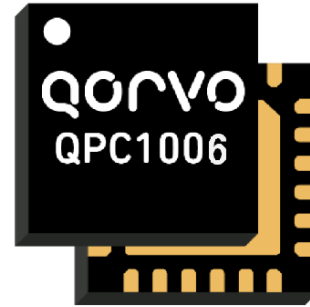


4mm x 4mm 24 Lead OVM QFN

## Key Features

- SP3T
- Frequency Range: 0.15 to 2.8 GHz
- Input Power: 50 W
- Insertion Loss: < 1.0 dB
- Isolation: >30 dB Typical
- Switching Speed: 50 ns
- Control Voltages: 0 V/-40 V
- Package Dimensions: 4 x 4 x 0.85 mm

*Performance is typical across frequency. Please reference electrical specification table and data plots for more details.*

## Functional Block Diagram

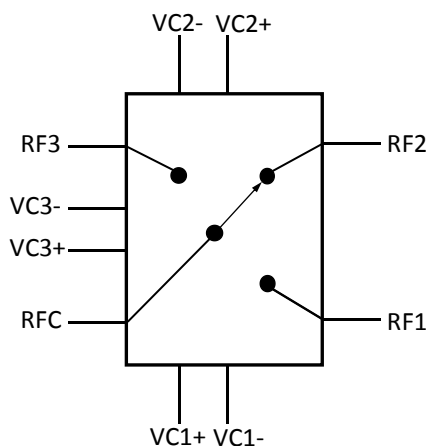

## Applications

- Commercial and Military Radar
- Communications
- Electronic Warfare
- Test Instrumentation
- General Purpose

## Ordering Information

Part No.	ECCN	Description
QPC1006	EAR99	0.15–2.8 GHz High Power GaN SP3T Switch
QPC1006EVB		Evaluation Board

## Absolute Maximum Ratings

Parameter	Rating
Control Voltage ( $V_C$ )	-50 V
Control Current ( $I_C$ )	3 mA
Power Dissipation <sup>(1)</sup>	14 W
RF Input Power, CW, 50 $\Omega$ , T = 25 °C	60 W
Channel Temperature, $T_{CH}$	275 °C
Mounting Temperature (30 sec)	260 °C
Storage Temperature	-40 to 150 °C

Exceeding any one or a combination of the Absolute Maximum Rating conditions may cause permanent damage to the device. Extended application of Absolute Maximum Rating conditions to the device may reduce device reliability.

Notes:

- 1) This is a total loss of which 4 W is mismatched loss and 3 W is dissipated in the passive structures.

## Recommended Operating Conditions

Parameter	Min	Typ	Max	Units
$V_{C1+}/V_{C1-}$		0/-40		V
$V_{C2+}/V_{C2-}$		-40/0		V
$V_{C3+}/V_{C3-}$		-40/0		V
Channel Temp., $T_{CH}$		$\leq 225$		°C

Electrical specifications are measured at specified test conditions. Specifications are not guaranteed over all recommended operating conditions.






## Electrical Specifications

Test conditions unless otherwise noted: 25 °C,  $V_{C1+}/V_{C1-} = 0\text{ V}/-40\text{ V}$ ,  $V_{C2+}/V_{C2-} = -40\text{ V}/0\text{ V}$ ,  $V_{C3+}/V_{C3-} = -40\text{ V}/0\text{ V}$ .  
See Logic table on page 13.

Parameter	Min	Typ	Max	Units
Operational Frequency Range	0.15	–	2.8	GHz
Insertion Loss (On-State)	Frequency = 0.15 GHz	0.30	–	dB
	Frequency = 1.0 GHz	0.43	–	
	Frequency = 2.8 GHz	1.0	–	
Input Return Loss (On-State) Common Port RL	Frequency = 0.15 GHz	35	–	dB
	Frequency = 1.0 GHz	33	–	
	Frequency = 2.8 GHz	12.5	–	
Output Return Loss (On-State) Switched Port RL	Frequency = 0.15 GHz	34.5	–	dB
	Frequency = 1.0 GHz	32	–	
	Frequency = 2.8 GHz	13	–	
Isolation (Off-State)	Frequency = 0.15 GHz	57	–	dB
	Frequency = 1.0 GHz	40	–	
	Frequency = 2.8 GHz	30	–	
Output Return Loss Isolated Port	Frequency = 0.15 GHz	2.3	–	dB
	Frequency = 1.0 GHz	2.4	–	
	Frequency = 2.8 GHz	2.0	–	
Insertion Loss @ $P_{IN} = 47\text{ dBm}$ (Pulsed RF) $PW = 100\mu\text{s}$ ; $DC = 10\%$	Frequency = 0.15 GHz	0.32		dB
	Frequency = 1.0 GHz	0.45		
	Frequency = 2.8 GHz	1.0		
Insertion Loss @ $P_{IN} = 47\text{ dBm}$ (CW)	Frequency = 0.15 GHz	0.37		dB
	Frequency = 1.0 GHz	0.55		
	Frequency = 2.8 GHz	1.2		
Input Power ( $P_{0.1dB}$ )		47		dBm
Control Voltage		-40	-50	V
Total Supply Current		<3		mA
Switching Speed		50		nS
Insertion Loss Temperature Coefficient	–	-0.0015	–	dB/°C






**Performance Plots – Small Signal**

Notes: RFC = Port1; RF1 = Port 2; RF2 = Port 3; RF3 = Port4. See Logic table on Page 13 for Voltage controls

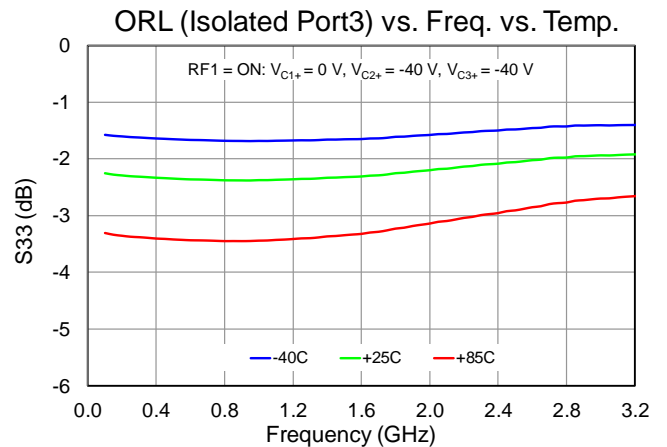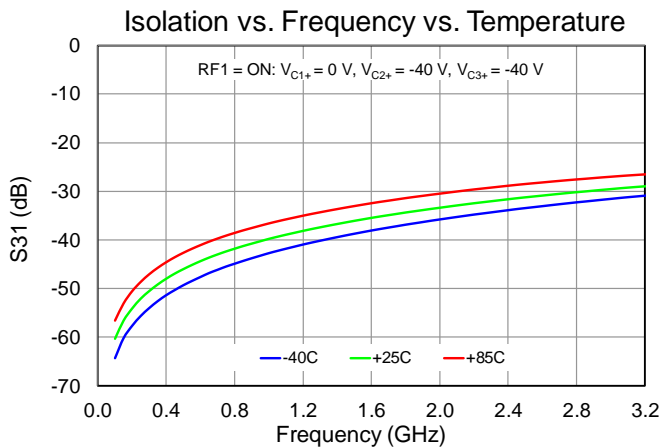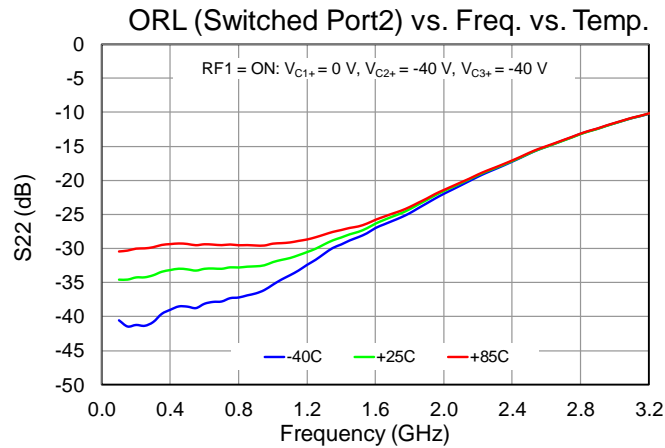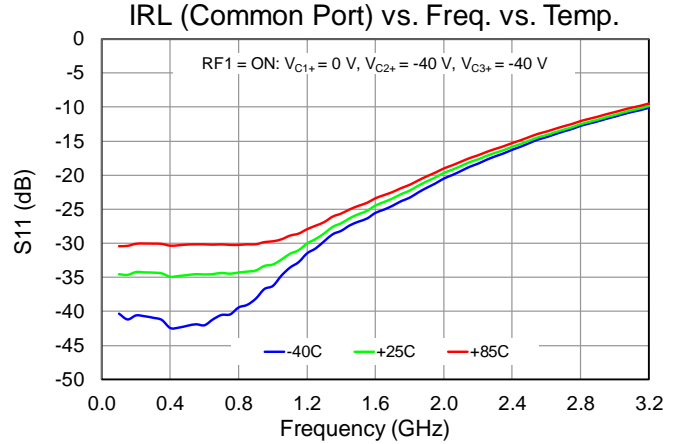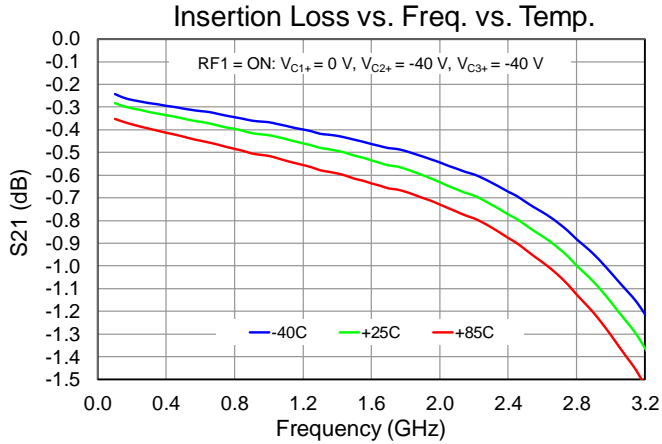







**Performance Plots – Small Signal**

Notes: RFC = Port1; RF1 = Port 2; RF2 = Port 3; RF3 = Port4. See Logic table on Page 13 for Voltage controls

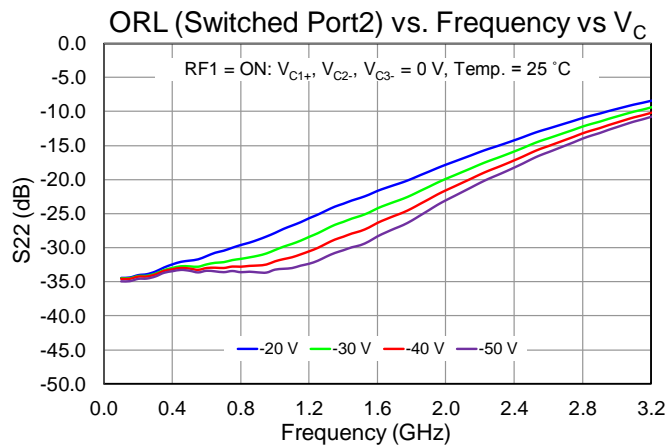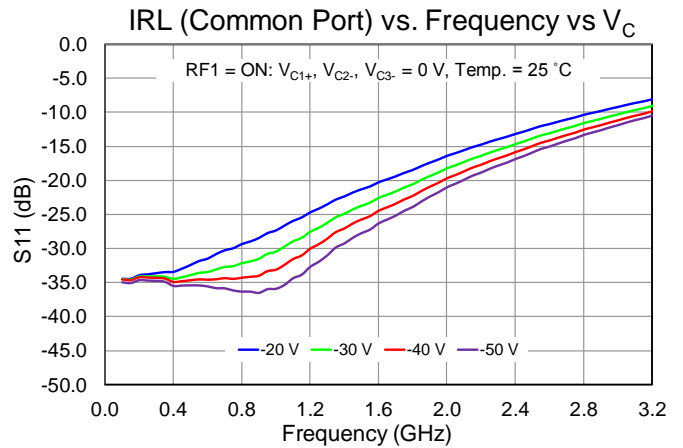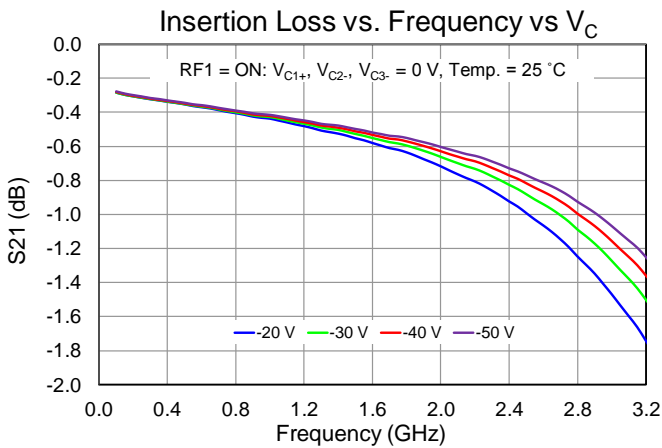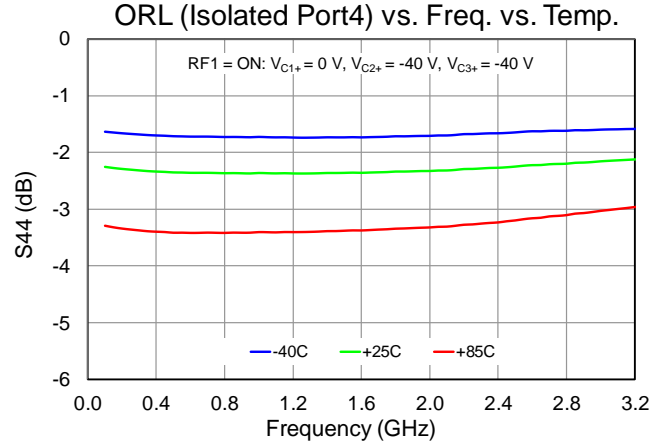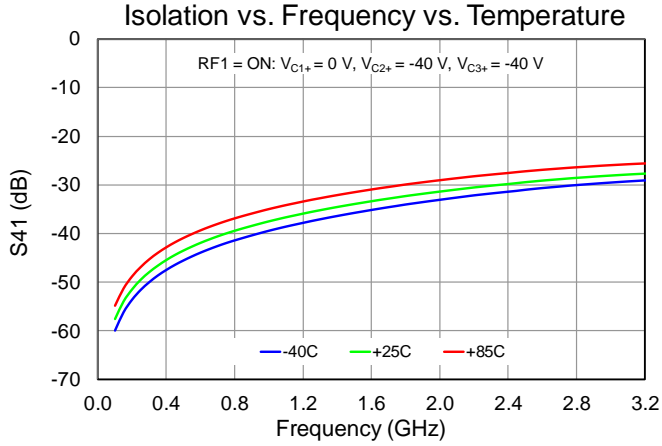







Performance Plots – Small Signal

Notes: RFC = Port1; RF1 = Port 2; RF2 = Port 3; RF3 = Port4. See Logic table on Page 13 for Voltage controls

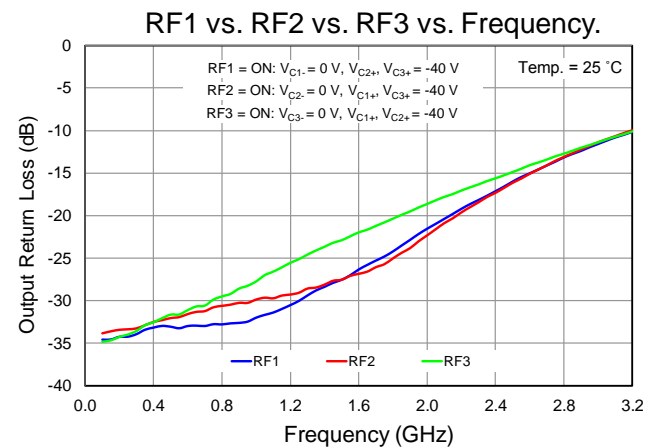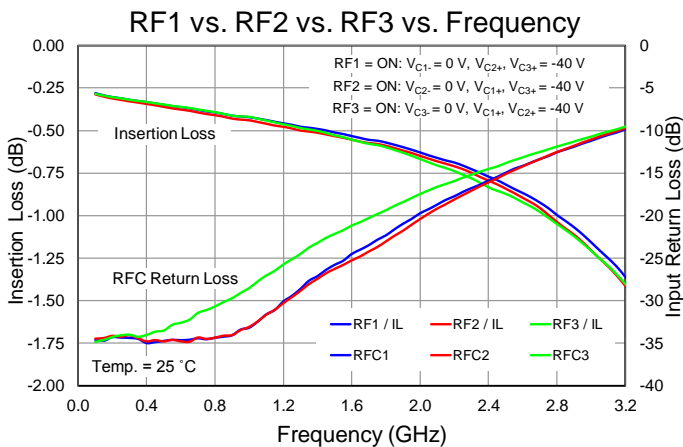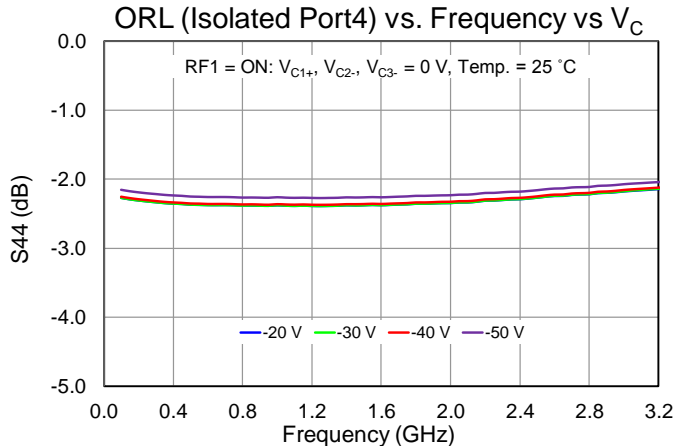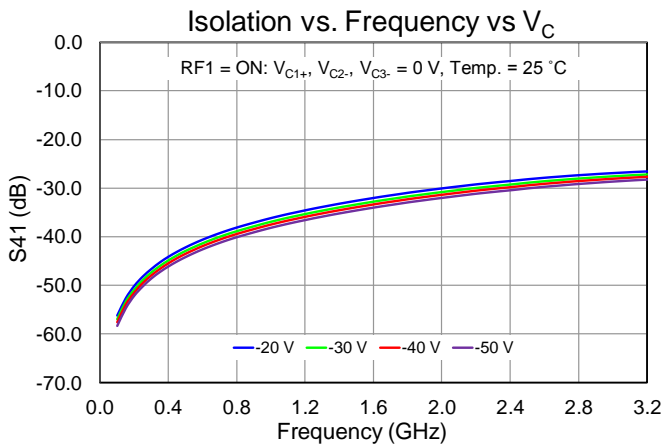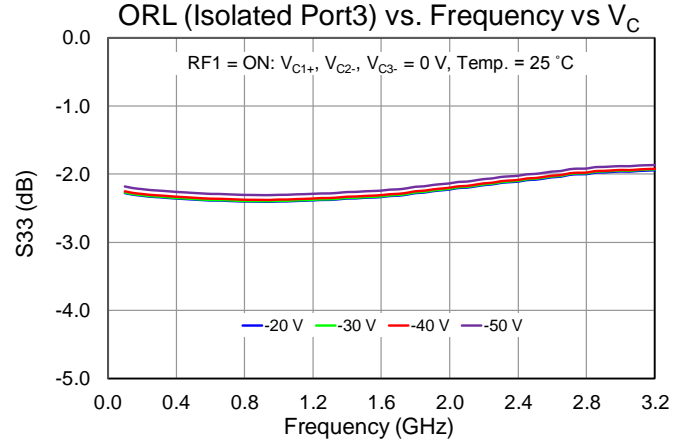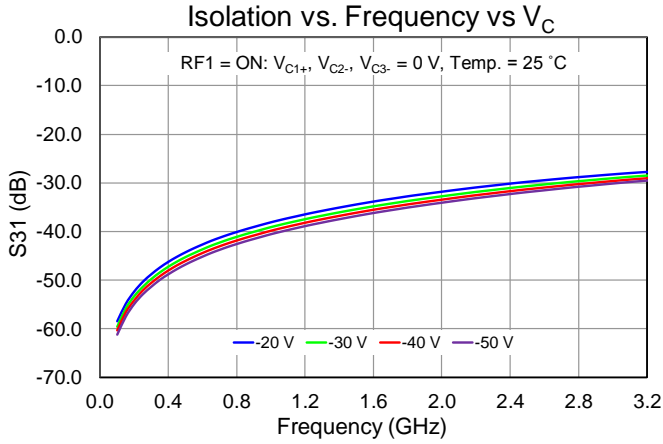






## Performance Plots – Compression (Pulsed)

Notes: RFC = Port1; RF1 = Port 2; RF2 = Port 3; RF3 = Port4. See Logic table on Page 13 for Voltage controls

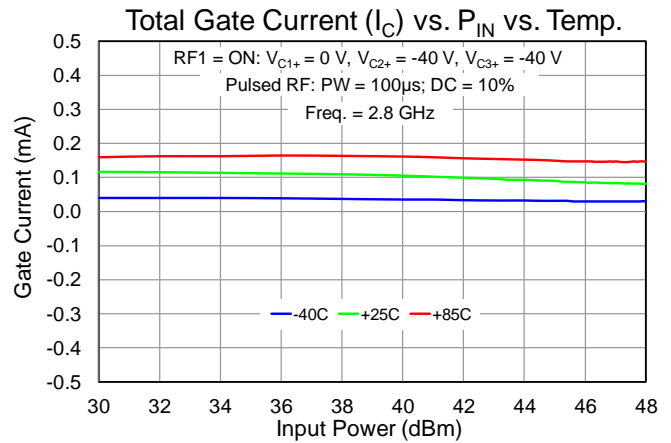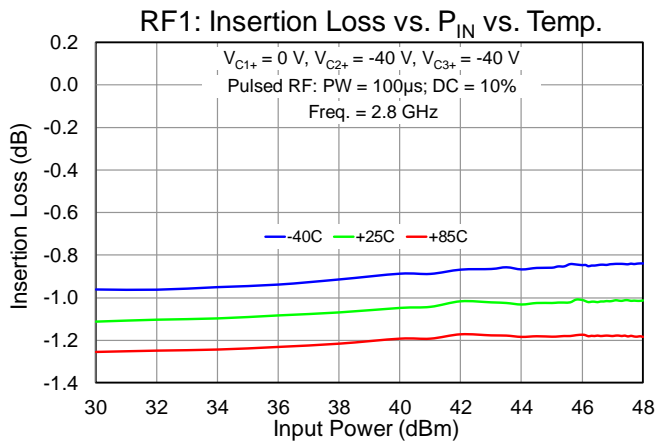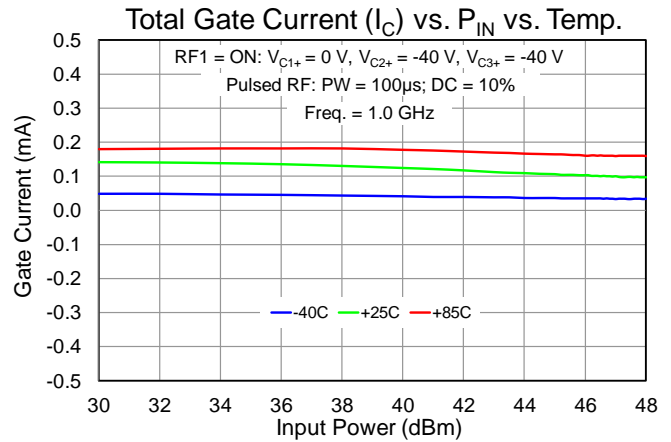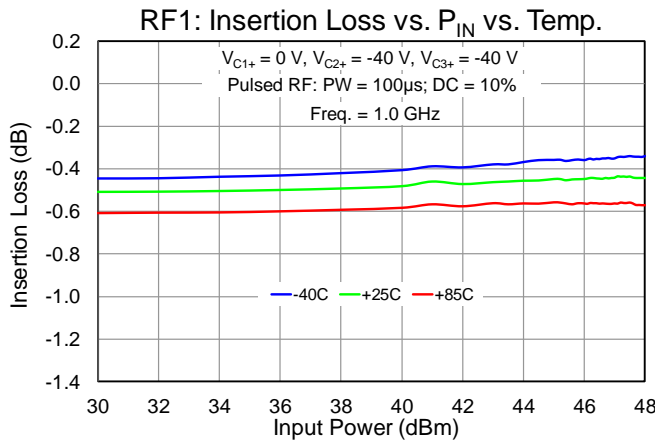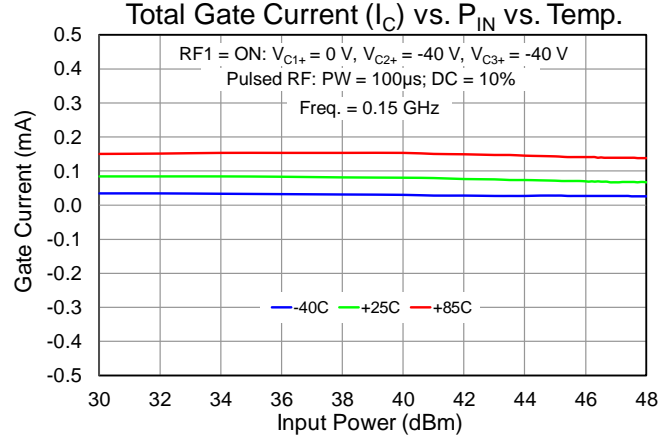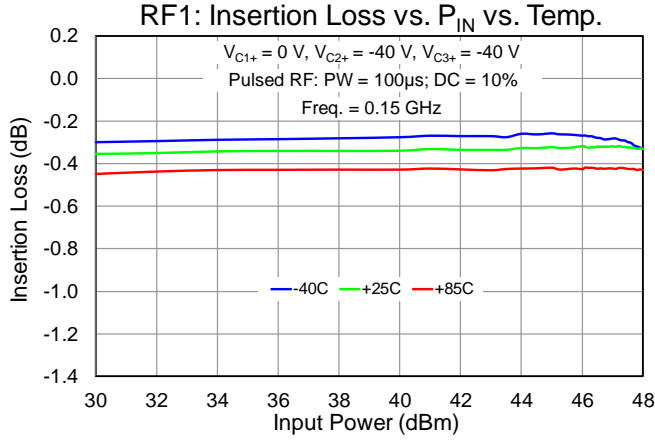

## Performance Plots – Compression (Pulsed)







Notes: RFC = Port1; RF1 = Port 2; RF2 = Port 3; RF3 = Port4. See Logic table on Page 13 for Voltage controls

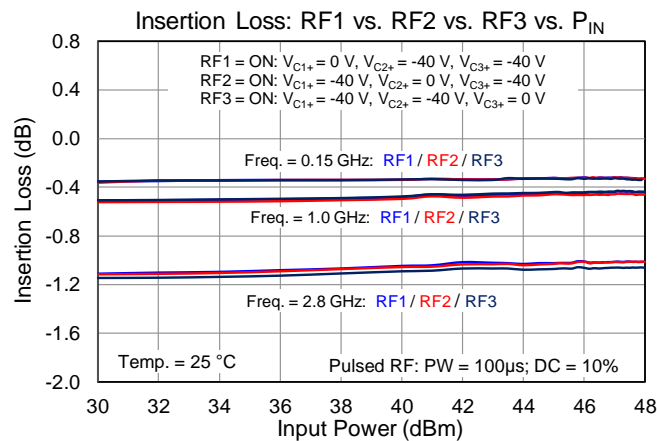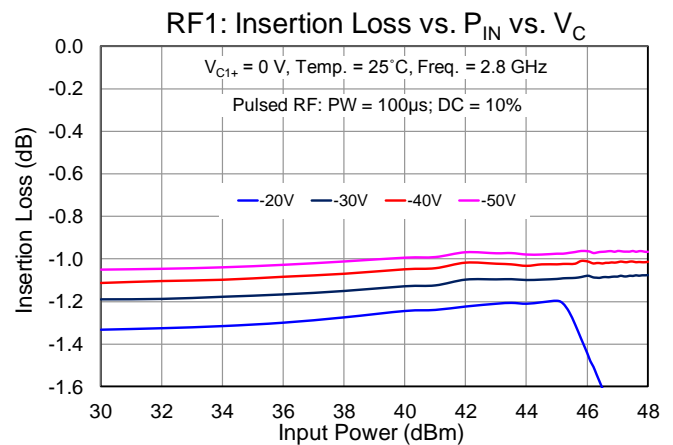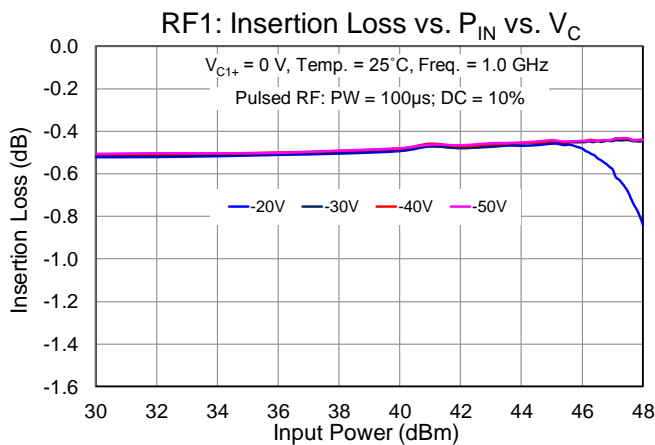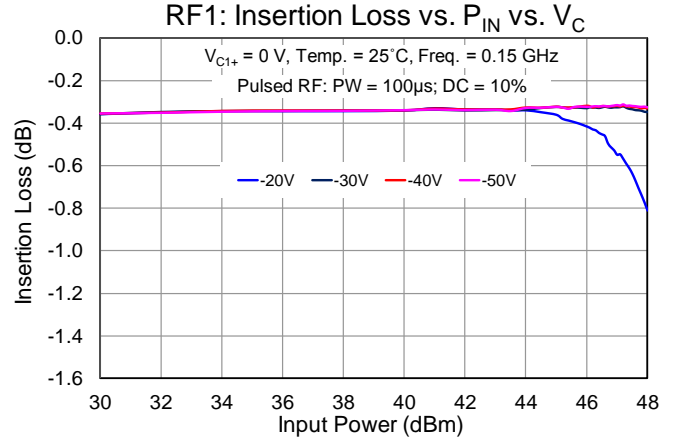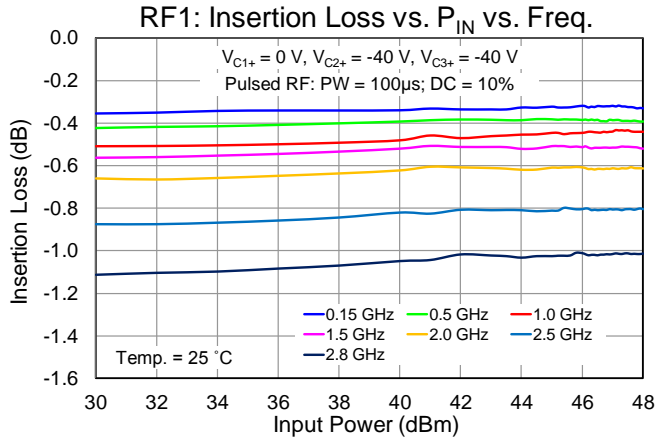








## Performance Plots – Compression (CW)

Notes: RFC = Port1; RF1 = Port 2; RF2 = Port 3; RF3 = Port4. See Logic table on Page 13 for Voltage controls

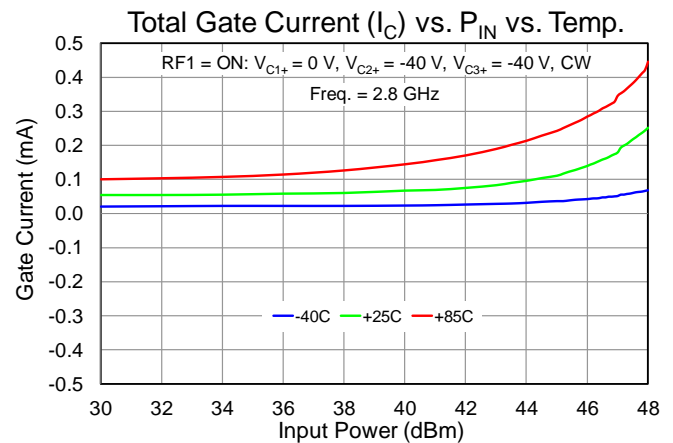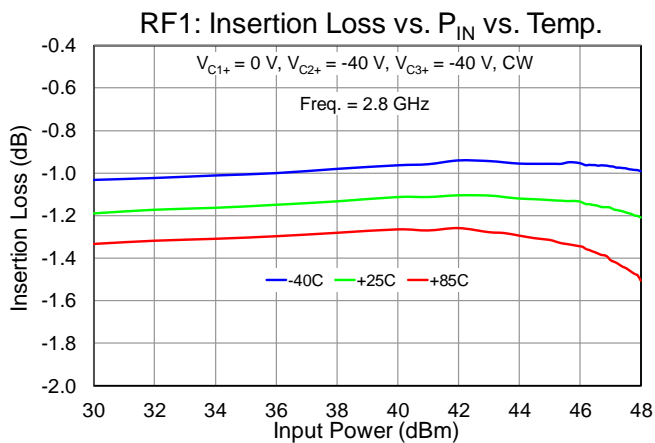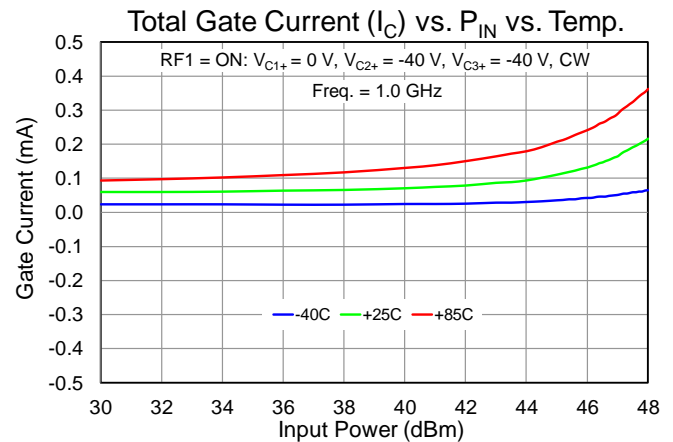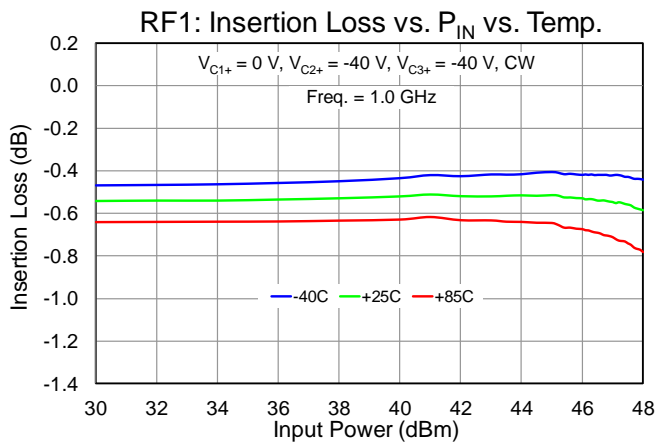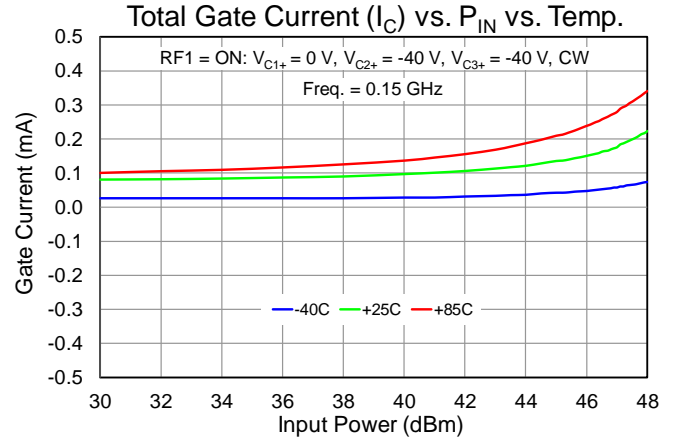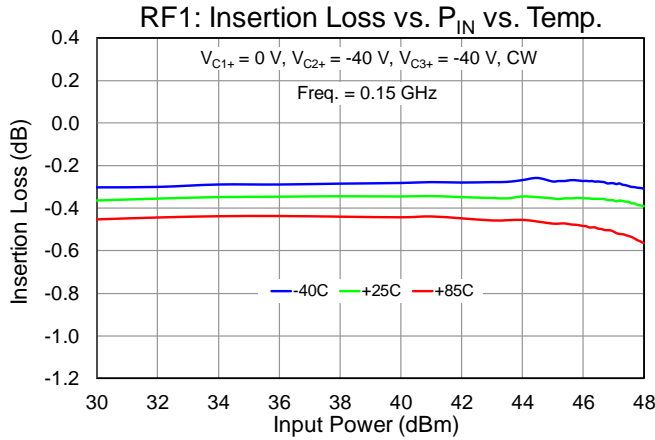




## Performance Plots – Compression (CW)

Notes: RFC = Port1; RF1 = Port 2; RF2 = Port 3; RF3 = Port4. See Logic table on Page 13 for Voltage controls

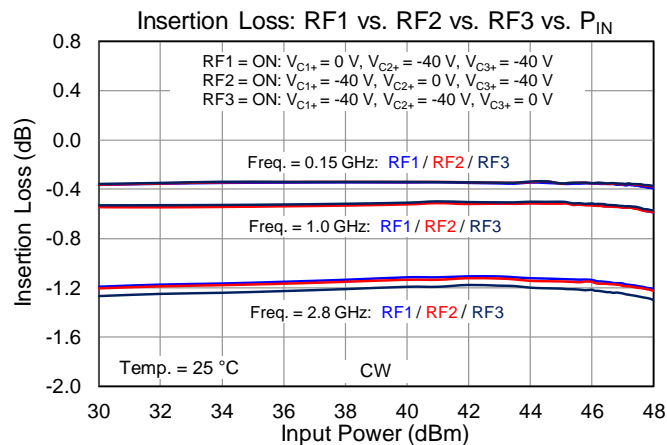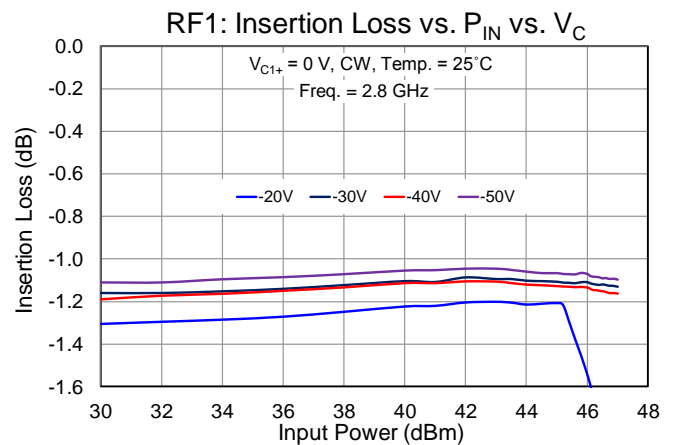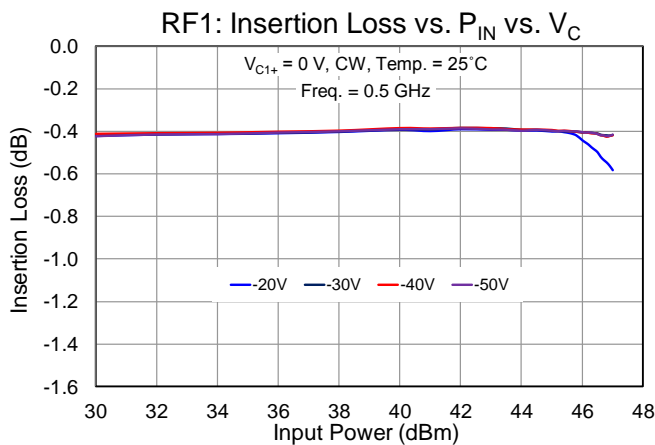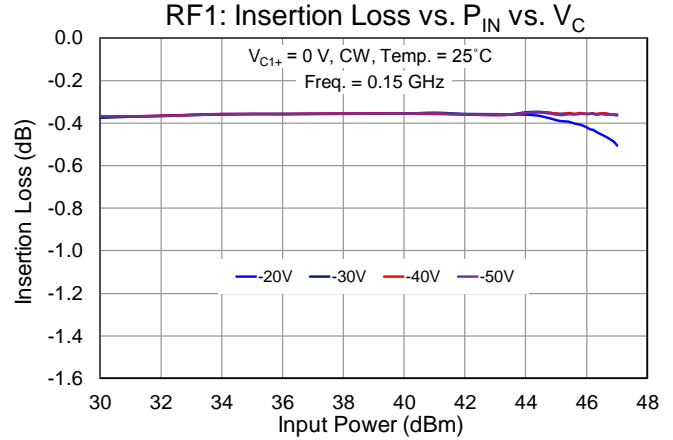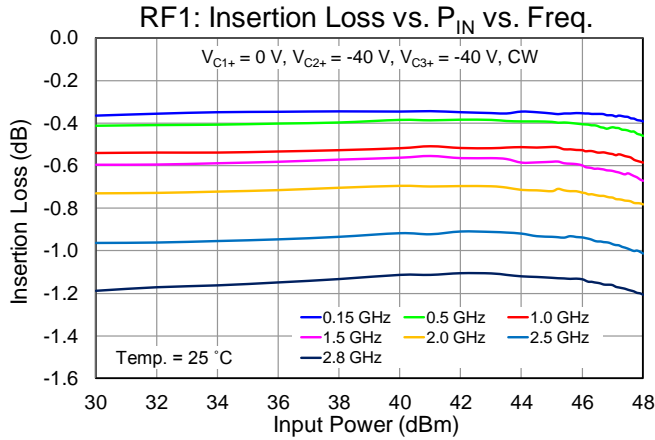

Performance Plots – Linearity

Notes: RFC = Port1; RF1 = Port 2; RF2 = Port 3; RF3 = Port4. See Logic table on Page 15 for Voltage controls

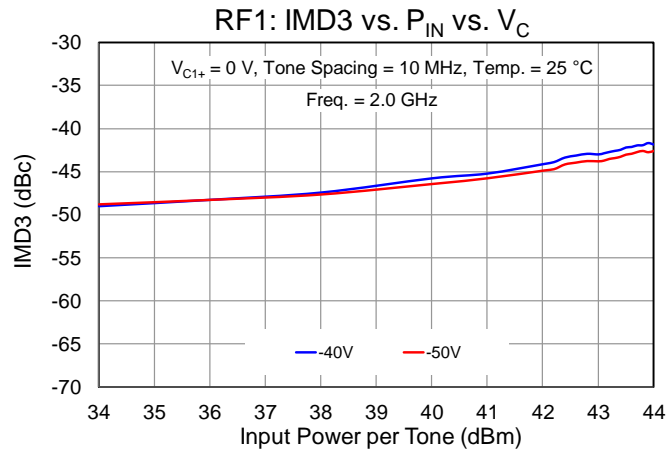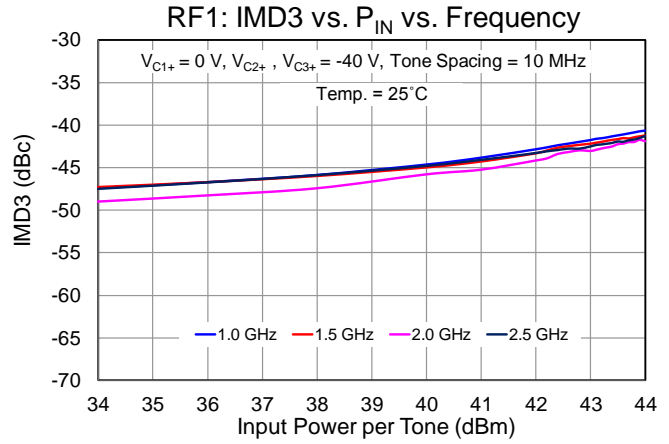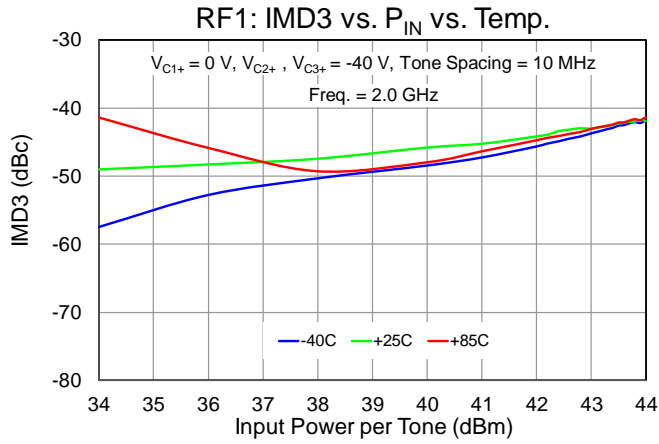

## Thermal and Reliability Information


Parameter	Test Conditions	Value	Units
Thermal Resistance ( $\theta_{JC}$ ) <sup>(1)</sup>		7.93	°C/W
Channel Temperature ( $T_{CH}$ ) <sup>(1)</sup>	$T_{BASE} = 85\text{ °C}$ , $V_{C1+} = 0\text{ V}$ , $V_{C2+} = -40\text{ V}$ , $V_{C3+} = -40\text{ V}$ Freq. = 2.8 GHz, $P_{IN} = 50\text{ W}$ , $P_{DISS}$ <sup>(2)</sup> = 5.8 W, CW	131	°C
Median Lifetime ( $T_M$ )		$1.57 \times 10^{10}$	Hrs

Notes:


1. Measured to the back of the package.
2. This is a total  $P_{DISS}$  in the FETs.

## Median Lifetime and Channel Temperature

Test Conditions:  $V_D = +40\text{ V}$ ; Failure Criteria = 10% reduction in  $I_{D\_MAX}$  during DC Life Testing

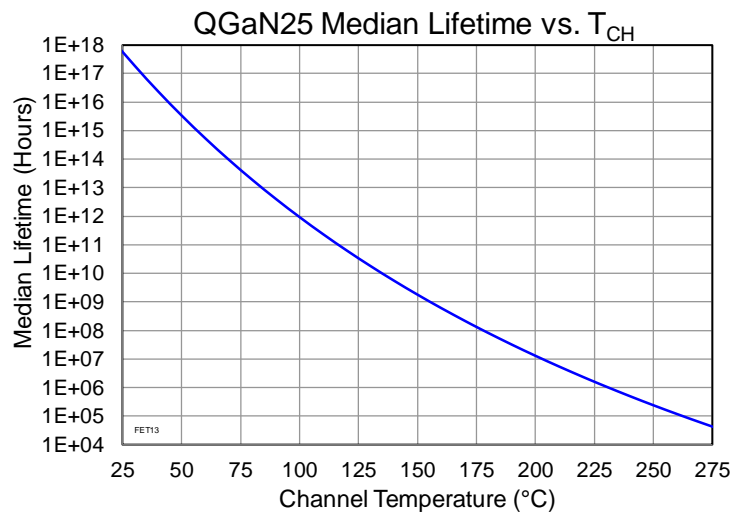

## Application Circuit

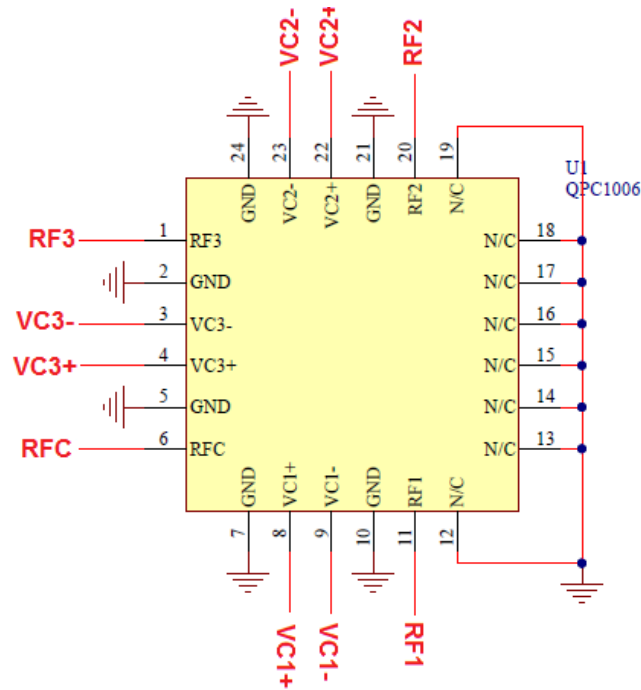

**Notes:**

1. This switch can be configured as a Single Pole, Single Throw (SPST) by terminating two unused RF switched ports with a 50 Ohm load.
2. External components are not required.

### Bias Up Procedure

1.  $V_{C1+}$  or  $V_{C2+}$  or  $V_{C3+}$  set to 0 V (see Logic Table for RF Path)
2.  $V_{C1-}$  or  $V_{C2-}$  or  $V_{C3-}$  set to -40 V (see Logic Table for RF Path)
3. Apply RF signal to RF Input

### Bias Up Down


1. Turn off RF supply
2. Turn  $V_{C1-}$  or  $V_{C2-}$  or  $V_{C3-}$  to 0 V
3. Turn  $V_{C1+}$  or  $V_{C2+}$  or  $V_{C3+}$  to 0 V

### Logic Table (SP3T Truth Table)

RF Path	State	$V_{C1+}$	$V_{C1-}$	$V_{C2+}$	$V_{C2-}$	$V_{C3+}$	$V_{C3-}$
RFC to RF1 ON	On-State (Insertion Loss), RF2 & RF3 = OFF	H	L	L	H	L	H
RFC to RF2 ON	On-State (Insertion Loss), RF1 & RF3 = OFF	L	H	H	L	L	H
RFC to RF3 ON	On-State (Insertion Loss), RF1 & RF2 = OFF	L	H	L	H	H	L

- VC High (H) = 0 V
- VC Low (L) = -20, -30, -40 or -50 V


**Evaluation Board (EVB) Assembly Layout.**

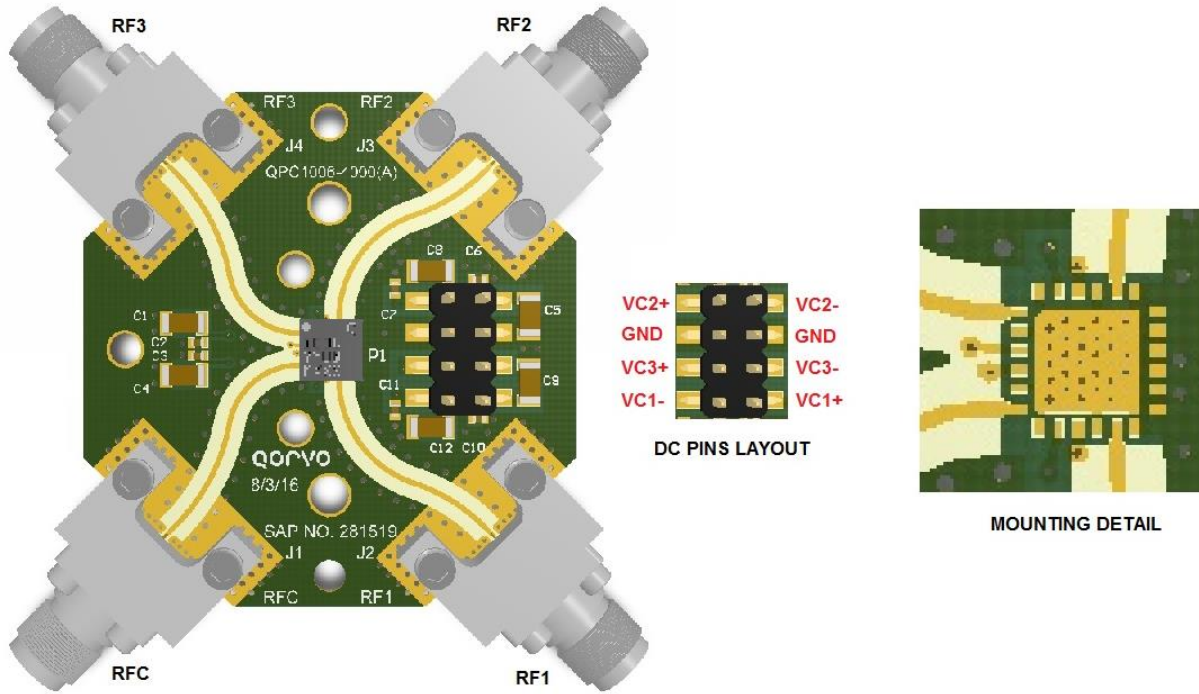

**Notes:**

1. This switch can be configured as a Single Pole, Single Throw (SPST) by terminating one unused RF switched port with a 50 Ohm load.
2. See Logic Table on page 13 for biasing the voltage controls.
3. External components are not required

## Mechanical Information

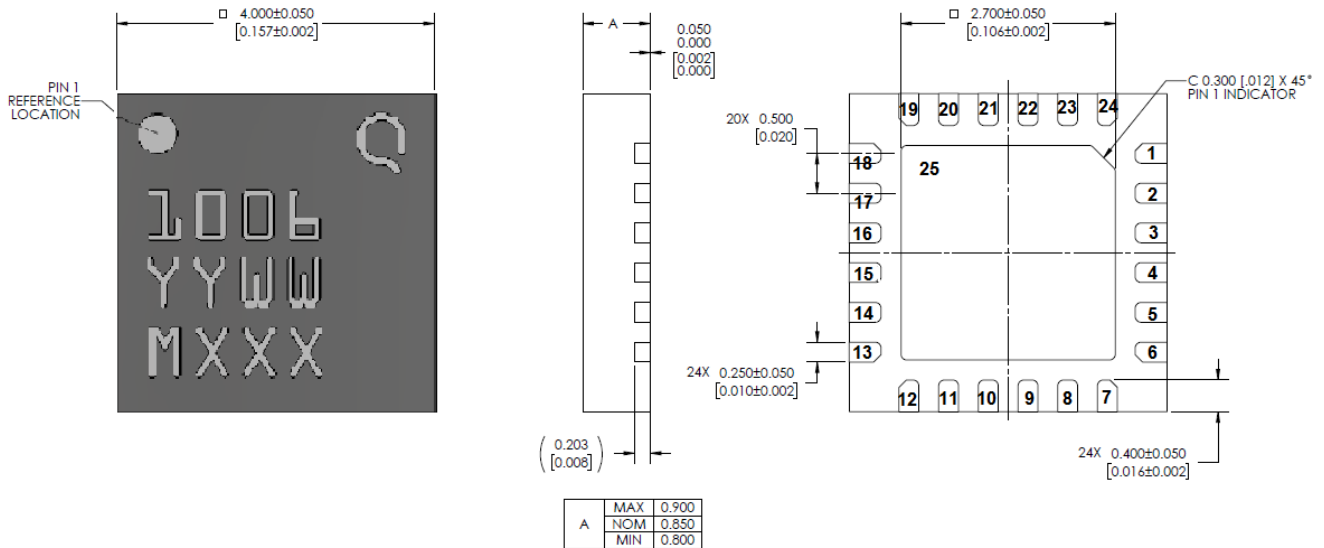

Units: millimeters

Tolerances: unless specified

x.xx = ± 0.25

x.xxx = ± 0.100

Materials:

Base: Laminate

Packaged Exposed Metallization is gold plated

Marking:

QPC1006: Part number

YY: Part Assembly year


WW: Part Assembly week

MXXX: Batch ID

## Pin Description

Pad No.	Symbol	Description
1	RF3	RF switched port 3; matched to 50 Ω; DC coupled
2, 5, 7, 10, 21, 24	GND	Ground. Connected to GND paddle (pin 25); should be grounded on PCB to improve isolation
3	V <sub>C3-</sub>	Control voltage #3; External components are not required
4	V <sub>C3+</sub>	Control voltage #3; External components are not required
6	RFC	RF common port; matched to 50 Ω; DC coupled
8	V <sub>C1+</sub>	Control voltage #1; External components are not required
9	V <sub>C1-</sub>	Control voltage #1; External components are not required
11	RF1	RF switched port 1; matched to 50 Ω; DC coupled
12 - 19	N/C	Not connected internally. Recommended to be grounded at EVB level
20	RF2	RF switched port 2; matched to 50 Ω; DC coupled
22	V <sub>C2+</sub>	Control voltage #2; External components are not required
23	V <sub>C2-</sub>	Control voltage #2; External components are not required
25	GND	Backside Paddle. Multiple vias should be employed to minimize inductance and thermal resistance.

Recommended Soldering Profile

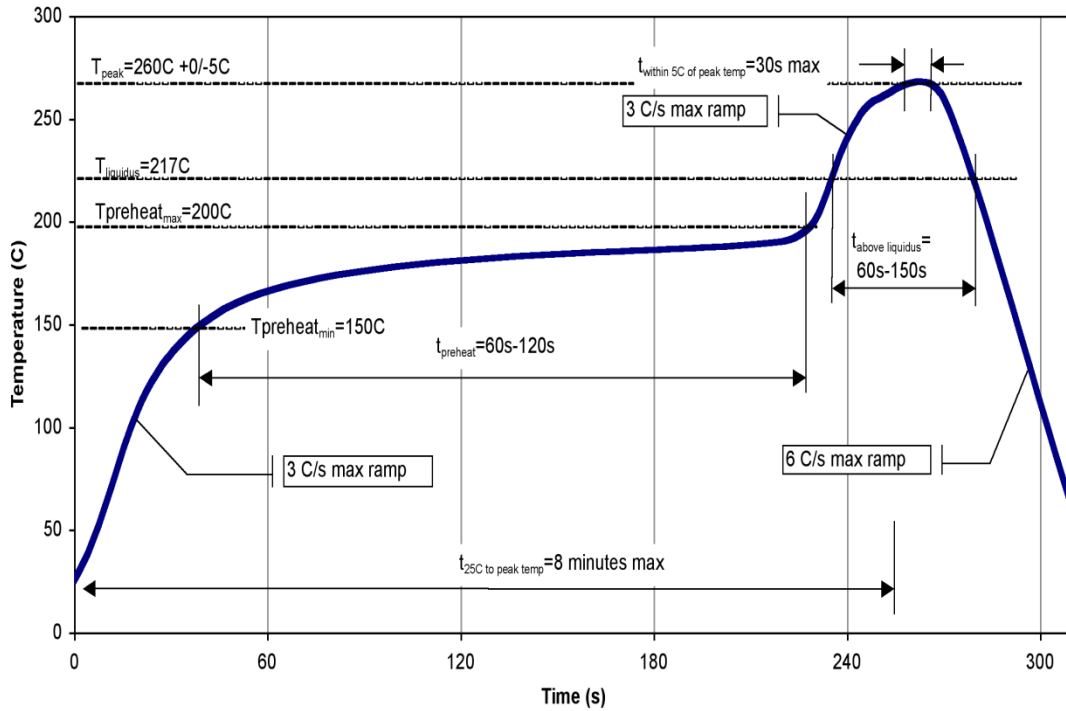



## Handling Precautions

Parameter	Rating	Standard
ESD – Human Body Model (HBM)	1A	ESDA / JEDEC JS-001-2012
ESD – Charged Device Model (CDM)	TBD	ESDA / JEDEC JS-002-2014
MSL – Convection Reflow 260 °C	TBD	JEDEC standard IPC/JEDEC J-STD-020



Caution!  
ESD-Sensitive Device

## Solderability

Compatible with the latest version of J-STD-020, Lead-free solder, 260 °C

## RoHS Compliance

This part is compliant with 2011/65/EU RoHS directive (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment) as amended by Directive 2015/863/EU.

This product also has the following attributes:

- Lead Free
- Halogen Free (Chlorine, Bromine)
- Antimony Free
- TBBP-A (C<sub>15</sub>H<sub>12</sub>Br<sub>4</sub>O<sub>2</sub>) Free
- PFOS Free
- SVHC Free



## Contact Information

For the latest specifications, additional product information, worldwide sales and distribution locations:

Web: [www.qorvo.com](http://www.qorvo.com)

Tel: 1-844-890-8163

Email: [customer.support@qorvo.com](mailto:customer.support@qorvo.com)

For technical questions and application information: Email: [appsupport@qorvo.com](mailto:appsupport@qorvo.com)

## Important Notice

The information contained herein is believed to be reliable; however, Qorvo makes no warranties regarding the information contained herein and assumes no responsibility or liability whatsoever for the use of the information contained herein. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for Qorvo products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. **THIS INFORMATION DOES NOT CONSTITUTE A WARRANTY WITH RESPECT TO THE PRODUCTS DESCRIBED HEREIN, AND QORVO HEREBY DISCLAIMS ANY AND ALL WARRANTIES WITH RESPECT TO SUCH PRODUCTS WHETHER EXPRESS OR IMPLIED BY LAW, COURSE OF DEALING, COURSE OF PERFORMANCE, USAGE OF TRADE OR OTHERWISE, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.**

Without limiting the generality of the foregoing, Qorvo products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.

Copyright 2016 © Qorvo, Inc. | Qorvo is a registered trademark of Qorvo, Inc.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)