

DATA SHEET

LuminOx O₂ Sensors LuminOx Evaluation Interface Board

FEATURES

- Allows quick and easy evaluation of the LuminOx sensor¹ with minimum effort and / or design work
- Interface mounted screw terminals for easy wiring
- The interface simultaneously provides three outputs:
 - RS232 (serial interface voltage levels)
 - RS485 (Modbus RTU) port allows multiple sensors to be addressed on a bus
 - 0—5V analogue output for basic measurements of oxygen only



Housing COMPACT	Supply Voltage 5 V VOLTAGE	Operating Temp 0°C to +50°C TEMPERATURE	Output Digital RS232 RS485	Analogue Output 0 - 5 V VOLTAGE	Response Time² < 30 secs
-------------------------------	---	--	---	--	---

BENEFITS

- Converts the LuminOx TTL level RS232 output into three standard industrial outputs
- Auto detects ppO₂ or O₂% variants of LuminOx sensor

PERFORMANCE SPECIFICATIONS³

LuminOx sensor compatibility	0—25% (O ₂ version) 0—300mbar (ppO ₂ version)
Resolution	
Digital outputs	0.01% / 0.1mbar
Analogue output	0.01V

TECHNICAL SPECIFICATIONS

Supply voltage (Vs)	4.75—5.25V _{DC}
Supply current (Is)	<50mA
Output Type	RS232, RS485 (Modbus RTU) and 0—5V
Temperature	
Operating:	0°C to +50°C
Storage:	0°C to +60°C

Need help? Ask the expert
Tel: + 44 (0)1236 459 020
and ask for “Technical”




NOTES

- 1) LuminOx sensor sold separately.
- 2) LuminOx sensor response time.
- 3) At ambient conditions. All performance measurements are at STP unless otherwise stated. Following extreme temperature fluctuations, re-calibration may be required.

OUTLINE DRAWING

All dimensions shown in mm. Tolerances = ±1mm.

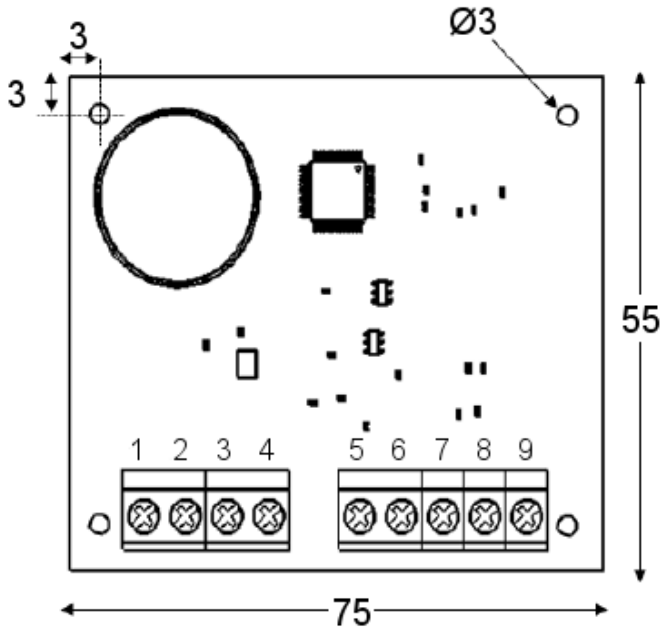

The sensor should be treated as an electronic component and handled using the correct ESD handling precautions.

1. RS232 Rx & Tx and RS485 A & B (pins 5, 6, 8 and 9) are referenced to the RS232/RS485 GND (pin 7). A connection should be made between pin 7 and the reference or common connection of the RS232 serial port or RS485 Bus.
2. Care should be taken when connecting the RS485 A & B connections to your system. The EIA-485 signalling specification states that signal A is the inverting or '-' pin and signal B is the non-inverting or '+' pin. This is in conflict with the A & B naming used by a number of differential transceiver manufacturers, including the transceiver used in the OXY-LC-485 interface. Therefore always ensure the '+' of the OXY-LC-485 interface is connected to the '+' input of the RS485 Bus and the '-' of the OXY-LC-485 interface is connected to the '-' input of the RS485 Bus.



ORDER INFORMATION

Specify the part number shown below when ordering.

L O X - E V B



ELECTRICAL INTERFACE

Refer to [Outline Drawing](#) above.

Pin	Designation
1	Vs (+5V _{DC})
2	GND (0V)
3	0—5V GND (0V)
4	0—5V Signal
5	RS232 Rx
6	RS232 Tx
7	RS232/RS485 GND (0V)
8	RS485 A (+)
9	RS485 B (-)

CAUTION

Do not exceed maximum ratings and ensure sensor(s) are operated in accordance with their requirements.
Carefully follow all wiring instructions. Incorrect wiring can cause permanent damage to the device.
Do NOT use chemical cleaning agents.

Failure to comply with these instructions may result in product damage.

INFORMATION

As customer applications are outside of SST Sensing Ltd.'s control, the information provided is given without legal responsibility. Customers should test under their own conditions to ensure that the equipment is suitable for their intended application.

For technical assistance or advice, please email:
technical@sstsensing.com

General Note: SST Sensing Ltd. reserves the right to make changes to product specifications without notice or liability. All information is subject to SST Sensing Ltd.'s own data and considered accurate at time of going to print.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru