

# **CTVS — Ceramic transient voltage suppressors**

SMD multilayer varistors (MLVs),  
automotive E series

**Series/Type:**

Date: December 2019

## Multilayer varistors (MLVs)

### Automotive E series

#### SMD

#### EPCOS type designation system for automotive series, single chips

| CT                                                                                                                                                                                                                                                                                                           | 0603 | S | 14 | B | AUTO | E2 | G2 |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|---|----|---|------|----|----|
| <b>Construction:</b><br>CT $\triangle$ Single chip with nickel barrier termination (AgNiSn)                                                                                                                                                                                                                  |      |   |    |   |      |    |    |
| <b>EAI case sizes:</b><br>0402<br>0603<br>0805<br>1206<br>1210<br>1812<br>2220                                                                                                                                                                                                                               |      |   |    |   |      |    |    |
| <b>Varistor voltage tolerance:</b><br>K $\triangle$ $\pm 10\%$ , standard<br>L $\triangle$ $\pm 10\%$ , standard<br>S $\triangle$ Special tolerance                                                                                                                                                          |      |   |    |   |      |    |    |
| <b>Maximum RMS operating voltage (<math>V_{RMS}</math>):</b><br>14 $\triangle$ 14 V<br>$V_{RMS} < 25$ V are suitable for 12 V DC supply systems<br>$V_{RMS} \geq 25$ V are suitable for 24 V DC supply systems                                                                                               |      |   |    |   |      |    |    |
| <b>Special tolerance for the varistor voltage:</b><br>– $\triangle$ Standard tolerance<br>A or B $\triangle$ Special tolerance                                                                                                                                                                               |      |   |    |   |      |    |    |
| – $\triangle$ Standard series<br>AUTO $\triangle$ specified for load-dump/ jump-start protection<br>(except CT0603S14BAUTOG and CT0805K17AUTOLCG)                                                                                                                                                            |      |   |    |   |      |    |    |
| <b>Special features:</b><br>– $\triangle$ Standard energy handling capability<br>E2 $\triangle$ Increased energy handling capability<br>HT $\triangle$ High temperature version<br>LC $\triangle$ Low capacitance version<br>CC $\triangle$ Controlled capacitance version<br>RF $\triangle$ Radio frequency |      |   |    |   |      |    |    |
| <b>Taping mode:</b><br>G $\triangle$ Taped, 180-mm reel, 7"<br>G2 $\triangle$ Taped, 330-mm reel, 13"                                                                                                                                                                                                        |      |   |    |   |      |    |    |

## Multilayer varistors (MLVs)

### Automotive E series

#### SMD

#### EPCOS type designation system for automotive series, array

| CA                                                                                     | 05                                                   | M2                                      | S                                                                      | 10                                                                                   | T                      | 100                                                                                  | H                                                                   | G                                                            |
|----------------------------------------------------------------------------------------|------------------------------------------------------|-----------------------------------------|------------------------------------------------------------------------|--------------------------------------------------------------------------------------|------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------|--------------------------------------------------------------|
| <b>Construction:</b><br>CA $\triangleq$ Array with nickel barrier termination (AgNiSn) | <b>EAI case sizes:</b><br>05 $\triangleq$ 0508 array | M2 $\triangleq$ Array with two elements | <b>Varistor voltage tolerance:</b><br>S $\triangleq$ Special tolerance | <b>Maximum RMS operating voltage (<math>V_{RMS}</math>):</b><br>10 $\triangleq$ 10 V | <b>Internal coding</b> | <b>Capacitance value:</b><br>100 $\triangleq$ $10 \cdot 10^0$ pF $\triangleq$ 100 pF | <b>Maximum capacitance matching tolerance:</b><br>H $\triangleq$ 3% | <b>Taping mode:</b><br>G $\triangleq$ Taped, 180-mm reel, 7" |
|                                                                                        |                                                      |                                         |                                                                        |                                                                                      |                        |                                                                                      |                                                                     |                                                              |
|                                                                                        |                                                      |                                         |                                                                        |                                                                                      |                        |                                                                                      |                                                                     |                                                              |

## Multilayer varistors (MLVs)

### Automotive E series

#### SMD

#### Features

- Reliable ESD protection up to 30 kV acc. to IEC 61000-4-2, level 4 (8 kV contact, 15 kV air)
- High energy absorption capability
- Low leakage current
- Long-term ESD stability
- Bidirectional protection
- No temperature derating up to 150 °C
- RoHS-compatible, lead-free
- Nickel barrier suitable for lead-free soldering
- Qualification based on AEC-Q200
- PSpice simulation models available

#### Applications

- Transient overvoltage protection in automotive applications: engine management, airbag, control units, electrohydraulic brake, ABS/ESP, sunroof
- Load-dump protection
- Jump-start protection

#### Design


- Multilayer technology
- Flammability rating better than UL 94 V-0
- Termination (see “Soldering directions”):
  - CT types with nickel barrier terminations (AgNiSn), recommended for lead-free reflow and wave soldering, and compatible with tin/lead solder.

#### V/I characteristics and derating curves

V/I and derating curves are attached to the data sheet. The curves are sorted by  $V_{RMS}$  and then by case size, which is included in the type designation.

#### Single chip

Internal circuit



MLV0006-H

Available case sizes:

| EIA  | Metric |
|------|--------|
| 0402 | 1005   |
| 0603 | 1608   |
| 0805 | 2012   |
| 1206 | 3216   |
| 1210 | 3225   |
| 1812 | 4532   |
| 2220 | 5750   |

## Multilayer varistors (MLVs)

### Automotive E series

#### SMD

#### Description for ESD/ EMI filter array

The ESD/EMI filter array provides an ideal combination of EMI filtering and ESD protection for high-speed bus system transceivers such as Ethernet and Flexray.

#### Features

- ESD protection acc. to IEC 61000-4-2, level 4
- Capacitance deviation between array elements  $C_1$  and  $C_2$ : < 3%
- Max. relative capacitance change: < 0.1%/K
- Low leakage current
- Load-dump/ jump-start resistant
- Stable protection level
- Bidirectional protection
- No temperature derating up to 125 °C
- RoHS-compatible, lead-free
- Qualification based on AEC-Q200

#### Applications


- Load-dump protection
- Jump-start protection

#### Design


- Two multilayer varistors with a common ground CT types with nickel barrier terminations (AgNiSn), recommended for lead-free reflow and wave soldering, and compatible with tin/lead solder.
- Flammability rating better than UL 94 V-0
- Termination (see "Soldering directions"):
  - CT types with nickel barrier terminations (AgNiSn), recommended for lead-free reflow and wave soldering, and compatible with tin/lead solder.

#### 2-fold array

Internal circuit



Model of EMI filtering with matched capacitances  $C_1$  and  $C_2$

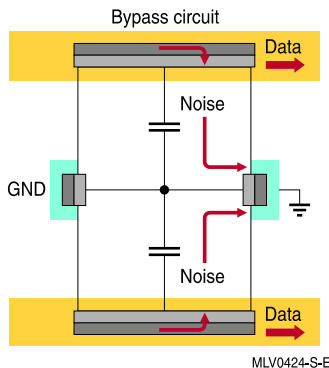

Available case sizes:

| EIA  | Metric |
|------|--------|
| 0508 | 1220   |

## Multilayer varistors (MLVs)

### Automotive E series

#### SMD


#### General technical data

|                               |                |                 |             |    |
|-------------------------------|----------------|-----------------|-------------|----|
| Maximum RMS operating voltage |                | $V_{RMS,max}$   | 10 ... 40   | V  |
| Maximum DC operating voltage  |                | $V_{DC,max}$    | 12 ... 56   | V  |
| Maximum surge current         | (8/20 $\mu$ s) | $I_{surge,max}$ | 2 ... 1200  | A  |
| Maximum load dump energy      | (10 pulses)    | $W_{LD}$        | 1 ... 25    | J  |
| Maximum jump-start voltage    | (5 min)        | $V_{jump}$      | 24.5 ... 45 | V  |
| Maximum clamping voltage      |                | $V_{clamp,max}$ | 35 ... 290  | V  |
| Operating temperature         |                | $T_{op}$        | -55/+150    | °C |
| Storage temperature           |                | LCT/UCT         | -55/+150    | °C |
| Response time                 |                | $t_{resp}$      | < 0.5       | ns |

#### Temperature derating


Climatic category: -55/+150 °C

for single chips

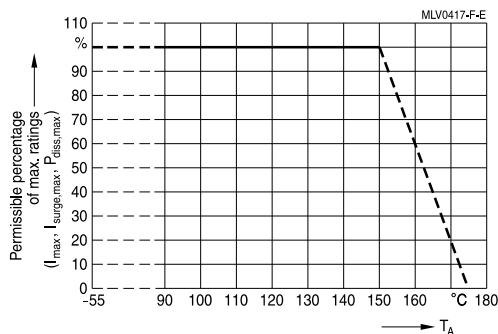

Climatic category: -40/+125 °C

for ESD/ EMI filter array and single chips type CT0402S20AHSG\_P/ CT0603S20AHSG\_P

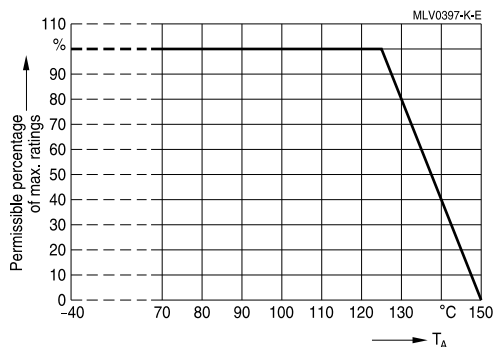

# Multilayer varistors (MLVs)

## Automotive E series

### SMD

#### Electrical specifications and ordering codes

#### Maximum ratings ( $T_{op,max}$ ), automotive standard series<sup>1)</sup>

| Type             | Ordering code   | $V_{RMS,max}$<br>V | $V_{DC,max}$<br>V | $W_{max}$<br>(2 ms)<br>mJ | $P_{diss,max}$<br>mW | $V_V$<br>(1 mA)<br>V | $\Delta V_V$<br>% |
|------------------|-----------------|--------------------|-------------------|---------------------------|----------------------|----------------------|-------------------|
| CT0805K11G       | B72510E0110K062 | 11                 | 14                | 200                       | 5                    | 18                   | ±10               |
| CT0402L14G       | B72590E0140L060 | 14                 | 16                | 30                        | 3                    | 23.5                 | ±15               |
| CT0603K14G       | B72500E0140K060 | 14                 | 18                | 200                       | 3                    | 22                   | ±10               |
| CT0603S14AHSG    | B72500E8140S160 | 14                 | 16                | 30                        | 3                    | 28                   | ±20               |
| CT0603S14BG      | B72500E0140S260 | 14                 | 18                | 200                       | 3                    | 24.5                 | ±15               |
| CT0603V150RFG    | B72500E7151V060 | 14                 | 16                | -                         | -                    | 150                  | ±35               |
| CT0805K14G       | B72510E0140K062 | 14                 | 18                | 300                       | 3                    | 22                   | ±10               |
| CT1206K14G       | B72520E0140K062 | 14                 | 18                | 500                       | 8                    | 22                   | ±10               |
| CT1210K14G       | B72530E0140K062 | 14                 | 18                | 1500                      | 10                   | 22                   | ±10               |
| CT1812K14G       | B72580E0140K062 | 14                 | 18                | 2300                      | 15                   | 22                   | ±10               |
| CT2220K14G       | B72540E0140K062 | 14                 | 18                | 5800                      | 20                   | 22                   | ±10               |
| CT0402S17AG      | B72590E0170S160 | 17                 | 19                | 10                        | 3                    | 32.5                 | ±25               |
| CT0603K17G       | B72500E0170K060 | 17                 | 22                | 200                       | 3                    | 27                   | ±10               |
| CT0603K17LCG     | B72500E2170K060 | 17                 | 22                | 100                       | 1                    | 27                   | ±10               |
| CT0603S17ALCG    | B72500E2170S160 | 17                 | 22                | 75                        | 3                    | 32.5                 | ±25               |
| CT0603S17BCCG    | B72500E5170S260 | 17                 | 22                | 75                        | 3                    | 32.5                 | ±25               |
| CT0805K17G       | B72510E0170K062 | 17                 | 22                | 300                       | 5                    | 27                   | ±10               |
| CT1206K17G       | B72520E0170K062 | 17                 | 22                | 600                       | 8                    | 27                   | ±10               |
| CT1210K17G       | B72530E0170K062 | 17                 | 22                | 1700                      | 10                   | 27                   | ±10               |
| CT1812K17G       | B72580E0170K062 | 17                 | 22                | 2700                      | 15                   | 27                   | ±10               |
| CT2220K17G       | B72540E0170K062 | 17                 | 22                | 7200                      | 20                   | 27                   | ±10               |
| CT0402S20AHSG_P  | B72590P8200S060 | 20                 | 24                | -                         | -                    | ≥ 100                | -                 |
| CT0603K20G       | B72500E0200K060 | 20                 | 26                | 200                       | 3                    | 33                   | ±10               |
| CT0603S20ACCG    | B72500E5200S160 | 20                 | 26                | 300                       | 3                    | 36                   | ±20               |
| CT0603S20AHSG_P  | B72500P8200S060 | 20                 | 24                | -                         | -                    | ≥ 100                | -                 |
| CT0805K20G       | B72510E0200K062 | 20                 | 26                | 300                       | 5                    | 33                   | ±10               |
| CT0805S20ACCG2G2 | B72510E9200S172 | 20                 | 26                | 400                       | 5                    | 34.5                 | ±15               |
| CT1206K20G       | B72520E0200K062 | 20                 | 26                | 700                       | 8                    | 33                   | ±10               |
| CT1210K20G       | B72530E0200K062 | 20                 | 26                | 1900                      | 10                   | 33                   | ±10               |
| CT1812K20G       | B72580E0200K062 | 20                 | 26                | 3000                      | 15                   | 33                   | ±10               |
| CT2220K20G       | B72540E0200K062 | 20                 | 26                | 7800                      | 20                   | 33                   | ±10               |
| CT0603K25G       | B72500E0250K060 | 25                 | 31                | 300                       | 3                    | 39                   | ±10               |
| CT0603L25HSG     | B72500E8250L060 | 25                 | 32                | 50                        | -                    | 61                   | ±15               |
| CT0603L25HTCCG   | B72500E5250L060 | 25                 | 32                | 50                        | -                    | 61                   | ±15               |
| CT0805K25G       | B72510E0250K062 | 25                 | 31                | 300                       | 5                    | 39                   | ±10               |

1)  $W_{LD}$  and  $V_{jump}$  values are not specified for automotive standard series.

# Multilayer varistors (MLVs)

## Automotive E series

### SMD

### Characteristics (T<sub>A</sub> = 25 °C)

| Type             | V <sub>clamp,max</sub><br>V | I <sub>surge,max</sub><br>(8/20<br>μs)<br>A | I <sub>clamp</sub><br>(8/20<br>μs)<br>A | C <sub>typ</sub> <sup>(2)</sup><br>pF | C <sub>min</sub> <sup>(2)</sup><br>pF | C <sub>max</sub> <sup>(2)</sup><br>pF | I <sub>leak,max</sub><br>μA | I <sub>leak</sub><br>μA |
|------------------|-----------------------------|---------------------------------------------|-----------------------------------------|---------------------------------------|---------------------------------------|---------------------------------------|-----------------------------|-------------------------|
| CT0805K11G       | 35                          | 120                                         | 1                                       | 400                                   | -                                     | -                                     | 20@14 V                     | -                       |
| CT0402L14G       | 46                          | 8                                           | 1                                       | 15                                    | -                                     | -                                     | 1@16 V                      | <1@14 V                 |
| CT0603K14G       | 40                          | 30                                          | 1                                       | 100                                   | -                                     | -                                     | 20@18 V                     | <1@14 V                 |
| CT0603S14AHSG    | 66                          | 5                                           | 1                                       | 15                                    | -                                     | 30                                    | 1@16 V                      | <1@14 V                 |
| CT0603S14BG      | 42                          | 30                                          | 1                                       | 120                                   | -                                     | -                                     | 5@18 V                      | <1@14 V                 |
| CT0603V150RFG    | 290                         | -                                           | 1                                       | 3                                     | -                                     | 5                                     | 3@16 V                      | -                       |
| CT0805K14G       | 40                          | 120                                         | 1                                       | 350                                   | -                                     | -                                     | 30@18V                      | 1@14 V                  |
| CT1206K14G       | 38                          | 200                                         | 1                                       | 700                                   | -                                     | -                                     | 70@18 V                     | <5@14 V                 |
| CT1210K14G       | 38                          | 400                                         | 2.5                                     | 2000                                  | -                                     | -                                     | 70@18 V                     | <5@14 V                 |
| CT1812K14G       | 38                          | 800                                         | 5                                       | 4500                                  | -                                     | -                                     | 90@18 V                     | <5@14 V                 |
| CT2220K14G       | 38                          | 1200                                        | 10                                      | 10000                                 | -                                     | -                                     | 80@18 V                     | <10@14 V                |
| CT0402S17AG      | 59                          | 6                                           | 1                                       | 15                                    | -                                     | -                                     | 1@16 V                      | <1@14 V                 |
| CT0603K17G       | 46                          | 30                                          | 1                                       | 100                                   | -                                     | -                                     | 30@22 V                     | <1@14 V                 |
| CT0603K17LCG     | 50                          | 10                                          | 1                                       | 30                                    | -                                     | 50                                    | 20@22 V                     | <1@14 V                 |
| CT0603S17ALCG    | 50                          | 30                                          | 1                                       | 50                                    | -                                     | 75                                    | 5@22 V                      | <1@14 V                 |
| CT0603S17BCCG    | 50                          | 30                                          | 1                                       | 53                                    | 31.8                                  | 74.2                                  | 5@22 V                      | <1@14 V                 |
| CT0805K17G       | 46                          | 120                                         | 1                                       | 400                                   | -                                     | -                                     | 50@22 V                     | 1@14 V                  |
| CT1206K17G       | 44                          | 200                                         | 1                                       | 650                                   | -                                     | -                                     | 70@22 V                     | <2@14 V                 |
| CT1210K17G       | 44                          | 400                                         | 2.5                                     | 1800                                  | -                                     | -                                     | 50@22 V                     | 1@14 V                  |
| CT1812K17G       | 44                          | 800                                         | 5                                       | 4000                                  | -                                     | -                                     | 35@22 V                     | <2@14 V                 |
| CT2220K17G       | 44                          | 1200                                        | 10                                      | 9000                                  | -                                     | -                                     | 70@22 V                     | <5@14 V                 |
| CT0402S20AHSG_P  | -                           | -                                           | -                                       | 4.7                                   | -                                     | 5.7                                   | 1@24 V                      | -                       |
| CT0603K20G       | 56                          | 30                                          | 1                                       | 90                                    | -                                     | -                                     | 20@26 V                     | <1@14 V                 |
| CT0603S20ACCG    | 67                          | 30                                          | 1                                       | 80                                    | 64                                    | 96                                    | 5@26 V                      | <1@14 V                 |
| CT0603S20AHSG_P  | -                           | -                                           | -                                       | 4.7                                   | -                                     | 5.7                                   | 1@24 V                      | -                       |
| CT0805K20G       | 56                          | 80                                          | 1                                       | 300                                   | -                                     | -                                     | 20@26 V                     | <1@14 V                 |
| CT0805S20ACCG2G2 | 64                          | 80                                          | 1                                       | 220                                   | 170                                   | 270                                   | 10@22 V                     | 1@28 V                  |
| CT1206K20G       | 54                          | 200                                         | 1                                       | 600                                   | -                                     | -                                     | 10@26 V                     | <1@14 V                 |
| CT1210K20G       | 54                          | 400                                         | 2.5                                     | 1500                                  | -                                     | -                                     | 20@26 V                     | 1@14 V                  |
| CT1812K20G       | 54                          | 800                                         | 5                                       | 3000                                  | -                                     | -                                     | 60@26 V                     | <1@14 V                 |
| CT2220K20G       | 54                          | 1200                                        | 10                                      | 7000                                  | -                                     | -                                     | 70@26 V                     | <2@14 V                 |
| CT0603K25G       | 67                          | 30                                          | 1                                       | 90                                    | -                                     | -                                     | 10@31 V                     | 1@28 V                  |
| CT0603L25HSG     | 120                         | 5                                           | 1                                       | 10                                    | -                                     | 15                                    | 1@32 V                      | <1@14 V                 |
| CT0603L25HTCCG   | 120                         | 5                                           | 1                                       | 10                                    | 5                                     | 15                                    | 1@32 V                      | <1@28 V                 |
| CT0805K25G       | 67                          | 80                                          | 1                                       | 250                                   | -                                     | -                                     | 25@31 V                     | 5@28 V                  |

2) Measurement frequency: f = 1 MHz for C < 100 pF, f = 1 KHz for C ≥ 100 pF



# Multilayer varistors (MLVs)

## Automotive E series

### SMD

#### Electrical specifications and ordering codes

#### Maximum ratings ( $T_{op,max}$ ), automotive standard series<sup>1)</sup>

| Type       | Ordering code   | $V_{RMS,max}$<br>V | $V_{DC,max}$<br>V | $W_{max}$<br>(2 ms)<br>mJ | $P_{diss,max}$<br>mW | $V_V$<br>(1 mA)<br>V | $\Delta V_V$<br>% |
|------------|-----------------|--------------------|-------------------|---------------------------|----------------------|----------------------|-------------------|
| CT1206K25G | B72520E0250K062 | 25                 | 31                | 1000                      | 8                    | 39                   | ±10               |
| CT1210K25G | B72530E0250K062 | 25                 | 31                | 1700                      | 10                   | 39                   | ±10               |
| CT1812K25G | B72580E0250K062 | 25                 | 31                | 3700                      | 15                   | 39                   | ±10               |
| CT2220K25G | B72540E0250K062 | 25                 | 31                | 9600                      | 20                   | 39                   | ±10               |
| CT0805K30G | B72510E0300K062 | 30                 | 38                | 300                       | 5                    | 47                   | ±10               |
| CT1206K30G | B72520E0300K062 | 30                 | 38                | 1100                      | 8                    | 47                   | ±10               |
| CT1210K30G | B72530E0300K062 | 30                 | 38                | 2000                      | 10                   | 47                   | ±10               |
| CT1812K30G | B72580E0300K062 | 30                 | 38                | 4200                      | 15                   | 47                   | ±10               |
| CT2220K30G | B72540E0300K062 | 30                 | 38                | 12000                     | 20                   | 47                   | ±10               |
| CT0805K35G | B72510E0350K062 | 35                 | 45                | 300                       | 5                    | 56                   | ±10               |
| CT1206K35G | B72520E0350K062 | 35                 | 45                | 400                       | 8                    | 56                   | ±10               |
| CT1210K35G | B72530E0350K062 | 35                 | 45                | 2000                      | 10                   | 56                   | ±10               |
| CT1812K35G | B72580E0350K062 | 35                 | 45                | 4000                      | 15                   | 56                   | ±10               |
| CT2220K35G | B72540E0350K062 | 35                 | 45                | 7700                      | 20                   | 56                   | ±10               |
| CT1206K40G | B72520E0400K062 | 40                 | 56                | 500                       | 8                    | 68                   | ±10               |
| CT2220K40G | B72540E0400K062 | 40                 | 56                | 9000                      | 20                   | 68                   | ±10               |

1)  $W_{LD}$  and  $V_{jump}$  values are not specified for automotive standard series.

# Multilayer varistors (MLVs)

## Automotive E series

### SMD

### Characteristics ( $T_A = 25\text{ }^{\circ}\text{C}$ )

| Type       | $V_{\text{clamp,max}}$<br>V | $I_{\text{surge,max}}$<br>(8/20<br>$\mu\text{s}$ )<br>A | $I_{\text{clamp}}$<br>(8/20<br>$\mu\text{s}$ )<br>A | $C_{\text{typ}}^{2)}$<br>pF | $C_{\text{min}}^{2)}$<br>pF | $C_{\text{max}}^{2)}$<br>pF | $I_{\text{leak,max}}$<br>$\mu\text{A}$ | $I_{\text{leak}}$<br>$\mu\text{A}$ |
|------------|-----------------------------|---------------------------------------------------------|-----------------------------------------------------|-----------------------------|-----------------------------|-----------------------------|----------------------------------------|------------------------------------|
| CT1206K25G | 65                          | 200                                                     | 1                                                   | 550                         | -                           | -                           | 10@31 V                                | 2.5@28 V                           |
| CT1210K25G | 65                          | 300                                                     | 2.5                                                 | 1500                        | -                           | -                           | 25@31 V                                | 10@28 V                            |
| CT1812K25G | 65                          | 800                                                     | 5                                                   | 2500                        | -                           | -                           | -                                      | -                                  |
| CT2220K25G | 65                          | 1200                                                    | 10                                                  | 5000                        | -                           | -                           | 110@31 V                               | <40@28 V                           |
| CT0805K30G | 77                          | 80                                                      | 1                                                   | 200                         | -                           | -                           | 40@38 V                                | 1@28 V                             |
| CT1206K30G | 77                          | 200                                                     | 1                                                   | 500                         | -                           | -                           | 25@38 V                                | 2@28 V                             |
| CT1210K30G | 77                          | 300                                                     | 2.5                                                 | 1000                        | -                           | -                           | 20@38 V                                | 1@28 V                             |
| CT1812K30G | 77                          | 800                                                     | 5                                                   | 2000                        | -                           | -                           | 70@38 V                                | 5@28 V                             |
| CT2220K30G | 77                          | 1200                                                    | 10                                                  | 4000                        | -                           | -                           | 50@38 V                                | <5@28 V                            |
| CT0805K35G | 95                          | 80                                                      | 1                                                   | 150                         | -                           | -                           | -                                      | -                                  |
| CT1206K35G | 90                          | 100                                                     | 1                                                   | 200                         | -                           | -                           | 20@45 V                                | <1@28 V                            |
| CT1210K35G | 90                          | 250                                                     | 2.5                                                 | 600                         | -                           | -                           | 20@45 V                                | 1@28 V                             |
| CT1812K35G | 90                          | 500                                                     | 5                                                   | 1200                        | -                           | -                           | 30@45 V                                | 1@27 V                             |
| CT2220K35G | 90                          | 1000                                                    | 10                                                  | 2500                        | -                           | -                           | 50@45 V                                | <2@28 V                            |
| CT1206K40G | 110                         | 100                                                     | 1                                                   | 250                         | -                           | -                           | 20@56 V                                | <1@28 V                            |
| CT2220K40G | 110                         | 1000                                                    | 10                                                  | 2000                        | -                           | -                           | 120@56 V                               | <1@28 V                            |

2) Measurement frequency:  $f = 1\text{ MHz}$  for  $C < 100\text{ pF}$ ,  $f = 1\text{ KHz}$  for  $C \geq 100\text{ pF}$

## Multilayer varistors (MLVs)

### Automotive E series

#### SMD

#### Electrical specifications and ordering codes

#### Maximum ratings ( $T_{op,max}$ )

#### Automotive series with load-dump/ jump-start protection<sup>1)</sup>

| Type               | Ordering code   | $V_{RMS,max}$ | $V_{DC,max}$ | $I_{surge,max}$<br>(8/20 $\mu$ s) | $W_{max}$<br>(2 ms) | $W_{LD}$<br>(10 pulses) | $P_{diss,max}$ |
|--------------------|-----------------|---------------|--------------|-----------------------------------|---------------------|-------------------------|----------------|
|                    |                 | V             | V            | A                                 | mJ                  | J                       | mW             |
| CT0603S14BAUTOG    | B72500E1140S260 | 14            | 16           | 30                                | 200                 | -                       | 3              |
| CT0805S14BAUTOG    | B72510E1140S262 | 14            | 16           | 120                               | 300                 | 1                       | 8              |
| CT1206S14BAUTOG    | B72520E1140S262 | 14            | 16           | 200                               | 600                 | 1.5                     | 8              |
| CT1210S14BAUTOG    | B72530E1140S262 | 14            | 16           | 400                               | 1600                | 3                       | 10             |
| CT1812S14BAUTOE2G2 | B72580E3140S272 | 14            | 16           | 800                               | 2400                | 12                      | 15             |
| CT1812S14BAUTOG    | B72580E1140S262 | 14            | 16           | 800                               | 2400                | 6                       | 15             |
| CT2220S14BAUTOE2G2 | B72540E3140S272 | 14            | 16           | 1200                              | 5800                | 25                      | 30             |
| CT2220S14BAUTOG    | B72540E1140S262 | 14            | 16           | 1200                              | 5800                | 12                      | 30             |
| CT0805K17AUTOLCG   | B72510E2170K062 | 17            | 22           | 30                                | 100                 | -                       | 4              |
| CT1210K17AUTOG     | B72530E1170K062 | 17            | 22           | 400                               | 1700                | 3                       | 10             |
| CT1206K20AUTOG     | B72520E1200K062 | 20            | 26           | 200                               | 700                 | 1.5                     | 8              |
| CT1210K20AUTOG     | B72530E1200K062 | 20            | 26           | 400                               | 1900                | 3                       | 10             |
| CT0805K25AUTOG     | B72510E1250K062 | 25            | 31           | 80                                | 300                 | 1                       | 5              |
| CT1206K25AUTOG     | B72520E1250K062 | 25            | 31           | 200                               | 1000                | 1.5                     | 8              |
| CT1210K25AUTOG     | B72530E1250K062 | 25            | 31           | 300                               | 1700                | 3                       | 10             |
| CT2220K30AUTOE2G2  | B72540E3300K072 | 30            | 34           | 1200                              | 12000               | 25                      | 30             |
| CT2220K30AUTOG     | B72540E1300K062 | 30            | 34           | 1200                              | 12000               | 12                      | 30             |

1)  $C_{min}$  and  $C_{max}$  values are not specified for standard automotive series with load dump/ jump start specification.

# Multilayer varistors (MLVs)

## Automotive E series

### SMD

Characteristics ( $T_A = 25\text{ °C}$ )

| Type               | $V_V$<br>(1 mA) | $\Delta V_V$ | $V_{\text{jump}}$<br>(5 min) | $V_{\text{clamp,max}}$ | $I_{\text{clamp}}$<br>(8/20<br>$\mu\text{s}$ ) | $C_{\text{typ}}$<br>(1 kHz) | $I_{\text{leak,max}}$ | $I_{\text{leak}}$ |
|--------------------|-----------------|--------------|------------------------------|------------------------|------------------------------------------------|-----------------------------|-----------------------|-------------------|
|                    | V               | %            | V                            | V                      | A                                              | pF                          | $\mu\text{A}$         | $\mu\text{A}$     |
| CT0603S14BAUTOG    | 24.5            | $\pm 15$     | 24.5                         | 42                     | 1                                              | 120                         | 1@16 V                | <1@14 V           |
| CT0805S14BAUTOG    | 24.5            | $\pm 15$     | 24.5                         | 42                     | 1                                              | 400                         | 5@16 V                | 1@14 V            |
| CT1206S14BAUTOG    | 24.5            | $\pm 15$     | 24.5                         | 40                     | 1                                              | 800                         | 5@16 V                | <2.5@14 V         |
| CT1210S14BAUTOG    | 24.5            | $\pm 15$     | 24.5                         | 40                     | 2.5                                            | 2000                        | 5@16 V                | <2.5@14 V         |
| CT1812S14BAUTOE2G2 | 24.5            | $\pm 15$     | 24.5                         | 40                     | 5                                              | 7000                        | 10@16 V               | 3@14 V            |
| CT1812S14BAUTOG    | 24.5            | $\pm 15$     | 24.5                         | 40                     | 5                                              | 5600                        | 10@16 V               | 3@14 V            |
| CT2220S14BAUTOE2G2 | 24.5            | $\pm 15$     | 24.5                         | 40                     | 10                                             | 15000                       | 20@16 V               | 10@14 V           |
| CT2220S14BAUTOG    | 24.5            | $\pm 15$     | 24.5                         | 40                     | 10                                             | 9500                        | 10@16 V               | 5@14 V            |
| CT0805K17AUTOLCG   | 29              | $\pm 15$     | -                            | 50                     | 1                                              | 100                         | 10@22 V               | 1@14 V            |
| CT1210K17AUTOG     | 27              | $\pm 10$     | 26.5                         | 44                     | 2.5                                            | 2000                        | 50@22 V               | 1@14 V            |
| CT1206K20AUTOG     | 33              | $\pm 10$     | 27                           | 54                     | 1                                              | 600                         | 10@26 V               | <1@14 V           |
| CT1210K20AUTOG     | 33              | $\pm 10$     | 27                           | 54                     | 2.5                                            | 1500                        | 20@26 V               | 1@14 V            |
| CT0805K25AUTOG     | 39              | $\pm 10$     | 29                           | 67                     | 1                                              | 250                         | 25@22 V               | 5@28 V            |
| CT1206K25AUTOG     | 39              | $\pm 10$     | 29                           | 65                     | 1                                              | 550                         | 10@31 V               | 2.5@28 V          |
| CT1210K25AUTOG     | 39              | $\pm 10$     | 29                           | 65                     | 2.5                                            | 1500                        | 25@31 V               | 10@28 V           |
| CT2220K30AUTOE2G2  | 47              | $\pm 10$     | 45                           | 77                     | 10                                             | 10000                       | 40@34 V               | 10@28 V           |
| CT2220K30AUTOG     | 47              | $\pm 10$     | 45                           | 77                     | 10                                             | 4000                        | 20@34 V               | 5@28 V            |

## Multilayer varistors (MLVs)

### Automotive E series

#### SMD

#### Electrical specifications and ordering codes

#### Maximum ratings ( $T_{op,max}$ )

#### Automotive series, array specification

| Type            | Ordering code   | $V_{RMS,max}$ | $V_{DC,max}$ | $I_{surge,max}$<br>(8/20 $\mu$ s) | $W_{max}$<br>(2 ms) | $V_{LD}$<br>(10 pulses,<br>300 ms) | $P_{diss,max}$ |
|-----------------|-----------------|---------------|--------------|-----------------------------------|---------------------|------------------------------------|----------------|
|                 |                 | V             | V            | A                                 | mJ                  | V                                  | mW             |
| CA05M2S10T100HG | B72812Q1120S160 | 10            | 12           | 5                                 | 10                  | 27                                 | 3              |

#### Characteristics ( $T_A = 25\text{ }^{\circ}\text{C}$ )

| Type            | $V_V$<br>(1 mA) | $\Delta V_V$ | $V_{jump}$<br>(60 s) | $V_{clamp,max}$ | $I_{clamp}$<br>(8/20 $\mu$ s) | $C_{typ}$<br>(1 MHz) | $C_{max}$<br>(1 MHz) | $I_{leak,max}$ |
|-----------------|-----------------|--------------|----------------------|-----------------|-------------------------------|----------------------|----------------------|----------------|
|                 | V               | %            | V                    | V               | A                             | pF                   | pF                   | $\mu$ A        |
| CA05M2S10T100HG | 26              | $\pm 20$     | 28                   | 60              | 1                             | 10                   | 15                   | 0.5@5 V        |

#### Note:

Pulse derating curve is not specified for automotive array CA05M2S10T100HG.


# Multilayer varistors (MLVs)

## Automotive E series

### SMD


#### Dimensional drawings

##### Single chip



| Case size<br>EIA / mm | l              | w               | h        | k             |
|-----------------------|----------------|-----------------|----------|---------------|
| 0402 / 1005           | $1.0 \pm 0.15$ | $0.50 \pm 0.10$ | 0.6 max. | 0.10 ... 0.30 |
| 0603 / 1608           | $1.6 \pm 0.15$ | $0.80 \pm 0.10$ | 0.9 max. | 0.10 ... 0.40 |
| 0805 / 2012           | $2.0 \pm 0.20$ | $1.25 \pm 0.15$ | 1.4 max. | 0.13 ... 0.75 |
| 1206 / 3216           | $3.2 \pm 0.30$ | $1.60 \pm 0.20$ | 1.7 max. | 0.25 ... 0.75 |
| 1210 / 3225           | $3.2 \pm 0.30$ | $2.50 \pm 0.25$ | 1.7 max. | 0.25 ... 0.75 |
| 1812 / 4532           | $4.5 \pm 0.40$ | $3.20 \pm 0.30$ | 2.5 max. | 0.25 ... 1.00 |
| 2220 / 5750           | $5.7 \pm 0.40$ | $5.00 \pm 0.40$ | 2.5 max. | 0.25 ... 1.00 |

##### 2-fold MCV array



| Case size<br>EIA / mm | l              | w               | h        | d               | k               | u               |
|-----------------------|----------------|-----------------|----------|-----------------|-----------------|-----------------|
| 0508 / 1220           | $2.0 \pm 0.20$ | $1.25 \pm 0.15$ | 0.9 max. | $0.50 \pm 0.20$ | $0.30 \pm 0.20$ | $0.20 \pm 0.10$ |

Dimensions in mm


## Multilayer varistors (MLVs)

### Automotive E series

#### SMD

#### Recommended solder pad layout


##### Single chip



Dimensions in mm

| Case size<br>EIA / mm | A    | B    | C    |
|-----------------------|------|------|------|
| 0402 / 1005           | 0.60 | 0.60 | 0.50 |
| 0603 / 1608           | 1.00 | 1.00 | 1.00 |
| 0805 / 2012           | 1.40 | 1.20 | 1.00 |
| 1206 / 3216           | 1.80 | 1.20 | 2.10 |
| 1210 / 3225           | 2.80 | 1.20 | 2.10 |
| 1812 / 4532           | 3.60 | 1.50 | 3.00 |
| 2220 / 5750           | 5.50 | 1.50 | 4.20 |

##### 2-fold MCV array



Dimensions in mm

| Case size<br>EIA / mm | A    | B    | C    | D    | E    |
|-----------------------|------|------|------|------|------|
| 0508 / 1220           | 1.00 | 1.30 | 0.40 | 0.60 | 2.16 |

# Multilayer varistors (MLVs)

## Automotive E series

### SMD

#### Delivery mode

| EIA case size | Taping    | Reel size mm | Packing unit pcs. | Type             | Ordering code   |
|---------------|-----------|--------------|-------------------|------------------|-----------------|
| Array         |           |              |                   |                  |                 |
| 0508          | Cardboard | 180          | 4000              | CA05M2S10T100HG  | B72812Q1120S160 |
| Single chip   |           |              |                   |                  |                 |
| 0402          | Cardboard | 180          | 10000             | CT0402L14G       | B72590E0140L060 |
| 0402          | Cardboard | 180          | 10000             | CT0402S17AG      | B72590E0170S160 |
| 0402          | Cardboard | 180          | 10000             | CT0402S20AHSG_P  | B72590P8200S060 |
| 0603          | Cardboard | 180          | 4000              | CT0603K14G       | B72500E0140K060 |
| 0603          | Cardboard | 180          | 4000              | CT0603K17G       | B72500E0170K060 |
| 0603          | Cardboard | 180          | 4000              | CT0603K17LCG     | B72500E2170K060 |
| 0603          | Cardboard | 180          | 4000              | CT0603K20G       | B72500E0200K060 |
| 0603          | Cardboard | 180          | 4000              | CT0603K25G       | B72500E0250K060 |
| 0603          | Cardboard | 180          | 4000              | CT0603L25HSG     | B72500E8250L060 |
| 0603          | Cardboard | 180          | 4000              | CT0603L25HTCCG   | B72500E5250L060 |
| 0603          | Cardboard | 180          | 4000              | CT0603S14AHSG    | B72500E8140S160 |
| 0603          | Cardboard | 180          | 4000              | CT0603S14BAUTOG  | B72500E1140S260 |
| 0603          | Cardboard | 180          | 4000              | CT0603S14BG      | B72500E0140S260 |
| 0603          | Cardboard | 180          | 4000              | CT0603S17ALCG    | B72500E2170S160 |
| 0603          | Cardboard | 180          | 4000              | CT0603S17BCCG    | B72500E5170S260 |
| 0603          | Cardboard | 180          | 4000              | CT0603S20ACCG    | B72500E5200S160 |
| 0603          | Cardboard | 180          | 4000              | CT0603S20AHSG_P  | B72500P8200S060 |
| 0603          | Cardboard | 180          | 4000              | CT0603V150RFG    | B72500E7151V060 |
| 0805          | Blister   | 180          | 3000              | CT0805K11G       | B72510E0110K062 |
| 0805          | Blister   | 180          | 3000              | CT0805K14G       | B72510E0140K062 |
| 0805          | Blister   | 180          | 3000              | CT0805K17AUTOLCG | B72510E2170K062 |
| 0805          | Blister   | 180          | 3000              | CT0805K17G       | B72510E0170K062 |
| 0805          | Blister   | 180          | 3000              | CT0805K20G       | B72510E0200K062 |
| 0805          | Blister   | 180          | 3000              | CT0805K25AUTOG   | B72510E1250K062 |
| 0805          | Blister   | 180          | 3000              | CT0805K25G       | B72510E0250K062 |
| 0805          | Blister   | 180          | 3000              | CT0805K30G       | B72510E0300K062 |
| 0805          | Blister   | 180          | 3000              | CT0805K35G       | B72510E0350K062 |
| 0805          | Blister   | 180          | 3000              | CT0805S14BAUTOG  | B72510E1140S262 |
| 0805          | Blister   | 330          | 12000             | CT0805S20ACC2G2  | B72510E9200S172 |
| 1206          | Blister   | 180          | 2000              | CT1206K25AUTOG   | B72520E1250K062 |
| 1206          | Blister   | 180          | 2000              | CT1206K25G       | B72520E0250K062 |
| 1206          | Blister   | 180          | 2000              | CT1206K30G       | B72520E0300K062 |
| 1206          | Blister   | 180          | 2000              | CT1206K35G       | B72520E0350K062 |
| 1206          | Blister   | 180          | 2000              | CT1206K40G       | B72520E0400K062 |
| 1206          | Blister   | 180          | 3000              | CT1206K14G       | B72520E0140K062 |
| 1206          | Blister   | 180          | 3000              | CT1206K17G       | B72520E0170K062 |
| 1206          | Blister   | 180          | 3000              | CT1206K20AUTOG   | B72520E1200K062 |
| 1206          | Blister   | 180          | 3000              | CT1206K20G       | B72520E0200K062 |
| 1206          | Blister   | 180          | 3000              | CT1206S14BAUTOG  | B72520E1140S262 |



# Multilayer varistors (MLVs)

## Automotive E series

### SMD


| EIA case size | Taping  | Reel size mm | Packing unit pcs. | Type               | Ordering code   |
|---------------|---------|--------------|-------------------|--------------------|-----------------|
| 1210          | Blister | 180          | 2000              | CT1210K20AUTOG     | B72530E1200K062 |
| 1210          | Blister | 180          | 2000              | CT1210K20G         | B72530E0200K062 |
| 1210          | Blister | 180          | 2000              | CT1210K25AUTOG     | B72530E1250K062 |
| 1210          | Blister | 180          | 2000              | CT1210K25G         | B72530E0250K062 |
| 1210          | Blister | 180          | 2000              | CT1210K30G         | B72530E0300K062 |
| 1210          | Blister | 180          | 2000              | CT1210K35G         | B72530E0350K062 |
| 1210          | Blister | 180          | 3000              | CT1210K14G         | B72530E0140K062 |
| 1210          | Blister | 180          | 3000              | CT1210K17AUTOG     | B72530E1170K062 |
| 1210          | Blister | 180          | 3000              | CT1210K17G         | B72530E0170K062 |
| 1210          | Blister | 180          | 3000              | CT1210S14BAUTOG    | B72530E1140S262 |
| 1812          | Blister | 180          | 1000              | CT1812K25G         | B72580E0250K062 |
| 1812          | Blister | 180          | 1000              | CT1812K30G         | B72580E0300K062 |
| 1812          | Blister | 180          | 1000              | CT1812K35G         | B72580E0350K062 |
| 1812          | Blister | 180          | 1500              | CT1812K14G         | B72580E0140K062 |
| 1812          | Blister | 180          | 1500              | CT1812K17G         | B72580E0170K062 |
| 1812          | Blister | 180          | 1500              | CT1812K20G         | B72580E0200K062 |
| 1812          | Blister | 180          | 1500              | CT1812S14BAUTOG    | B72580E1140S262 |
| 1812          | Blister | 330          | 3000              | CT1812S14BAUTOE2G2 | B72580E3140S272 |
| 2220          | Blister | 180          | 1000              | CT2220K25G         | B72540E0250K062 |
| 2220          | Blister | 180          | 1000              | CT2220K30AUTOG     | B72540E1300K062 |
| 2220          | Blister | 180          | 1000              | CT2220K30G         | B72540E0300K062 |
| 2220          | Blister | 180          | 1000              | CT2220K35G         | B72540E0350K062 |
| 2220          | Blister | 180          | 1000              | CT2220K40G         | B72540E0400K062 |
| 2220          | Blister | 180          | 1500              | CT2220K14G         | B72540E0140K062 |
| 2220          | Blister | 180          | 1500              | CT2220K17G         | B72540E0170K062 |
| 2220          | Blister | 180          | 1500              | CT2220K20G         | B72540E0200K062 |
| 2220          | Blister | 180          | 1500              | CT2220S14BAUTOG    | B72540E1140S262 |
| 2220          | Blister | 330          | 3000              | CT2220K30AUTOE2G2  | B72540E3300K072 |
| 2220          | Blister | 330          | 3000              | CT2220S14BAUTOE2G2 | B72540E3140S272 |

# Multilayer varistors (MLVs)


## Automotive E series

### SMD

### V/I characteristics for automotive standard series

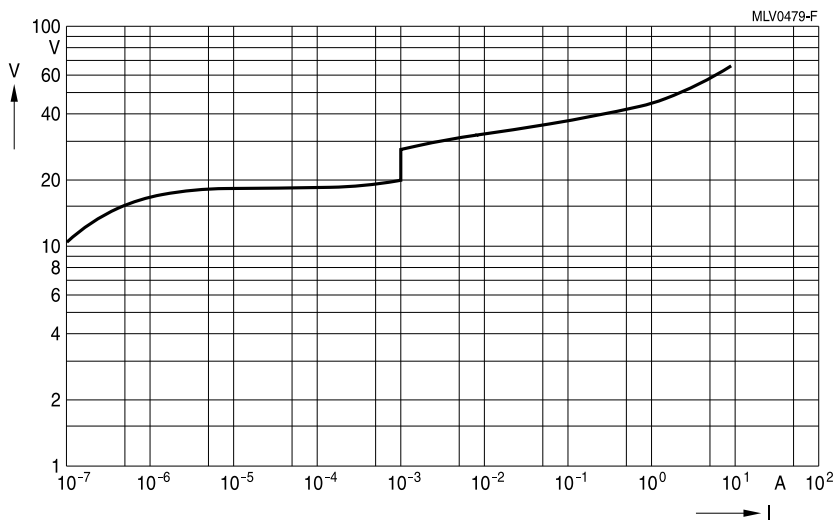

CT0402L14G

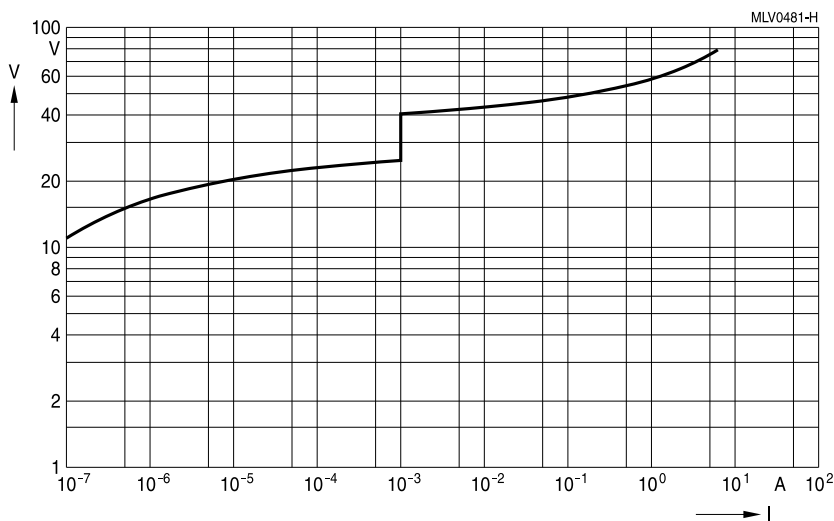


CT0402S17AG

# Multilayer varistors (MLVs)


## Automotive E series

### SMD

#### V/I characteristics for automotive standard series

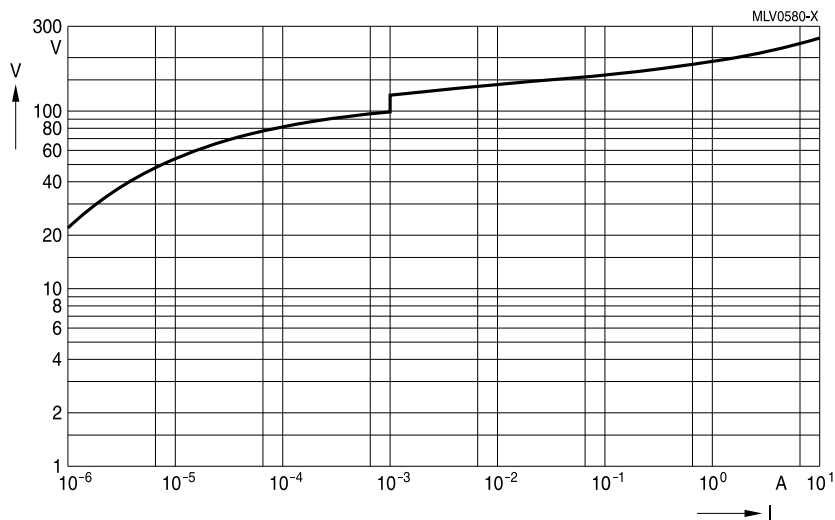

CT0402S20AHSG\_P

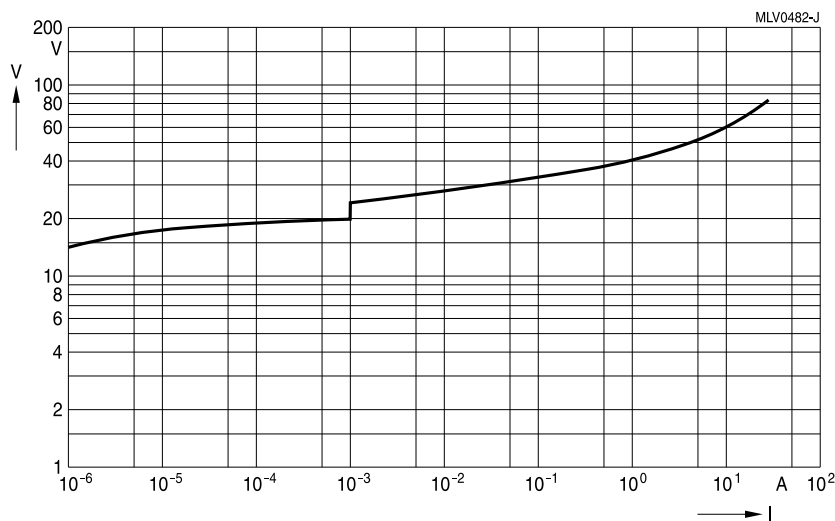


CT0603K14G

# Multilayer varistors (MLVs)


## Automotive E series

### SMD

### V/I characteristics for automotive standard series

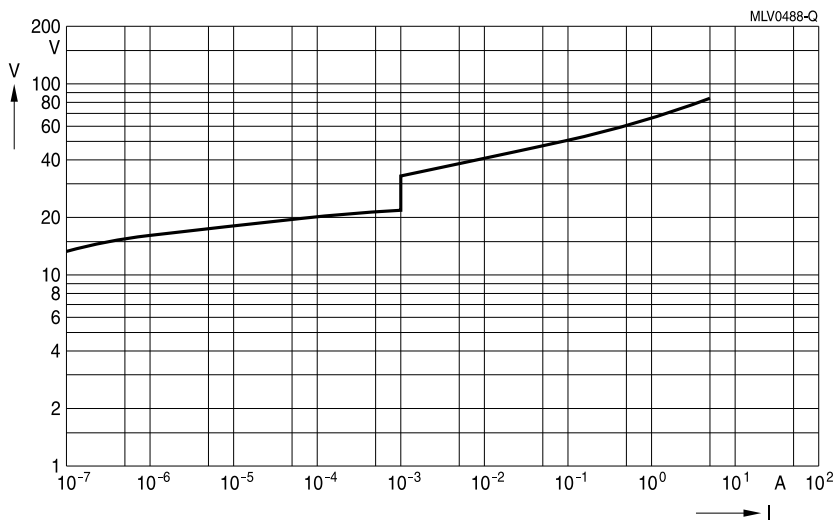

CT0603S14AHSG

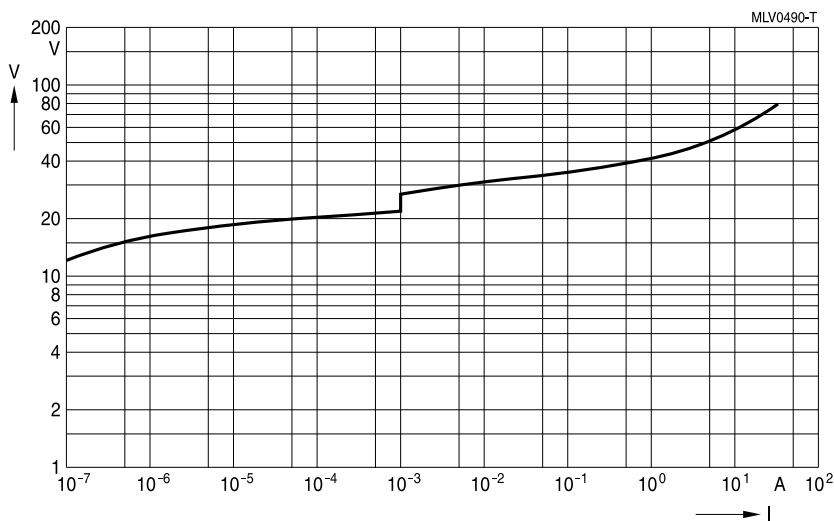


CT0603S14BG

**Multilayer varistors (MLVs)**


**Automotive E series**

**SMD**

**V/I characteristics for automotive standard series**

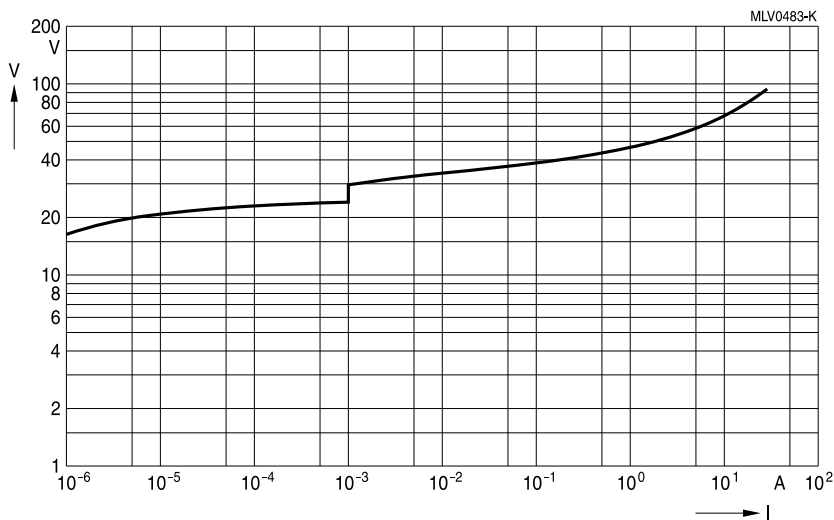

**CT0603K17G**

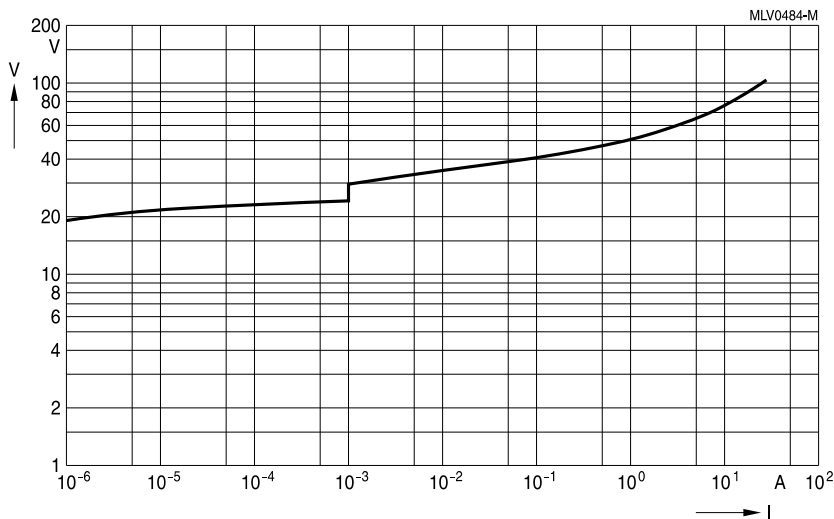


**CT0603K17LCG**

# Multilayer varistors (MLVs)

## Automotive E series


### SMD

### V/I characteristics for automotive standard series

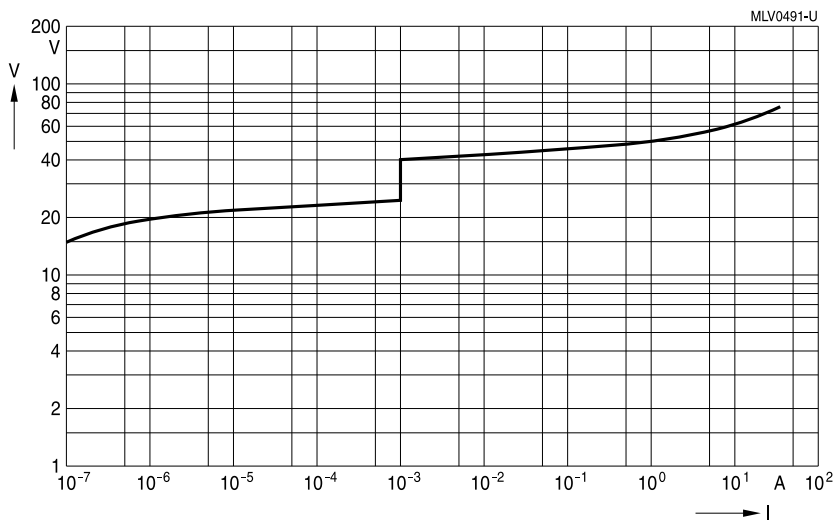

CT0603S17ALCG

CT0603S17BCCG

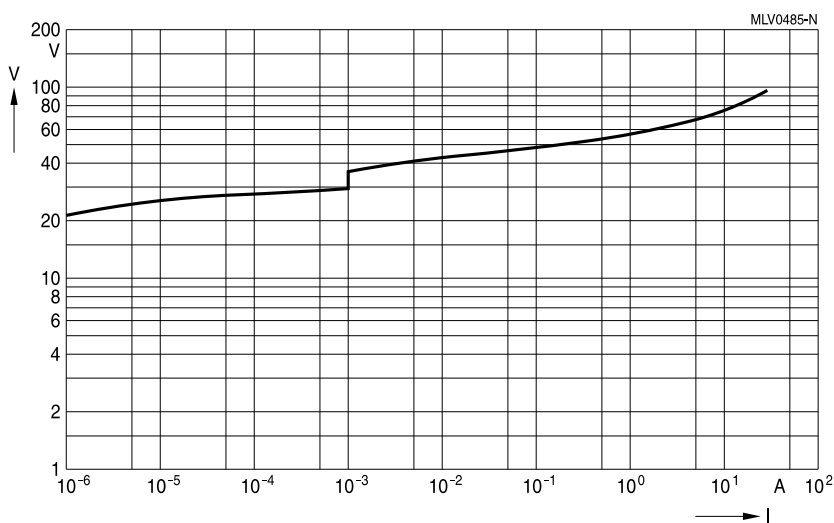


CT0603K20G

# Multilayer varistors (MLVs)


## Automotive E series

### SMD

#### V/I characteristics for automotive standard series

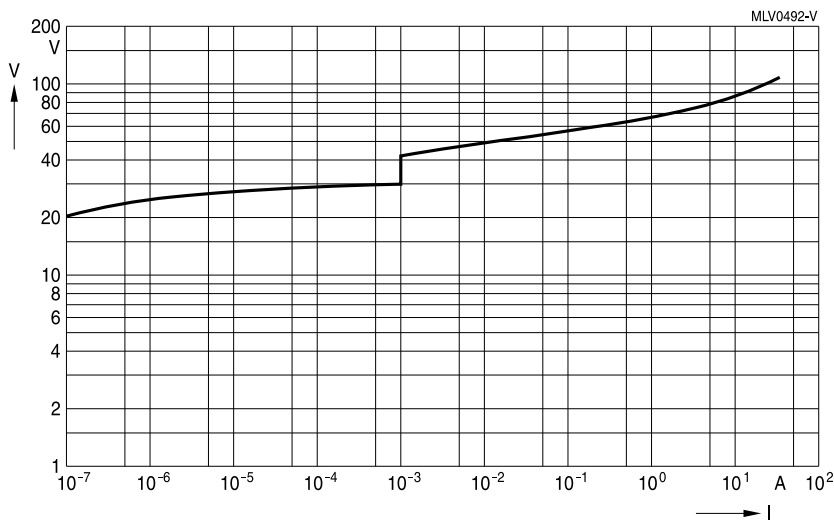

#### CT0603S20ACCG

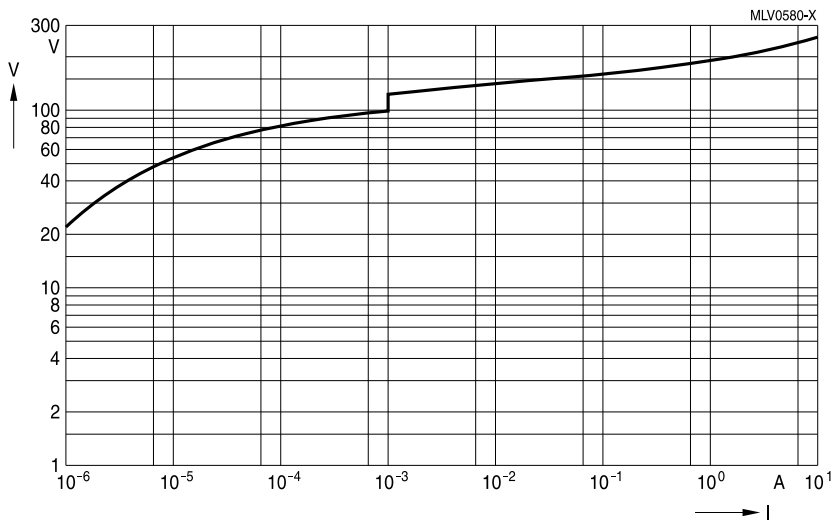


#### CT0603S20AHSG\_P

# Multilayer varistors (MLVs)

## Automotive E series

### SMD

### V/I characteristics for automotive standard series

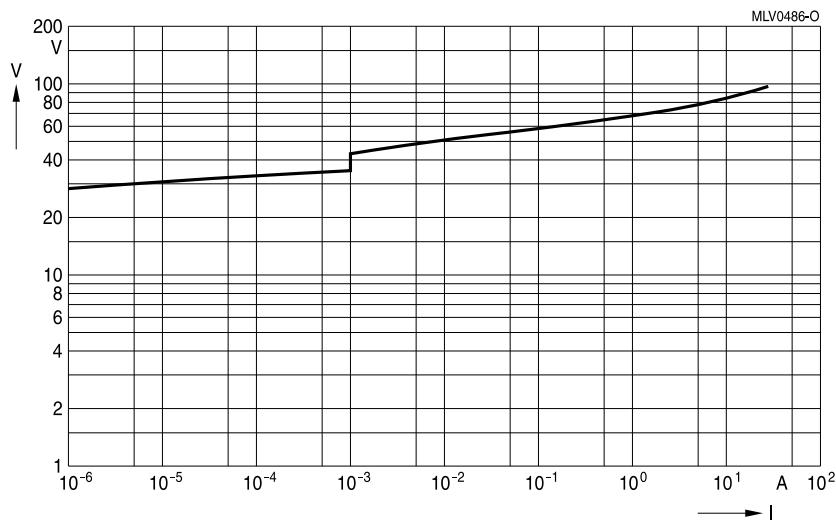




# Multilayer varistors (MLVs)

## Automotive E series


### SMD

#### V/I characteristics for automotive standard series

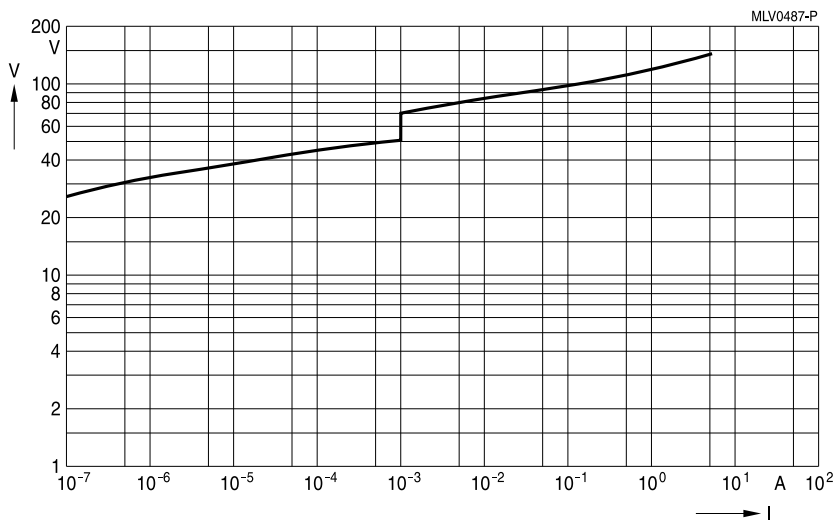

CT0603L25HSG

CT0603L25HTCCG

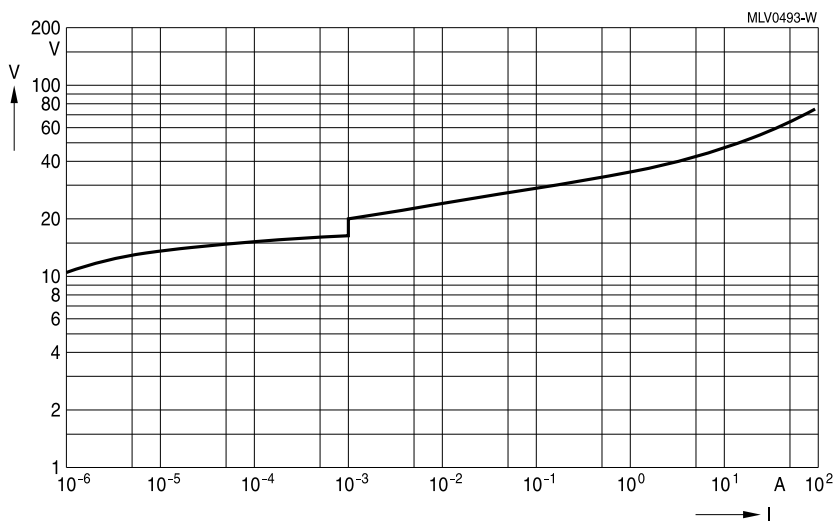


CT0805K11G

# Multilayer varistors (MLVs)


## Automotive E series

### SMD

### V/I characteristics for automotive standard series

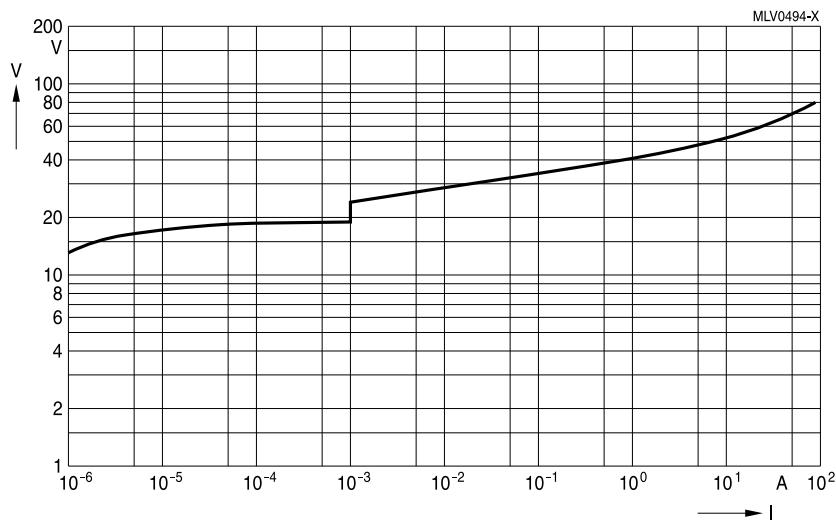

CT0805K14G

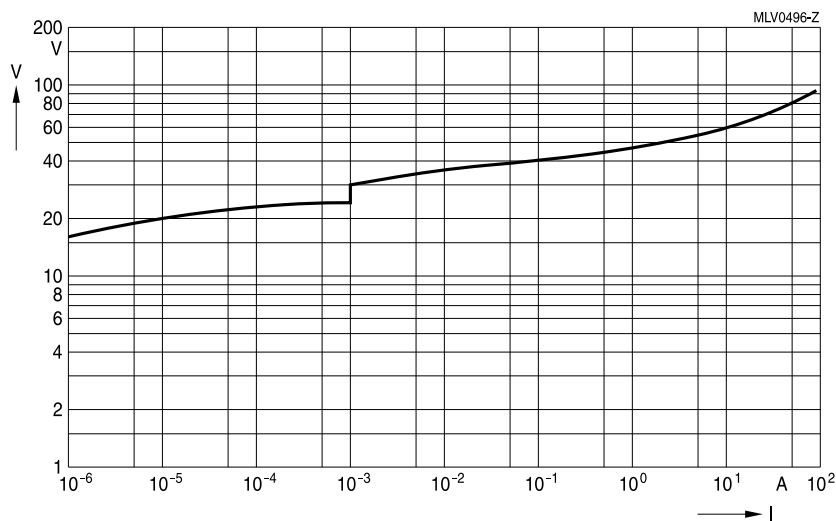


CT0805K17G

# Multilayer varistors (MLVs)


## Automotive E series

### SMD

### V/I characteristics for automotive standard series

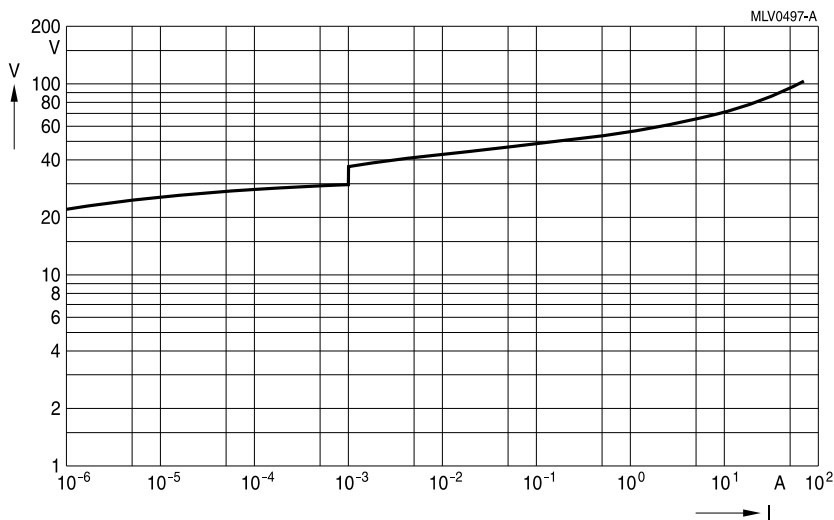

### CT0805K20G

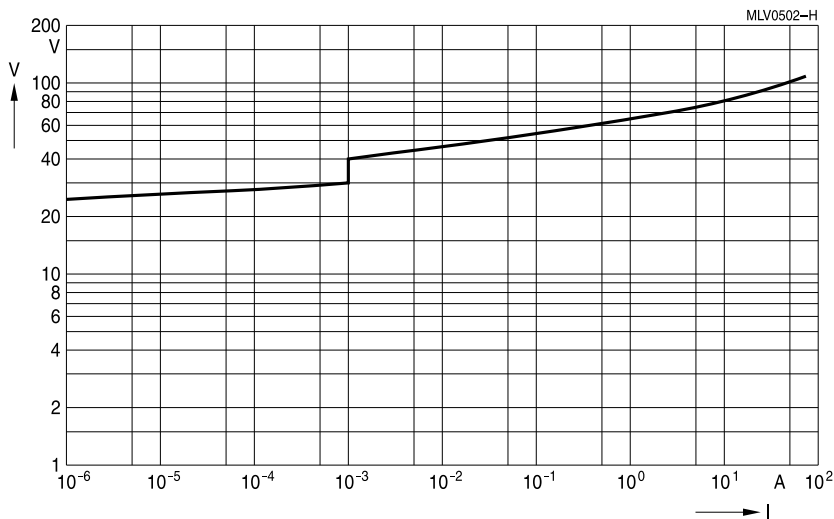


### CT0805S20ACC2G2

# Multilayer varistors (MLVs)


## Automotive E series

### SMD

### V/I characteristics for automotive standard series

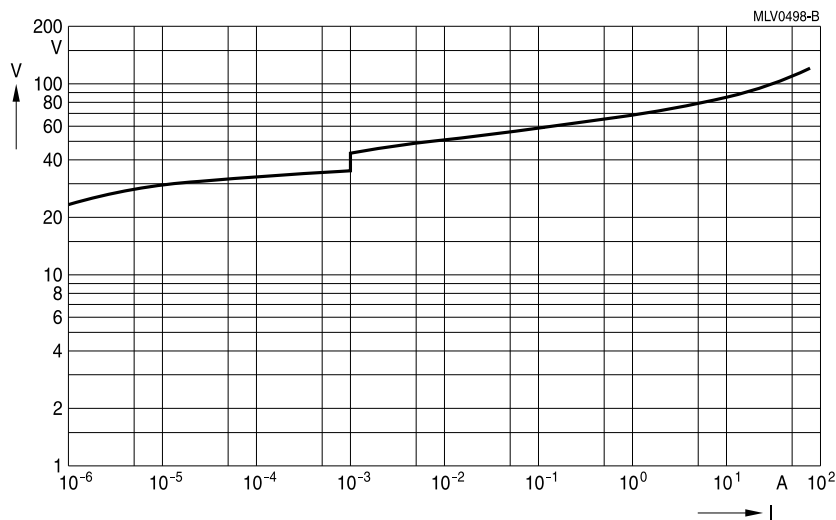

CT0805K25G

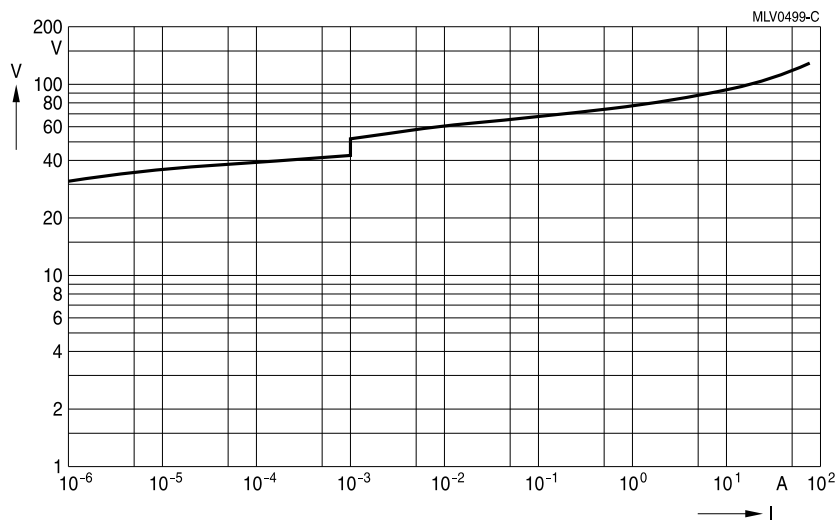


CT0805K30G

# Multilayer varistors (MLVs)


## Automotive E series

### SMD

#### V/I characteristics for automotive standard series

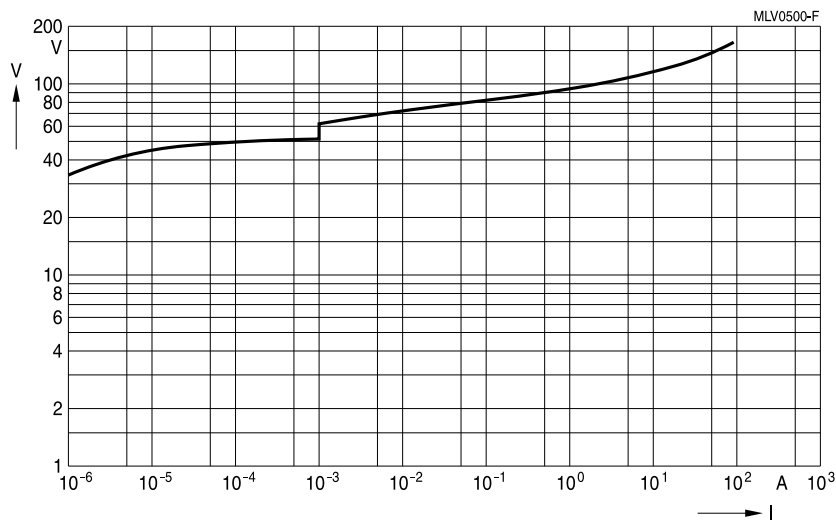

#### CT0805K35G

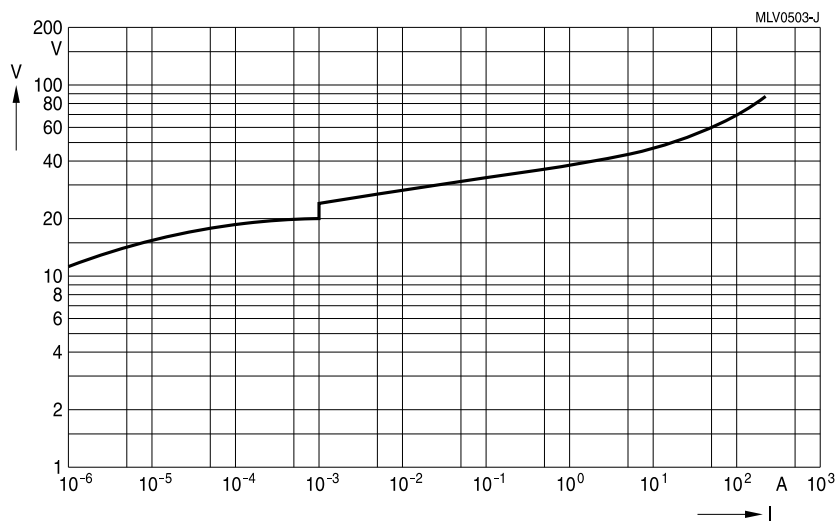


#### CT1206K14G

# Multilayer varistors (MLVs)


## Automotive E series

### SMD

### V/I characteristics for automotive standard series

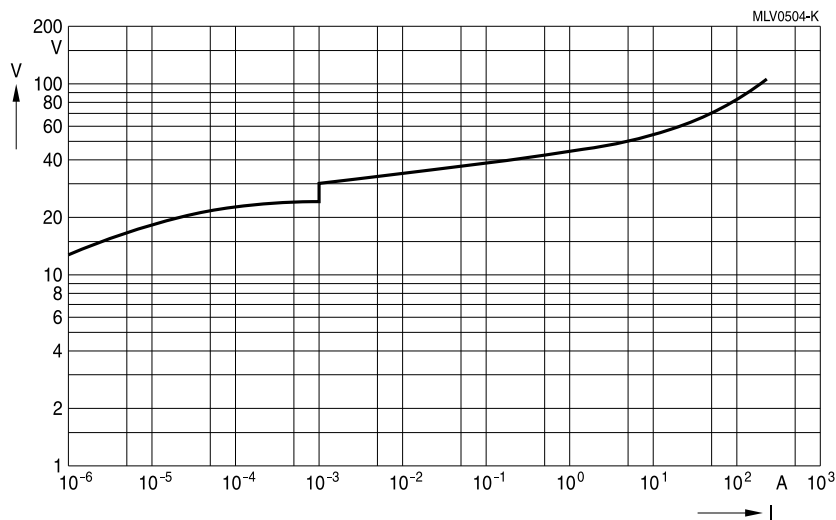

CT1206K17G

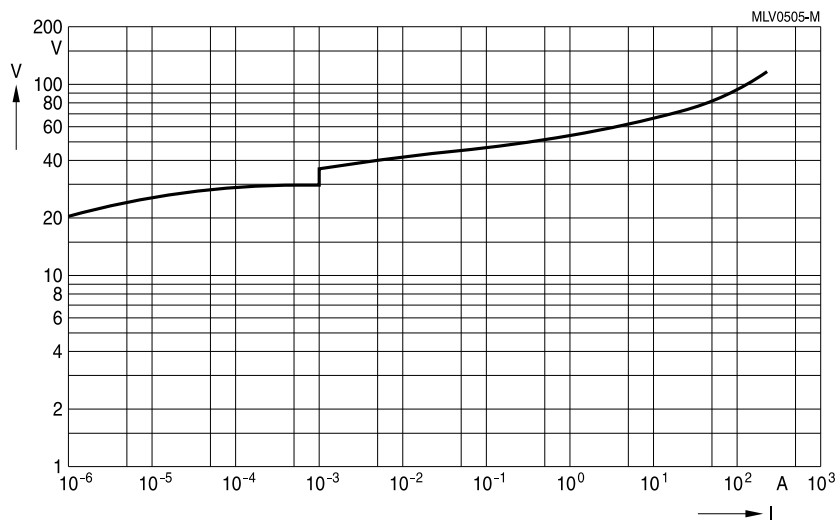


CT1206K20G

# Multilayer varistors (MLVs)


## Automotive E series

### SMD

#### V/I characteristics for automotive standard series

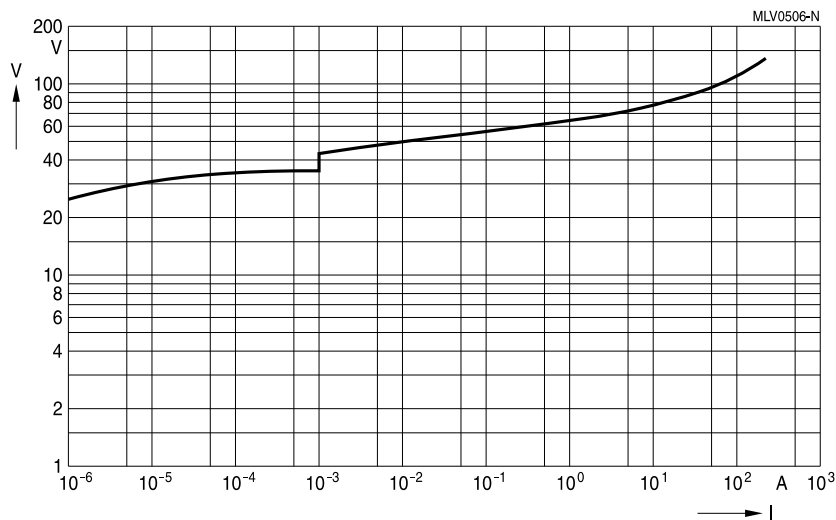

#### CT1206K25G

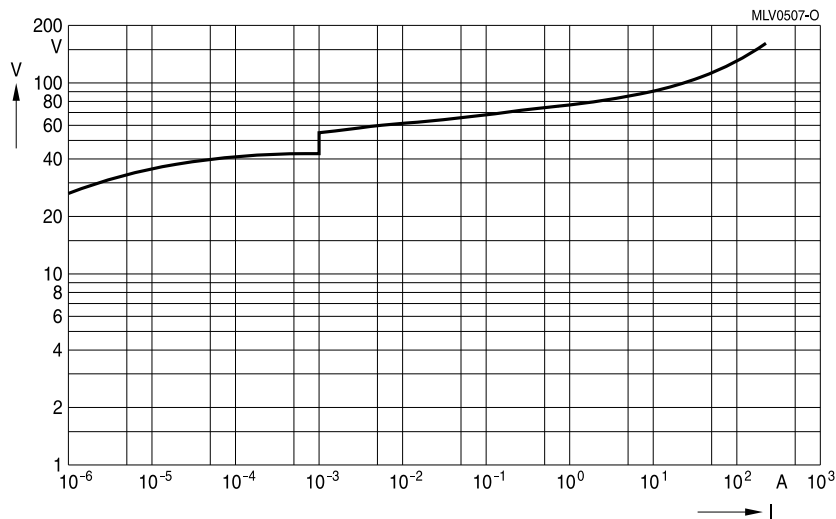


#### CT1206K30G

# Multilayer varistors (MLVs)


## Automotive E series

### SMD

### V/I characteristics for automotive standard series

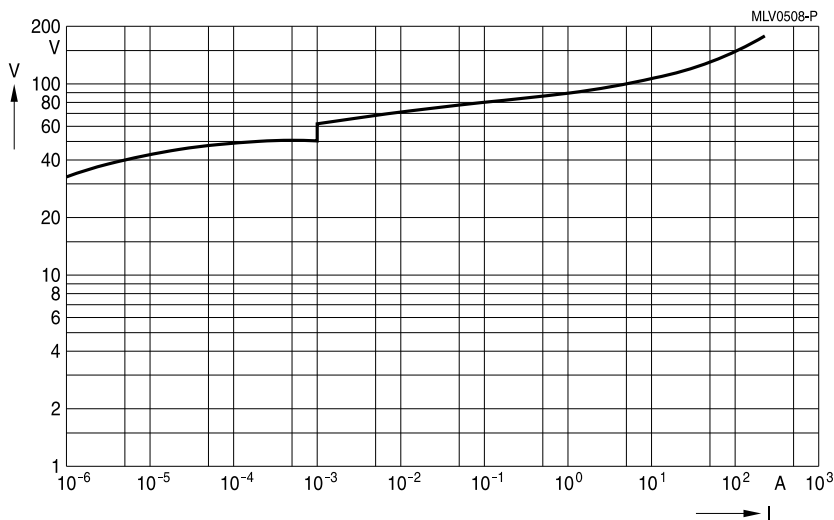

CT1206K35G

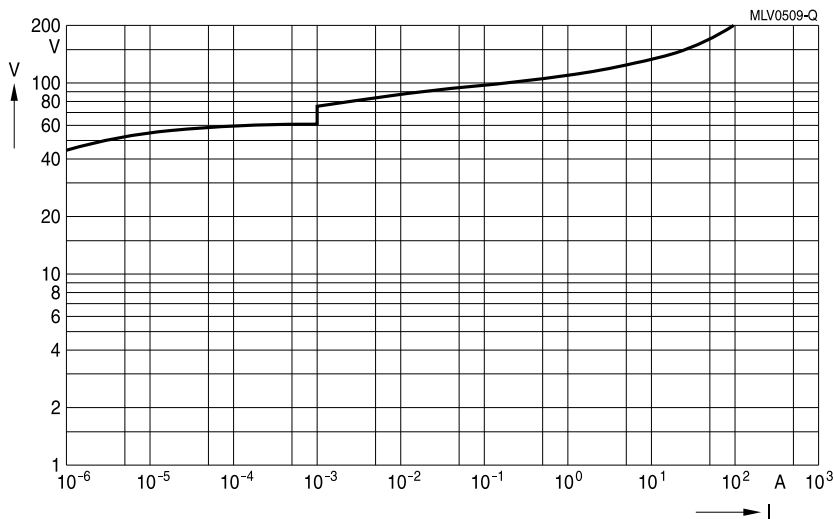

CT1206K40G




# Multilayer varistors (MLVs)


## Automotive E series

### SMD

#### V/I characteristics for automotive standard series

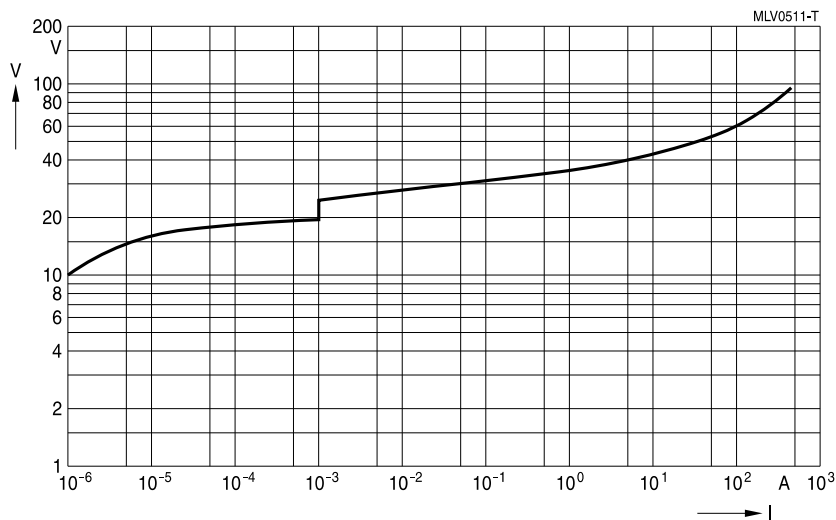

CT1210K14G

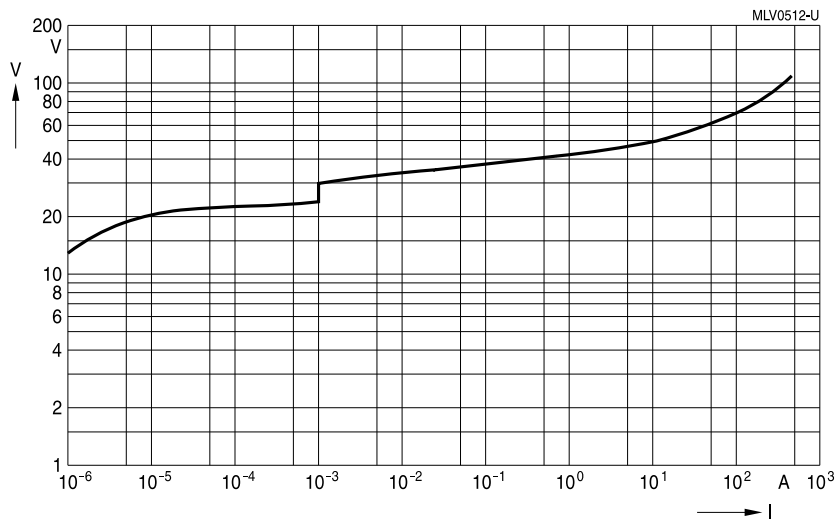


CT1210K17G

# Multilayer varistors (MLVs)


## Automotive E series

### SMD

#### V/I characteristics for automotive standard series

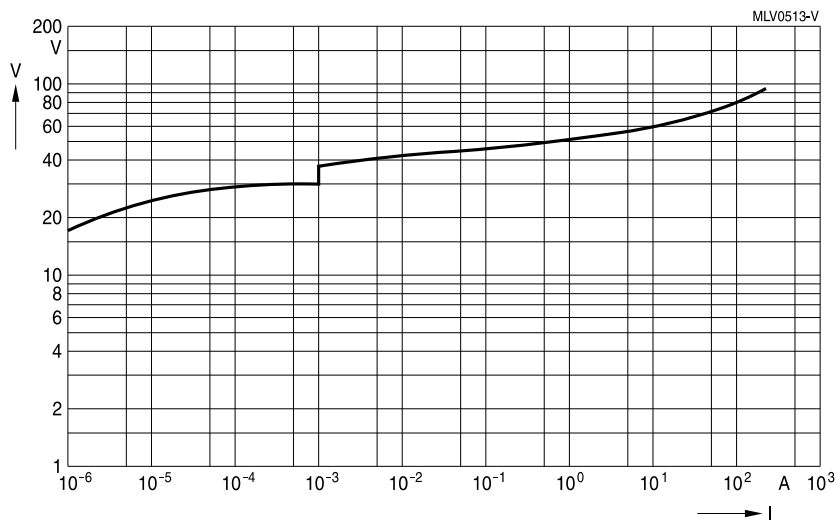

#### CT1210K20G

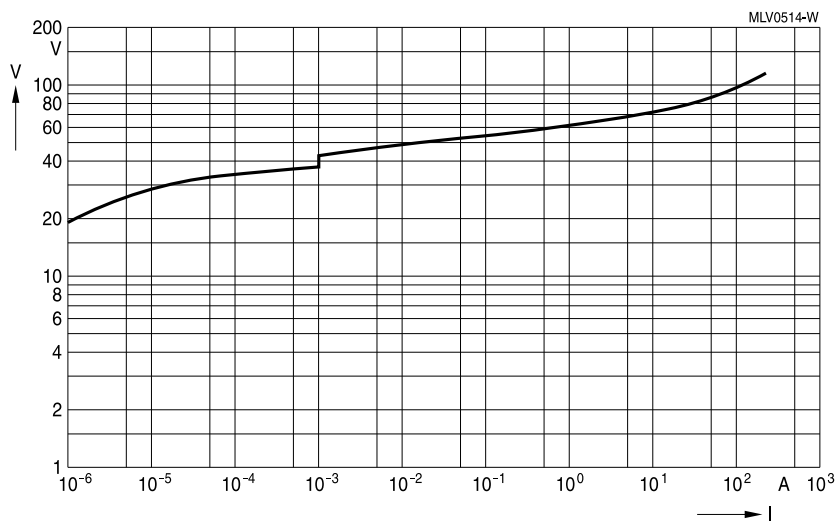


#### CT1210K25G

# Multilayer varistors (MLVs)


## Automotive E series

### SMD

#### V/I characteristics for automotive standard series

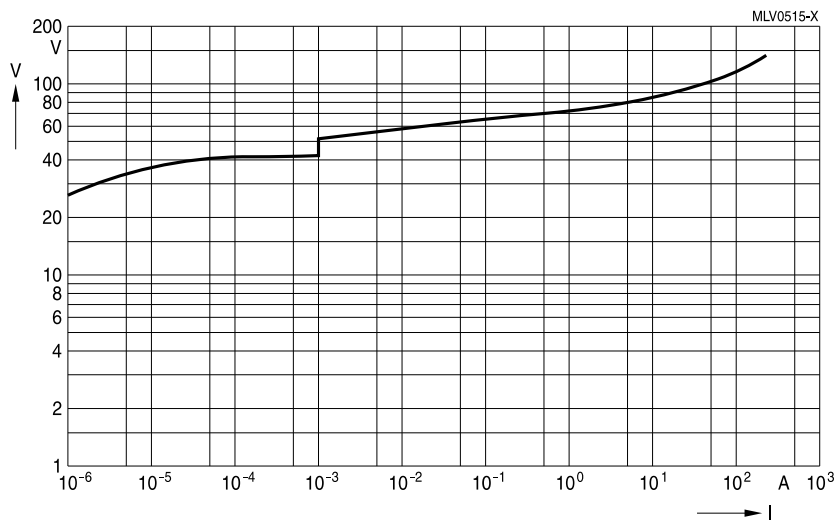

#### CT1210K30G

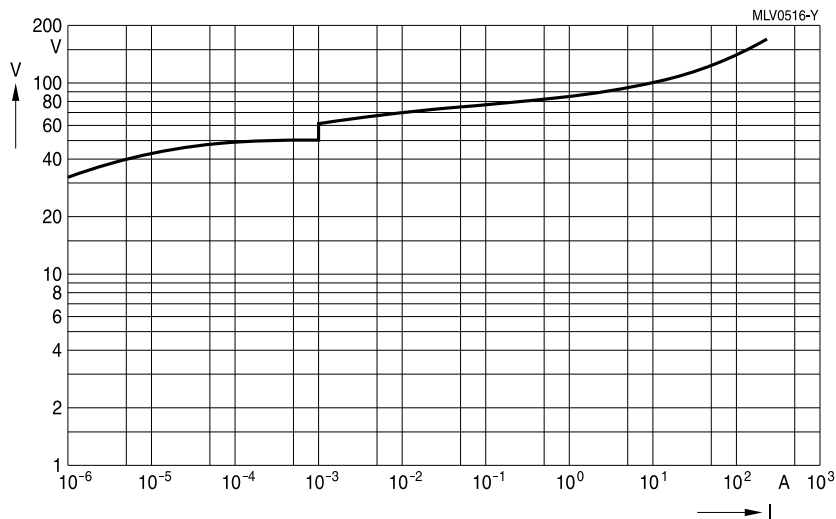


#### CT1210K35G

# Multilayer varistors (MLVs)


## Automotive E series

### SMD

### V/I characteristics for automotive standard series

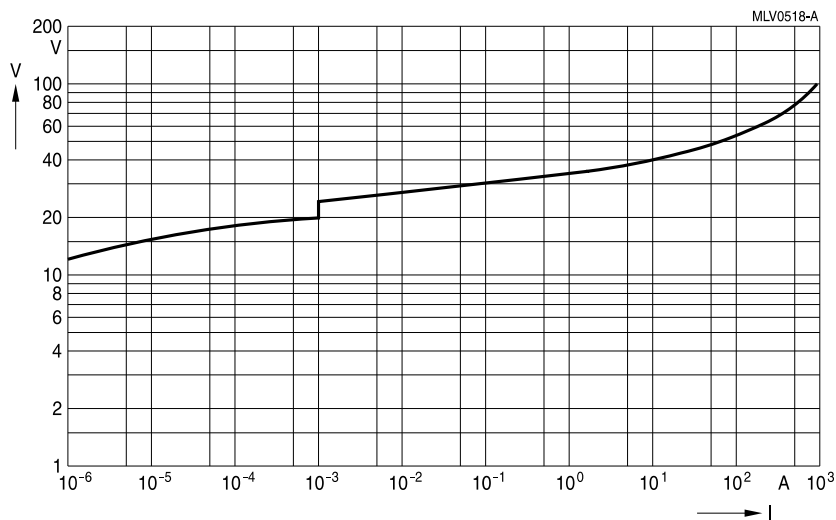

### CT1812K14G

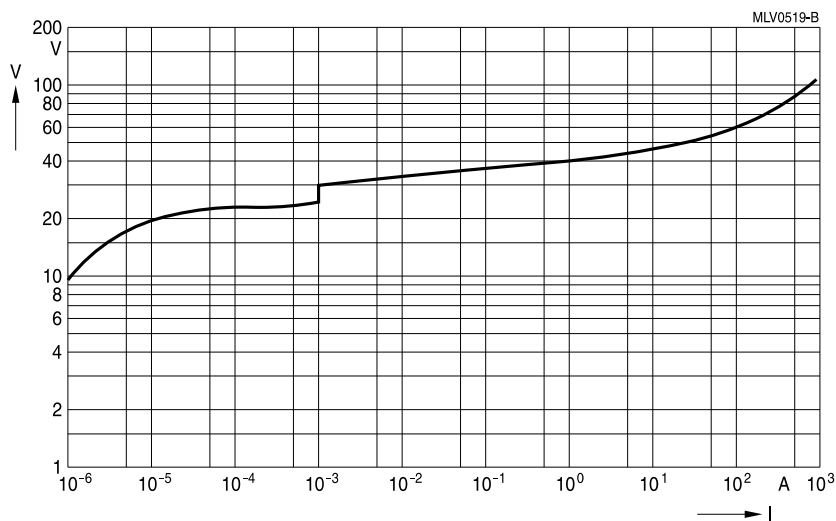


### CT1812K17G

# Multilayer varistors (MLVs)


## Automotive E series

### SMD

#### V/I characteristics for automotive standard series

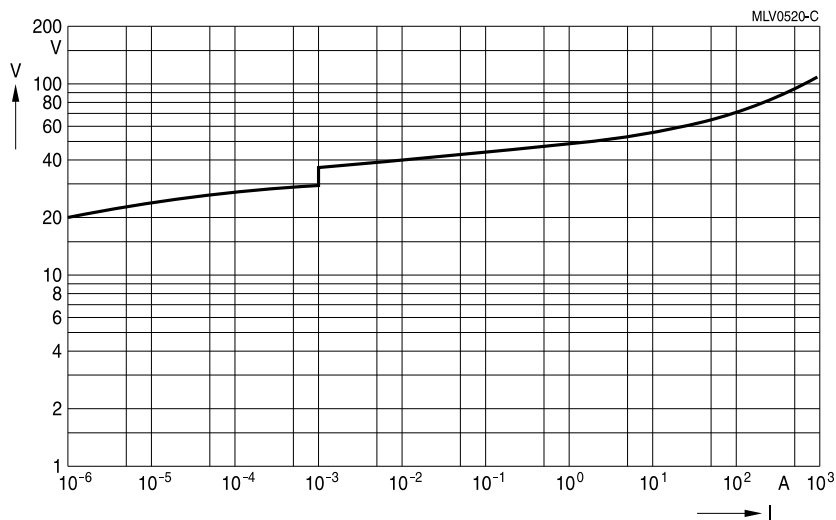

CT1812K20G

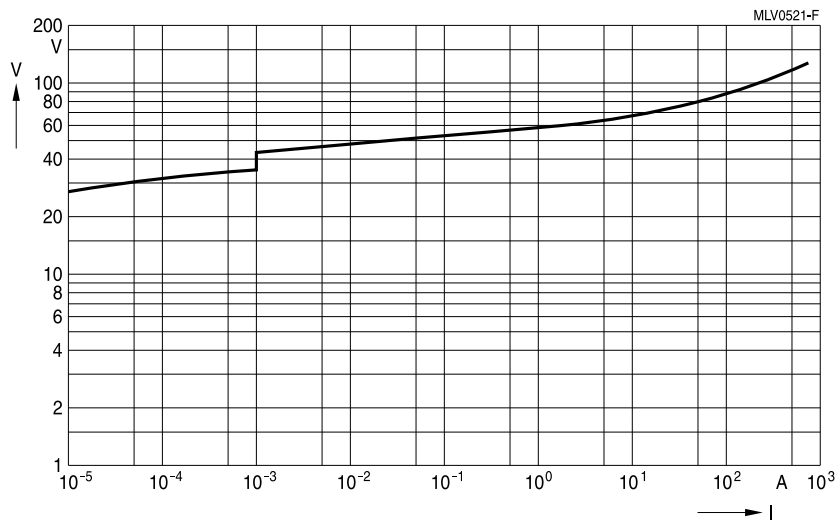


CT1812K25G

# Multilayer varistors (MLVs)


## Automotive E series

### SMD

### V/I characteristics for automotive standard series

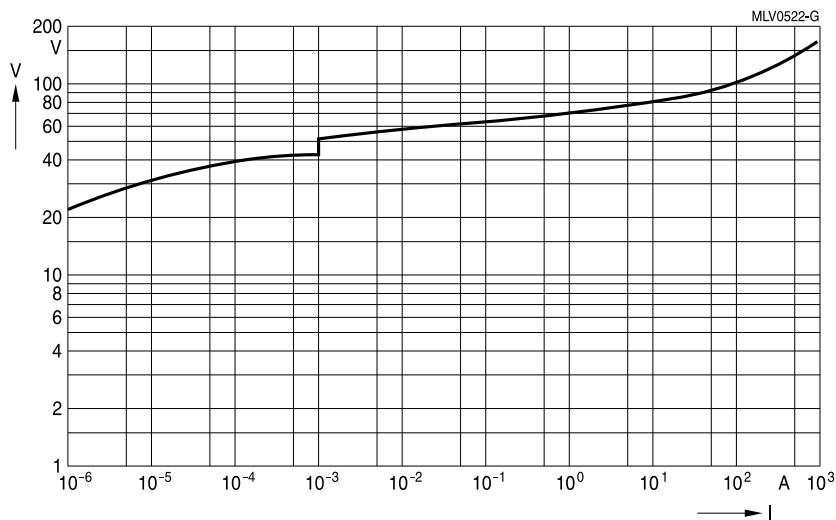

### CT1812K30G

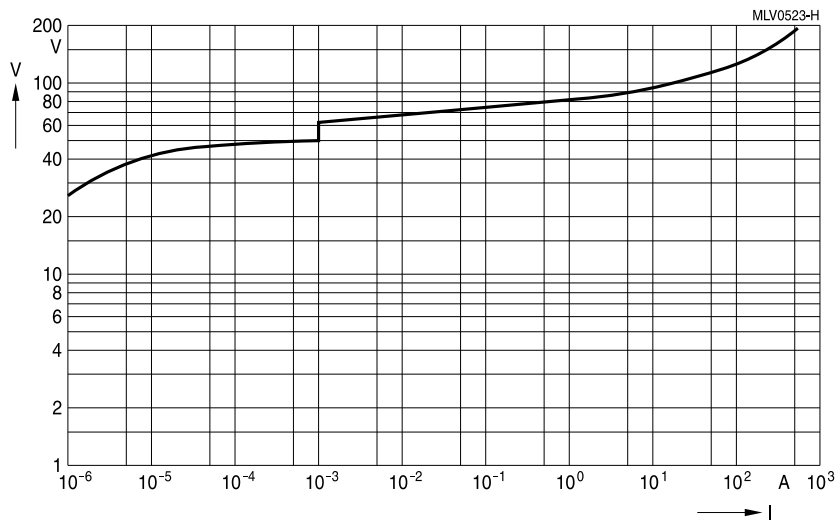


### CT1812K35G

# Multilayer varistors (MLVs)


## Automotive E series

### SMD

#### V/I characteristics for automotive standard series

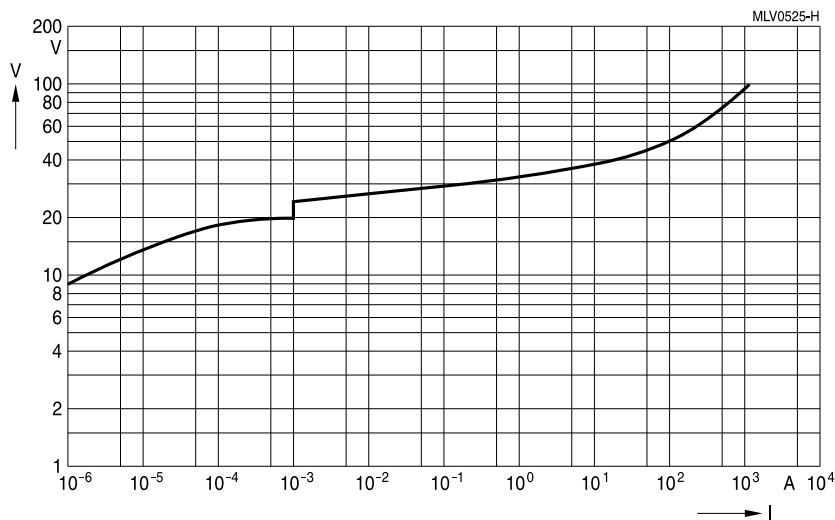

CT2220K14G

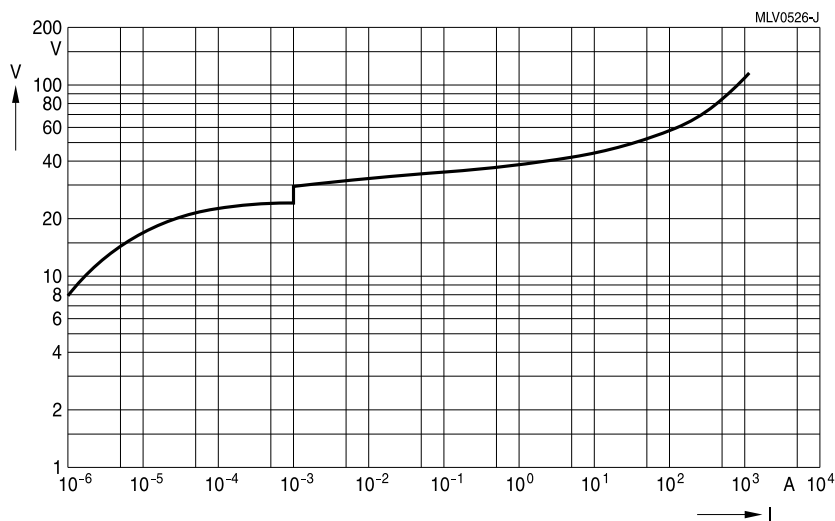


CT2220K17G

# Multilayer varistors (MLVs)


## Automotive E series

### SMD

### V/I characteristics for automotive standard series

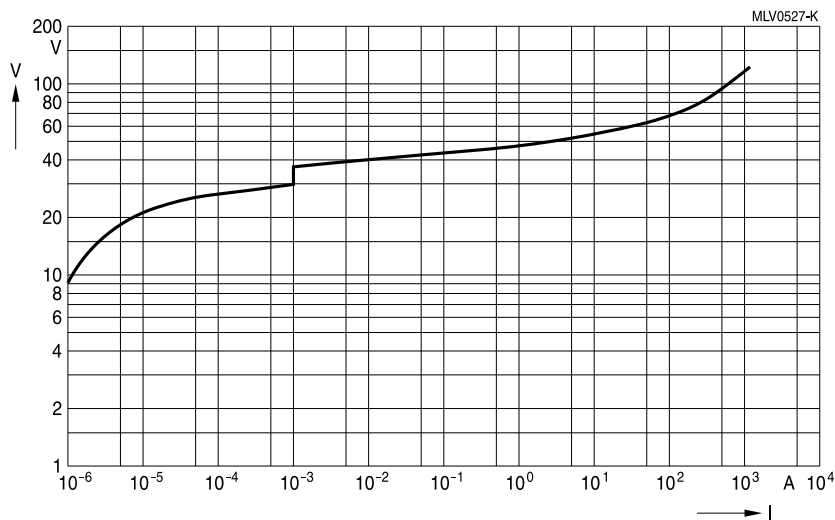

### CT2220K20G

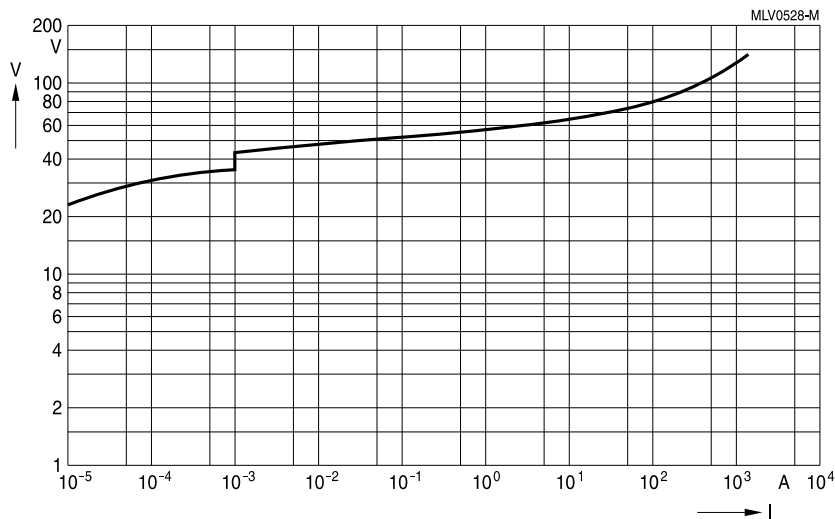

### CT2220K25G




# Multilayer varistors (MLVs)


## Automotive E series

### SMD

#### V/I characteristics for automotive standard series

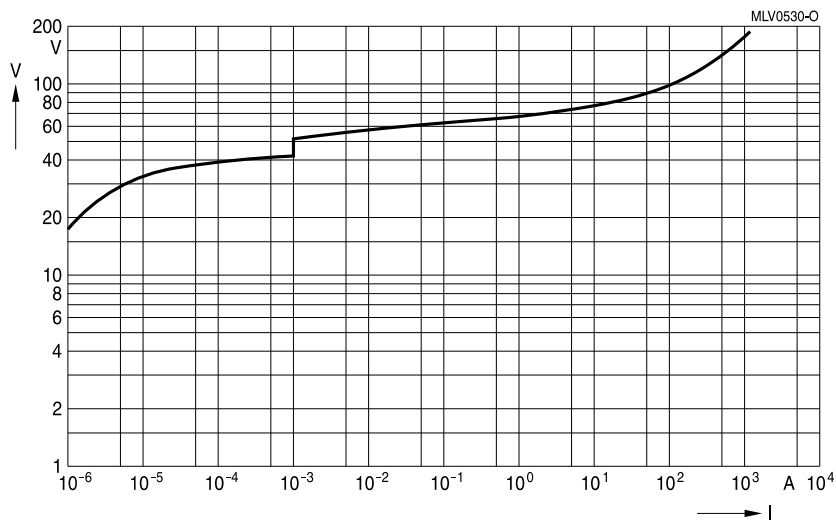

CT2220K30G

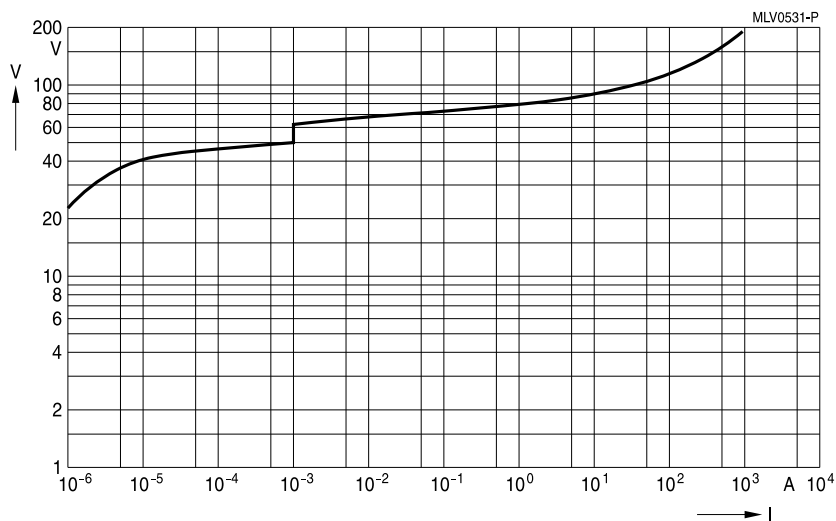


CT2220K35G

# Multilayer varistors (MLVs)

## Automotive E series

### SMD

### V/I characteristics for automotive standard series

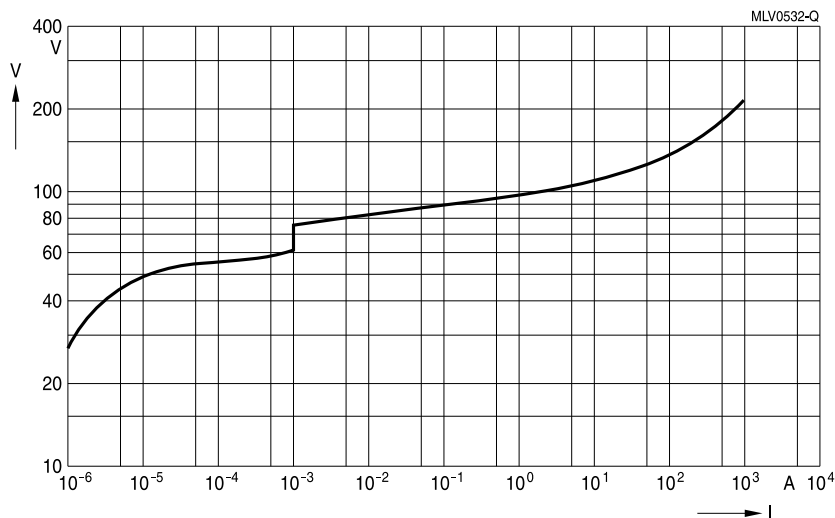


CT2220K40G

**Multilayer varistors (MLVs)**


**Automotive E series**

**SMD**

**V/I characteristics for automotive series with load dump/ jump-start protection**

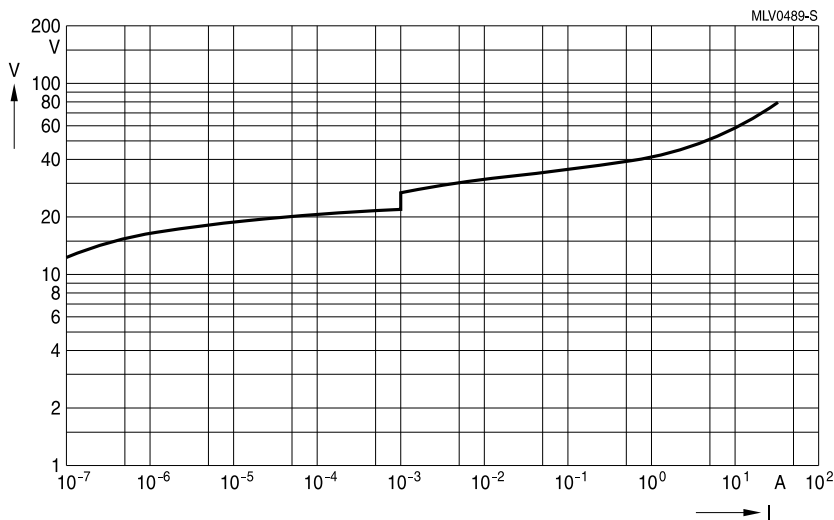

**CT0603S14BAUTOG**

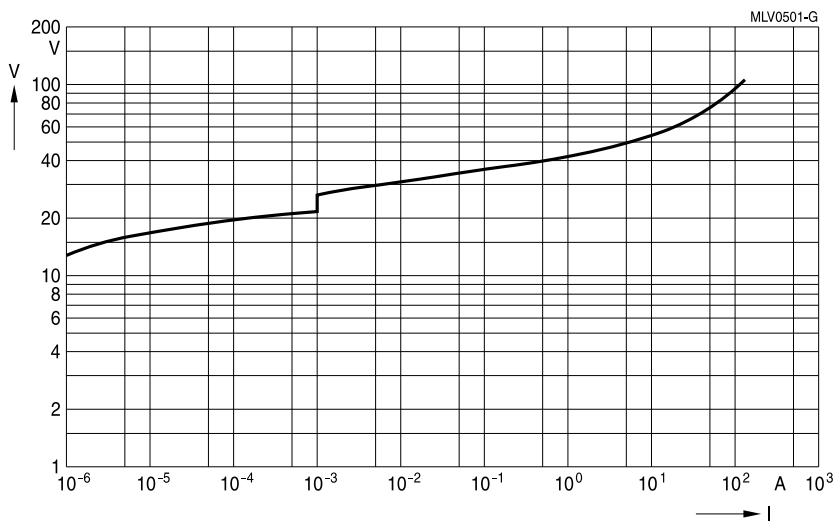


**CT0805S14BAUTOG**

# Multilayer varistors (MLVs)


## Automotive E series

### SMD

### V/I characteristics for automotive series with load dump/ jump-start protection

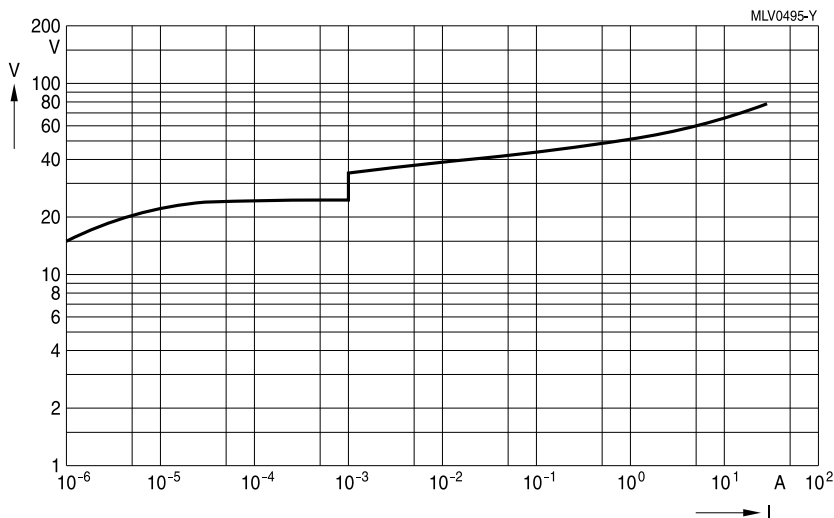

### CT0805K17AUTOLCG

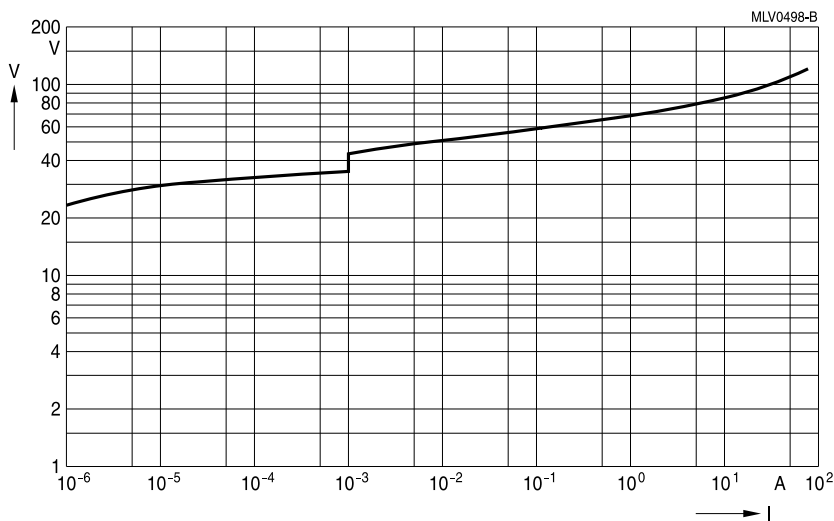


### CT0805K25AUTOG

# Multilayer varistors (MLVs)


## Automotive E series

### SMD

### V/I characteristics for automotive series with load dump/ jump-start protection

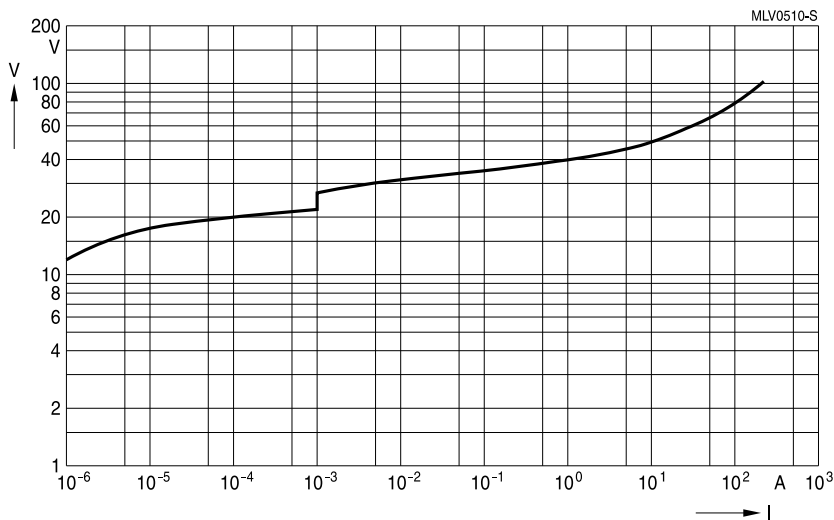

### CT1206S14BAUTOG

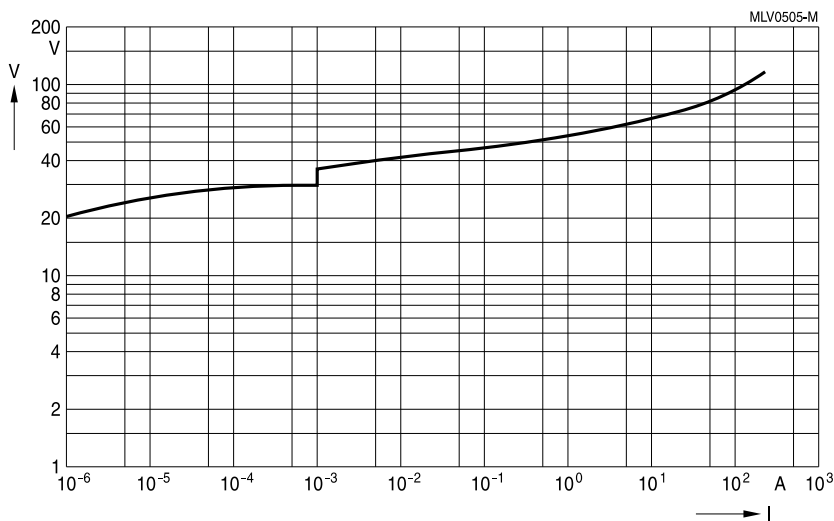


### CT1206K20AUTOG

**Multilayer varistors (MLVs)**


**Automotive E series**

**SMD**

**V/I characteristics for automotive series with load dump/ jump-start protection**

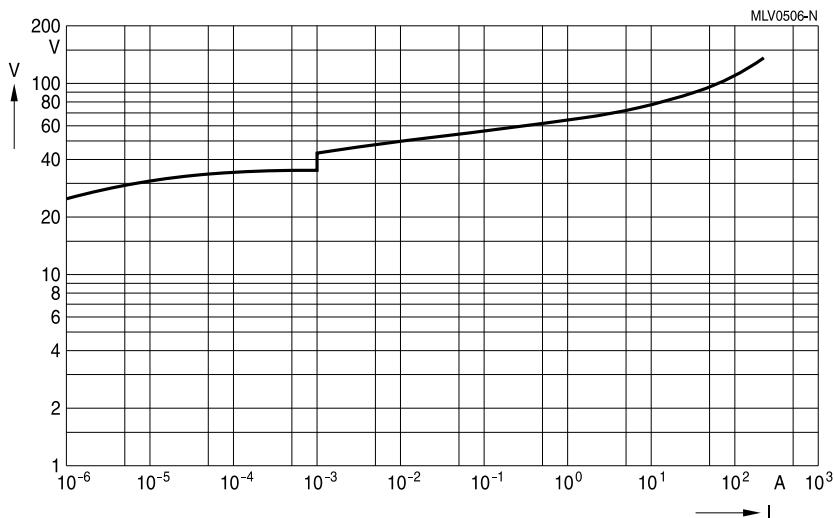

**CT1206K25AUTOG**

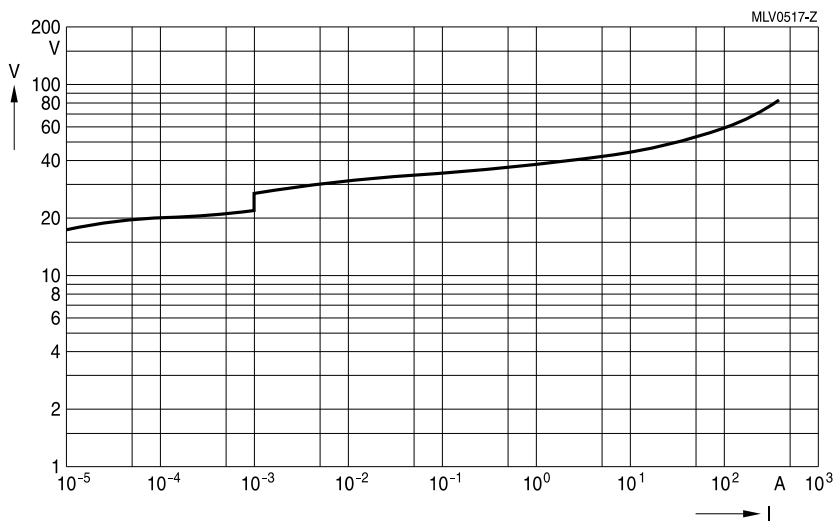


**CT1210S14BAUTOG**

# Multilayer varistors (MLVs)


## Automotive E series

### SMD

#### V/I characteristics for automotive series with load dump/ jump-start protection

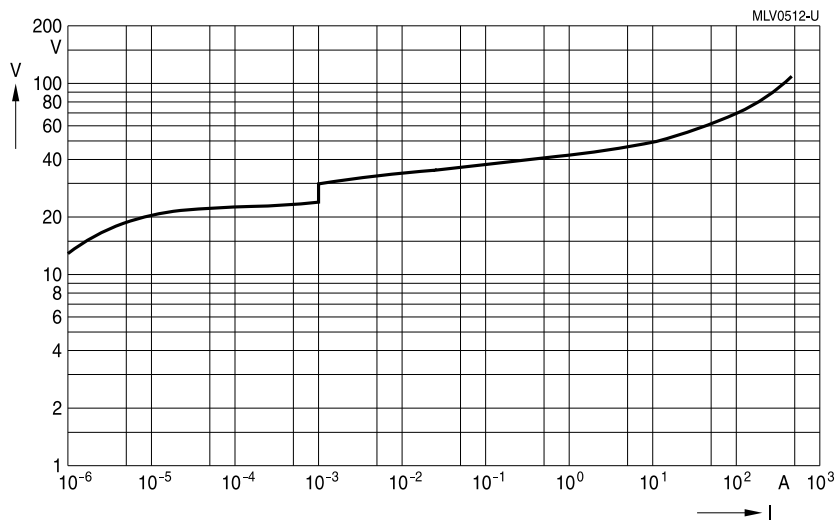

#### CT1210K17AUTOG

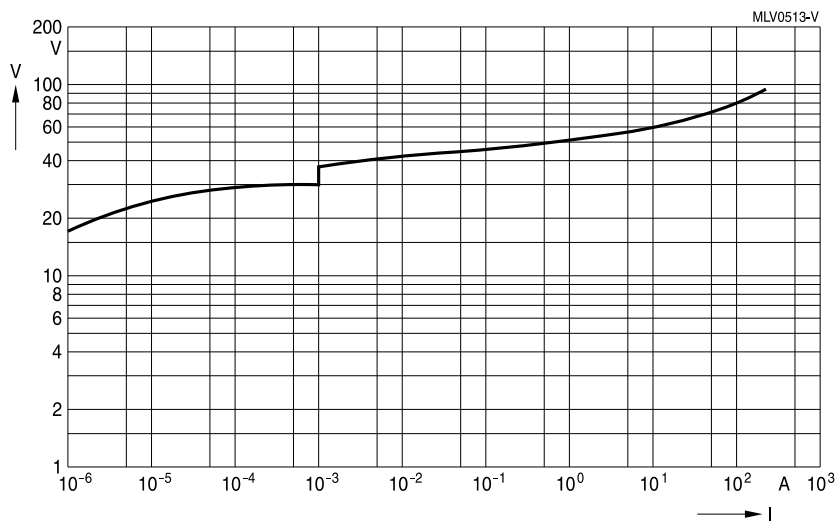


#### CT1210K20AUTOG

# Multilayer varistors (MLVs)


## Automotive E series

### SMD

### V/I characteristics for automotive series with load dump/ jump-start protection

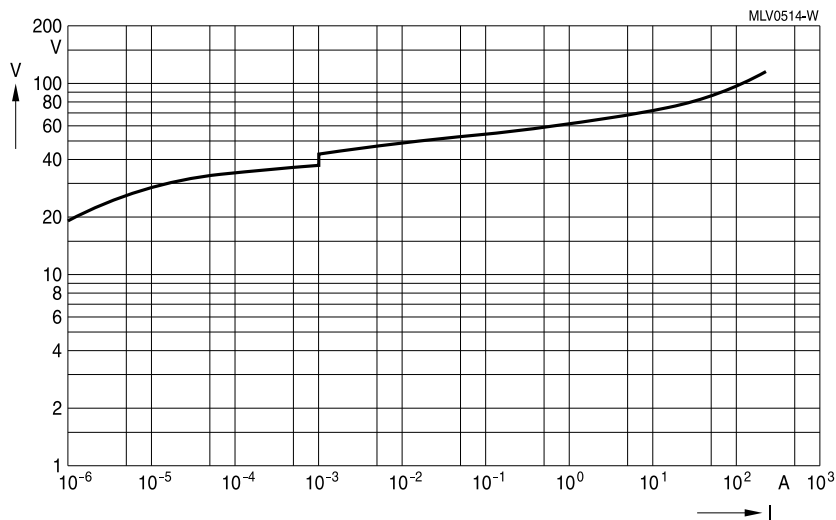

### CT1210K25AUTOG

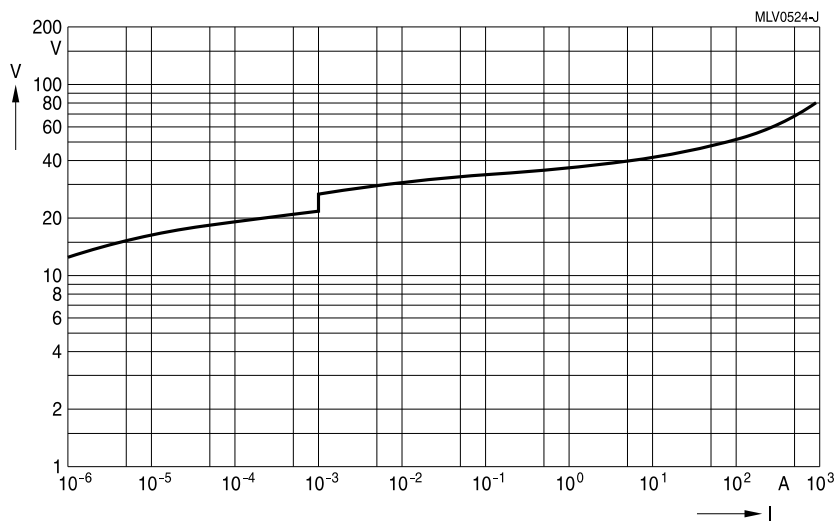

### CT1812S14BAUTOE2G2

### CT1812S14BAUTOG




**Multilayer varistors (MLVs)**


**Automotive E series**

**SMD**

**V/I characteristics for automotive series with load dump/ jump-start protection**

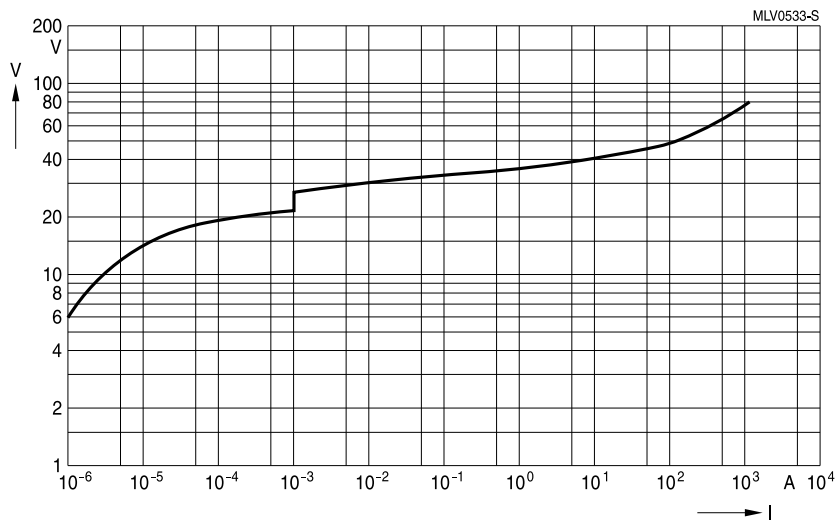

CT2220S14BAUTOE2G2

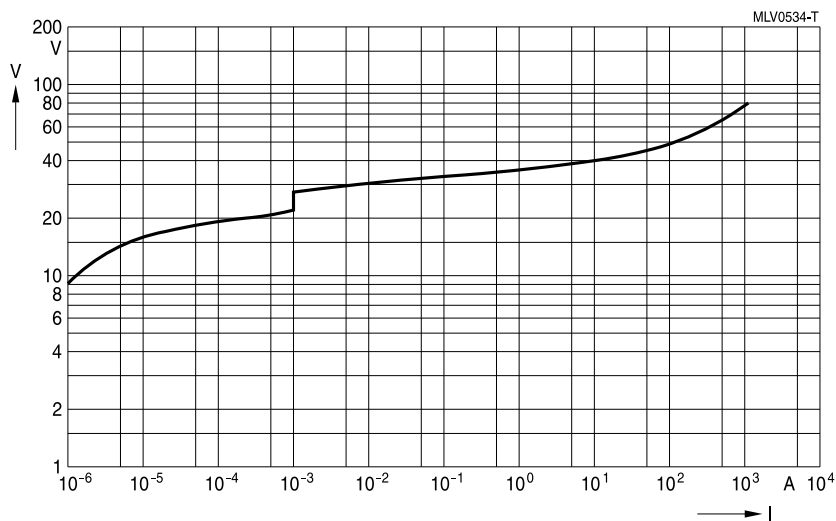


CT2220S14BAUTOG

**Multilayer varistors (MLVs)**


**Automotive E series**

**SMD**

**V/I characteristics for automotive series with load dump/ jump-start protection**

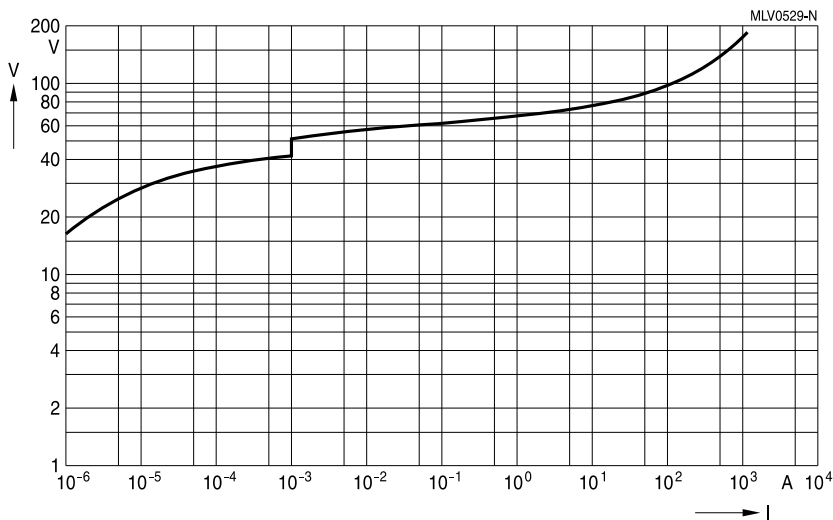

**CT2220K30AUTOE2G2**

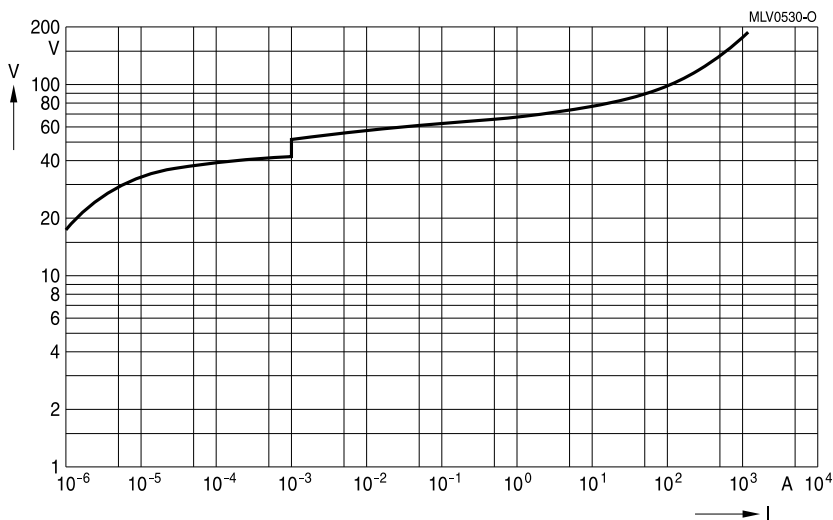

**CT2220K30AUTOG**


# Multilayer varistors (MLVs)

## Automotive E series

### SMD

#### V/I characteristics for automotive series, array

(Derating curve is not specified for CA05M2S10T100HG)

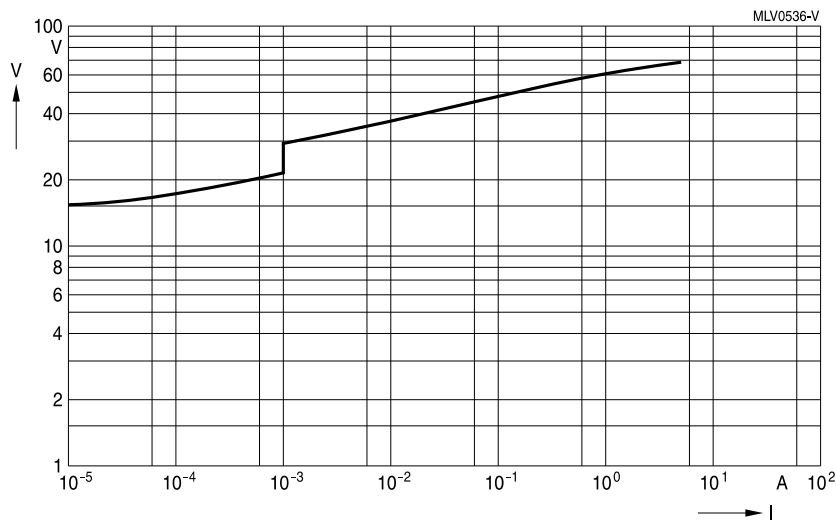

CA05M2S10T100HG, MCV array

## Multilayer varistors (MLVs)


### Automotive E series

#### SMD


#### Derating curves for automotive standard series

Maximum surge current  $I_{\text{surge,max}} = f(t_r, \text{pulse train})$

For explanation of the derating curves refer to "General technical information", chapter 2.7.1

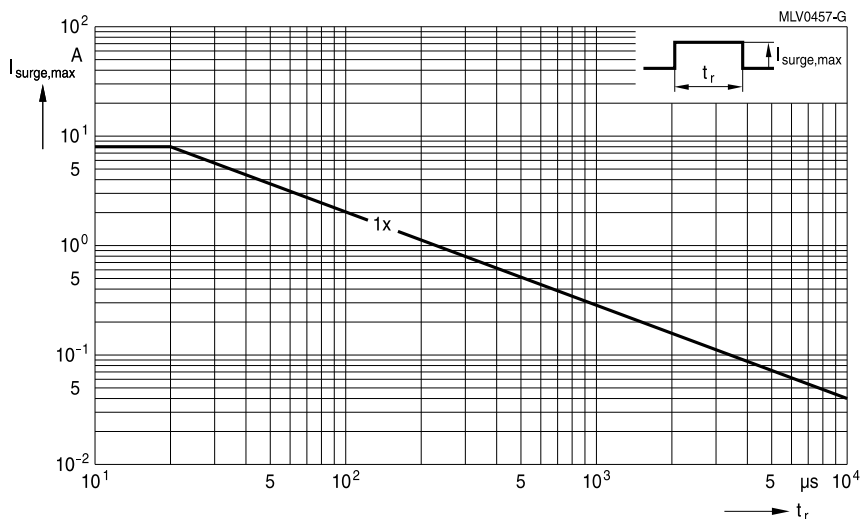

CT0402L14G

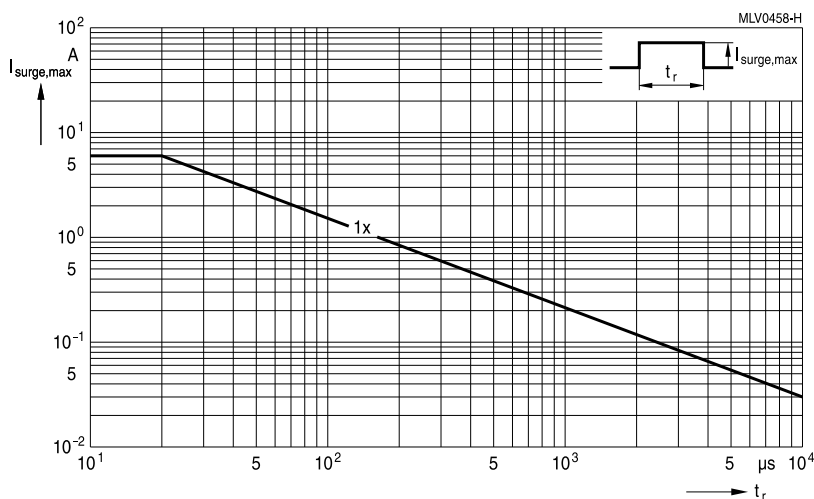

CT0402S17AG

# Multilayer varistors (MLVs)


## Automotive E series

### SMD

#### Derating curves for automotive standard series

Maximum surge current  $I_{\text{surge,max}} = f(t_r, \text{pulse train})$


For explanation of the derating curves refer to "General technical information", chapter 2.7.1

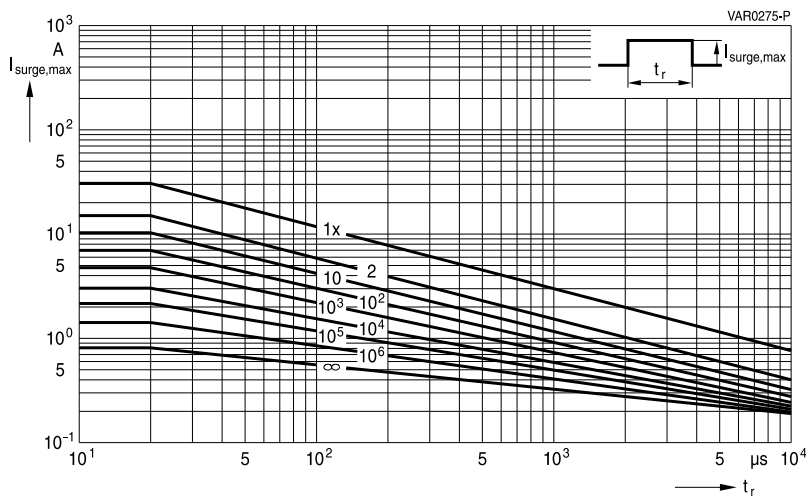

CT0603K14G ... K25G  
CT0603S17ALCG

CT0603K17LCG  
CT0603S17BCCG

CT0603S14BG  
CT0603S20ACCG

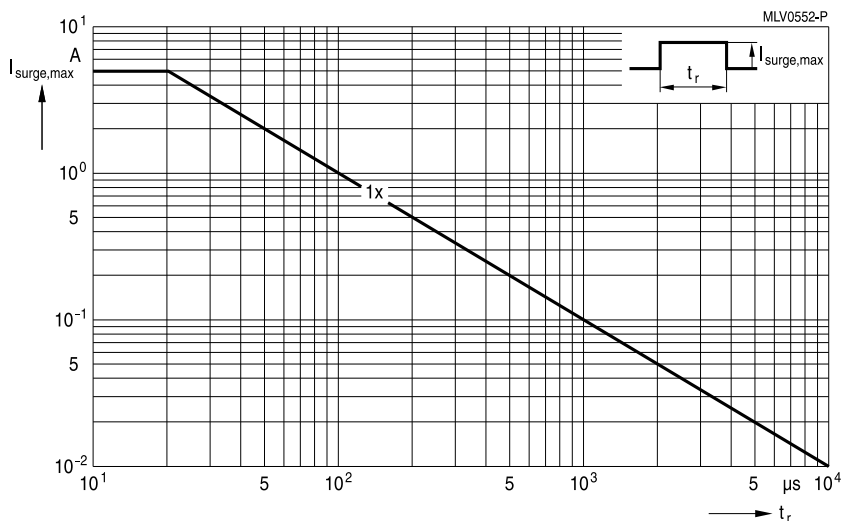

CT0603L25HTCCG

CT0603S14AHSG

CT0603L25HSG

**Multilayer varistors (MLVs)**


**Automotive E series**

**SMD**


**Derating curves for automotive standard series**

Maximum surge current  $I_{\text{surge,max}} = f(t_r, \text{pulse train})$

For explanation of the derating curves refer to "General technical information", chapter 2.7.1

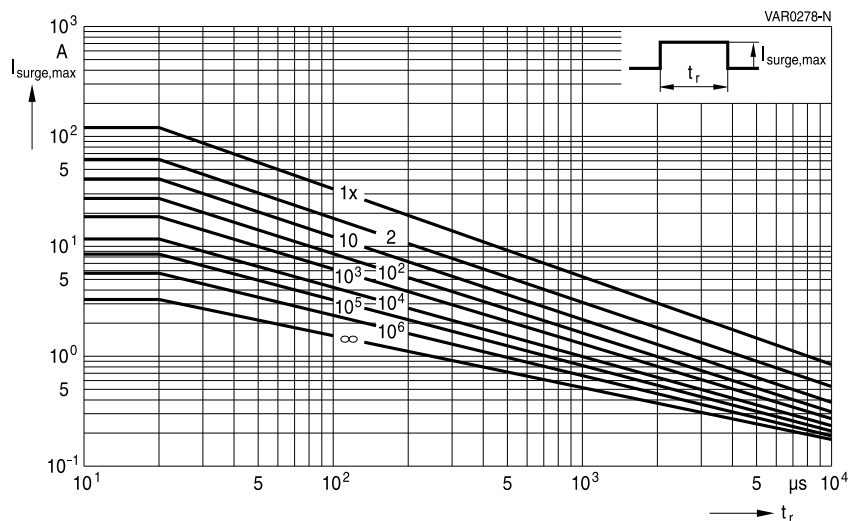

CT0805K11G ... K17G

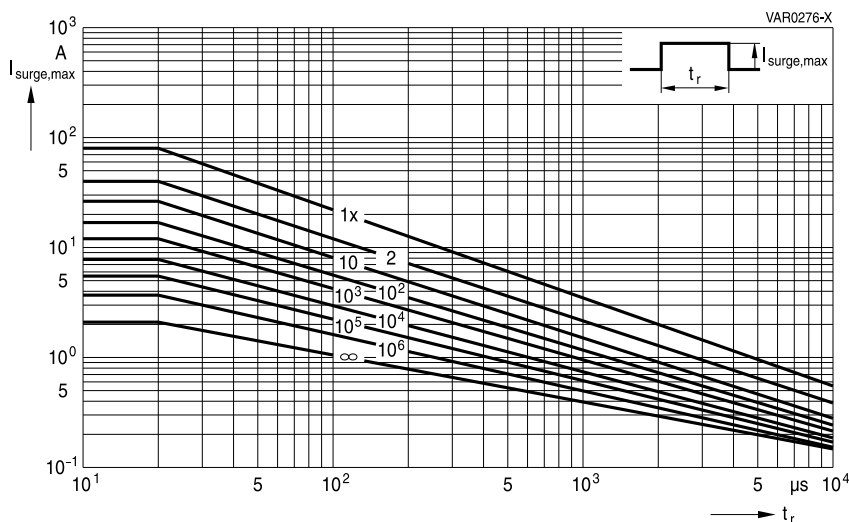

CT0805K20G ... K35G

CT0805S20ACC2G2

## Multilayer varistors (MLVs)


### Automotive E series

#### SMD


#### Derating curves for automotive standard series

Maximum surge current  $I_{\text{surge,max}} = f(t_r, \text{pulse train})$

For explanation of the derating curves refer to "General technical information", chapter 2.7.1

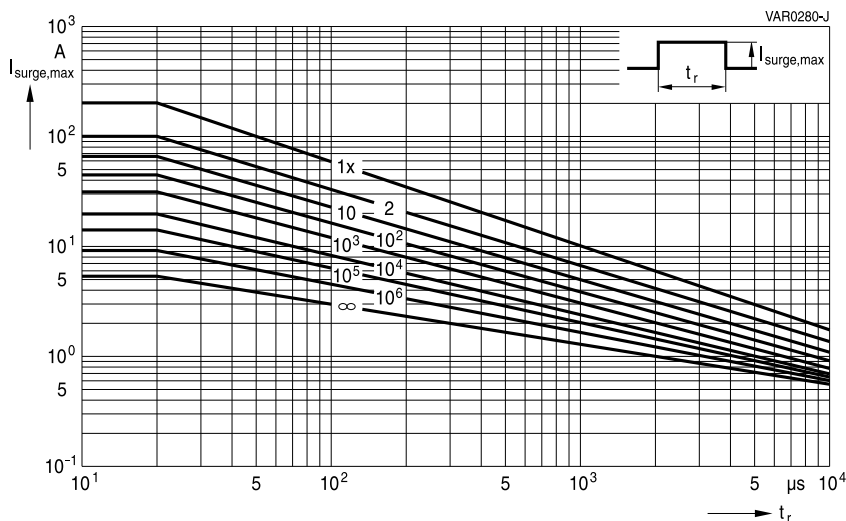

CT1206K14G ... K30G

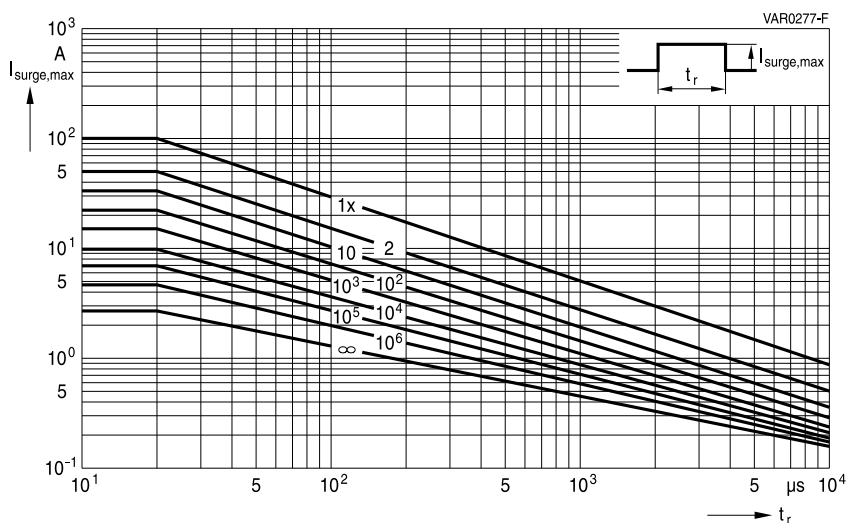

CT1206K35G ... K40G

# Multilayer varistors (MLVs)


## Automotive E series

### SMD


#### Derating curves for automotive standard series

Maximum surge current  $I_{\text{surge,max}} = f(t_r, \text{pulse train})$

For explanation of the derating curves refer to "General technical information", chapter 2.7.1

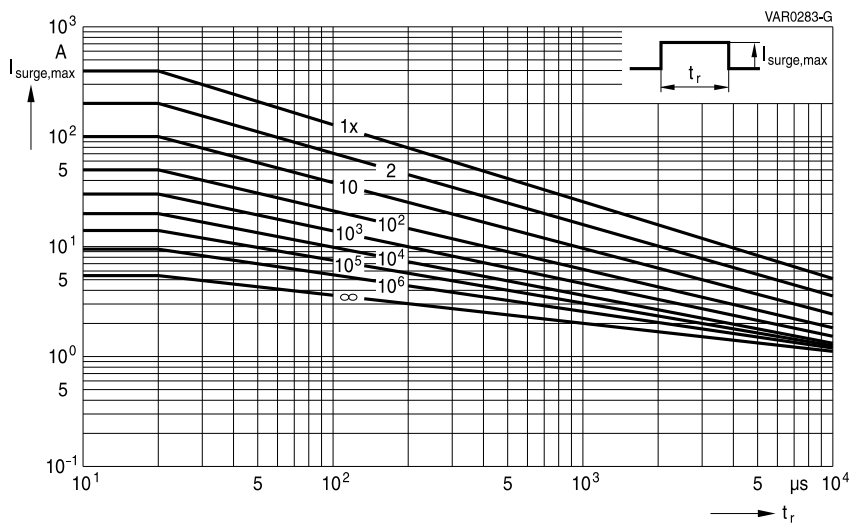

CT1210K14G ... K20G

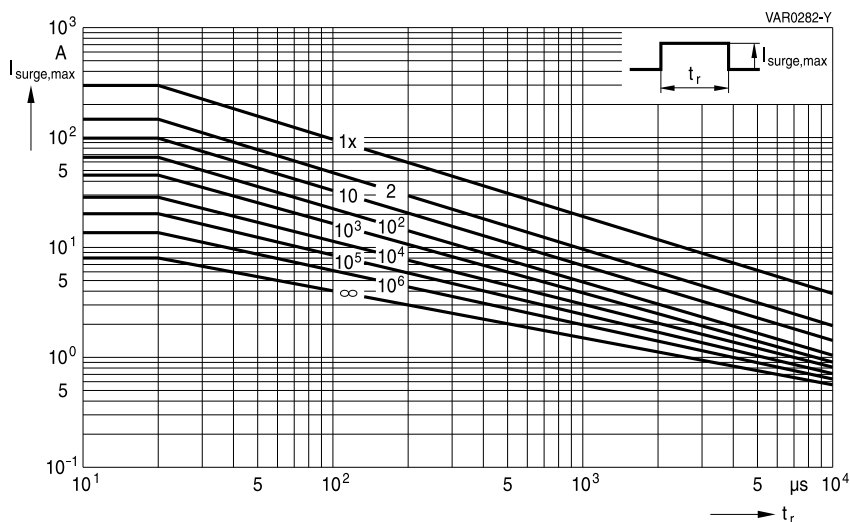

CT1210K25G ... K30G



# Multilayer varistors (MLVs)


## Automotive E series

### SMD


#### Derating curves for automotive standard series

Maximum surge current  $I_{\text{surge,max}} = f(t_r, \text{pulse train})$

For explanation of the derating curves refer to "General technical information", chapter 2.7.1

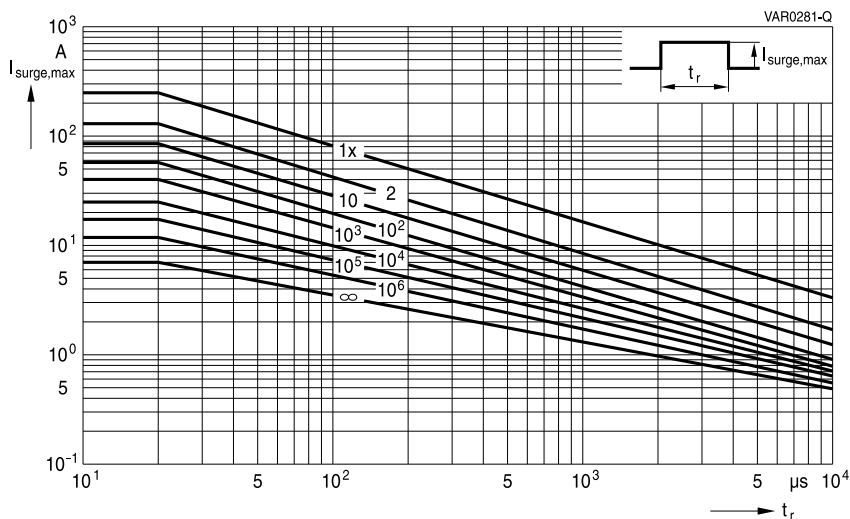

CT1210K35G

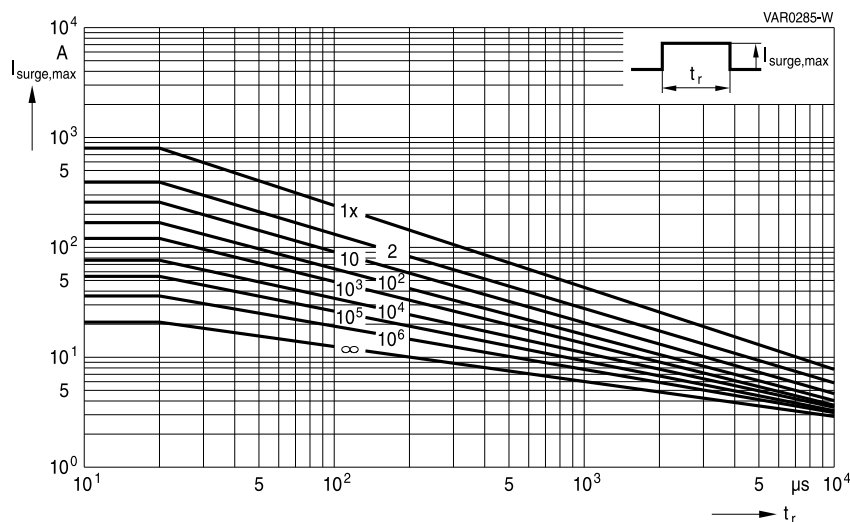

CT1812K14G ... K30G

# Multilayer varistors (MLVs)


## Automotive E series

### SMD


#### Derating curves for automotive standard series

Maximum surge current  $I_{\text{surge,max}} = f(t_r, \text{pulse train})$

For explanation of the derating curves refer to "General technical information", chapter 2.7.1

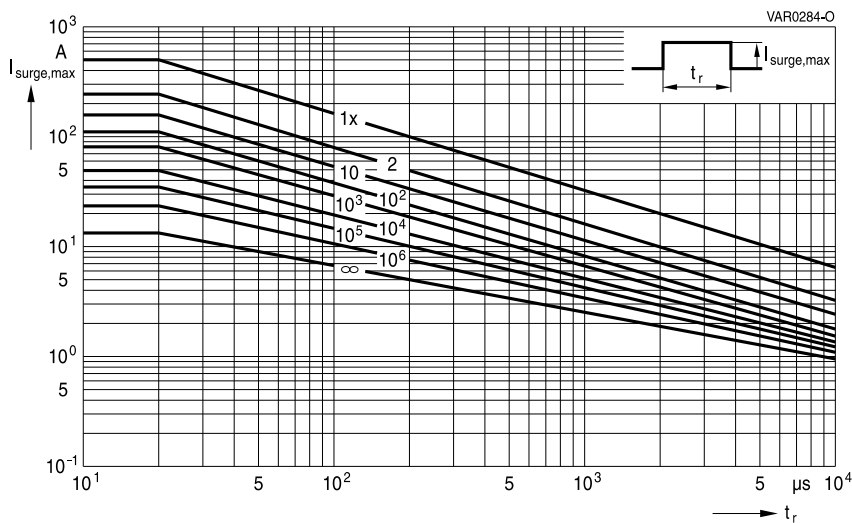

CT1812K35G

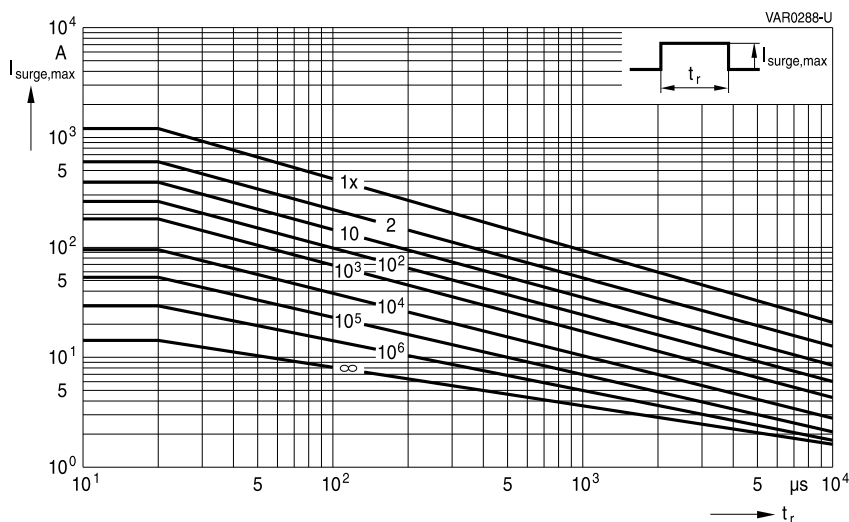

CT2220K14G ... K30G

## Multilayer varistors (MLVs)


### Automotive E series

#### SMD

#### Derating curves for automotive standard series

Maximum surge current  $I_{\text{surge,max}} = f(t_r, \text{pulse train})$

For explanation of the derating curves refer to "General technical information", chapter 2.7.1

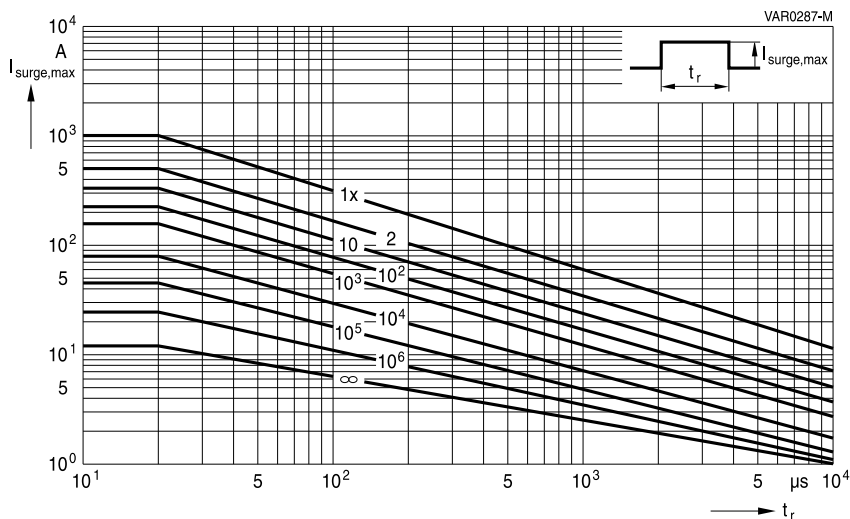

CT2220K35G ... K40G

**Multilayer varistors (MLVs)**


**Automotive E series**

**SMD**


**Derating curves for automotive series with load dump/ jump-start protection**

Maximum surge current  $I_{\text{surge,max}} = f(t_r, \text{pulse train})$

For explanation of the derating curves refer to "General technical information", chapter 2.7.1

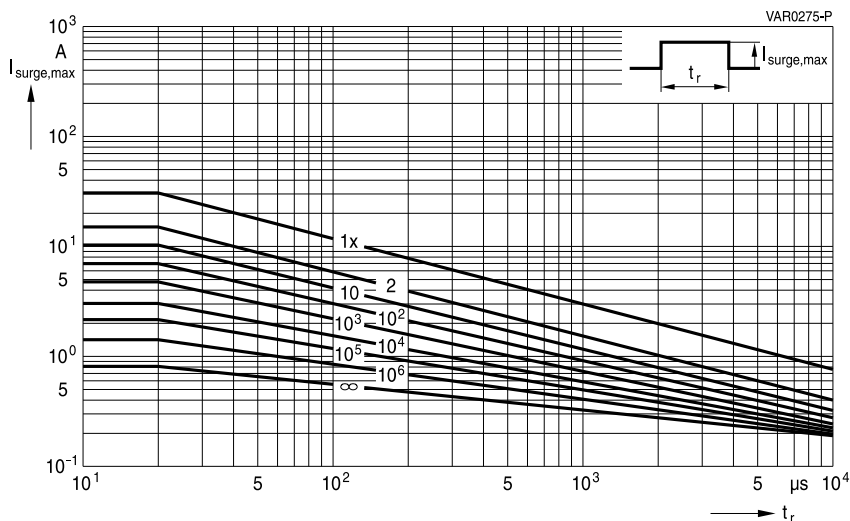

CT0603S14BAUTOG

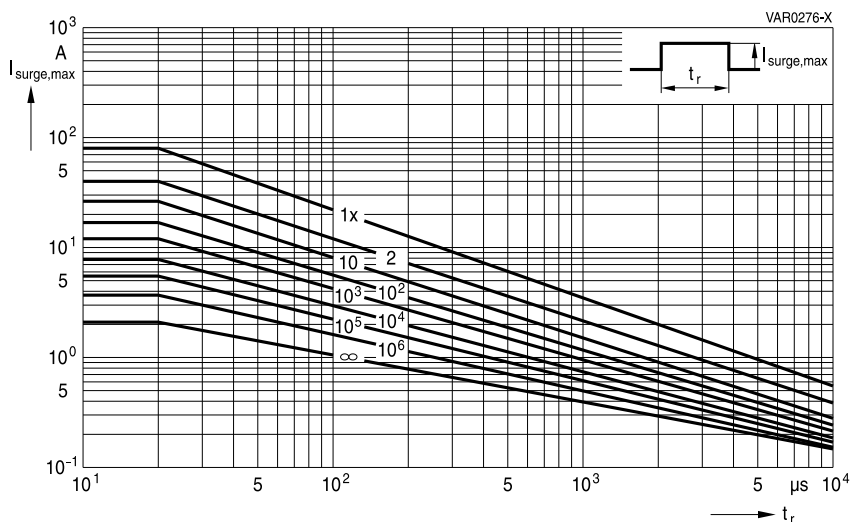

CT0805K17AUTOLCG

CT0805K25AUTOG

**Multilayer varistors (MLVs)**


**Automotive E series**

**SMD**


**Derating curves for automotive series with load dump/ jump-start protection**

Maximum surge current  $I_{\text{surge,max}} = f(t_r, \text{pulse train})$

For explanation of the derating curves refer to "General technical information", chapter 2.7.1

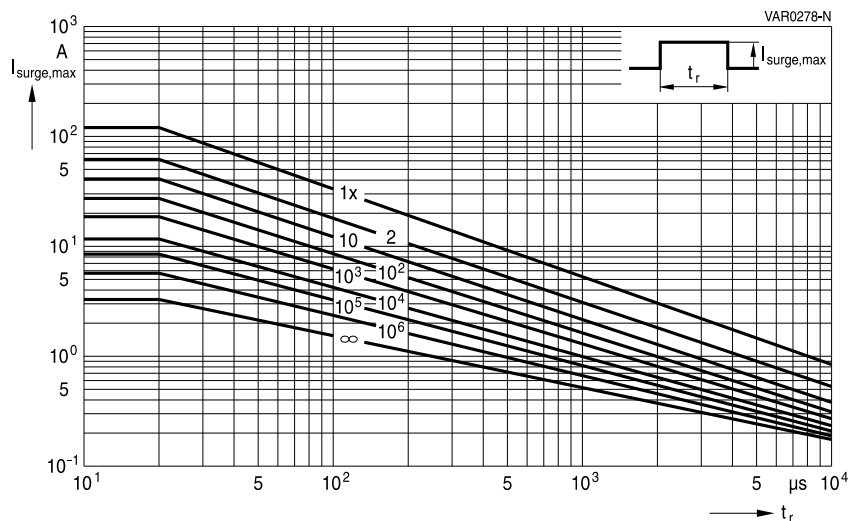

CT0805S14BAUTOG

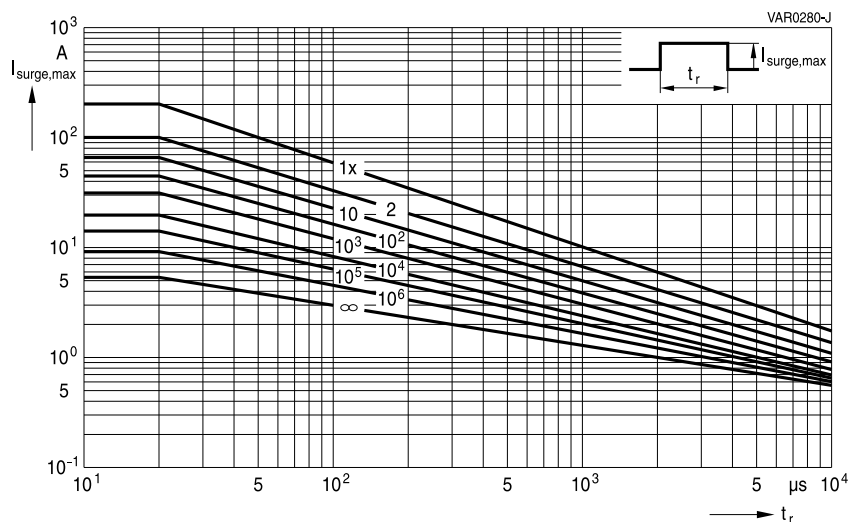

CT1206K20AUTOG

CT1206K25AUTOG

CT1206S14BAUTOG

**Multilayer varistors (MLVs)**


**Automotive E series**

**SMD**

**Derating curves for automotive series with load dump/ jump-start protection**

Maximum surge current  $I_{\text{surge,max}} = f(t_r, \text{pulse train})$


For explanation of the derating curves refer to "General technical information", chapter 2.7.1

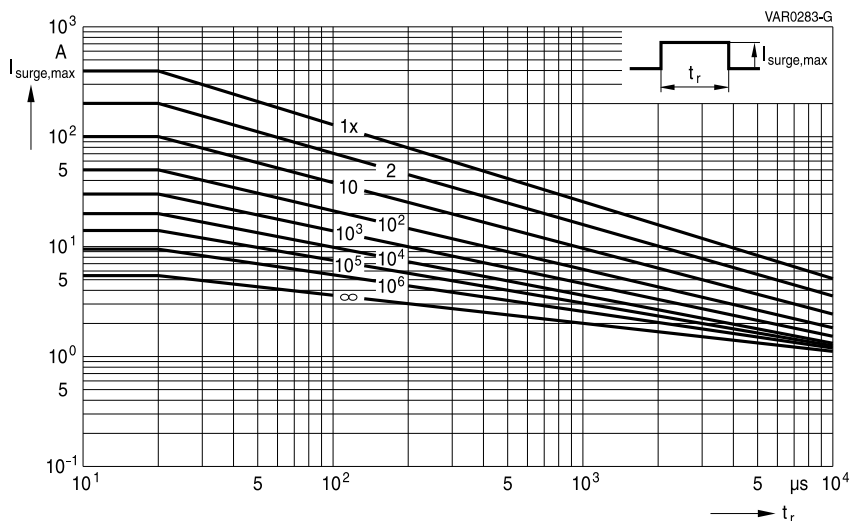

CT1210K17AUTOG

CT1210K20AUTOG

CT1210S14BAUTOG

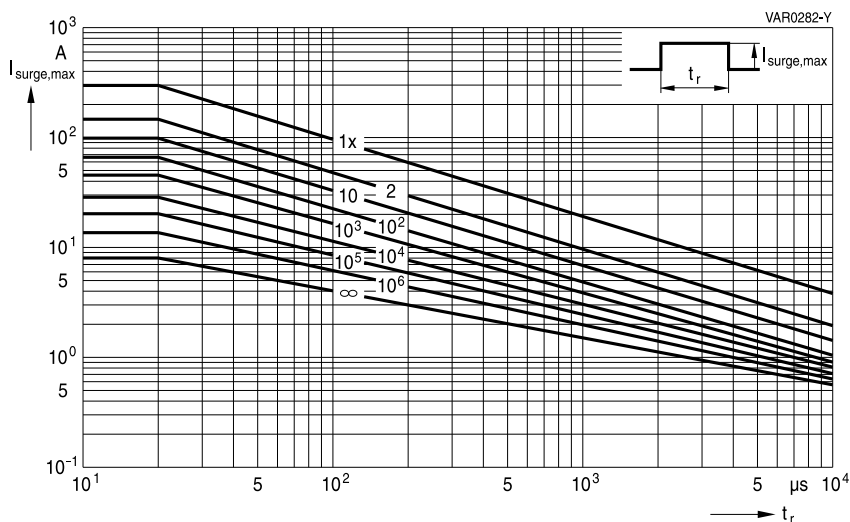

CT1210K25AUTOG

**Multilayer varistors (MLVs)**


**Automotive E series**

**SMD**

**Derating curves for automotive series with load dump/ jump-start protection**


Maximum surge current  $I_{\text{surge,max}} = f(t_r, \text{pulse train})$

For explanation of the derating curves refer to "General technical information", chapter 2.7.1

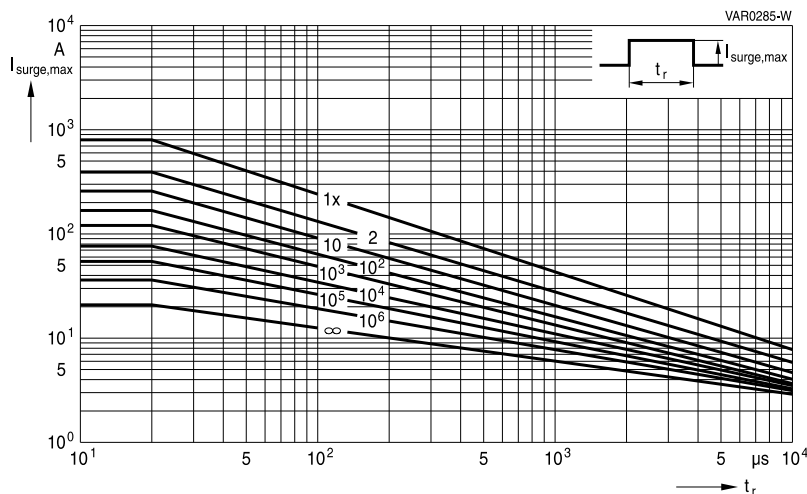

CT1812S14BAUTOE2G2

CT1812S14BAUTOG

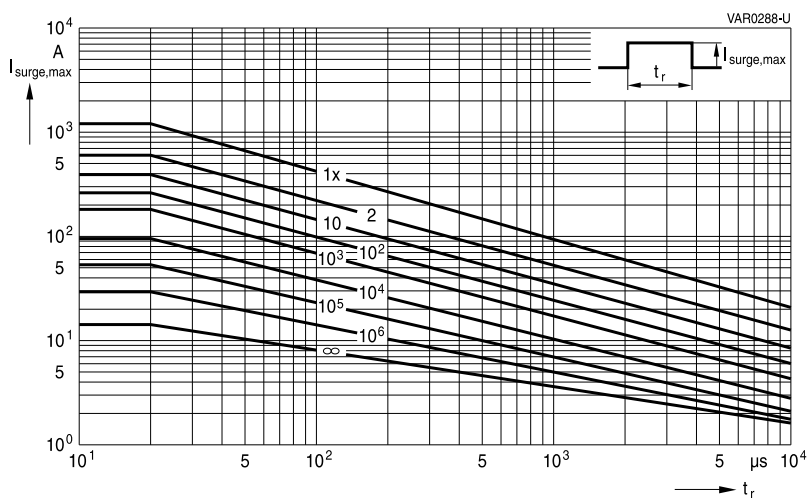

CT2220K30AUTOE2G2

CT2220S14BAUTOE2G2

CT2220K30AUTOG

CT2220S14BAUTOG

# Multilayer varistors (MLVs)


## Automotive E series

### SMD

### Taping and packing

#### 1 Taping and packing for SMD components

##### 1.1 Blister tape (taping to IEC 60286-3)

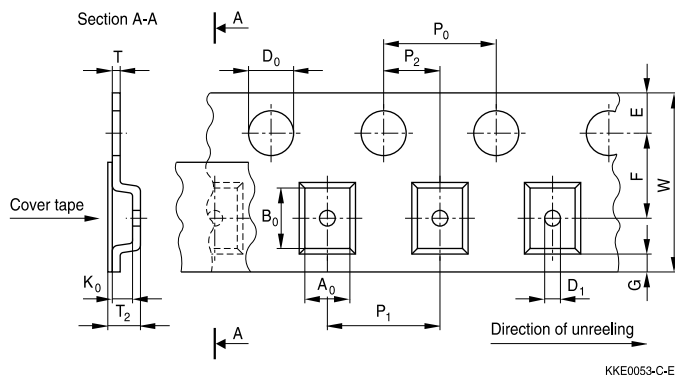

KKE0053-C-E

### Dimensions in mm

|                | 8-mm tape           |               |               |               |               | 12-mm tape          |               | Tolerance           |
|----------------|---------------------|---------------|---------------|---------------|---------------|---------------------|---------------|---------------------|
|                | Case size (inch/mm) |               |               |               |               | Case size (inch/mm) |               |                     |
|                |                     |               | 0508/<br>1220 | 0612/<br>1632 | 1012/<br>2532 |                     |               |                     |
|                | 0603/<br>1608       | 0506/<br>1216 | 0805/<br>2012 | 1206/<br>3216 | 1210/<br>3225 | 1812/<br>4532       | 2220/<br>5750 |                     |
| A <sub>0</sub> | 0.9 ±0.10           | 1.50          | 1.50          | 1.80          | 2.80          | 3.50                | 5.10          | ±0.20               |
| B <sub>0</sub> | 1.75 ±0.10          | 1.80          | 2.30          | 3.40          | 3.50          | 4.80                | 6.00          | ±0.20               |
| K <sub>0</sub> | 1.0                 | 0.80          | 1.80          |               |               | 3.40                |               | max.                |
| T              | 0.30                |               |               |               |               | 0.30                |               | max.                |
| T <sub>2</sub> | 1.3                 | 1.20          | 2.50          |               |               | 3.90                |               | max.                |
| D <sub>0</sub> | 1.50                |               |               |               |               | 1.50                |               | +0.10/−0            |
| D <sub>1</sub> | 0.3                 |               |               |               |               | 1.50                |               | min.                |
| P <sub>0</sub> | 4.00                |               |               |               |               | 4.00                |               | ±0.10 <sup>1)</sup> |
| P <sub>2</sub> | 2.00                |               |               |               |               | 2.00                |               | ±0.05               |
| P <sub>1</sub> | 4.00                |               |               |               |               | 8.00                |               | ±0.10               |
| W              | 8.00                |               |               |               |               | 12.00               |               | ±0.30               |
| E              | 1.75                |               |               |               |               | 1.75                |               | ±0.10               |
| F              | 3.50                |               |               |               |               | 5.50                |               | ±0.05               |
| G              | 0.75                |               |               |               |               | 0.75                |               | min.                |

1) ≤±0.2 mm over 10 sprocket holes.




## Multilayer varistors (MLVs)

### Automotive E series


#### SMD

#### Part orientation in tape pocket for blister tape


For discrete chip, EIA case sizes 0603, 0805, 1206, 1210, 1812 and 2220

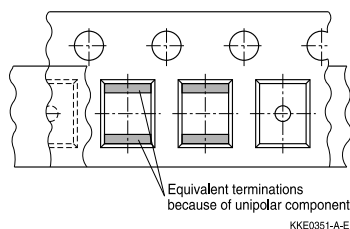


For array, EIA case size 0612



For arrays, EIA case sizes 0506 and 1012

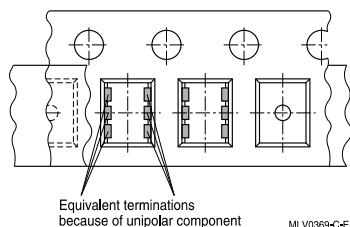

For filter array, EIA case size 0508



#### Additional taping information


|                           |                                                                                                             |
|---------------------------|-------------------------------------------------------------------------------------------------------------|
| Reel material             | Polystyrol (PS)                                                                                             |
| Tape material             | Polystyrol (PS) or Polycarbonat (PC) or PVC                                                                 |
| Tape break force          | min. 10 N                                                                                                   |
| Top cover tape strength   | min. 10 N                                                                                                   |
| Top cover tape peel force | 0.1 to 1.0 N for 8-mm tape and 0.1 to 1.3 N for 12-mm tape at a peel speed of 300 mm/min                    |
| Tape peel angle           | Angle between top cover tape and the direction of feed during peel off: 165° to 180°                        |
| Cavity play               | Each part rests in the cavity so that the angle between the part and cavity center line is no more than 20° |

# Multilayer varistors (MLVs)

## Automotive E series

### SMD

## 1.2 Cardboard tape (taping to IEC 60286-3)

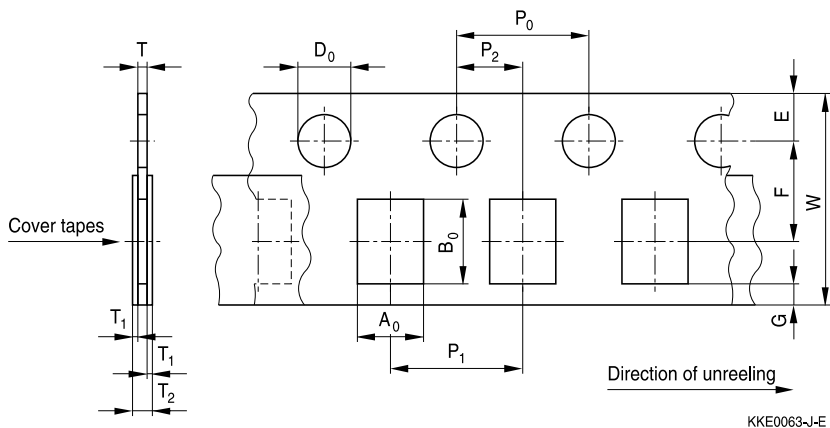

### Dimensions in mm

|                | 8-mm tape           |           |           |           |           |                     | Tolerance           |
|----------------|---------------------|-----------|-----------|-----------|-----------|---------------------|---------------------|
|                | Case size (inch/mm) |           |           |           |           | Case size (inch/mm) |                     |
|                | 0201/0603           | 0402/1005 | 0405/1012 | 0603/1608 | 1003/2508 | 0508/1220           |                     |
| A <sub>0</sub> | 0.38 ±0.05          | 0.60      | 1.05      | 0.95      | 1.00      | 1.60                | ±0.20               |
| B <sub>0</sub> | 0.68 ±0.05          | 1.15      | 1.60      | 1.80      | 2.85      | 2.40                | ±0.20               |
| T              | 0.42 ±0.02          | 0.60      | 0.75      | 0.95      | 0.95      | 0.95                | max.                |
| T <sub>2</sub> | 0.4 min.            | 0.70      | 0.90      | 1.10      | 1.10      | 1.10                | max.                |
| D <sub>0</sub> | 1.50 ±0.1           | 1.50      |           |           |           | 1.50                | +0.10/−0            |
| P <sub>0</sub> | 4.00                |           |           |           |           |                     | ±0.10 <sup>2)</sup> |
|                | 2.00                |           |           |           |           |                     | ±0.05               |
| P <sub>1</sub> | 2.00 ±0.05          | 2.00      | 4.00      | 4.00      | 4.00      | 4.00                | ±0.10               |
| W              | 8.00                |           |           |           |           |                     | ±0.30               |
| E              | 1.75                |           |           |           |           |                     | ±0.10               |
| F              | 3.50                |           |           |           |           |                     | ±0.05               |
| G              | 0.75                |           |           |           |           |                     | min.                |

2) ≤0.2 mm over 10 sprocket holes.


## Multilayer varistors (MLVs)

### Automotive E series


#### SMD

#### Part orientation in tape pocket for cardboard tape


For discrete chip, EIA case sizes 0201, 0402, 0603 and 1003




For array, EIA case size 0405



For array, EIA case size 0508



For filter array, EIA case size 0405



#### Additional taping information


|                           |                                                                                                             |
|---------------------------|-------------------------------------------------------------------------------------------------------------|
| Reel material             | Polystyrol (PS)                                                                                             |
| Tape material             | Cardboard                                                                                                   |
| Tape break force          | min. 10 N                                                                                                   |
| Top cover tape strength   | min. 10 N                                                                                                   |
| Top cover tape peel force | 0.1 to 1.0 N at a peel speed of 300 mm/min                                                                  |
| Tape peel angle           | Angle between top cover tape and the direction of feed during peel off: 165° to 180°                        |
| Cavity play               | Each part rests in the cavity so that the angle between the part and cavity center line is no more than 20° |

# Multilayer varistors (MLVs)

## Automotive E series

### SMD

### 1.3 Reel packing

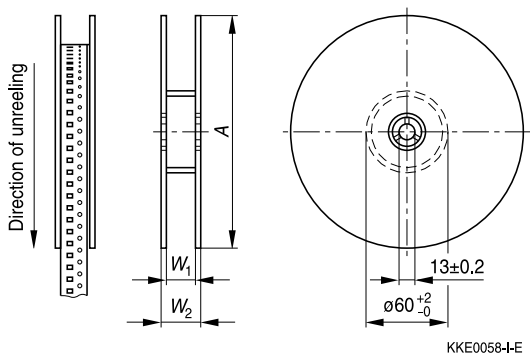


### Dimensions in mm


|       | 8-mm tape     |               | 12-mm tape     |                |
|-------|---------------|---------------|----------------|----------------|
|       | 180-mm reel   | 330-mm reel   | 180-mm reel    | 330-mm reel    |
| A     | 180 $+0/-3$   | 330 $+0/-2.0$ | 180 $+0/-3$    | 330 $+0/-2.0$  |
| $W_1$ | 8.4 $+1.5/-0$ | 8.4 $+1.5/-0$ | 12.4 $+1.5/-0$ | 12.4 $+1.5/-0$ |
| $W_2$ | 14.4 max.     | 14.4 max.     | 18.4 max.      | 18.4 max.      |

### Leader, trailer

#### Trailer (tape end)

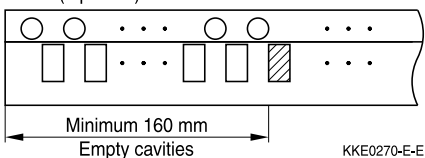

#### Leader


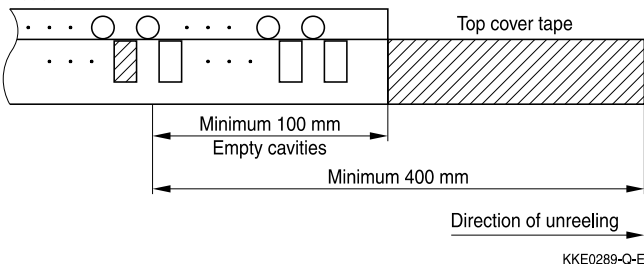


# Multilayer varistors (MLVs)

## Automotive E series

### SMD

#### 1.4 Packing units for discrete chip and array chip

|                      |  |  |  |  |  |
|----------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|
| Case size<br>inch/mm | Chip thickness<br>th                                                              | Cardboard tape<br>W                                                               | Blister tape<br>W                                                                 | Ø 180-mm reel<br>pcs.                                                             | Ø 330-mm reel<br>pcs.                                                              |
| 0201/0603            | 0.33 mm                                                                           | 8 mm                                                                              | —                                                                                 | 15000                                                                             | —                                                                                  |
| 0402/1005            | 0.6 mm                                                                            | 8 mm                                                                              | —                                                                                 | 10000                                                                             | 50000                                                                              |
| 0405/1012            | 0.7 mm                                                                            | 8 mm                                                                              | —                                                                                 | 5000                                                                              | —                                                                                  |
| 0506/1216            | 0.5 mm                                                                            | —                                                                                 | 8 mm                                                                              | 4000                                                                              | —                                                                                  |
| 0508/1220            | 0.9 mm                                                                            | 8 mm                                                                              | 8 mm                                                                              | 4000                                                                              | —                                                                                  |
| 0603/1608            | 0.9 mm                                                                            | 8 mm                                                                              | 8 mm                                                                              | 4000                                                                              | 16000                                                                              |
| 0612/1632            | 0.7 mm                                                                            | —                                                                                 | 8 mm                                                                              | 3000                                                                              | —                                                                                  |
| 0805/2012            | 0.7 mm                                                                            | —                                                                                 | 8 mm                                                                              | 3000                                                                              | —                                                                                  |
|                      | 0.9 mm                                                                            | —                                                                                 | 8 mm                                                                              | 3000                                                                              | 12000                                                                              |
|                      | 1.3 mm                                                                            | —                                                                                 | 8 mm                                                                              | 3000                                                                              | 12000                                                                              |
| 1003/2508            | 0.9 mm                                                                            | 8 mm                                                                              | —                                                                                 | 4000                                                                              | —                                                                                  |
| 1012/2532            | 1.0 mm                                                                            | —                                                                                 | 8 mm                                                                              | 2000                                                                              | —                                                                                  |
| 1206/3216            | 0.9 mm                                                                            | —                                                                                 | 8 mm                                                                              | 3000                                                                              | —                                                                                  |
|                      | 1.3 mm                                                                            | —                                                                                 | 8 mm                                                                              | 3000                                                                              | 12000                                                                              |
|                      | 1.4 mm                                                                            | —                                                                                 | 8 mm                                                                              | 2000                                                                              | 8000                                                                               |
|                      | 1.6 mm                                                                            | —                                                                                 | 8 mm                                                                              | 2000                                                                              | 8000                                                                               |
| 1210/3225            | 0.9 mm                                                                            | —                                                                                 | 8 mm                                                                              | 3000                                                                              | —                                                                                  |
|                      | 1.3 mm                                                                            | —                                                                                 | 8 mm                                                                              | 3000                                                                              | 12000                                                                              |
|                      | 1.4 mm                                                                            | —                                                                                 | 8 mm                                                                              | 2000                                                                              | 8000                                                                               |
|                      | 1.6 mm                                                                            | —                                                                                 | 8 mm                                                                              | 2000                                                                              | 8000                                                                               |
| 1812/4532            | 1.3 mm                                                                            | —                                                                                 | 12 mm                                                                             | 1500                                                                              | —                                                                                  |
|                      | 1.4 mm                                                                            | —                                                                                 | 12 mm                                                                             | 1000                                                                              | —                                                                                  |
|                      | 1.6 mm                                                                            | —                                                                                 | 12 mm                                                                             | 1000                                                                              | 4000                                                                               |
|                      | 2.0 mm                                                                            | —                                                                                 | 12 mm                                                                             | —                                                                                 | 3000                                                                               |
|                      | 2.3 mm                                                                            | —                                                                                 | 12 mm                                                                             | —                                                                                 | 3000                                                                               |
| 2220/5750            | 1.3 mm                                                                            | —                                                                                 | 12 mm                                                                             | 1500                                                                              | —                                                                                  |
|                      | 1.4 mm                                                                            | —                                                                                 | 12 mm                                                                             | 1000                                                                              | —                                                                                  |
|                      | 1.6 mm                                                                            | —                                                                                 | 12 mm                                                                             | 1000                                                                              | —                                                                                  |
|                      | 2.0 mm                                                                            | —                                                                                 | 12 mm                                                                             | —                                                                                 | 3000                                                                               |
|                      | 2.3 mm                                                                            | —                                                                                 | 12 mm                                                                             | —                                                                                 | 3000                                                                               |
|                      | 2.7 mm                                                                            | —                                                                                 | 12 mm                                                                             | 600                                                                               | —                                                                                  |
|                      | 3.0 mm                                                                            | —                                                                                 | 12 mm                                                                             | 600                                                                               | —                                                                                  |

**Multilayer varistors (MLVs)****Automotive E series****SMD****2 Delivery mode for leaded SHCV varistors**

Standard delivery mode for SHCV types is bulk. Alternative taping modes (AMMO pack or taped on reel) are available upon request.

Packing units for:

| Type      | Pieces |
|-----------|--------|
| SR6       | 2000   |
| SR1 / SR2 | 1000   |

For types not listed in this data book please contact EPCOS.

## Multilayer varistors (MLVs)

### Automotive E series


#### SMD

### Soldering directions

#### 1 Terminations and soldering methods

##### 1.1 Nickel barrier termination

The nickel barrier layer of the silver/nickel/tin termination prevents leaching of the silver base metallization layer. This allows great flexibility in the selection of soldering parameters. The tin prevents the nickel layer from oxidizing and thus ensures better wetting by the solder. The nickel barrier termination is suitable for lead-free soldering, as well as for other commonly-used soldering methods.

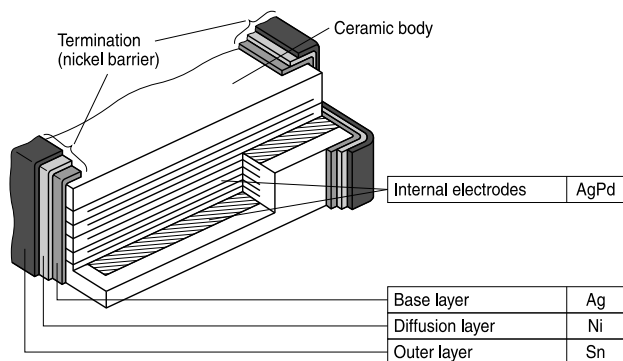


KKE0484-W-E

Multilayer CTVS: Structure of nickel barrier termination

##### 1.2 Silver-platinum termination

Silver-platinum terminations are mainly used for the large EIA case sizes 1812 and 2220. The silver-platinum termination is approved for reflow soldering, SnPb soldering and lead-free soldering with a silver containing solder paste. In case of SnPb soldering, a solder paste Sn62Pb36Ag2 is recommended. For lead-free reflow soldering, a solder paste SAC, e.g. Sn95.5Ag3.8Cu0.7, is recommended.

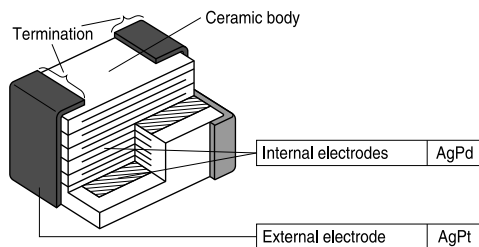

MLV0435-F-E

Multilayer varistor: Structure of silver-platinum termination

## Multilayer varistors (MLVs)

### Automotive E series

#### SMD

#### 1.3 Silver-palladium termination

Silver-palladium terminations are designed for the use of conductive adhesives. Lead-free reflow soldering does not form a proper solder joint. In general reflow or wave soldering is not recommended.

#### 1.4 Tinned iron wire

All SHCV types with tinned terminations are suitable for lead-free and SnPb soldering.



## Multilayer varistors (MLVs)


### Automotive E series

#### SMD

## 2 Recommended soldering temperature profiles

### 2.1 Reflow soldering temperature profile

Temperature ranges for reflow soldering acc. to IEC 60068-2-58 recommendations.

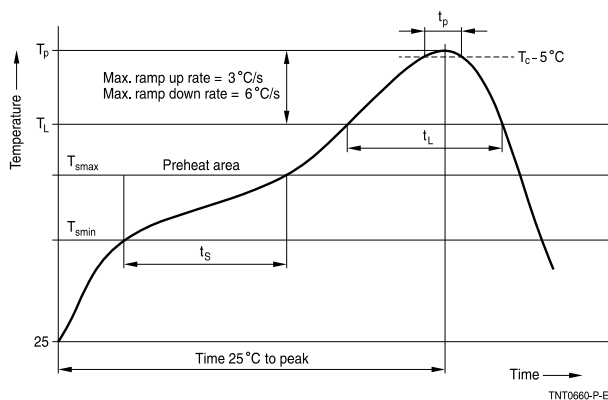

| Profile feature                    |                          | Sn-Pb eutectic assembly         | Pb-free assembly  |
|------------------------------------|--------------------------|---------------------------------|-------------------|
| Preheat and soak                   |                          |                                 |                   |
| - Temperature min                  | $T_{smin}$               | 100 °C                          | 150 °C            |
| - Temperature max                  | $T_{smax}$               | 150 °C                          | 200 °C            |
| - Time                             | $t_{smin}$ to $t_{smax}$ | 60 ... 120 s                    | 60 ... 120 s      |
| Average ramp-up rate               | $T_{smax}$ to $T_p$      | 3 °C/ s max.                    | 3 °C/ s max.      |
| Liquidous temperature              | $T_L$                    | 183 °C                          | 217 °C            |
| Time at liquidous                  | $t_L$                    | 40 ... 150 s                    | 40 ... 150 s      |
| Peak package body temperature      | $T_p$                    | 215 °C ... 260 °C <sup>1)</sup> | 235 °C ... 260 °C |
| Time above ( $T_p - 5\text{ °C}$ ) | $t_p$                    | 10 ... 40 s                     | 10 ... 40 s       |
| Average ramp-down rate             | $T_p$ to $T_{smax}$      | 6 °C/ s max.                    | 6 °C/ s max.      |
| Time 25 °C to peak temperature     |                          | max. 8 minutes                  | max. 8 minutes    |

1) Depending on package thickness.

**Notes:** All temperatures refer to topside of the package, measured on the package body surface.


Number of reflow cycles: 3

Iron soldering should be avoided, hot air methods are recommended for repair purposes.

## SMD

### 2.2 Wave soldering temperature profile

Temperature characteristics at component terminal with dual-wave soldering

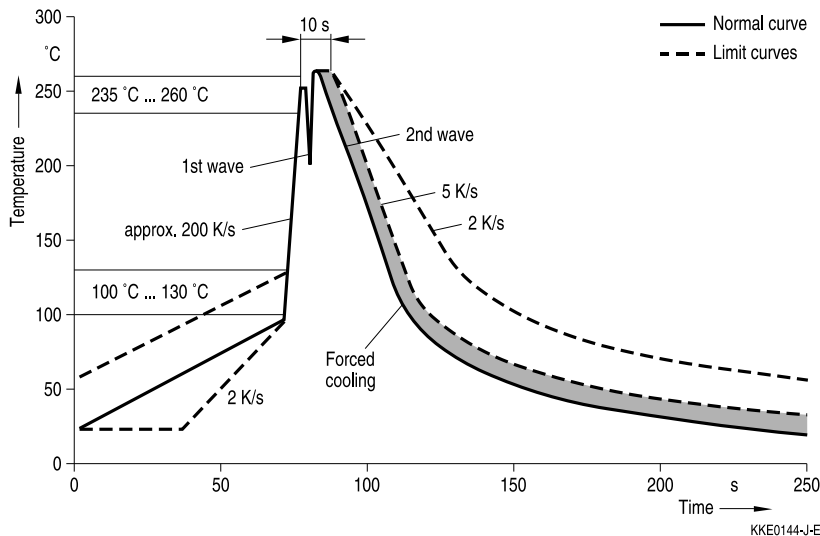

## 3 Solder joint profiles / solder quantity

### 3.1 Nickel barrier termination

If the meniscus height is too low, that means the solder quantity is too low, the solder joint may break, i.e. the component becomes detached from the joint. This problem is sometimes interpreted as leaching of the external terminations.

If the solder meniscus is too high, i.e. the solder quantity is too large, the vise effect may occur. As the solder cools down, the solder contracts in the direction of the component. If there is too much solder on the component, it has no leeway to evade the stress and may break, as in a vise.



The figures below show good and poor solder joints for dual-wave and infrared soldering.

## Multilayer varistors (MLVs)

### Automotive E series





#### SMD

#### 3.1.1 Solder joint profiles for nickel barrier termination - dual-wave soldering



Good and poor solder joints caused by amount of solder in dual-wave soldering.

#### 3.1.2 Solder joint profiles for nickel barrier termination / silver-platinum termination - reflow soldering

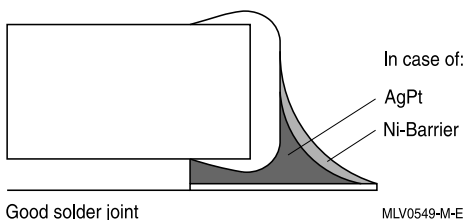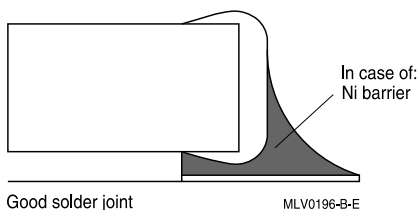

Good and poor solder joints caused by amount of solder in reflow soldering.

## Multilayer varistors (MLVs)

### Automotive E series

#### SMD

#### 4 Solderability tests

| Test                                                                                  | Standard          | Test conditions<br>Sn-Pb soldering                                                                                                 | Test conditions<br>Pb-free soldering                                                                                                          | Criteria/ test results                                                                                                    |
|---------------------------------------------------------------------------------------|-------------------|------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|
| Wettability                                                                           | IEC<br>60068-2-58 | Immersion in<br>60/40 SnPb solder<br>using non-activated<br>flux at $215 \pm 3$ °C for<br>$3 \pm 0.3$ s                            | Immersion in<br>Sn96.5Ag3.0Cu0.5<br>solder using non- or<br>low activated flux<br>at $245 \pm 5$ °C<br>for $3 \pm 0.3$ s                      | Covering of 95% of<br>end termination,<br>checked by visual<br>inspection                                                 |
| Leaching<br>resistance                                                                | IEC<br>60068-2-58 | Immersion in<br>60/40 SnPb<br>solder using<br>mildly activated flux<br>without preheating<br>at $260 \pm 5$ °C<br>for $10 \pm 1$ s | Immersion in<br>Sn96.5Ag3.0Cu0.5<br>solder using non- or<br>low activated flux<br>without preheating<br>at $255 \pm 5$ °C<br>for $10 \pm 1$ s | No leaching of<br>contacts                                                                                                |
| Thermal shock<br>(solder shock)                                                       |                   | Dip soldering at<br>$300$ °C/5 s                                                                                                   | Dip soldering at<br>$300$ °C/5 s                                                                                                              | No deterioration of<br>electrical parameters.<br>Capacitance change:<br>$ \Delta C/C_0  \leq 15\%$                        |
| Tests of resistance<br>to soldering heat<br>for SMDs                                  | IEC<br>60068-2-58 | Immersion in<br>60/40 SnPb for 10 s<br>at $260$ °C                                                                                 | Immersion in<br>Sn96.5Ag3.0Cu0.5<br>for 10 s at $260$ °C                                                                                      | Change of varistor<br>voltage:<br>$ \Delta V/V (1 \text{ mA})  \leq 5\%$                                                  |
| Tests of resistance<br>to soldering heat<br>for radial leaded<br>components<br>(SHCV) | IEC<br>60068-2-20 | Immersion<br>of leads in<br>60/40 SnPb<br>for 10 s at $260$ °C                                                                     | Immersion<br>of leads in<br>Sn96.5Ag3.0Cu0.5<br>for 10 s at $260$ °C                                                                          | Change of varistor<br>voltage: $ \Delta V/V (1 \text{ mA})  \leq 5\%$<br>Change of<br>capacitance X7R:<br>$\leq -5/+10\%$ |

## Multilayer varistors (MLVs)


### Automotive E series

#### SMD


#### Note:

#### Leaching of the termination

Effective area at the termination might be lost if the soldering temperature and/or immersion time are not kept within the recommended conditions. Leaching of the outer electrode should not exceed 25% of the chip end area (full length of the edge A-B-C-D) and 25% of the length A-B, shown below as mounted on substrate.

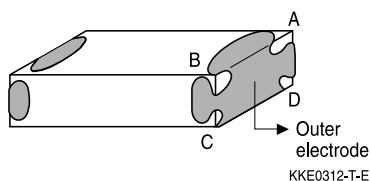

As a single chip

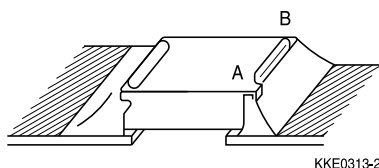

As mounted on substrate

## 5 Notes for proper soldering

### 5.1 Preheating and cooling

- According to IEC 60068-2-58. Please refer to section 2 of this chapter.

### 5.2 Repair/ rework

Manual soldering with a soldering iron must be avoided, hot-air methods are recommended for rework purposes.

### 5.3 Cleaning

All environmentally compatible agents are suitable for cleaning. Select the appropriate cleaning solution according to the type of flux used. The temperature difference between the components and cleaning liquid must not be greater than 100 °C. Ultrasonic cleaning should be carried out with the utmost caution. Too high ultrasonic power can impair the adhesive strength of the metallized surfaces.

### 5.4 Solder paste printing (reflow soldering)

An excessive application of solder paste results in too high a solder fillet, thus making the chip more susceptible to mechanical and thermal stress. Too little solder paste reduces the adhesive strength on the outer electrodes and thus weakens the bonding to the PCB. The solder should be applied smoothly to the end surface.

## Multilayer varistors (MLVs)

### Automotive E series

#### SMD

#### 5.5 Selection of flux

Used flux should have less than or equal to 0.1 wt % of halogenated content, since flux residue after soldering could lead to corrosion of the termination and/or increased leakage current on the surface of the component. Strong acidic flux must not be used. The amount of flux applied should be carefully controlled, since an excess may generate flux gas, which in turn is detrimental to solderability.

#### 5.6 Storage of CTVSs

Solderability is guaranteed for one year from date of delivery for multilayer varistors, CeraDiodes and ESD/EMI filters (half a year for chips with AgPt terminations) and two years for SHCV components, provided that components are stored in their original packages.

Storage temperature:  $-25\text{ }^{\circ}\text{C}$  to  $+45\text{ }^{\circ}\text{C}$

Relative humidity:  $\leq 75\%$  annual average,  $\leq 95\%$  on 30 days a year

The solderability of the external electrodes may deteriorate if SMDs and leaded components are stored where they are exposed to high humidity, dust or harmful gas (hydrogen chloride, sulfurous acid gas or hydrogen sulfide).

Do not store SMDs and leaded components where they are exposed to heat or direct sunlight. Otherwise the packing material may be deformed or SMDs/ leaded components may stick together, causing problems during mounting.

After opening the factory seals, such as polyvinyl-sealed packages, it is recommended to use the SMDs or leaded components as soon as possible.

Solder CTVS components after shipment from TDK Electronics within the time specified:

CTVS with Ni barrier termination: 12 months

CTVS with AgPt termination: 6 months

SHCV (leaded components): 24 months

#### 5.7 Placement of components on circuit board

Especially in the case of dual-wave soldering, it is of advantage to place the components on the board before soldering in that way that their two terminals do not enter the solder bath at different times.

Ideally, both terminals should be wetted simultaneously.

## Multilayer varistors (MLVs)

### Automotive E series

#### SMD

#### 5.8 Soldering cautions

An excessively long soldering time or high soldering temperature results in leaching of the outer electrodes, causing poor adhesion and a change of electrical properties of the varistor due to the loss of contact between electrodes and termination.

Keep the recommended down-cooling rate.

#### 5.9 Standards

CECC 00802

IEC 60068-2-58

IEC 60068-2-20

## Multilayer varistors (MLVs)

### Automotive E series

#### SMD

### Symbols and terms

#### For ceramic transient voltage suppressors (CTVS)

| Symbol                   | Term                                             |
|--------------------------|--------------------------------------------------|
| $C_{\text{line,max}}$    | Maximum capacitance per line                     |
| $C_{\text{line,min}}$    | Minimum capacitance per line                     |
| $C_{\text{line,typ}}$    | Typical capacitance per line                     |
| $C_{\text{max}}$         | Maximum capacitance                              |
| $C_{\text{min}}$         | Minimum capacitance                              |
| $C_{\text{nom}}$         | Nominal capacitance                              |
| $\Delta C_{\text{nom}}$  | Tolerance of nominal capacitance                 |
| $C_{\text{typ}}$         | Typical capacitance                              |
| $f_{\text{cut-off,max}}$ | Maximum cut-off frequency                        |
| $f_{\text{cut-off,min}}$ | Minimum cut-off frequency                        |
| $f_{\text{cut-off,typ}}$ | Typical cut-off frequency                        |
| $f_{\text{res,typ}}$     | Typical resonance frequency                      |
| $I$                      | Current                                          |
| $I_{\text{clamp}}$       | Clamping current                                 |
| $I_{\text{leak}}$        | Leakage current                                  |
| $I_{\text{leak,max}}$    | Maximum leakage current                          |
| $I_{\text{leak,typ}}$    | Typical leakage current                          |
| $I_{\text{PP}}$          | Peak pulse current                               |
| $I_{\text{surge,max}}$   | Maximum surge current (also termed peak current) |
| LCT                      | Lower category temperature                       |
| $L_{\text{typ}}$         | Typical inductance                               |
| $P_{\text{diss,max}}$    | Maximum power dissipation                        |
| $P_{\text{PP}}$          | Peak pulse power                                 |
| $R_{\text{ins}}$         | Insulation resistance                            |
| $R_{\text{min}}$         | Minimum resistance                               |
| $R_{\text{S}}$           | Resistance per line                              |
| $R_{\text{S,typ}}$       | Typical resistance per line                      |
| $T_{\text{A}}$           | Ambient temperature                              |
| $T_{\text{op}}$          | Operating temperature                            |
| $T_{\text{op,max}}$      | Maximum operating temperature                    |
| $T_{\text{stg}}$         | Storage temperature                              |



## Multilayer varistors (MLVs)

### Automotive E series

#### SMD

| Symbol            | Term                                                       |
|-------------------|------------------------------------------------------------|
| $t_r$             | Duration of equivalent rectangular wave                    |
| $t_{resp}$        | Response time                                              |
| $t_{resp,max}$    | Maximum response time                                      |
| UCT               | Upper category temperature                                 |
| V                 | Voltage                                                    |
| $V_{BR,min}$      | Minimum breakdown voltage                                  |
| $V_{clamp,max}$   | Maximum clamping voltage                                   |
| $V_{DC,max}$      | Maximum DC operating voltage (also termed working voltage) |
| $V_{ESD,air}$     | Air discharge ESD capability                               |
| $V_{ESD,contact}$ | Contact discharge ESD capability                           |
| $V_{jump}$        | Maximum jump-start voltage                                 |
| $V_{RMS,max}$     | Maximum AC operating voltage, root-mean-square value       |
| $V_V$             | Varistor voltage (also termed breakdown voltage)           |
| $V_{LD}$          | Maximum load dump voltage                                  |
| $V_{leak}$        | Measurement voltage for leakage current                    |
| $V_{V,min}$       | Minimum varistor voltage                                   |
| $V_{V,max}$       | Maximum varistor voltage                                   |
| $\Delta V_V$      | Tolerance of varistor voltage                              |
| $W_{LD}$          | Maximum load dump energy                                   |
| $W_{max}$         | Maximum energy absorption (also termed transient energy)   |
| $\alpha_{typ}$    | Typical insertion loss                                     |
| $\tan \delta$     | Dissipation factor                                         |
| $e$               | Lead spacing                                               |
| $\ll * \gg$       | Maximum possible application conditions                    |

All dimensions are given in mm.

The commas used in numerical values denote decimal points.

## Multilayer varistors (MLVs)

### Automotive E series

#### SMD

### Cautions and warnings

#### General

Some parts of this publication contain statements about the suitability of our ceramic transient voltage suppressor (CTVS) components (multilayer varistors (MLVs)), CeraDiodes, ESD/EMI filters, leaded transient voltage/ RFI suppressors (SHCV types)) for certain areas of application, including recommendations about incorporation/design-in of these products into customer applications. The statements are based on our knowledge of typical requirements often made of our CTVS devices in the particular areas. We nevertheless expressly point out that such statements cannot be regarded as binding statements about the suitability of our CTVS components for a particular customer application. As a rule, EPCOS is either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always incumbent on the customer to check and decide whether the CTVS devices with the properties described in the product specification are suitable for use in a particular customer application.

- Do not use EPCOS CTVS components for purposes not identified in our specifications, application notes and data books.
- Ensure the suitability of a CTVS in particular by testing it for reliability during design-in. Always evaluate a CTVS component under worst-case conditions.
- Pay special attention to the reliability of CTVS devices intended for use in safety-critical applications (e.g. medical equipment, automotive, spacecraft, nuclear power plant).

#### Design notes

- Always connect a CTVS in parallel with the electronic circuit to be protected.
- Consider maximum rated power dissipation if a CTVS has insufficient time to cool down between a number of pulses occurring within a specified isolated time period. Ensure that electrical characteristics do not degrade.
- Consider derating at higher operating temperatures. Choose the highest voltage class compatible with derating at higher temperatures.
- Surge currents beyond specified values will puncture a CTVS. In extreme cases a CTVS will burst.
- If steep surge current edges are to be expected, make sure your design is as low-inductance as possible.
- In some cases the malfunctioning of passive electronic components or failure before the end of their service life cannot be completely ruled out in the current state of the art, even if they are operated as specified. In applications requiring a very high level of operational safety and especially when the malfunction or failure of a passive electronic component could endanger human life or health (e.g. in accident prevention, life-saving systems, or automotive battery line applications such as clamp 30), ensure by suitable design of the application or other measures (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of such a malfunction or failure. Only use CTVS components from the automotive series in safety-relevant applications.

## Multilayer varistors (MLVs)

### Automotive E series

#### SMD

- Specified values only apply to CTVS components that have not been subject to prior electrical, mechanical or thermal damage. The use of CTVS devices in line-to-ground applications is therefore not advisable, and it is only allowed together with safety countermeasures like thermal fuses.

#### Storage

- Only store CTVS in their original packaging. Do not open the package prior to processing.
- Storage conditions in original packaging: temperature  $-25$  to  $+45^{\circ}\text{C}$ , relative humidity  $\leq 75\%$  annual average, maximum  $95\%$ , dew precipitation is inadmissible.
- Do not store CTVS devices where they are exposed to heat or direct sunlight. Otherwise the packaging material may be deformed or CTVS may stick together, causing problems during mounting.
- Avoid contamination of the CTVS surface during storage, handling and processing.
- Avoid storing CTVS devices in harmful environments where they are exposed to corrosive gases for example ( $\text{SO}_x$ ,  $\text{Cl}$ ).
- Use CTVS as soon as possible after opening factory seals such as polyvinyl-sealed packages.
- Solder CTVS components after shipment from EPCOS within the time specified:
  - CTVS with Ni barrier termination, 12 months
  - CTVS with AgPt termination, 6 months
  - SHCV, 24 months

#### Handling

- Do not drop CTVS components and allow them to be chipped.
- Do not touch CTVS with your bare hands - gloves are recommended.
- Avoid contamination of the CTVS surface during handling.
- Washing processes may damage the product due to the possible static or cyclic mechanical loads (e.g. ultrasonic cleaning). They may cause cracks to develop on the product and its parts, which might lead to reduced reliability or lifetime.

#### Mounting

- When CTVS devices are encapsulated with sealing material or overmolded with plastic material, electrical characteristics might be degraded and the life time reduced.
- Make sure an electrode is not scratched before, during or after the mounting process.
- Make sure contacts and housings used for assembly with CTVS components are clean before mounting.
- The surface temperature of an operating CTVS can be higher. Ensure that adjacent components are placed at a sufficient distance from a CTVS to allow proper cooling.
- Avoid contamination of the CTVS surface during processing.

## Multilayer varistors (MLVs)

### Automotive E series

#### SMD

#### Soldering

- Complete removal of flux is recommended to avoid surface contamination that can result in an instable and/or high leakage current.
- Use resin-type or non-activated flux.
- Bear in mind that insufficient preheating may cause ceramic cracks.
- Rapid cooling by dipping in solvent is not recommended, otherwise a component may crack.

#### Operation

- Use CTVS only within the specified operating temperature range.
- Use CTVS only within specified voltage and current ranges.
- Environmental conditions must not harm a CTVS. Only use them in normal atmospheric conditions. Reducing the atmosphere (e.g. hydrogen or nitrogen atmosphere) is prohibited.
- Prevent a CTVS from contacting liquids and solvents. Make sure that no water enters a CTVS (e.g. through plug terminals).
- Avoid dewing and condensation.
- EPCOS CTVS components are mainly designed for encased applications. Under all circumstances avoid exposure to:
  - direct sunlight
  - rain or condensation
  - steam, saline spray
  - corrosive gases
  - atmosphere with reduced oxygen content
- EPCOS CTVS devices are not suitable for switching applications or voltage stabilization where static power dissipation is required.

This listing does not claim to be complete, but merely reflects the experience of EPCOS AG.

#### Display of ordering codes for EPCOS products

The ordering code for one and the same EPCOS product can be represented differently in data sheets, data books, other publications, on the EPCOS website, or in order-related documents such as shipping notes, order confirmations and product labels. **The varying representations of the ordering codes are due to different processes employed and do not affect the specifications of the respective products.** Detailed information can be found on the Internet under [www.epcos.com/orderingcodes](http://www.epcos.com/orderingcodes)

## Important notes

The following applies to all products named in this publication:

1. Some parts of this publication contain **statements about the suitability of our products for certain areas of application**. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out **that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application**. As a rule, we are either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether a product with the properties described in the product specification is suitable for use in a particular customer application.
2. We also point out that **in individual cases, a malfunction of electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified**. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health (e.g. in accident prevention or lifesaving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of an electronic component.
3. **The warnings, cautions and product-specific notes must be observed.**
4. In order to satisfy certain technical requirements, **some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as hazardous)**. Useful information on this will be found in our Material Data Sheets on the Internet ([www.tdk-electronics.tdk.com/material](http://www.tdk-electronics.tdk.com/material)). Should you have any more detailed questions, please contact our sales offices.
5. We constantly strive to improve our products. Consequently, **the products described in this publication may change from time to time**. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order. We also **reserve the right to discontinue production and delivery of products**. Consequently, we cannot guarantee that all products named in this publication will always be available. The aforementioned does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.
6. Unless otherwise agreed in individual contracts, **all orders are subject to our General Terms and Conditions of Supply**.

## Important notes

7. **Our manufacturing sites serving the automotive business apply the IATF 16949 standard.** The IATF certifications confirm our compliance with requirements regarding the quality management system in the automotive industry. Referring to customer requirements and customer specific requirements ("CSR") TDK always has and will continue to have the policy of respecting individual agreements. Even if IATF 16949 may appear to support the acceptance of unilateral requirements, we hereby like to emphasize that **only requirements mutually agreed upon can and will be implemented in our Quality Management System.** For clarification purposes we like to point out that obligations from IATF 16949 shall only become legally binding if individually agreed upon.
8. The trade names EPCOS, CeraCharge, CeraDiode, CeraLink, CeraPad, CeraPlas, CSMP, CTVS, DeltaCap, DigiSiMic, ExoCore, FilterCap, FormFit, LeaXield, MiniBlue, MiniCell, MKD, MKK, MotorCap, PCC, PhaseCap, PhaseCube, PhaseMod, PhiCap, PowerHap, PQSine, PQvar, SIFERRIT, SIFI, SIKOREL, SilverCap, SIMDAD, SiMic, SIMID, SineFormer, SIOV, ThermoFuse, WindCap are **trademarks registered or pending** in Europe and in other countries. Further information will be found on the Internet at [www.tdk-electronics.tdk.com/trademarks](http://www.tdk-electronics.tdk.com/trademarks).

Release 2018-10

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## EPCOS / TDK:

|                                        |                                        |                                        |                                        |                                        |
|----------------------------------------|----------------------------------------|----------------------------------------|----------------------------------------|----------------------------------------|
| <a href="#"><u>B72500E0140K060</u></a> | <a href="#"><u>B72500E0140S260</u></a> | <a href="#"><u>B72500E0170K060</u></a> | <a href="#"><u>B72500E0200K060</u></a> | <a href="#"><u>B72500E0250K060</u></a> |
| <a href="#"><u>B72500E1140S260</u></a> | <a href="#"><u>B72500E2170K060</u></a> | <a href="#"><u>B72500E2170S160</u></a> | <a href="#"><u>B72500E5170S260</u></a> | <a href="#"><u>B72500E5200S160</u></a> |
| <a href="#"><u>B72510E0110K062</u></a> | <a href="#"><u>B72510E0140K062</u></a> | <a href="#"><u>B72510E0170K062</u></a> | <a href="#"><u>B72510E0200K062</u></a> | <a href="#"><u>B72510E0250K062</u></a> |
| <a href="#"><u>B72510E0300K062</u></a> | <a href="#"><u>B72510E1140S262</u></a> | <a href="#"><u>B72510E2170K062</u></a> | <a href="#"><u>B72510E9200S172</u></a> | <a href="#"><u>B72530E1140S262</u></a> |
| <a href="#"><u>B72580E0250K062</u></a> | <a href="#"><u>B72530E0250K062</u></a> | <a href="#"><u>B72520E0250K062</u></a> | <a href="#"><u>B72540E1300K062</u></a> | <a href="#"><u>B72540E0170K062</u></a> |
| <a href="#"><u>B72530E0170K062</u></a> | <a href="#"><u>B72520E0400K062</u></a> | <a href="#"><u>B72510E1250K062</u></a> | <a href="#"><u>B72540E0300K062</u></a> | <a href="#"><u>B72530E1250K062</u></a> |
| <a href="#"><u>B72520E1200K062</u></a> | <a href="#"><u>B72580E0140K062</u></a> | <a href="#"><u>B72580E0300K062</u></a> | <a href="#"><u>B72530E1200K062</u></a> | <a href="#"><u>B72540E0350K062</u></a> |
| <a href="#"><u>B72520E1250K062</u></a> | <a href="#"><u>B72540E3140S272</u></a> | <a href="#"><u>B72520E0350K062</u></a> | <a href="#"><u>B72530E0300K062</u></a> | <a href="#"><u>B72580E1140S262</u></a> |
| <a href="#"><u>B72520E0170K062</u></a> | <a href="#"><u>B72530E1170K062</u></a> | <a href="#"><u>B72590E8140S160</u></a> | <a href="#"><u>B72540E3300K072</u></a> | <a href="#"><u>B72540E0140K062</u></a> |
| <a href="#"><u>B72530E0200K062</u></a> | <a href="#"><u>B72580E3140S272</u></a> | <a href="#"><u>B72500E5250L060</u></a> | <a href="#"><u>B72520E0200K062</u></a> | <a href="#"><u>B72530E0350K062</u></a> |
| <a href="#"><u>B72520E1140S262</u></a> | <a href="#"><u>B72580E0200K062</u></a> | <a href="#"><u>B72590E0140L060</u></a> | <a href="#"><u>B72520E0140K062</u></a> | <a href="#"><u>B72530E0140K062</u></a> |
| <a href="#"><u>B72540E1140S262</u></a> | <a href="#"><u>B72580E0350K062</u></a> | <a href="#"><u>B72540E0250K062</u></a> | <a href="#"><u>B72540E0200K062</u></a> | <a href="#"><u>B72520E0300K062</u></a> |
| <a href="#"><u>B72580E0170K062</u></a> | <a href="#"><u>B72510E0350K062</u></a> | <a href="#"><u>B72540E0400K062</u></a> | <a href="#"><u>B72590E0170S160</u></a> |                                        |

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)