

LioN-Power Multi-protocol – 16 Digital Outputs, M12 L-coded or 7/8” Power Supply Connection, PROFINET, EtherNet/IP or EtherCAT

| Product Description | | |
|--|---|---|
| Type | 0980 ESL 392-121 | 0980 ESL 392-111 |
| |           |           |
| Description | LioN-P Multi-protocol module, PROFINET, EtherNet/IP or EtherCAT device, 16 digital outputs channels, M12 LAN connection, 4-poles, D-coded, M12 L-coded power supply, 5-poles | LioN-P Multi-protocol module, PROFINET, EtherNet/IP or EtherCAT device, 16 digital outputs channels, M12 LAN connection, 4-poles, D-coded, 7/8” power supply, 5-poles |
| Order No. | 934879002 | 934882002 |
| Technical Data | | |
| Protection Degree | IP65, IP67, IP69K (only if mounted and locked in combination with Hirschmann/Lumberg connector) | IP65, IP67 (only if mounted and locked in combination with Hirschmann/Lumberg connector) |
| Ambient Temperature (Operation) | -20 °C to +70 °C | |
| Dimensions (W x H x D) | 59.6 x 30.7 x 200 (mm) | 59.6 x 26.2 x 206 (mm) |
| Weight | 500 g | 520 g |
| Housing Material | Metal, Zinc Die-cast | |
| Bus System | | |
| Protocol | PROFINET /EtherNet/IP/EtherCAT I/O Device | |
| Connection | M12 LAN connection, 4-poles, D-coded | |
| Transmission Rate | Fast Ethernet (10/100 Mbit/s), Full Duplex | |
| Rotary Address Switches | Yes, 3x | |
| Power Supply | | |
| Nominal Voltage | 24 V DC (SELV/PELV) | |
| Nominal Voltage Range | 18 to 30 V DC | |
| Connection | M12, L-coded, 5-poles | 7/8”, 5-poles |
| Current Carrying Capacity of Connector | 16 A | 9 A |
| Current Consumption (typ.) | 160 mA (+/-20% at 24 V DC) | |
| Output Channels | | |
| Number of Channels | 16 | |
| Connection | M12, 5-poles, A-coded | |
| Channel Type | p-switching | |
| Nominal Voltage | 24 V DC via Uaux (actuator power supply) | |
| Output Current per Channel | max. 2 A | |
| Output Current per Module | max. 9 A | |
| Protective Circuit | Electronically: Overload protection, short-circuit protection | |
| Galvanically Isolated | Yes | |

Continued Next Page

Bit Assignment







| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|------------------------|----|----|----|----|----|----|----|----|
| M12 Output 16D0 | | | | | | | | |
| Byte 0 | 4B | 4A | 3B | 3A | 2B | 2A | 1B | 1A |
| Byte 1 | 8B | 8A | 7B | 7A | 6B | 6A | 5B | 5A |

Lion-Power Multi-protocol – 16 Digital Outputs, M12 L-coded or 7/8" Power Supply Connection, PROFINET, EtherNet/IP or EtherCAT

Diagnostic Indication | 0980 ESL 392-121 and 0980 ESL 392-111

| LED | Indicator | Condition |
|---------------------|---|--|
| 1...8 A | Yellow | Channel status |
| 1...8 DIA A | Red | Periphery error |
| 1...8 B | White | Channel status |
| 1...8 DIA B | Red | Periphery error |
| P1 Lnk/Act | Green Green blinking Off | Connection to an Ethernet device I/O device exchanging data No connection to another device |
| P2 Lnk/Act | Green Yellow blinking Off | Connection to an Ethernet device I/O device exchanging data No connection to another device |
| PROFINET | | |
| BF | Red Off | Bus error, no data exchange with I/O controller No error message |
| DIA | Red Red blinking Off | Common indicator for periphery errors Firmware update No error message |
| EtherNet/IP | | |
| MS (Module status) | Green Green blinking Red/green blinking Red blinking Off | Device is ready for operating Wrong configuration Self test is running Firmware update IP address is available |
| NS (Network status) | Green blinking Green Red blinking Red Red/green blinking Off | IP address is available Connection to master is available At least one connection has timed out IP address is already being used by another device Self test is running Device is switched off/device has no IP address |
| EtherCAT | | |
| RUN | Green | Device is in state OPERATIONAL |
| | Green blinking | Device is in state PRE-OPERATIONAL |
| | Green single flash | Device is in state SAFE-OPERATIONAL |
| | Green flickerng | Device is in state BOOTSTRAP |
| | Off | Device is in state INIT |
| ERR | Red | "An critical communication or application controller error has occurred " |
| | Red double flash | An application watchdog timeout has occurred. |
| | Red single flash | "Slave device application has changed the EtherCAT state autonomously, due to local error" |
| | Red blinking | General Configuration Error |
| | Red flickering | Booting Error was detected |
| | Off | No error |
| Us | Green | Voltage $19\text{ V} \leq U_s \leq 30\text{ V}$ |
| | Red | $U_s \text{ Voltage} < 19\text{ V}$ or $U_s > 30\text{ V}$ |

Pin Assignment


| M12 I/O Port, A-coded | M12 Power Supply, L-coded | Power Supply 7/8" | M12 LAN Connection, D-coded |
|--|--|--|--|
|  <ul style="list-style-type: none"> 1 = +24 V 2 = IN B 3 = GND (0 V) 4 = IN A 5 = FE |  <ul style="list-style-type: none"> 1 = +24 V 2 = GND UL 3 = GND (0 V) 4 = +24 V UL 5 = FE |  <ul style="list-style-type: none"> 1 = GND UL 2 = GND (0 V) 3 = FE 4 = +24 V 5 = +24 V UL |  <ul style="list-style-type: none"> 1 = TD+ 2 = RD+ 3 = TD- 4 = RD- |
| |  |  | |

Continued Next Page


LioN-Power Multi-protocol – 16 Digital Outputs, M12 L-coded or 7/8” Power Supply Connection, PROFINET, EtherNet/IP or EtherCAT

Technical Drawing

0980 ESL 392-121

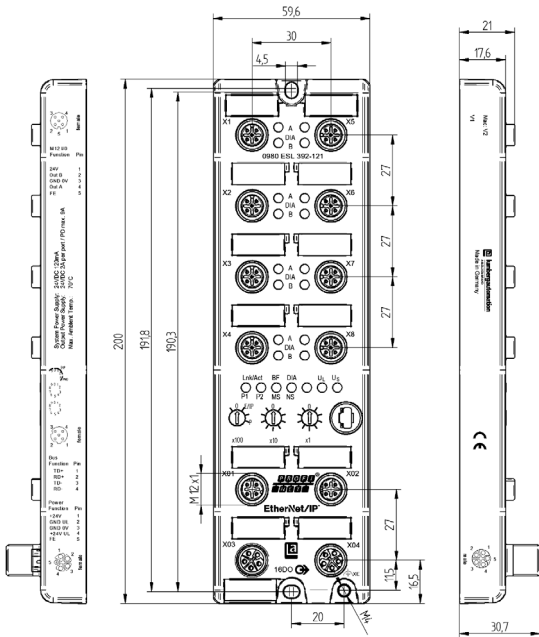

0980 ESL 392-111

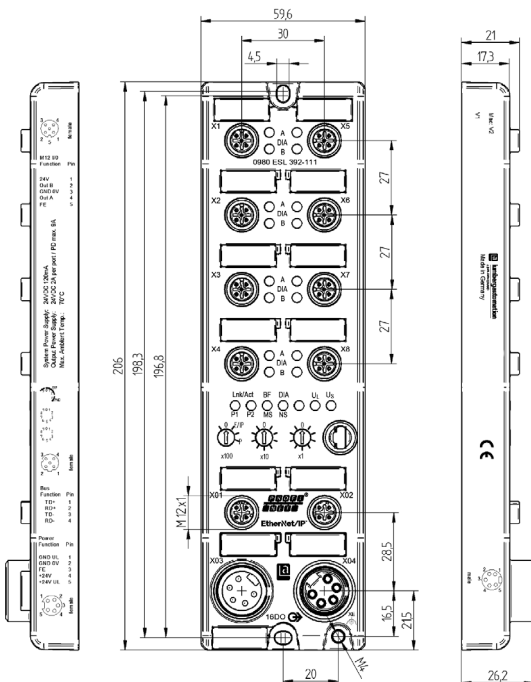

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru