


W11 Relay V23101

- Multi purpose relay
- Small size permitting high packing density
- 1 form C contact (1 CO, 1 changeover contact)
- 200mW and 450mW coils
- 1A and 3A contacts
- High shock resistance of 30g
- Ambient temperature for sensitive version up to 85°C
- Immersion cleanable

Typical applications

Security devices, electric door openers, duplex intercommunication systems, measurement and controls




Approvals

UL 508 File No. E 111441
Technical data of approved types on request

Contact Data	1.25A	3A
Contact arrangement	1 form C (CO)	
Max. switching voltage	120VDC, 125VAC	
Rated current	1.25A	3A
Limiting continuous current, 85°C	1.25A	3A
Switching power	30W, 62.5VA	72W, 360VA
Contact material	AgPd, gold plated AgNi, gold plated	AgNi
Min. recommended contact load	10mA at 20 mV	
Minimum switching voltage	100µV	
Initial contact resistance	100mΩ at 10mA, 20mV	
Frequency of operation, without load max.	20 operations/s	
Operate / release time max.	7ms/5ms	
Bounce time max., form A/form B	2/10ms	
Electrical endurance, standard version		
at 24VDC / 1.25A	min. 3x10 ⁵ ops.	
at 24VDC / 3A		min. 2x10 ⁵ ops.
at 120VAC / 1.25A	min. 1.5x10 ⁵ ops.	
at 120VAC / 3A		min. 4x10 ⁵ ops.
sensitive version		
at 24VDC / 1.25A	min. 2x10 ⁵ ops.	
at 24VDC / 3A		min. 1x10 ⁵ ops.
at 120VAC / 1.25A	min. 1x10 ⁵ ops.	
at 120VAC / 3A		min. 3x10 ⁵ ops.
Mechanical endurance	typ. 10x10 ⁶ operations	

Max. DC load breaking capacity

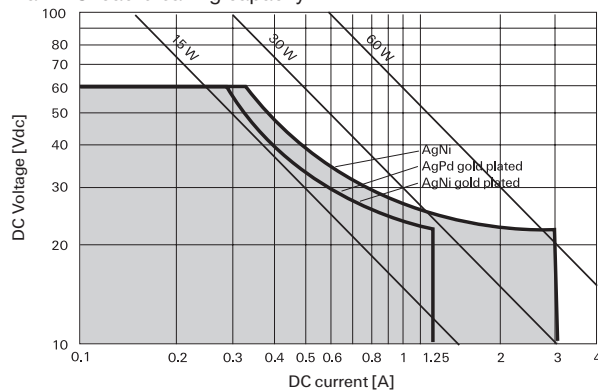


Coil Data

Magnetic system	neutral
Coil voltage range	1.5 to 24VDC
Max. coil temperature	130°C
Thermal resistance	< 125K/W

Coil versions, monostable


Coil code	Rated voltage VDC	Operate voltage VDC _{min.}	Limiting Voltage VDC _{max.}	Release voltage VDC _{min.}	Coil resistance Ω±10%	Rated coil power mW
Standard coil, 450mW						
001	1.5	1.3	2.6	0.15	6	375
002	3	2.1	4.7	0.30	20	450
003	5	3.5	7.9	0.50	56	446
004	6	4.2	9.5	0.60	80	450
005	9	6.3	14.2	0.90	180	450
006	12	8.4	19.0	1.20	320	450
007	24	16.8	38.0	2.40	1280	450
Sensitive coil, 200mW						
101	1.5	1.1	3.6	0.15	12	188
102	3	2.3	7.1	0.30	45	200
103	5	3.8	11.6	0.50	120	208
104	6	4.5	14.2	0.60	180	200
105	9	6.8	21.2	0.90	400	203
106	12	9.0	28.0	1.20	700	206
107	24	18.0	56.0	2.40	2800	206
108	18	13.5	33.0	1.80	1620	200

All figures are given for coil without pre-energization, at ambient temperature +23°C.

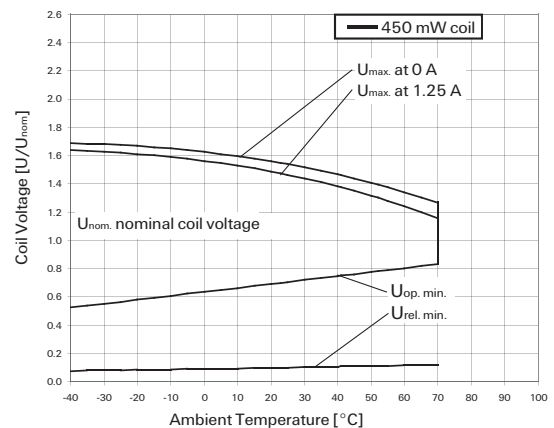

W11 Relay V23101 (Continued)

Coil Data (continued)

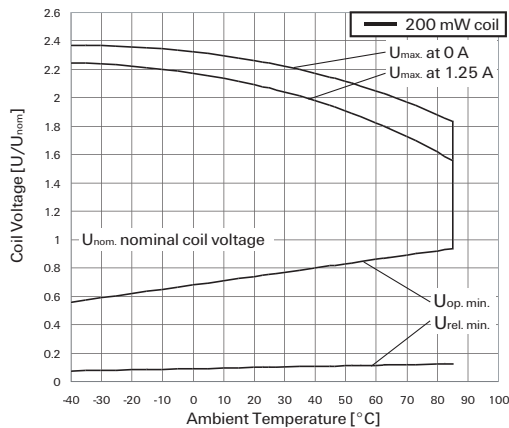

Coil operative range graphs

U _{nom}	Nominal coil voltage
U _{max}	Upper limit of the operative range of the coil voltage (limiting voltage) when coils are continuously energized
U _{op. min.}	Lower limit of the operative range of the coil voltage (reliable operate voltage)
U _{rel. min.}	Lower limit of the operative range of the coil voltage (reliable release voltage)

Insulation Data

Initial dielectric strength	
between open contacts	750Vrms
between contact and coil	1000Vrms
Initial insulation resistance at 500VDC	> 109Ω
Capacitance	
between open contacts	max. 2pF
between contact and coil	max. 10pF

Other Data


Material compliance: EU RoHS/ELV, China RoHS, REACH, Halogen content refer to the Product Compliance Support Center at www.te.com/customersupport/rohssupportcenter

Ambient temperature	-40 to +85°C
Category of environmental protection	IEC 61810
Degree of protection, IEC 60529	RT III - immersion cleanable
Vibration resistance (functional)	IP 67
Shock resistance (functional)	10g, 10 to 200Hz
Shock resistance (destructive)	IEC 60068-2-27 (half sine)
Terminal type	30g
Weight	100g
Resistance to soldering heat THT	PCB-THT
Ultrasonic cleaning	max. 4g
Packaging/unit	265°C/10s
	not recommended
	tube/25 pcs.
	box/625 pcs.


Terminal assignment

TOP view on component side of PCB


6 pin version with symmetrical coil assignment
V23101-D0xxx-Axxx




6 pin version with asymmetrical coil assignment
V23101-D0xxx-Bxxx



5 pin version with symmetrical coil assignment
V23101-D1xxx-Axxx




5 pin version with asymmetrical coil assignment
V23101-D1xxx-Bxxx




PCB layout

TOP view on component side of PCB

6 pin version




5 pin version




W11 Relay V23101 (Continued)

Dimensions



Packing

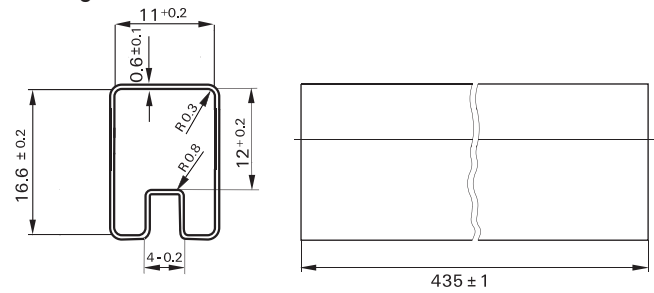

Product code structure

Typical product code **V23101 D0 104 B 401**

Type	
V23101 W11 Series Signal Relay	
Pinning	
D0	6 pin version (standard)
D1	5-pin version (without pin no. 6)
Coil	
Coil code: please refer to coil versions table	
Coil terminal assignment	
A	Symmetrical coil assignment
B	Asymmetrical coil assignment
Contacts	
201	1 form C (CO), AgPd, gold plated
301	1 form C (CO), AgNi
401	1 form C (CO), AgNi, gold plated

W11 Relay V23101 (Continued)

Product Code	Pinning	Coil	Coil voltage	Coil assignment	Cont.material	Part number	
V23101-D0001-A201	6 pins version	Standard coil	1.5VDC	Symmetrical	AgPd, Au plated	1393779-1	
V23101-D0002-A201			3VDC			1393779-3	
V23101-D0003-A201			5VDC			1393779-5	
V23101-D0004-A201			6VDC			1393779-8	
V23101-D0005-A201			9VDC	Asymmetrical		1-1393779-1	
V23101-D0006-A201			12VDC			1-1393779-3	
V23101-D0007-A201			24VDC			1-1393779-8	
V23101-D0001-B201			1.5VDC			1393779-2	
V23101-D0002-B201			3VDC			1393779-4	
V23101-D0003-B201			5VDC			1393779-6	
V23101-D0004-B201			6VDC			1-1393779-0	
V23101-D0005-B201			9VDC			1-1393779-2	
V23101-D0006-B201			12VDC			1-1393779-6	
V23101-D0007-B201			24VDC			2-1393779-0	
V23101-D0006-A301			12VDC	Symmetrical	AgNi	4-1419172-4	
V23101-D0003-B301			5VDC	Asymmetrical		1393779-7	
V23101-D0006-B301			12VDC	Asymmetrical		1-1393779-7	
V23101-D0007-B301			24VDC			2-1393779-1	
V23101-D0003-A401	5VDC	Symmetrical	AgNi, Au plated	1422028-2			
V23101-D0006-A401	12VDC	Asymmetrical		1422028-3			
V23101-D0007-A401	24VDC			1422028-5			
V23101-D0006-B401	12VDC			1422028-4			
V23101-D0007-B401	24VDC	5 pins	Symmetrical	AgPd, Au plated	1422028-6		
V23101-D1006-A201	12VDC				4-1393779-1		
V23101-D1003-B201	5VDC				Asymmetrical	4-1393779-0	
V23101-D1006-B201	12VDC				Asymmetrical	4-1393779-2	
V23101-D1007-B201	24VDC					1413012-1	
V23101-D1006-A401	12VDC				Symmetrical	AgNi, Au plated	1-1422028-2
V23101-D1006-B401					Asymmetrical		1-1422028-3
V23101-D0101-A201	6 pins version				Sensitive coil	1.5VDC	Symmetrical
V23101-D0102-A201		3VDC	Asymmetrical	2-1393779-4			
V23101-D0103-A201		5VDC		2-1393779-6			
V23101-D0104-A201		6VDC		2-1393779-8			
V23101-D0105-A201		9VDC		3-1393779-0			
V23101-D0106-A201		12VDC		3-1393779-2			
V23101-D0107-A201		24VDC		3-1393779-5			
V23101-D0108-A201		18VDC		3-1393779-9			
V23101-D0101-B201		1.5VDC		2-1393779-3			
V23101-D0102-B201		3VDC		2-1393779-5			
V23101-D0103-B201		5VDC		2-1393779-7			
V23101-D0104-B201		6VDC		2-1393779-9			
V23101-D0105-B201		9VDC	3-1393779-1				
V23101-D0106-B201		12VDC	3-1393779-3				
V23101-D0107-B201		24VDC	3-1393779-8				
V23101-D0106-A301		12VDC	Symmetrical	AgNi		1422037-2	
V23101-D0107-A301		24VDC	Asymmetrical			3-1393779-7	
V23101-D0106-B301		12VDC				3-1393779-4	
V23101-D0103-A401	5VDC	Symmetrical	AgNi, Au plated	1422028-7			
V23101-D0106-A401	12VDC	Asymmetrical		1422028-8			
V23101-D0107-A401	24VDC			1422028-9			
V23101-D0108-A401	18VDC			1-1422028-1			
V23101-D0107-B401	24VDC	Asymmetrical		1-1422028-0			
V23101-D1106-A201	12VDC	Symmetrical		AgPd, Au plated	4-1393779-3		
V23101-D1107-A201	24VDC	Asymmetrical			4-1393779-6		
V23101-D1106-B201	12VDC			4-1393779-4			
V23101-D1107-B201	24VDC			4-1393779-7			
V23101-D1106-B301	12VDC	Symmetrical	AgNi	4-1393779-5			
V23101-D1106-A401				AgNi, Au plated	1-1422028-4		
V23101-D1106-B401					1-1422028-5		

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru