

NOTES: (G)

1. DRAWING TO BE INTERPRETED IN ACCORDANCE WITH THE CURRENT REVISION OF ASME Y14.5.
2. THIS PART/PRODUCT IS TO BE MANUFACTURED WITH THE LATEST APPLICABLE REGULATIONS OF EC DIRECTIVES FOR THE RESTRICTION OF THE USE OF HAZARDOUS SUBSTANCES IN ELECTRICAL AND ELECTRONIC EQUIPMENT (ROHS), WASTE ELECTRICAL AND ELECTRONIC EQUIPMENT (WEEE) AND REGISTRATION, EVALUATION, AUTHORIZATION AND RESTRICTION OF CHEMICALS (REACH)

3. LABEL TO INCLUDE:

PART NUMBER

"OTTO 21649"

DATE CODE (YYWW)

4. OUTPUTS ARE FROM THE CENTER TO THE FULL

TRAVEL POSITION IN EACH DIRECTION.

OPTIONS "AA", "BB", "CC", "DD", "EE", "FF" PROVIDE INCREASED VOLTAGE IN +X, +Y; AND DECREASING VOLTAGE IN -X, -Y DIRECTION FROM ONE OUTPUT PER AXIS.

OPTIONS "GG" AND "HH" PROVIDE INCREASING VOLTAGES .

IN ALL DIRECTIONS (+X, +Y, -X, -Y) FROM 2 OUTPUTS PER AXIS.

5. OPTIONS "BB" AND "EE" PROVIDE REDUNDANT OUTPUT 2

WHICH DUPLICATES OUTPUT 1

OPTIONS "CC" AND "FF" PROVIDE REDUNDANT OUTPUT 2

WHICH IS INVERSE OF OUTPUT 1

6. FULL BOOT VERSION SHOWN AS DEFAULT. SEE PAGE 4 FOR

ALTERNATIVE SWITCH/BOOT STYLES.

7. GATED IS RESTRICTED MOVEMENT IN Y AXIS ONLY.

8. USE N FOR FULL BOOT, Z-AXIS, & NO PUSHBUTTON OPTIONS.

9. 1-9 USED ONLY FOR PUSHBUTTON OPTIONS.

NOT APPLICABLE IN Z-AXIS.

(G) JHT-

SWITCH / BOOT STYLE (6)

- 11 = WITH P9 PUSHBUTTON & FULL BOOT
12 = WITH P9 PUSHBUTTON & HALF BOOT
21 = WITHOUT PUSHBUTTON & FULL BOOT
32 = Z AXIS WITH DETENT & HALF BOOT, SINGLE OUTPUT
42 = Z AXIS WITH FRICTION HOLD & HALF BOOT, SINGLE OUTPUT
52 = Z AXIS RETURN TO CENTER & HALF BOOT, SINGLE OUTPUT
62 = Z AXIS WITH DETENT & HALF BOOT, DUAL OUTPUT
72 = Z AXIS WITH FRICTION HOLD & HALF BOOT, DUAL OUTPUT
82 = Z AXIS RETURN TO CENTER & HALF BOOT, DUAL OUTPUT
92 = Z AXIS WITH DETENT & HALF BOOT, SINGLE OUTPUT WITH 2 PUSHBUTTONS
A2 = Z AXIS WITH FRICTION HOLD & HALF BOOT, SINGLE OUTPUT WITH 2 PUSHBUTTONS
B2 = Z AXIS RETURN TO CENTER & HALF BOOT, SINGLE OUTPUT WITH 2 PUSHBUTTONS
C2 = Z AXIS WITH DETENT & HALF BOOT, DUAL OUTPUT WITH 2 PUSHBUTTONS
D2 = Z AXIS WITH FRICTION HOLD & HALF BOOT, DUAL OUTPUT WITH 2 PUSHBUTTONS
E2 = Z AXIS RETURN TO CENTER & HALF BOOT, DUAL OUTPUT WITH 2 PUSHBUTTONS

GATING

- 1 = GATED; SINGLE AXIS -- RETURN TO CENTER (7)
2 = (SPARE)
3 = OMNI DIRECTIONAL; ROUND SMOOTH FEEL
4 = OMNI DIRECTIONAL; ROUND ON-AXIS AND OFF-AXIS, GUIDED FEEL
5 = OMNI DIRECTIONAL; ROUND ON-AXIS, GUIDED FEEL

OPERATE FORCE

1 = 16 OZ

JOYSTICK OUTPUT 1 (4)

- AA = 2.5+/-2.0 VDC
BB = 2.5+/-2.0 VDC
CC = 2.5+/-2.0 VDC
DD = 2.5+/-1.5 VDC
EE = 2.5+/-1.5 VDC
FF = 2.5+/-1.5 VDC
GG = 0.5-4.5 VDC
HH = 1-4 VDC

JOYSTICK OUTPUT 2 (5)


- NONE
2.5+/-2.0 VDC
2.5+/-2.0 VDC
NONE
2.5+/-1.5 VDC
2.5+/-1.5 VDC
0.5-4.5 VDC
1-4 VDC

TERMINATION

1 = 24 AWG WIRE LEADS

P9 BUTTON COLOR


- N = NONE (8)
1 = RED
2 = BLACK
3 = ORANGE
4 = YELLOW
5 = GREEN
6 = BLUE
7 = PURPLE
8 = GRAY
9 = WHITE

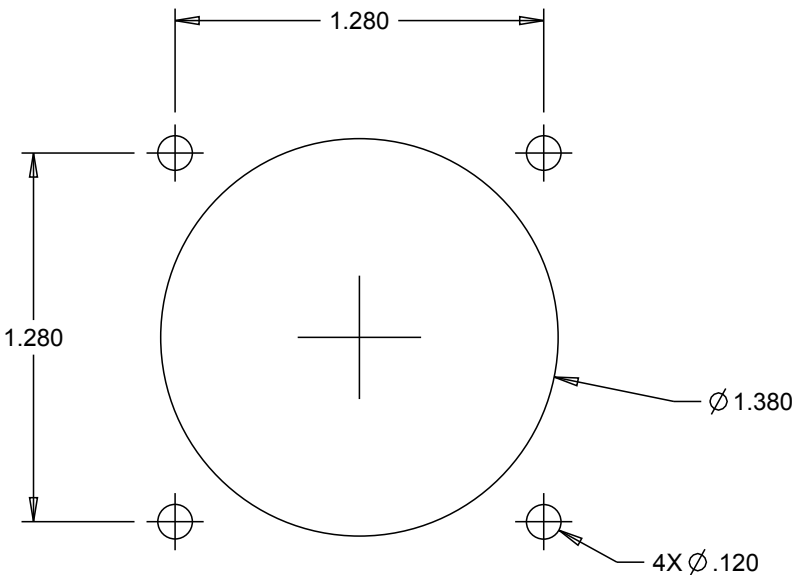



SUGGESTED PANEL OPENING
MAX. PANEL THICKNESS OF 0.140

SLOT DENOTES
+Y

4X #4-40 UNC-2B
THREADED INSERTS
.375 THD. DEPTH

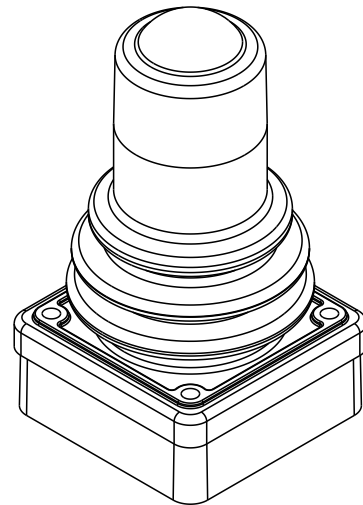

SCALE 4:5

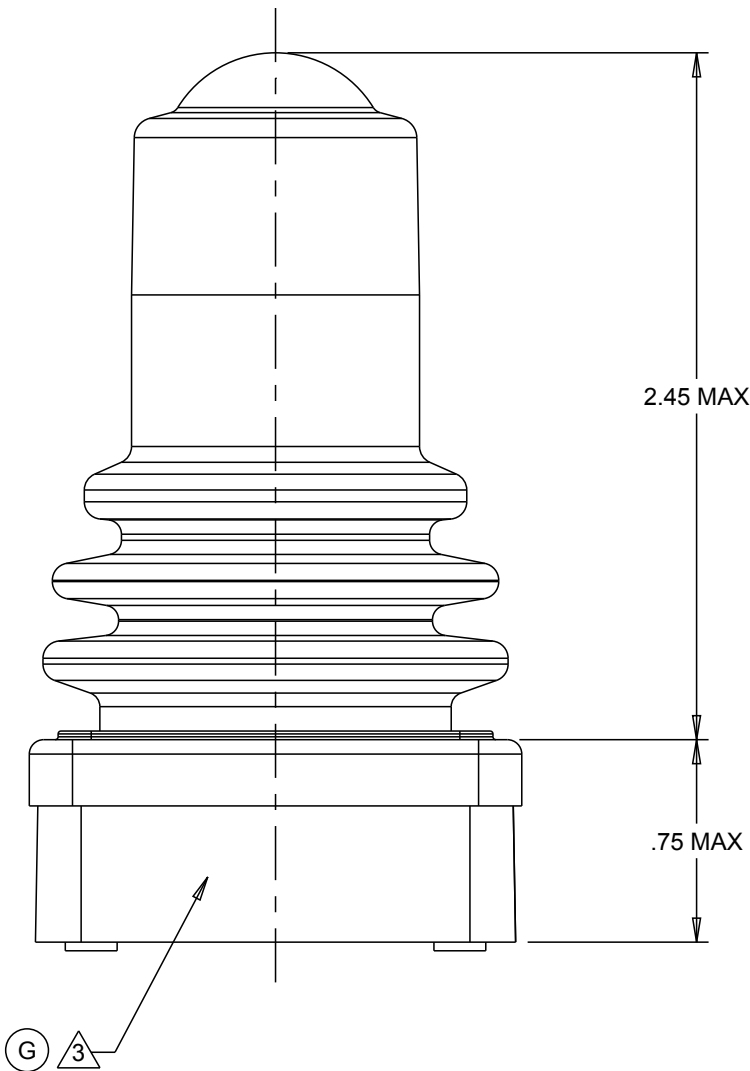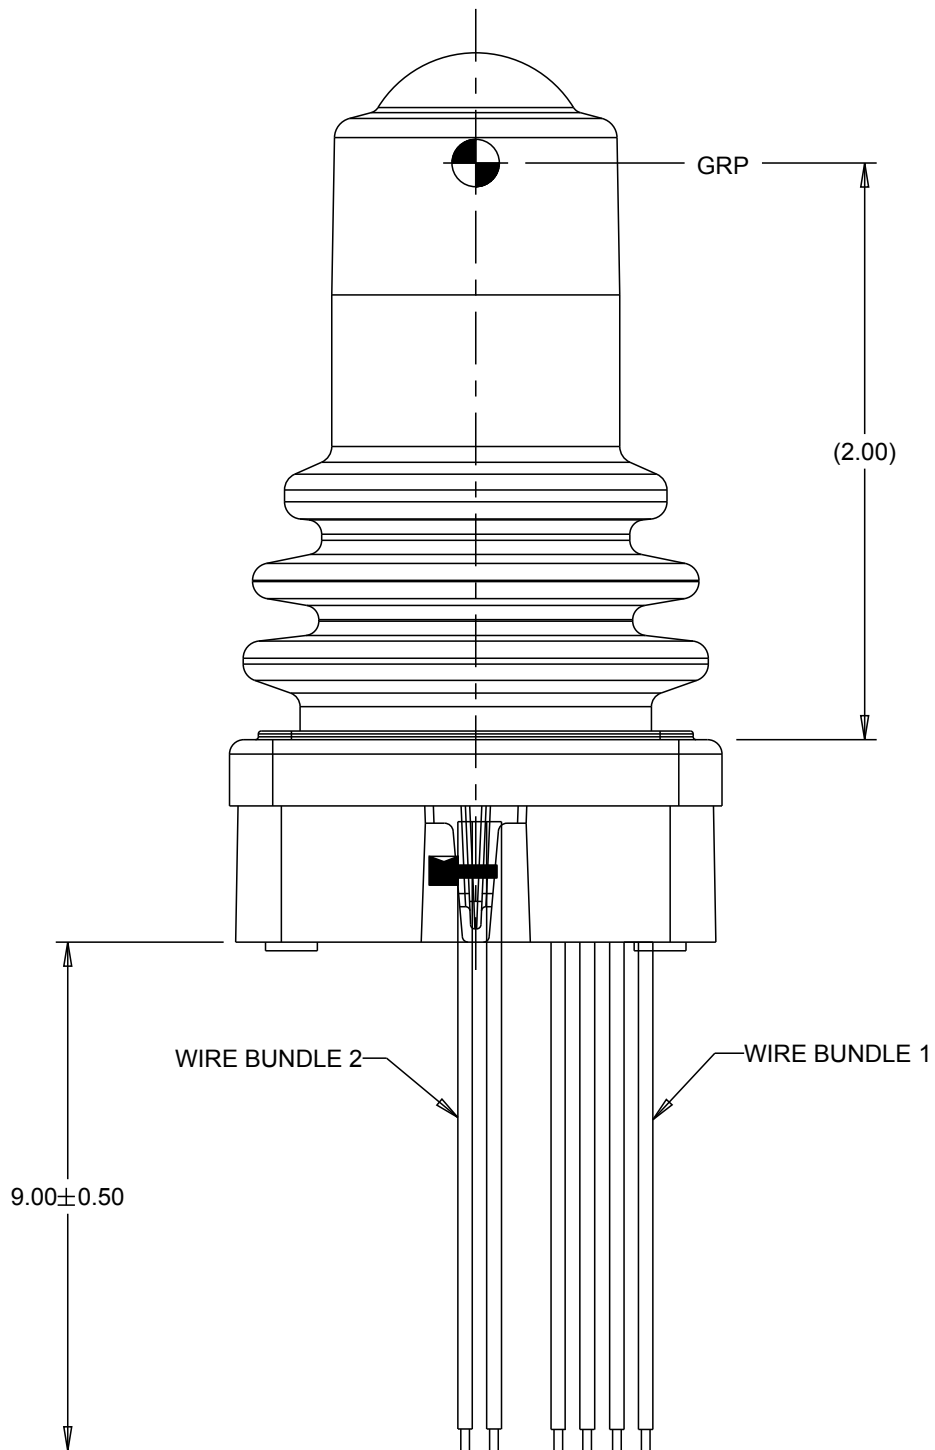

WIRES NOT SHOWN IN
ALL VIEWS FOR CLARITY

MANUFACTURING
SPC
SPECIAL REQUIREMENT

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES.
TOLERANCES:
.XX ±.03
.XXX ±.010
ANGLES ±2°
DO NOT SCALE

OTTO
CARPENTERSVILLE, ILLINOIS USA

THIS DOCUMENT IS THE CONFIDENTIAL PROPERTY OF OTTO ENGINEERING, INC.. IT IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF OTTO ENGINEERING, INC..

DESCRIPTION

JHT, LINEAR HALL EFFECT
JOYSTICK

DRWN. JLW
CHKD. MRM
APPD. AH

SIZE
C

FSCM NO
21649

DRAWING NO.
JHT-_____

REV.
G


THIRD ANGLE
PROJECTION

Scale 3:2

Sheet 1 OF 4


PRODUCT SPECIFICATIONS				
ELECTRICAL:				
JOYSTICK				
RATED AT Vcc = 5V @ 20° C LOAD = 1ma (4.7KΩ)	UNITS	MIN	TYP	MAX
SUPPLY VOLTAGE	VDC	4.50	5.00	5.50
OUTPUT VOLTAGE TOLERANCE AT CENTER (SEE APPROPRIATE GRAPH FOR OUTPUT VOLTAGES)	VDC @5V Vcc	-.25	N/A	+ .25
OUTPUT VOLTAGE TOLERANCE FULL TRAVEL (SEE APPROPRIATE GRAPH FOR OUTPUT VOLTAGES)	VDC @5V Vcc	-.25	N/A	+ .25
SUPPLY CURRENT PER OUTPUT B=0, Vcc=5V, Io=0	mA	N/A	10	12
OUTPUT IMPEDANCE	kΩ	N/A	1.0	N/A
P9				
CIRCUIT	SPST-NO-DB			
JOYSTICK Z AXIS RETURN TO CENTER				
RATED AT Vcc = 5V @ 20° C LOAD = 1ma (4.7KΩ)	UNITS	MIN	TYP	MAX
SUPPLY VOLTAGE	VDC	4.50	5.00	5.50
OUTPUT 1+2 VOLTAGE, +Z, -Z 0° DEFLECTION	VDC @5V Vcc	2.25	2.50	2.75
OUTPUT 1+2 AT FULL TRAVEL +Z DIRECTION	VDC @5V Vcc	4.25	4.50	4.55
OUTPUT 1+2 AT FULL TRAVEL -Z DIRECTION	VDC @5V Vcc	0.45	0.50	0.75
SUPPLY CURRENT (PER SENSOR) B=0, Vcc=5V, Io=0	mA	NA	NA	10
OUTPUT SOURCE CURRENT LIMIT B=-X*, Vo=0	mA	-1.0	NA	1.0
JOYSTICK Z AXIS FRICTION				
RATED AT Vcc = 5V @ 20° C LOAD = 1ma (4.7KΩ)	UNITS	MIN	TYP	MAX
SUPPLY VOLTAGE	VDC	4.50	5.00	5.50
OUTPUT 1+2 AT FULL TRAVEL +Z DIRECTION	VDC @5V Vcc	4.25	4.50	4.55
OUTPUT 1+2 AT FULL TRAVEL -Z DIRECTION	VDC @5V Vcc	0.45	0.50	0.75
SUPPLY CURRENT (PER SENSOR) B=0, Vcc=5V, Io=0	mA	NA	NA	10
OUTPUT SOURCE CURRENT LIMIT B=-X*, Vo=0	mA	-1.0	NA	1.0
JOYSTICK Z AXIS 3 DETENT				
RATED AT Vcc = 5V @ 20° C LOAD = 1ma (4.7KΩ)	UNITS	MIN	TYP	MAX
SUPPLY VOLTAGE	VDC	4.50	5.00	5.50
OUTPUT 1+2 VOLTAGE, +Z, -Z 0° DEFLECTION	VDC @5V Vcc	2.25	2.50	2.75
OUTPUT 1+2 AT FULL TRAVEL +Z DIRECTION	VDC @5V Vcc	4.25	4.50	4.55
OUTPUT 1+2 AT FULL TRAVEL -Z DIRECTION	VDC @5V Vcc	0.45	0.50	0.75
SUPPLY CURRENT (PER SENSOR) B=0, Vcc=5V, Io=0	mA	NA	NA	10
OUTPUT SOURCE CURRENT LIMIT B=-X*, Vo=0	mA	-1.0	NA	1.0
MECHANICAL:				
JOYSTICK				
MECHANICAL LIFE ALL DIRECTIONS	5,000,000 CYCLES			
TRAVEL ANGLE	DEGREES	18	20	22
OVER TRAVEL ANGLE	DEGREES	0.5	1.0	1.5
MAX ALLOWABLE RADIAL FORCE (STYLES 11, 12, & 21) @ GRP	LBS	N/A	N/A	50
MAX ALLOWABLE RADIAL FORCE (ALL OTHER STYLES) @ GRP	LBS	N/A	N/A	15
P9				
MECHANICAL LIFE	1,000,000 CYCLES			
OPERATING FORCE @ 20° C	OZ	8	12	16
KEYPAD				
MECHANICAL LIFE	1,000,000 CYCLES			
OPERATIONAL FORCE	OZ	2	4	6
Z AXIS				
MECHANICAL LIFE ALL DIRECTIONS	1,000,000 CYCLES			
TRAVEL ANGLE (TOTAL)	DEGREES	56	60	64
OPERATIONAL TORQUE WITH DETENT	IN-OZ	10	20	30
OPERATIONAL TORQUE WITH FRICTION HOLD	IN-OZ	1	4	7
OPERATIONAL TORQUE RETURN TO CENTER	IN-OZ	8	16	24
MAXIMUM ALLOWABLE ROTATIONAL TORQUE	IN-LBS	N/A	N/A	15
ENVIRONMENTAL:				
OPERATING TEMPERATURE	°C	-40	20	85
KEYPAD				
ELECTRONICS SEAL INTEGRITY	WATERTIGHT TO IP65			
JOYSTICK				
ELECTRONICS SEAL INTEGRITY	WATERTIGHT TO IP68S, 1 METER			
EMI/RFI WITHSTAND	PER SAE J1113 CONTACT FACTORY FOR DETAILS			
MATERIAL:				
HOUSING	THERMOPLASTIC, BLACK			
BELLOWS	SILICONE, BLACK			
HARDWARE	NOT PROVIDED			

G

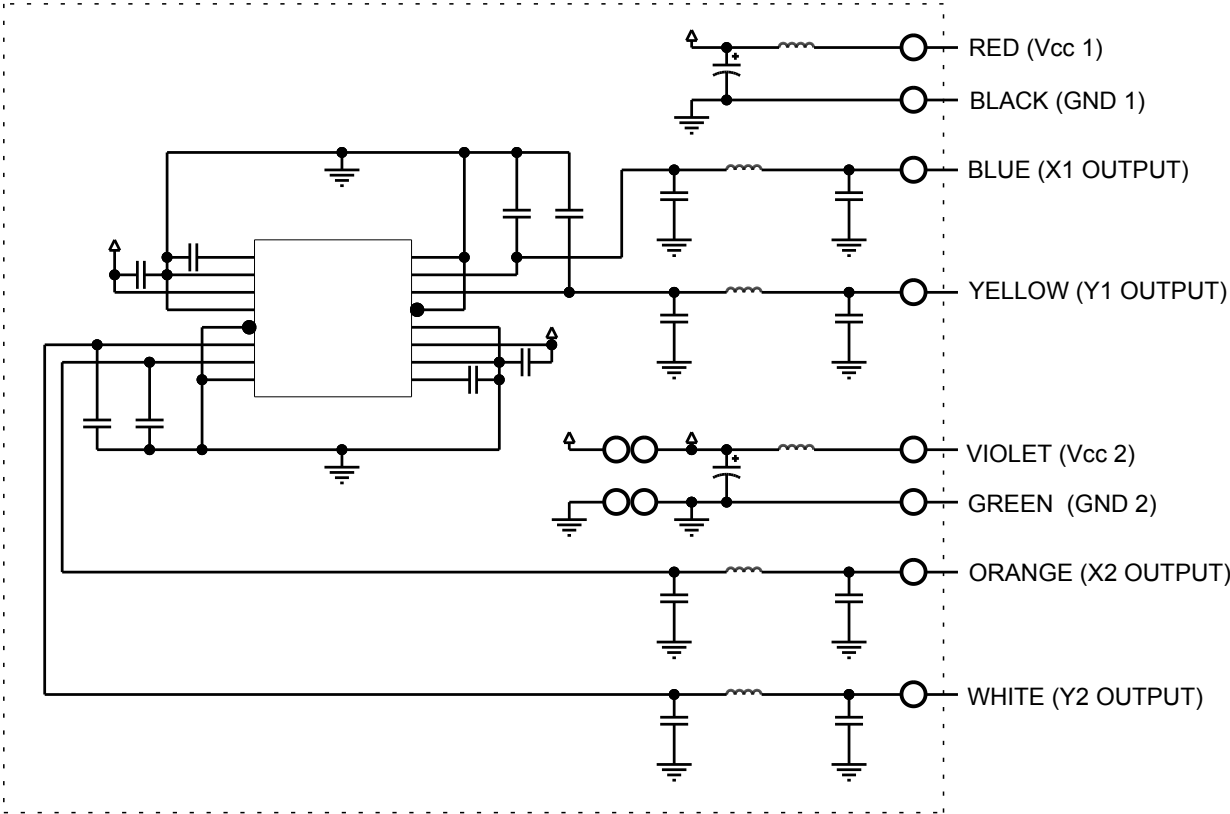


GENERAL SCHEMATIC

(WIRE BUNDLE 1)
ALL OUTPUTS ARE NOT PRESENT IN ALL CONFIGURATIONS

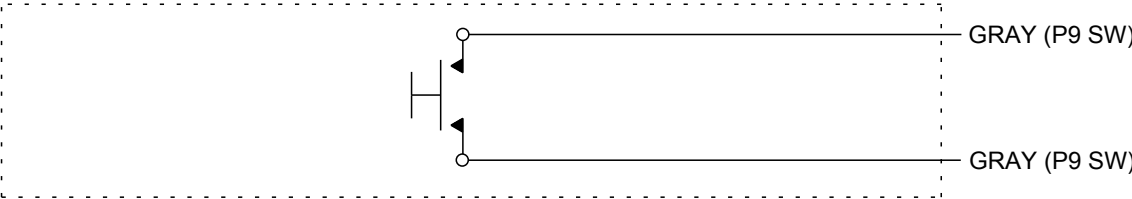


PUSHBUTTON SCHEMATIC

(WIRE BUNDLE 2)
ALL WIRES ARE NOT PRESENT IN ALL CONFIGURATIONS

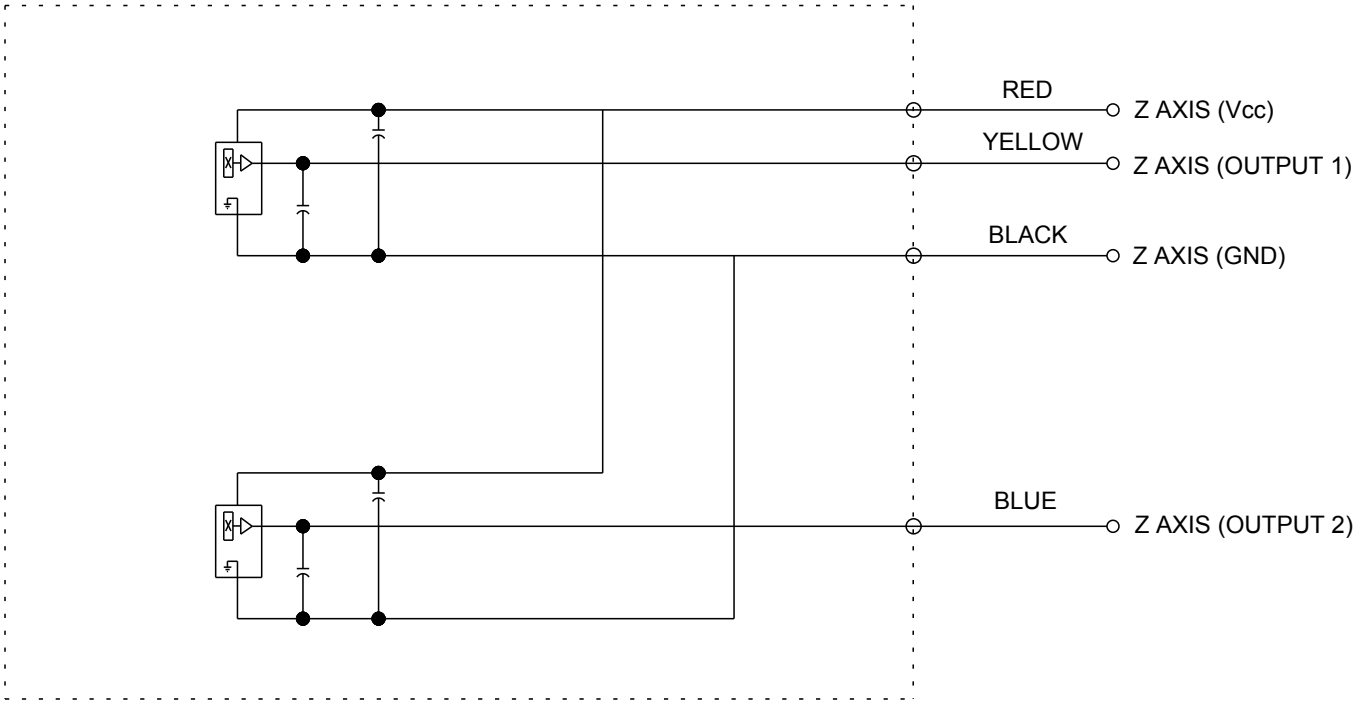

Z AXIS SCHEMATIC

(WIRE BUUNDLE 2)
ALL WIRES ARE NOT PRESENT IN ALL CONFIGURATIONS

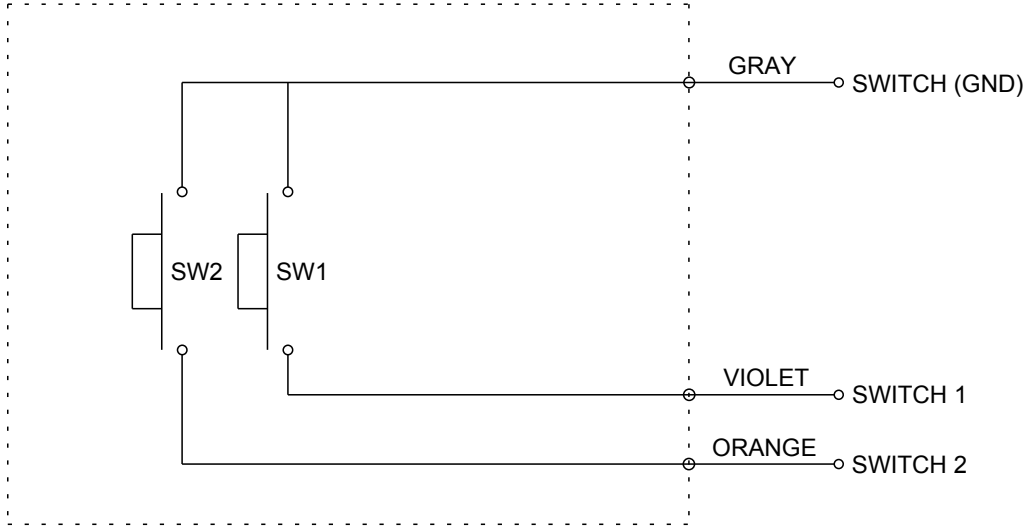

KEYPAD SCHEMATIC

(WIRE BUNDLE 2)
ALL WIRES ARE NOT PRESENT IN ALL CONFIGURATIONS

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES.
TOLERANCES ARE AS LISTED.
MUST BE FREE FROM BURRS
AND SHARP EDGES

TOLERANCES
.XX ±.03
.XXX ±.010
ANGLES ±2°
DO NOT SCALE DRAWING

THIS DOCUMENT IS THE CONFIDENTIAL
PROPERTY OF OTTO ENGINEERING, INC..
IT IS NOT TO BE USED IN ANY WAY
DETRIMENTAL TO THE INTERESTS
OF OTTO ENGINEERING, INC..

DRWN. JLW
CHKD. MRM
APPD. AH

SIZE
C

FSCM NO
21649

DRAWING NO.
JHT-_____


REV.
G

THIRD ANGLE
PROJECTION


Scale 1:1

Sheet 2 OF 4


OPTION AA

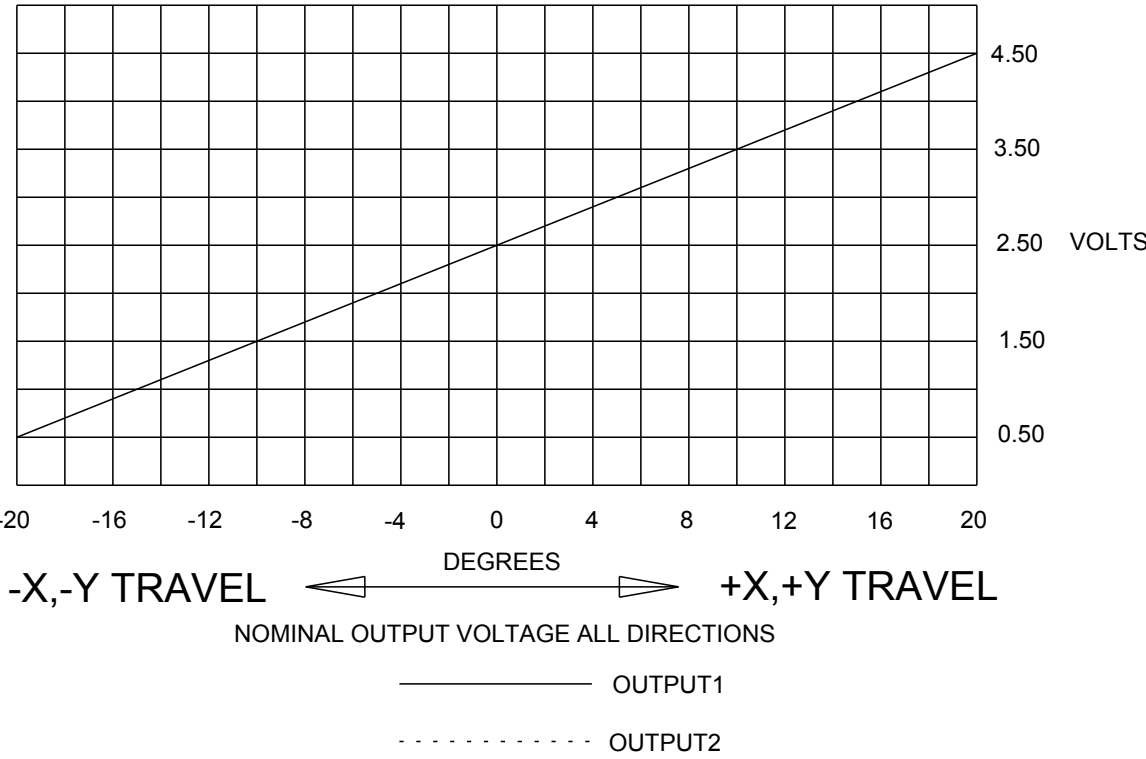


OPTION BB

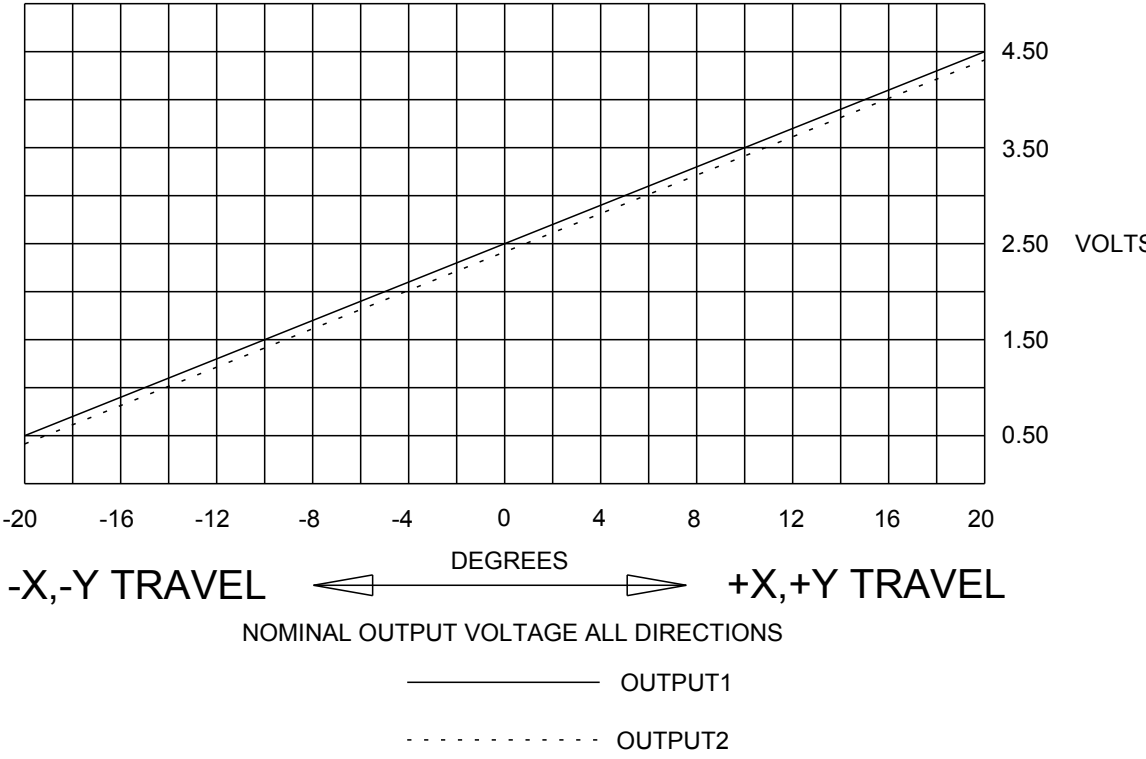


OPTION CC

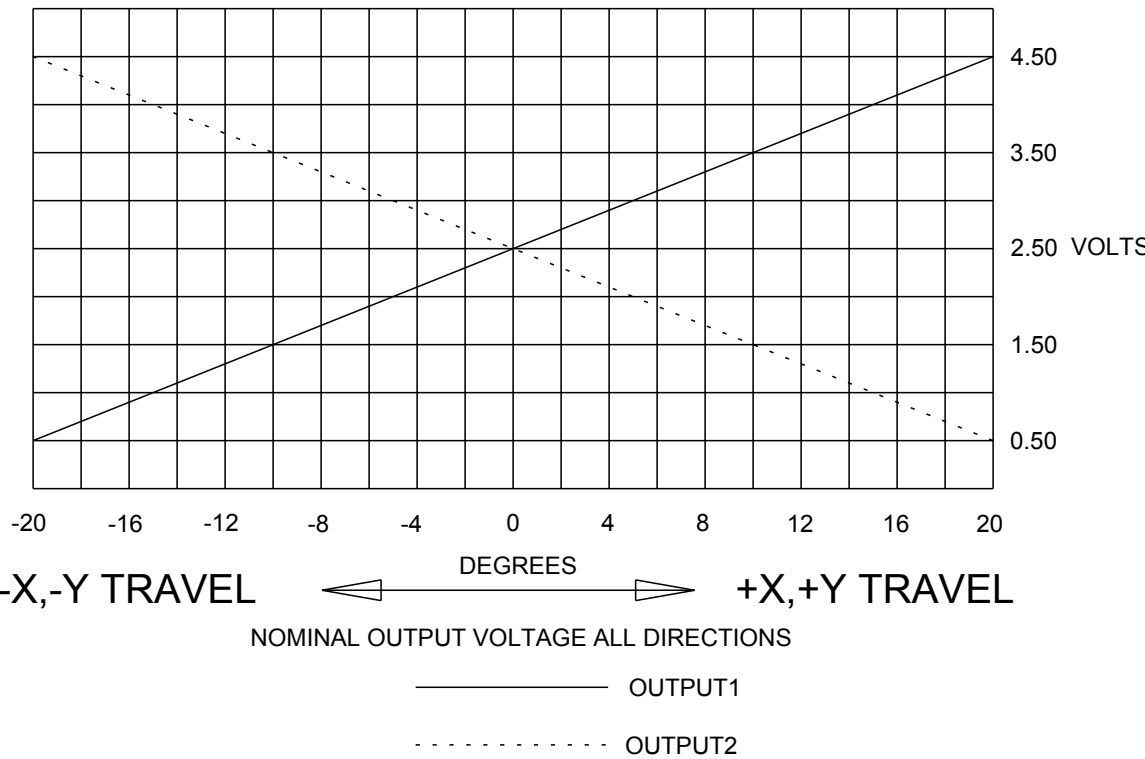


OPTION DD

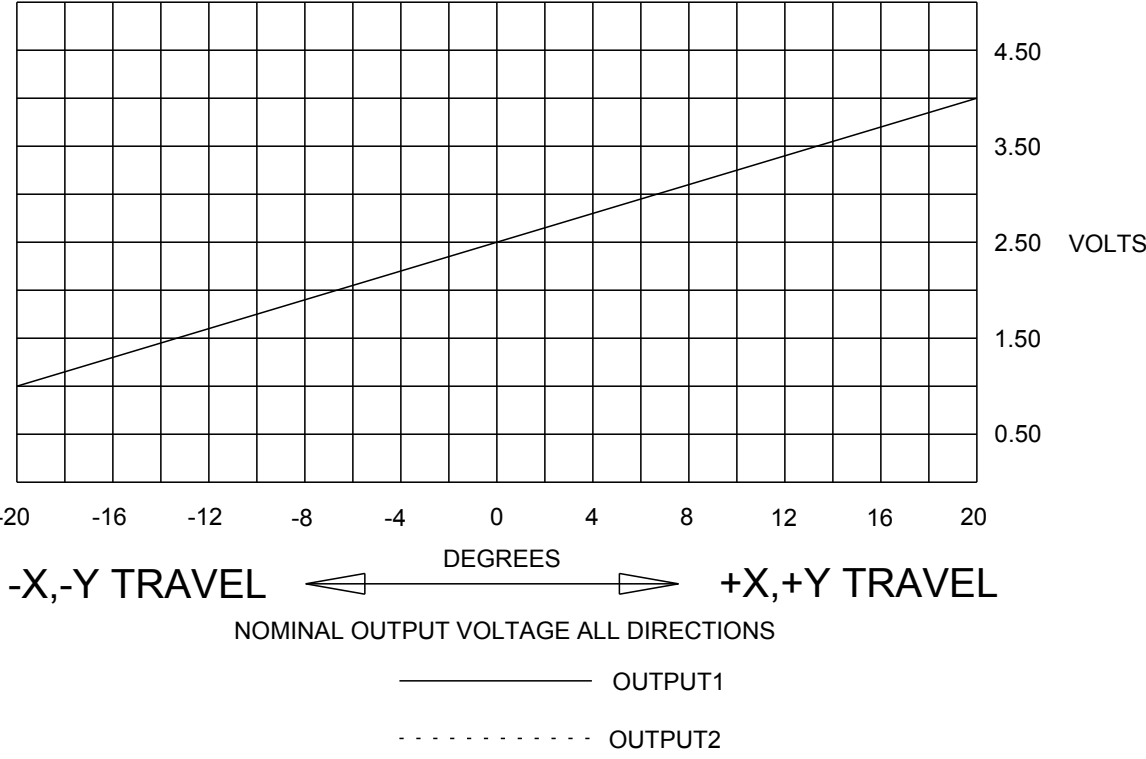


OPTION EE

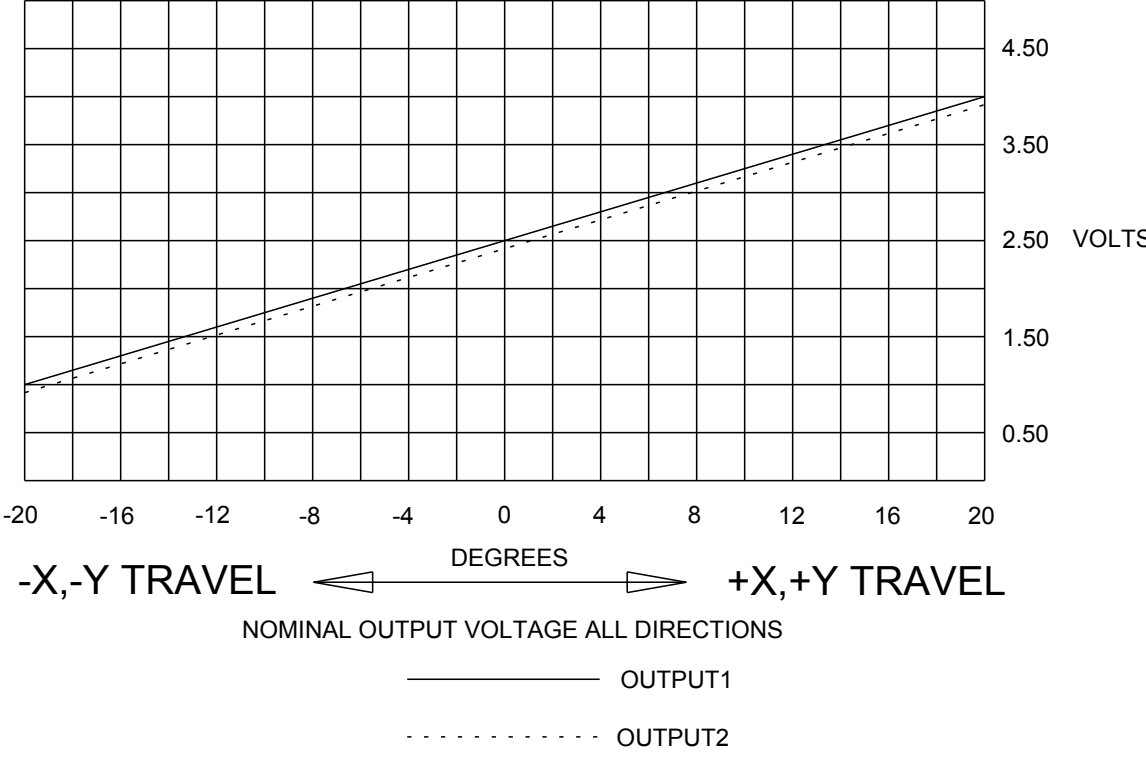


OPTION FF

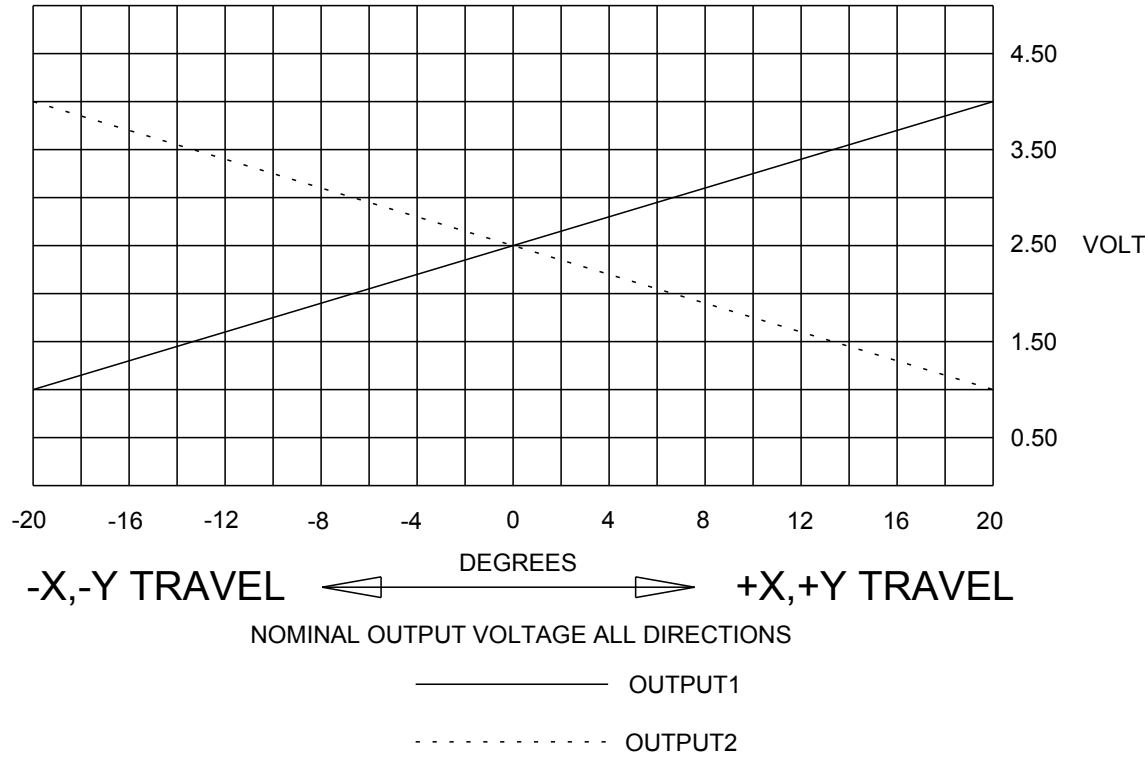

OPTION GG

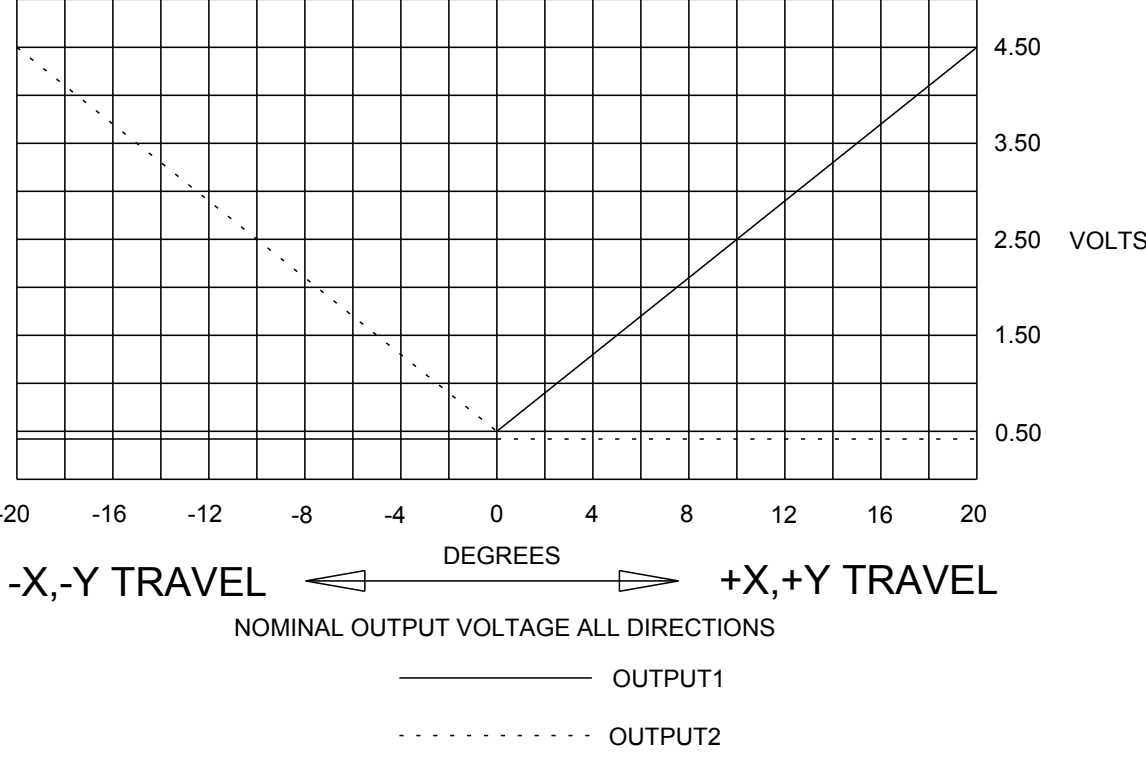

OPTION HH

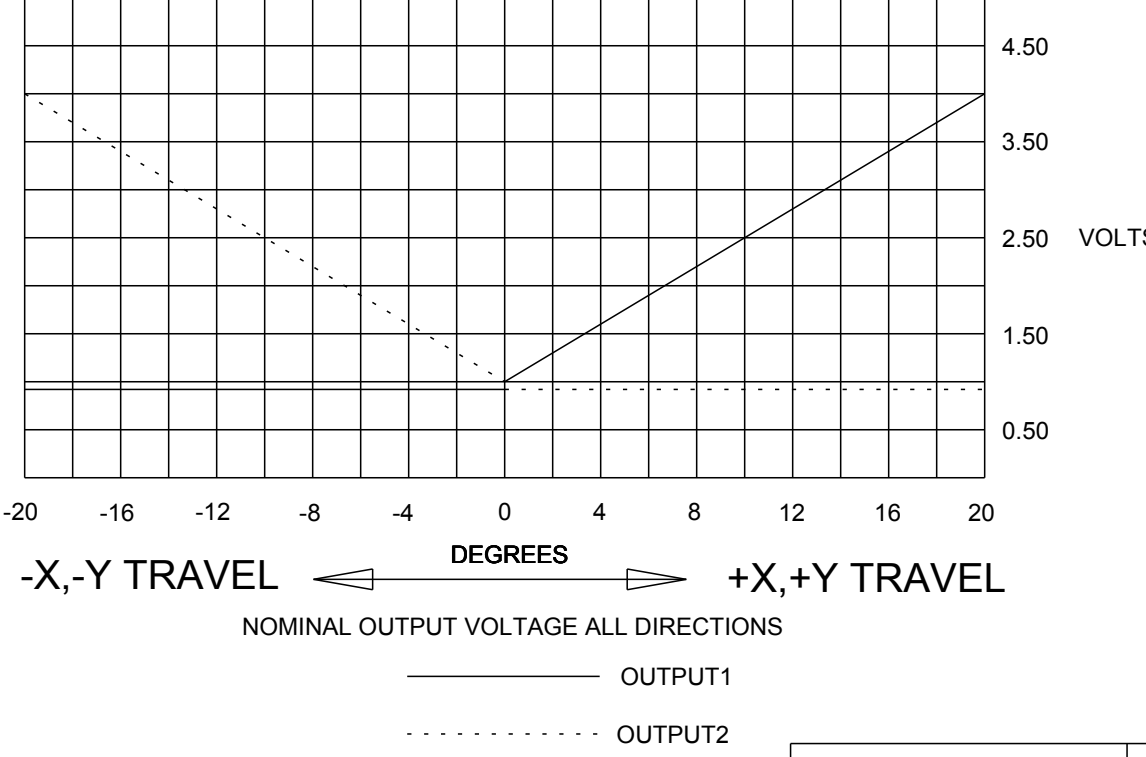

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES.
TOLERANCES ARE AS LISTED.
MUST BE FREE FROM BURRS
AND SHARP EDGES

TOLERANCES
.XX ±.03
.XXX ±.010
ANGLES ±2°
DO NOT SCALE DRAWING

THIS DOCUMENT IS THE CONFIDENTIAL
PROPERTY OF OTTO ENGINEERING, INC..
IT IS NOT TO BE USED IN ANY WAY
DETRIMENTAL TO THE INTERESTS
OF OTTO ENGINEERING, INC..

DRWN. JLW
CHKD. MRM
APPD. AH
WT.

SIZE
C

FSCM NO
21649






DRAWING NO.
JHT-_____

REV.
G


THIRD ANGLE
PROJECTION

Scale 1:1


Sheet 3 OF 4

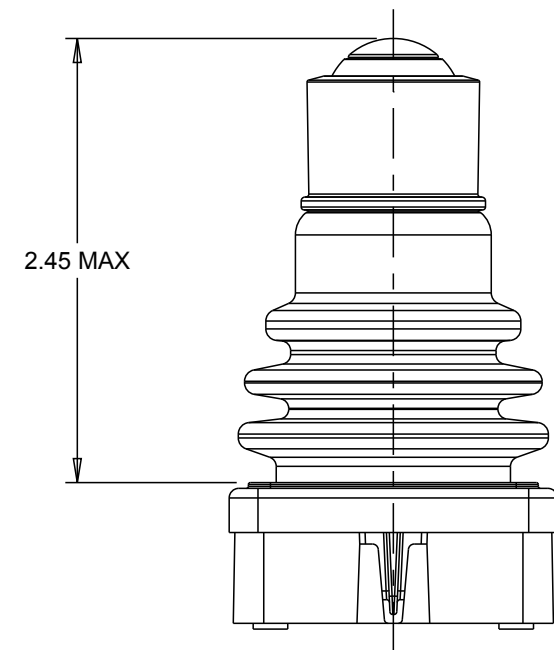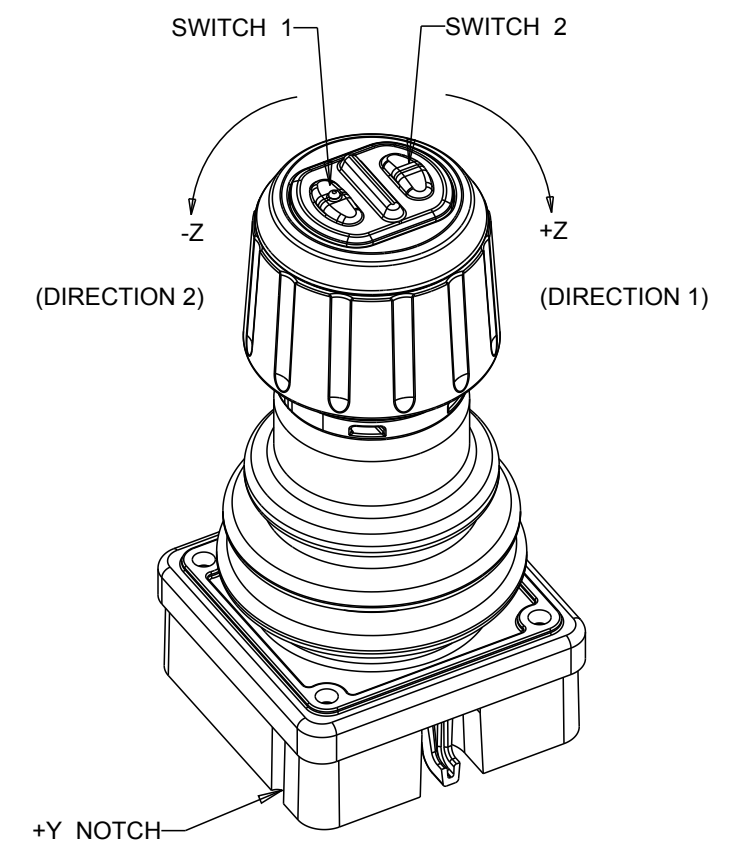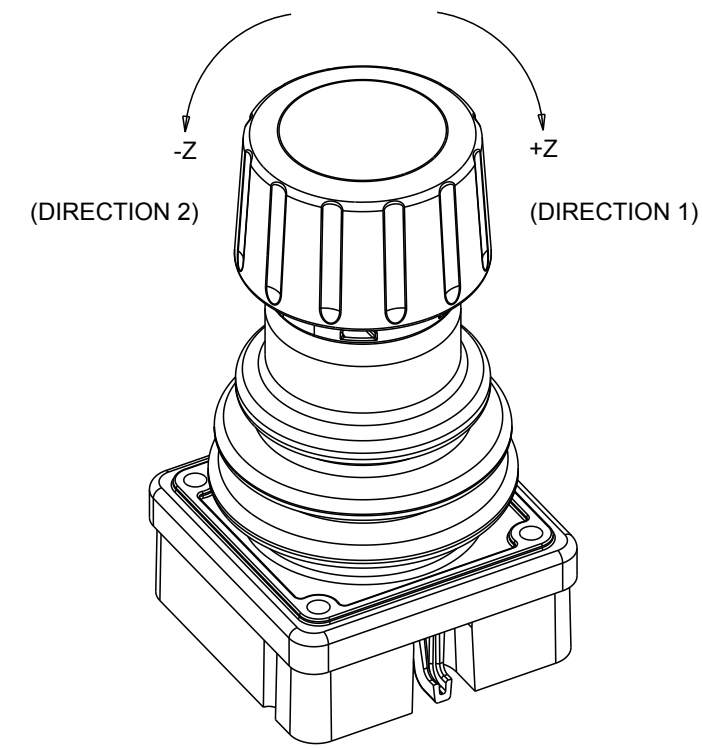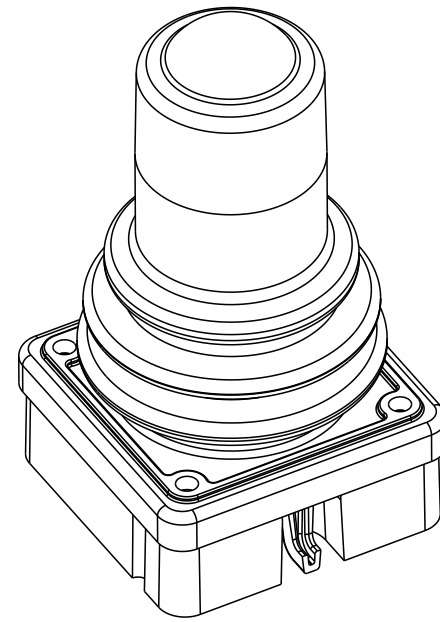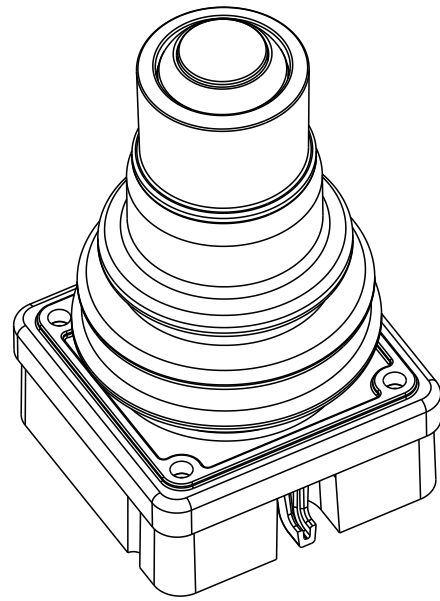


HALF BOOT

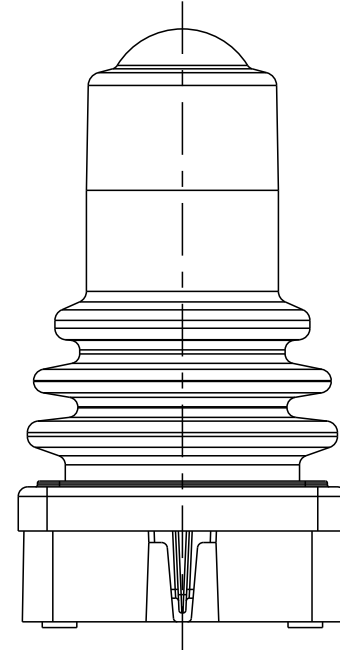

FULL BOOT

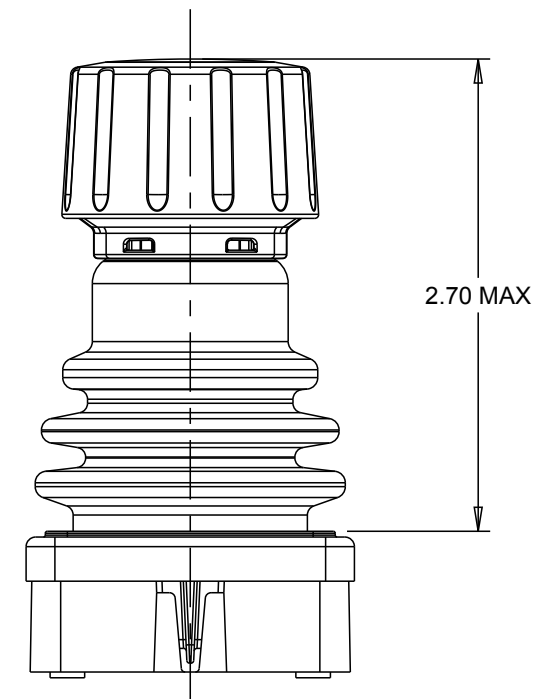

Z AXIS

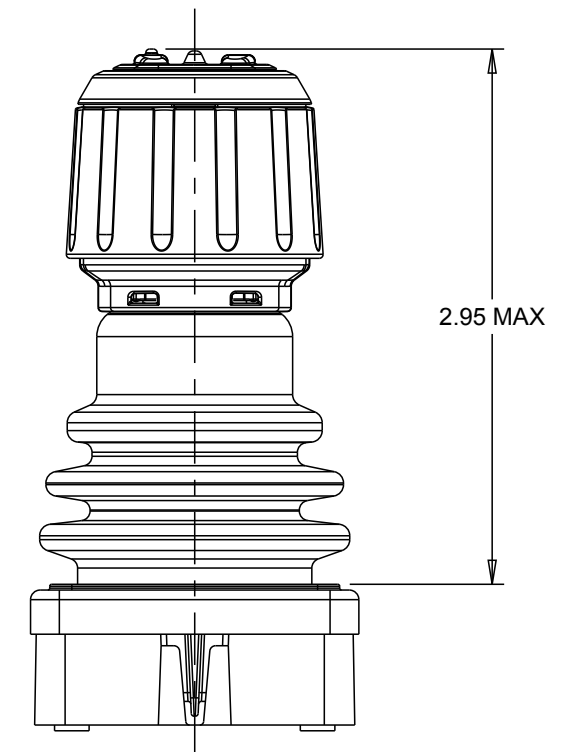

Z AXIS WITH
PUSHBUTTONS

SWITCH / STYLE BOOT CONFIGURATION

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES.
TOLERANCES ARE AS LISTED.
MUST BE FREE FROM BURRS
AND SHARP EDGES

TOLERANCES
.XX ±.03
.XXX ±.010
ANGLES ±2°
DO NOT SCALE DRAWING

THIS DOCUMENT IS THE CONFIDENTIAL
PROPERTY OF OTTO ENGINEERING, INC..
IT IS NOT TO BE USED IN ANY WAY
DETRIMENTAL TO THE INTERESTS
OF OTTO ENGINEERING, INC..

DRWN. JLW
CHKD. MRM
APPD. AH

SIZE
C

FSCM NO
21649

DRAWING NO.
JHT-_____

REV.
G

THIRD ANGLE
PROJECTION

Scale 1:1

Sheet 4 OF 4

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru