

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0740592521

Status:

Active

Overview:

[vhdm](#)

Description:

2.00mm (.079") Pitch VHDM® Board-to-Board Backplane Header, Vertical, 6-Row, Guide Pin Signal Module, Shield End Version, 150 Circuits, Pin Length 4.75mm (.187")


Documents:

[3D Model](#)

[Drawing \(PDF\)](#)

[RoHS Certificate of Compliance \(PDF\)](#)

|                                |                                                                                 |
|--------------------------------|---------------------------------------------------------------------------------|
| <b>General</b>                 |                                                                                 |
| Product Family                 | Backplane Connectors                                                            |
| Series                         | 74059                                                                           |
| Application                    | Backplane                                                                       |
| Application Tooling Documents  | <a href="http://www.molex.com/pdm_docs/ats/TM-622010999.pdf">Tooling Manual</a> |
| Comments                       | Position B                                                                      |
| Component Type                 | PCB Header                                                                      |
| Overview                       | <a href="#">vhdm</a>                                                            |
| Product Name                   | VHDM®                                                                           |
| Style                          | N/A                                                                             |
| <b>Physical</b>                |                                                                                 |
| Circuits (Loaded)              | 150                                                                             |
| Circuits (maximum)             | 150                                                                             |
| Color - Resin                  | Black                                                                           |
| Durability (mating cycles max) | 200                                                                             |
| First Mate / Last Break        | No                                                                              |
| Guide to Mating Part           | Yes                                                                             |
| Keying to Mating Part          | Yes                                                                             |
| Material - Metal               | Beryllium Copper, High Performance Alloy (HPA), Stainless Steel                 |
| Material - Plating Mating      | Gold                                                                            |
| Material - Plating Termination | Tin-Lead                                                                        |
| Material - Resin               | High Temperature Thermoplastic                                                  |
| Number of Columns              | N/A                                                                             |
| Number of Pairs                | Open Pin Field                                                                  |
| Number of Rows                 | 6                                                                               |
| Orientation                    | Vertical                                                                        |
| PC Tail Length (in)            | 0.098 In                                                                        |
| PC Tail Length (mm)            | 2.50 mm                                                                         |
| PCB Locator                    | No                                                                              |
| PCB Retention                  | None                                                                            |
| PCB Thickness Recommended (in) | 0.070 In                                                                        |
| PCB Thickness Recommended (mm) | 1.80 mm                                                                         |
| Packaging Type                 | Tube                                                                            |
| Pitch - Mating Interface (in)  | 0.079 In                                                                        |
| Pitch - Mating Interface (mm)  | 2.00 mm                                                                         |
| Pitch - Term. Interface (in)   | 0.039 In                                                                        |
| Pitch - Term. Interface (mm)   | 2.00 mm                                                                         |
| Plating min: Mating (µin)      | 30                                                                              |
| Plating min: Mating (µm)       | 0.75                                                                            |
| Plating min: Termination (µin) | 30                                                                              |
| Plating min: Termination (µm)  | 0.75                                                                            |
| Polarized to PCB               | Yes                                                                             |
| Stackable                      | No                                                                              |



Series

image - Reference only

EU RoHS

RoHS Compliant by Exemption

REACH SVHC

Not Reviewed

Halogen-Free

Status

Not Reviewed

China RoHS



Pb

**Need more information on product environmental compliance?**

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

**Search Parts in this Series**  
74059Series

**Mates With**  
74030 VHDM® Board-to-Board Daughtercard Receptacle

|                                                                                                                                                                                 |                            |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|
| <b>Application Tooling   FAQ</b>                                                                                                                                                |                            |
| Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document. |                            |
| Global                                                                                                                                                                          |                            |
| Description                                                                                                                                                                     | Product #                  |
| Flat Rock Tooling for Pneumatic Press                                                                                                                                           | <a href="#">0622013700</a> |
| VHDM® Signal Pin                                                                                                                                                                | <a href="#">0622015700</a> |
| Insertor Repair Tool                                                                                                                                                            |                            |
| VHDM® 6 Row Pin and Shield Repair Tool                                                                                                                                          | <a href="#">0622015800</a> |


|                                                                          |                              |                                                                                             |                   |
|--------------------------------------------------------------------------|------------------------------|---------------------------------------------------------------------------------------------|-------------------|
| Surface Mount Compatible (SMC)                                           | Yes                          | VHDM® 6 Row Shield Extraction Tool                                                          | <u>0622016000</u> |
| Temperature Range - Operating                                            | -55°C to +105°C              | VHDM® Insertion Module for Advanced Mate Signal Header, 6 Row by 25 Wide, 50.00mm (1.97")   | <u>0622020204</u> |
| Termination Interface: Style                                             | Through Hole - Compliant Pin | VHDM® Insertion Module for Standard Shield Signal Header, 6 Row by 25 Wide, 50.00mm (1.97") | <u>0622020208</u> |
| <b>Electrical</b>                                                        |                              |                                                                                             |                   |
| Current - Maximum per Contact                                            | 1A                           |                                                                                             |                   |
| Data Rate                                                                | 3.125 Gbps                   |                                                                                             |                   |
| Real Signals (per 25mm)                                                  | 72                           |                                                                                             |                   |
| Shield Type                                                              | Ground Plane Shield          |                                                                                             |                   |
| Shielded                                                                 | Yes                          |                                                                                             |                   |
| Voltage - Maximum                                                        | 120V AC (RMS)/DC             |                                                                                             |                   |
| <b>Material Info</b>                                                     |                              |                                                                                             |                   |
| <b>Reference - Drawing Numbers</b>                                       |                              |                                                                                             |                   |
| Sales Drawing                                                            | SD-74059-002                 |                                                                                             |                   |
| VHDM and Very High Density Metric are trademarks of Amphenol Corporation |                              |                                                                                             |                   |

This document was generated on 05/19/2010


PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION



BACKPLANE HOLE PATTERN  
RECOMMENDED DIMENSIONS

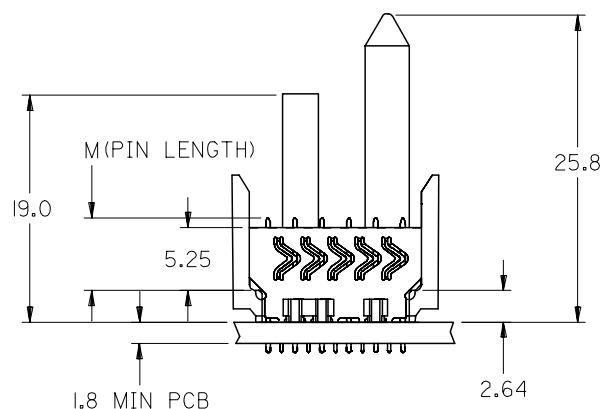

- NOTES:
1. MATERIALS:  
HOUSING - LIQUID CRYSTAL POLYMER (LCP),  
GLASS-FILLED, UL 94V-0, COLOR: BLACK  
SIGNAL PIN & SHIELD - COPPER ALLOY
  2. FINISHES:  
CONTACT AREA: SELECTIVE GOLD (Au)  
PCB TAILS: SELECTIVE TIN/LEAD (Sn/Pb)  
OR SELECTIVE MATTE TIN (Sn)  
NICKEL (Ni) OVERALL.
  3. THIS PART CONFORMS TO MOLEX PRODUCT  
SPECIFICATION PS-74031-999
  4. FOR MIXED CONTACT LENGTHS CONSULT  
MOLEX FOR AVAILABILITY
  5. FOR SPECIFIC MATERIAL NUMBERS & MATING  
INFORMATION REFER TO SHEET 2 AND 3
  6. PACKAGE PER PK-74058-003
  7. EITHER MARK PART WITH PART NUMBER & DATE  
CODE APPROXIMATELY WHERE SHOWN OR PLACE  
LABEL ON THE TUBE.

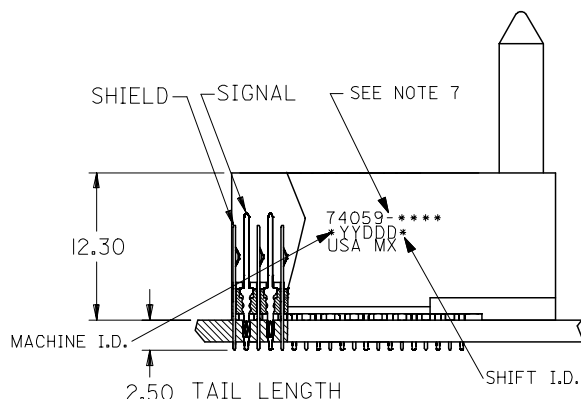

|                                                                                                                             |  |                                                                                                                                  |                                       |              |                            |                          |                    |                                                              |                           |  |  |  |
|-----------------------------------------------------------------------------------------------------------------------------|--|----------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|--------------|----------------------------|--------------------------|--------------------|--------------------------------------------------------------|---------------------------|--|--|--|
| ADDED TOLERANCE<br>EC NO: UCP2006-2669<br>DRW: JONI AK 2006/06/02<br>CHKD: JONI AK 2006/06/02<br>APPR: CB IXL ER 2006/06/09 |  | QUALITY SYMBOLS<br><br>▽=0<br>▽=0                                                                                                | GENERAL TOLERANCES (UNLESS SPECIFIED) |              | DIMENSION STYLE<br>MM ONLY |                          | SCALE<br>2.5:1     | DESIGN UNITS<br>METRIC                                       | THIRD ANGLE<br>PROJECTION |  |  |  |
|                                                                                                                             |  |                                                                                                                                  |                                       | mm           | INCH                       | DRAWN BY<br>MWANG        | DATE<br>1998/11/09 | TITLE<br>VHDM 6 ROW<br>SHIELD END BACKPLANE<br>SALES DRAWING |                           |  |  |  |
|                                                                                                                             |  |                                                                                                                                  |                                       |              |                            | CHECKED BY<br>JLAURX     | DATE<br>1998/11/09 |                                                              |                           |  |  |  |
|                                                                                                                             |  |                                                                                                                                  |                                       |              |                            | APPROVED BY<br>CB IXL ER | DATE<br>1998/11/19 | MOLEX MOLEX INCORPORATED                                     |                           |  |  |  |
|                                                                                                                             |  |                                                                                                                                  | ANGULAR ±1/2°                         |              | MATERIAL NO.               |                          | DOCUMENT NO.       |                                                              | SHEET NO.                 |  |  |  |
| DRAFT WHERE APPLICABLE<br>MUST REMAIN<br>WITHIN DIMENSIONS                                                                  |  | SEE SHEET 2                                                                                                                      |                                       | SD-74059-002 |                            | 1 OF 3                   |                    |                                                              |                           |  |  |  |
| SIZE<br>B                                                                                                                   |  | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX<br>INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION |                                       |              |                            |                          |                    |                                                              |                           |  |  |  |

|                           |       |       |       |       |       |       |       |       |       |
|---------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| M/N<br>74059-( )          | -**0* | -**1* | -**2* | -**3* | -**4* | -**5* | -**6* | -**7* | -**8* |
| KEYING PIN<br>ORIENTATION | O     | A     | B     | C     | D     | E     | F     | G     | H     |

74059- \* \* \* \*

NUMBER OF COLUMNS/PLATING  
10 = 10 COLUMN TIN/LEAD  
21 = 11 COLUMN TIN/LEAD\*  
25 = 25 COLUMN TIN/LEAD  
90 = 10 COLUMN MATTE TIN  
85 = 25 COLUMN MATTE TIN  
81 = 11 COLUMN MATTE TIN\*  
CONTACT LOAD (PIN LENGTH)  
1 & 6 = 4.75  
2 & 7 = 6.25  
3 & 8 = 4.25  
4 & 9 = 5.15

\* - SEE SHEET 3 FOR 11 COLUMN P/N'S



| PART NUMBER | COLUMN | NUMBER OF SIGNAL PIN | NUMBER OF SHIELD | A     | B     | M    | Au (um) THICKNESS | Sn (um) THICKNESS |
|-------------|--------|----------------------|------------------|-------|-------|------|-------------------|-------------------|
| 74059-*0*1  | 10     | 60                   | 10               | 27.00 | 18.00 | 4.75 | 0.76              | 0.76-1.52         |
| 74059-*0*6  |        |                      |                  |       |       |      | 1.27              |                   |
| 74059-*5*1  | 25     | 150                  | 25               | 57.00 | 48.00 |      | 0.76              |                   |
| 74059-*5*6  |        |                      |                  |       |       |      | 1.27              |                   |
| 74059-*0*2  | 10     | 60                   | 10               | 27.00 | 18.00 | 6.25 | 0.76              |                   |
| 74059-*0*7  |        |                      |                  |       |       |      | 1.27              |                   |
| 74059-*5*2  | 25     | 150                  | 25               | 57.00 | 48.00 |      | 0.76              |                   |
| 74059-*5*7  |        |                      |                  |       |       |      | 1.27              |                   |
| 74059-*0*3  | 10     | 60                   | 10               | 27.00 | 18.00 | 4.25 | 0.76              |                   |
| 74059-*5*3  | 25     | 150                  | 25               | 57.00 | 48.00 |      | 0.76              |                   |
| 74059-*5*8  |        |                      |                  |       |       |      | 1.27              |                   |
| 74059-*0*4  | 10     | 60                   | 10               | 27.00 | 18.00 | 5.15 | 0.76              |                   |
| 74059-*0*9  |        |                      |                  |       |       |      | 1.27              |                   |
| 74059-*5*4  | 25     | 150                  | 25               | 57.00 | 48.00 |      | 0.76              |                   |
| 74059-*5*9  |        |                      |                  |       |       |      | 1.27              |                   |

ADDED SHEET 3  
EC NO: UCP2006-1491  
DRW: JONIAK 2006/01/19  
CHKD: JONIAK 2006/01/19  
APPR: CBIXLER 2006/01/23

DESCRIPTION  
REV

QUALITY SYMBOLS  
=0  
=0

GENERAL TOLERANCES (UNLESS SPECIFIED)  
mm INCH  
4 PLACES ± --- ± ---  
3 PLACES ± --- ± ---  
2 PLACES ± --- ± ---  
1 PLACE ± --- ± ---  
ANGULAR ±1/2°  
DRAFT WHERE APPLICABLE  
MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE  
MM ONLY  
DRAWN BY DATE  
MWANG 1998/11/09  
CHECKED BY DATE  
JLAURX 1998/11/09  
APPROVED BY DATE  
CBIXLER 1998/11/09  
MATERIAL NO.  
SEE CHART

SCALE  
2.5:1  
DESIGN UNITS  
METRIC  
THIRD ANGLE PROJECTION

VHDM 6 ROW  
SHIELD END BACKPLANE  
SALES DRAWING  
MOLEX INCORPORATED  
SD-74059-002  
SHEET NO.  
2 OF 3

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)