


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION JAN , 2004.  
 © COPYRIGHT 2004 By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
E	B	B1	REVISED PER ECO-11-005033	01APR11	RK HMR

NOTES:

- 1 SINGLE PACK IN ACCORDANCE WITH SPEC 107-3275
  - 2 100 BULK PACK IN ACCORDANCE WITH SPEC 107-3275
  - 3 0.08µm GOLD PLATING
  - 4 0.76µm GOLD PLATING
  - 5 PASSIVATED (GOLD PLATED CABLE ENTRY)
- 6 ELECTRICAL CHARACTERISTICS  
 FREQUENCY RANGE:  
 BRASS BODY: DC - 6.0GHz  
 STAINLESS STEEL (PASSIVATED): DC - 18.0GHz  
 STAINLESS STEEL (GOLD): DC - 18.0GHz  
 NOMINAL IMPEDANCE: 50 Ohm  
 INSULATION RESISTANCE: 5000 MOhm  
 WORKING VOLTAGE: 500 Volts RMS at Sea Level  
 DIELECTRIC WITHSTAND VOLTAGE: 1500 Volts RMS Max  
 CONTACT RESISTANCE:  
 CENTRE CONTACT: 3 mOhm Max  
 OUTER CONTACT: 2 mOhm Max  
 VSWR @ 4GHz: 1.35:1  
 INSERTION LOSS dB @ x 1.5 GHz: 0.06 Max
- 7 MECHANICAL CHARACTERISTICS  
 COUPLING NUT RETENTION FORCE: 267N  
 CABLE RETENTION FORCE: 110N Min  
 CLAMP NUT RECOMMENDED TORQUE: 80-110N  
 DURABILITY: 500 Cycles Min
- 8 ENVIRONMENTAL CHARACTERISTICS  
 OPERATING TEMPERATURE: -65 to +165 DegC
- 9 FOR TECHNICAL DATA REFER TO YOUR LOCAL TE CONNECTIVITY SALES OFFICE
- 10 ALL DIMENSIONS ARE NOMINAL FOR REFERENCE ONLY UNLESS OTHERWISE STATED

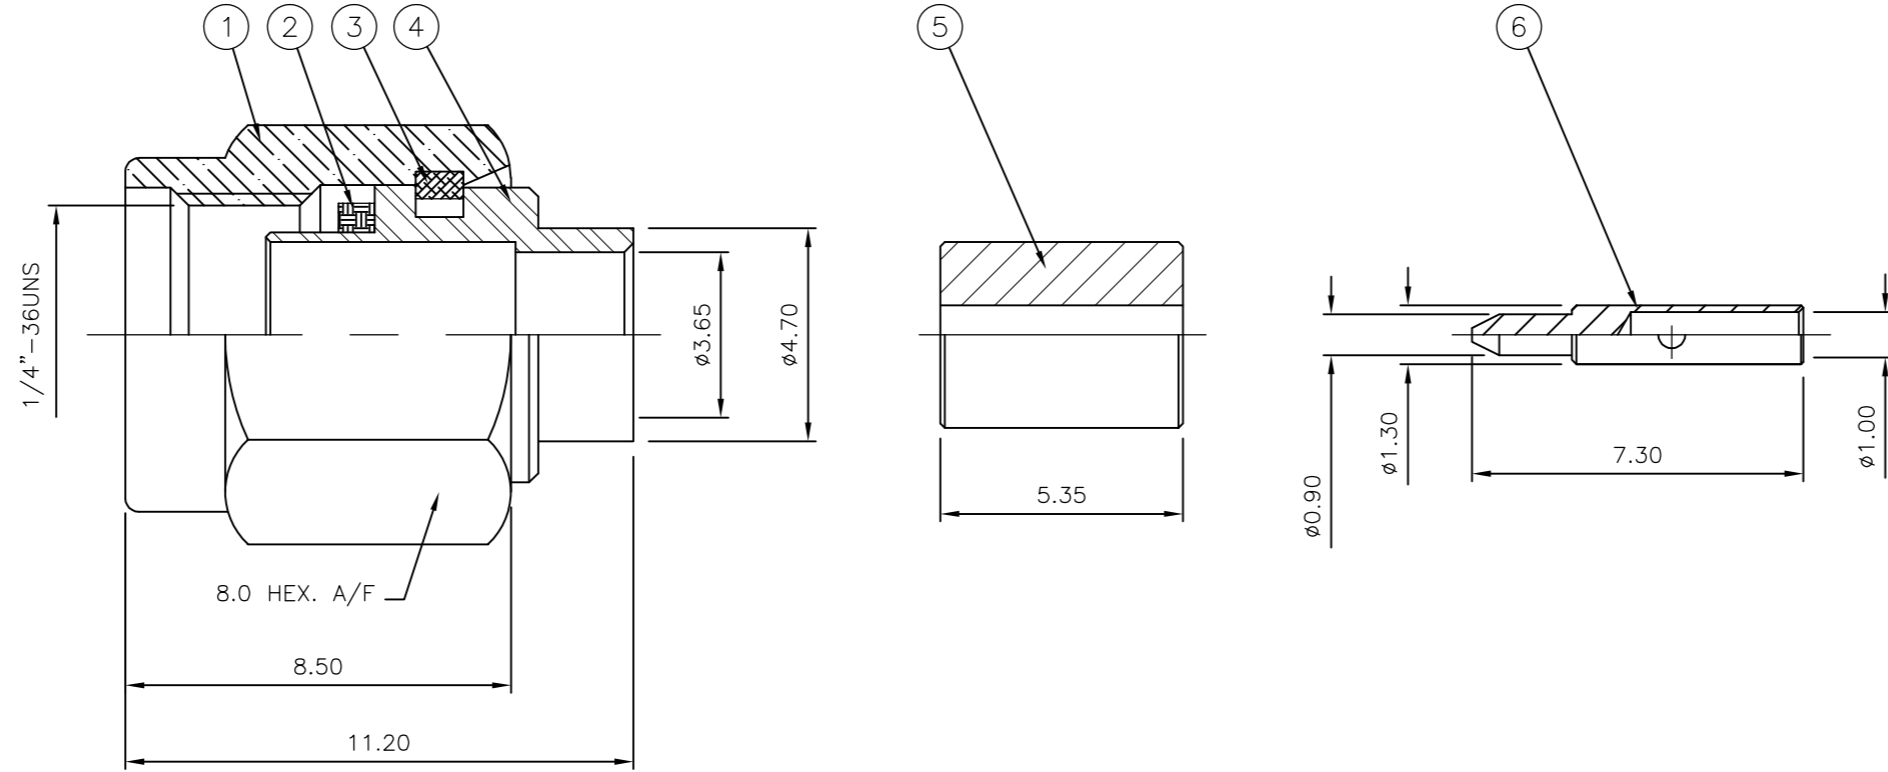

QTY	QTY PER ASSY	QTY PER ASSY	QTY PER ASSY	QTY PER ASSY	QTY PER ASSY	QTY PER ASSY	QTY PER ASSY	QTY PER ASSY	QTY PER ASSY	MATERIAL	DESCRIPTION	ITEM
1	1	1	1	1	1	1	1	1	1	BRASS	△ CENTER CONTACT	6
1	1	1	1	1	1	1	1	1	1	PTFE	INSULATOR	5
1	1	-	-	-	-	-	-	-	-	BRASS	△ BODY	4
-	-	1	1	-	-	-	-	-	-	STAINLESS STEEL	△ BODY	4
-	-	-	-	-	-	1	1	-	-	STAINLESS STEEL	△ BODY	4
1	1	1	1	1	1	1	1	1	1	STAINLESS STEEL	CIRCLIP	3
1	1	1	1	1	1	1	1	1	1	SILICON	GASKET	2
1	1	-	-	-	-	-	-	-	-	BRASS	△ SHELL	1
-	-	1	1	-	-	-	-	-	-	STAINLESS STEEL	△ SHELL	1
-	-	-	-	1	1	-	-	-	-	STAINLESS STEEL	△ SHELL	1
3--1	3--0	2--1	2--0	1--1	1--0	-	-	-	-	MATERIAL	DESCRIPTION	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R.SMITH 28JAN04	TE Connectivity	
DIMENSIONS: mm		CHK S.PARLOW 28JAN04	NAME SMA STRAIGHT PLUG DIRECT SOLDER NON CAPTIVE CENTRE CONTACT RG402/U	
TOLERANCES UNLESS OTHERWISE SPECIFIED		APVD F.WHEELER-KING 28JAN04	DRAWING NO A2 00779 C=1478903	
0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±		PRODUCT SPEC APPLICATION SPEC	RESTRICTED TO	
MATERIAL SEE TABLE		FINISH -	WEIGHT -	SCALE NTS
		CUSTOMER DRAWING		SHEET 1 of 2
				REV B1

4

3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION JAN , 2004.  
 © COPYRIGHT 2004 By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
E	B	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1			

COMPONENTS

MAIN BODY (ITEM 1,2,3,4)

DIELECTRIC (ITEM 5)

CENTRE CONTACT (ITEM 6)

ASSEMBLY INSTRUCTIONS  
RG402/U

STEP 1: PREPARATION OF CABLE

1. INSERT SQUARED CABLE END INTO FIXTURE BASE HOLE PATTERN No. 2
2. PLACE SAW IN SAW SLOT AND CUT THROUGH OUTER CONDUCTOR AND INTO DIELECTRIC WHILST ROTATING CABLE
3. REMOVE CABLE FROM FIXTURE AND FINISH CUTTING DIELECTRIC WITH CUTTING BLADE
4. BARE INNER CONDUCTOR BY PRYING CUT OUTER CONDUCTOR AND DIELECTRIC FROM CABLE
5. TRIM CABLE INNER CONDUCTOR TO LENGTH

Diagram illustrating the preparation of the cable. A cable is inserted into a fixture base (1055439-1) which has a hole pattern (No. 2). The cable is cut through the outer conductor and dielectric while rotating. The inner conductor is then bared by prying the outer conductor and dielectric away. The inner conductor is trimmed to length. Labels include: FIXTURE BASE 1055439-1, HOLE PATTERN No. 2, CABLE INNER CONDUCTOR, CABLE OUTER CONDUCTOR, and a 90-degree angle and 2.8mm dimension.

STEP 2: SOLDERING OF CENTRE CONTACT TO CABLE

1. TIN INNER CONDUCTOR OF CABLE
2. PLACE SOLDER GAUGE ON INNER CONDUCTOR FLUSH WITH END OF OUTER CONTACT
3. PLACE CENTRE CONTACT IN HOLDER. HEAT CENTRE CONTACT AND PUSH IT OVER INNER CONDUCTOR OF CABLE TO REST FIRMLY AGAIN SOLDER GAUGE
4. REMOVE SOLDER GAUGE AND EXCESS SOLDER

Diagram illustrating the soldering process. A centre contact holder (1055454-1) is used to hold the centre contact. A solder gauge (91362-6) is placed on the inner conductor of the cable. The centre contact is heated and pushed over the inner conductor until it rests firmly against the solder gauge. Labels include: HEAT HERE, SOLDER GAUGE 91362-6, CABLE, CENTRE CONTACT HOLDER 1055454-1, CENTRE CONTACT, and a 0.25mm dimension.

STEP 3: SOLDERING OF CABLE TO HOUSING

1. SCREW HOUSING ASSEMBLY ONTO LOCATOR TOOL
2. CAREFULLY INSERT CABLE ASSEMBLY INTO PRE-ASSEMBLED HOUSING DIELECTRIC OF HOUSING ASSEMBLY
3. PLACE LOOSE ASSEMBLY IN FIXTURE BASE AS SHOWN
4. BOTTOM LOCATOR TOOL AGAIN FIXTURE BASE AS SHOWN
5. MAINTAINING PRESSURE ON CABLE TO KEEP LOCATOR TOOL BOTTOMED TIGHTEN CLAMP SCREW TO SECURE CABLE
6. SOLDER CABLE TO HOUSING

NOTE: FIXTURE SHOULD BE CLAMPED VERTICALLY IN VICE (SO THAT CONNECTOR INTERFACE IS FACING DOWN)

Diagram illustrating the soldering of the cable to the housing. The cable assembly is inserted into the housing dielectric of the housing assembly. The housing assembly is secured to the locator tool (1055443-1) using a clamp screw. The cable is then soldered to the housing. Labels include: FIXTURE BASE 1055439-1, CLAMP SCREW, SOLDER HERE 60/40, LOCATOR TOOL 1055443-1, CABLE SUB-ASSY, and CLAMP INSERT 1055447-1.

STEP 4: PRESSING OF DIELECTRIC INTO HOUSING SUB-ASSEMBLY

1. THREAD INSERT TOOL INTO HOUSING SUB-ASSEMBLY
2. INSERT DIELECTRIC INTO INSERT TOOL HOUSING
3. PLACE INSERT TOOL PLUNGER INTO POSITION AND PRESS UNTIL FLANGE BOTTOMS ON TOOL HOUSING
4. ASSEMBLY IS NOW COMPLETE

Diagram illustrating the pressing of the dielectric into the housing sub-assembly. A dielectric insert tool (1055447-1) is used to press the dielectric into the housing sub-assembly. Labels include: DIELECTRIC, DIELECTRIC INSERT TOOL 1055447-1, and HOUSING SUB-ASSEMBLY.

NOTES: INTERFACE DIMENSIONS PER MIL-STD-384A-310-1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	R.SMITH	28JAN04	 TE Connectivity							
DIMENSIONS:		CHK	S.PARLOW	28JAN04								
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED	APVD	F.WHEELER-KING	28JAN04								
	0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ± FINISH	NAME	SMA STRAIGHT PLUG DIRECT SOLDER NON CAPTIVE CENTRE CONTACT RG402/U									
MATERIAL	SEE TABLE	PRODUCT SPEC	-		SIZE	A2	CAGE CODE	00779	DRAWING NO	C=1478903	RESTRICTED TO	-
CUSTOMER DRAWING		WEIGHT	-		SCALE	NTS		SHEET	2 OF 2		REV	B1

1471-9 (3/11)

1478903

A

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)  
Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)