

## C5D25170H

Silicon Carbide Schottky Diode

Z-REC<sup>®</sup> RECTIFIER

$$V_{RRM} = 1700 \text{ V}$$

$$I_F(T_c=135^\circ\text{C}) = 33.6 \text{ A}$$

$$Q_c = 255 \text{ nC}$$

### Features

- 1.7kV Schottky Rectifier
- Zero Reverse Recovery Current
- High-Frequency Operation
- Temperature-Independent Switching
- Extremely Fast Switching
- Positive Temperature Coefficient on  $V_F$


### Benefits

- Replace Bipolar with Unipolar Rectifiers
- Essentially No Switching Losses
- Higher Efficiency
- Reduction of Heat Sink Requirements
- Parallel Devices Without Thermal Runaway

### Applications

- Switch Mode Power Supplies (SMPS)
- Boost diodes in PFC or DC/DC stages
- Free Wheeling Diodes in Inverter stages
- 1500V Solar Inverter

### Package



TO-247-2



| Part Number | Package  | Marking  |
|-------------|----------|----------|
| C5D25170H   | TO-247-2 | C5D25170 |

### Maximum Ratings (T<sub>c</sub>=25°C unless otherwise specified)

| Symbol                            | Parameter                                  | Value              | Unit         | Test Conditions                                                                                                               | Note   |
|-----------------------------------|--------------------------------------------|--------------------|--------------|-------------------------------------------------------------------------------------------------------------------------------|--------|
| $V_{RRM}$                         | Repetitive Peak Reverse Voltage            | 1700               | V            |                                                                                                                               |        |
| $V_R$                             | DC Peak Reverse Voltage                    | 1700               | V            |                                                                                                                               |        |
| $I_F$                             | Continuous Forward Current                 | 70<br>33.6<br>25.6 | A            | T <sub>c</sub> =25°C<br>T <sub>c</sub> =135°C<br>T <sub>c</sub> =150°C                                                        | Fig. 3 |
| $I_{FRM}$                         | Repetitive Peak Forward Surge Current      | 99<br>57           | A            | T <sub>c</sub> =25°C, t <sub>p</sub> =10 ms, Half Sine Pulse<br>T <sub>c</sub> =110°C, t <sub>p</sub> =10 ms, Half Sine Pulse |        |
| $I_{FSM}$                         | Non-Repetitive Forward Surge Current       | 117<br>88          | A            | T <sub>c</sub> =25°C, t <sub>p</sub> =10 ms, Half Sine Pulse<br>T <sub>c</sub> =110°C, t <sub>p</sub> =10 ms, Half Sine Pulse |        |
| $P_{tot}$                         | Power Dissipation                          | 384<br>167         | W            | T <sub>c</sub> =25°C<br>T <sub>c</sub> =110°C                                                                                 | Fig. 4 |
| T <sub>J</sub> , T <sub>stg</sub> | Operating Junction and Storage Temperature | -55 to<br>+175     | °C           |                                                                                                                               |        |
|                                   | TO-247 Mounting Torque                     | 1<br>8.8           | Nm<br>lbf-in | M3 Screw<br>6-32 Screw                                                                                                        |        |

## Electrical Characteristics

| Symbol | Parameter                 | Typ.               | Max.       | Unit          | Test Conditions                                                                                                                                                                                                     | Note   |
|--------|---------------------------|--------------------|------------|---------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|
| $V_F$  | Forward Voltage           | 1.5<br>2.5         | 1.8<br>3.0 | V             | $I_F = 25\text{ A}$ $T_J = 25^\circ\text{C}$<br>$I_F = 25\text{ A}$ $T_J = 175^\circ\text{C}$                                                                                                                       | Fig. 1 |
| $I_R$  | Reverse Current           | 20<br>120          | 200<br>300 | $\mu\text{A}$ | $V_R = 1700\text{ V}$ $T_J = 25^\circ\text{C}$<br>$V_R = 1700\text{ V}$ $T_J = 175^\circ\text{C}$                                                                                                                   | Fig. 2 |
| $Q_C$  | Total Capacitive Charge   | 255                |            | nC            | $V_R = 1700\text{ V}$ , $I_F = 25\text{ A}$<br>$di/dt = 200\text{ A}/\mu\text{s}$<br>$T_J = 25^\circ\text{C}$                                                                                                       | Fig. 5 |
| C      | Total Capacitance         | 1950<br>190<br>140 |            | pF            | $V_R = 0\text{ V}$ , $T_J = 25^\circ\text{C}$ , $f = 1\text{ MHz}$<br>$V_R = 800\text{ V}$ , $T_J = 25^\circ\text{C}$ , $f = 1\text{ MHz}$<br>$V_R = 1700\text{ V}$ , $T_J = 25^\circ\text{C}$ , $f = 1\text{ MHz}$ | Fig. 6 |
| $E_C$  | Capacitance Stored Energy | 175                |            | $\mu\text{J}$ | $V_R = 1700\text{ V}$                                                                                                                                                                                               | Fig. 7 |

Note: This is a majority carrier diode, so there is no reverse recovery charge.

## Thermal Characteristics

| Symbol          | Parameter                                | Typ. | Unit                      | Note   |
|-----------------|------------------------------------------|------|---------------------------|--------|
| $R_{\theta JC}$ | Thermal Resistance from Junction to Case | 0.39 | $^\circ\text{C}/\text{W}$ | Fig. 8 |

## Typical Performance

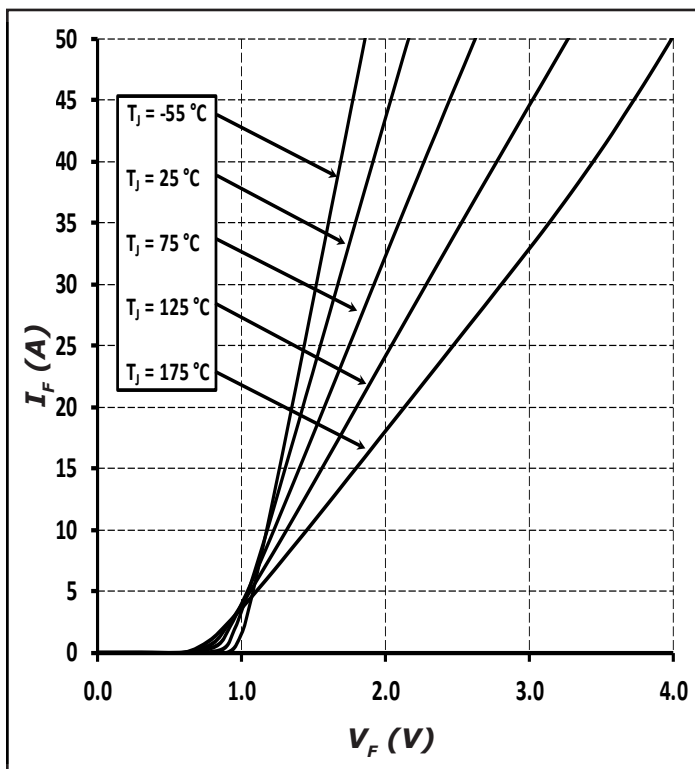


Figure 1. Forward Characteristics

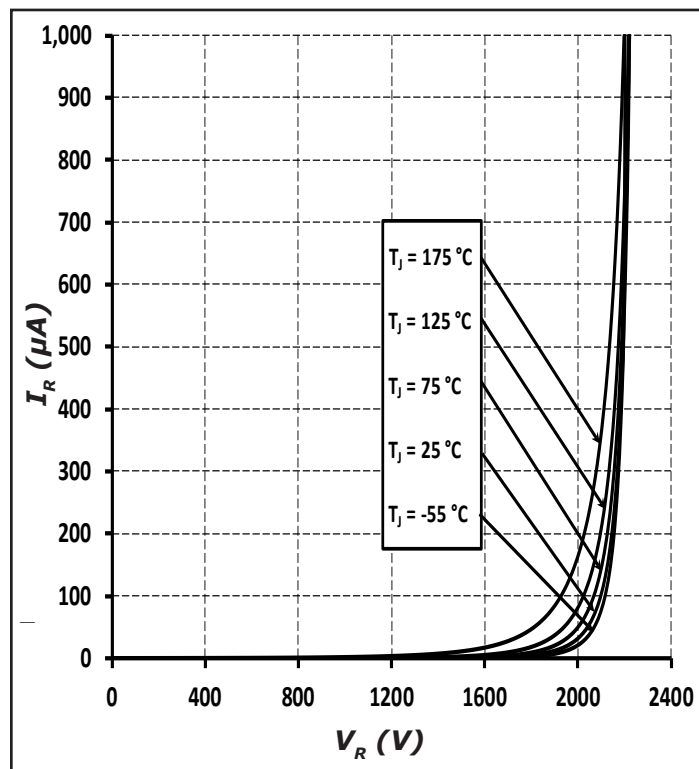


Figure 2. Reverse Characteristics

## Typical Performance

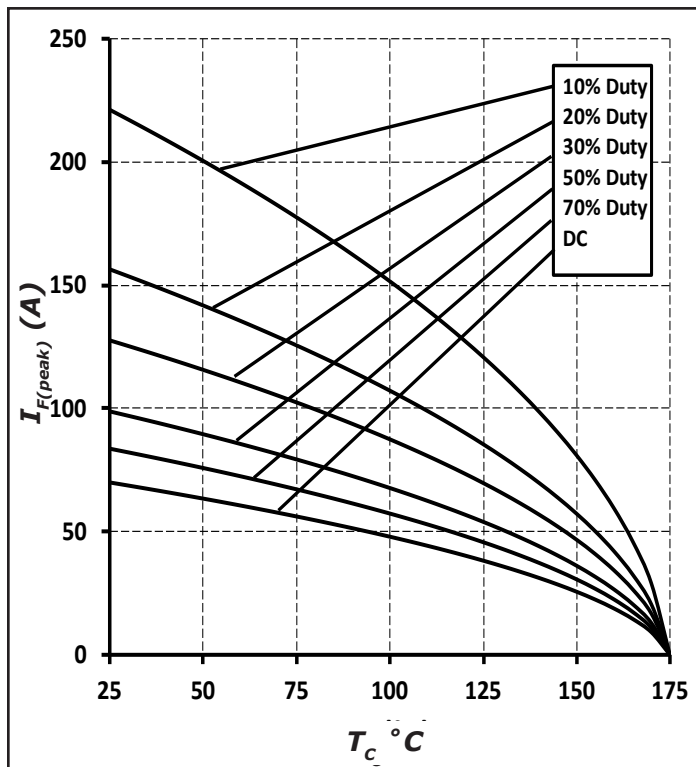


Figure 3. Current Derating

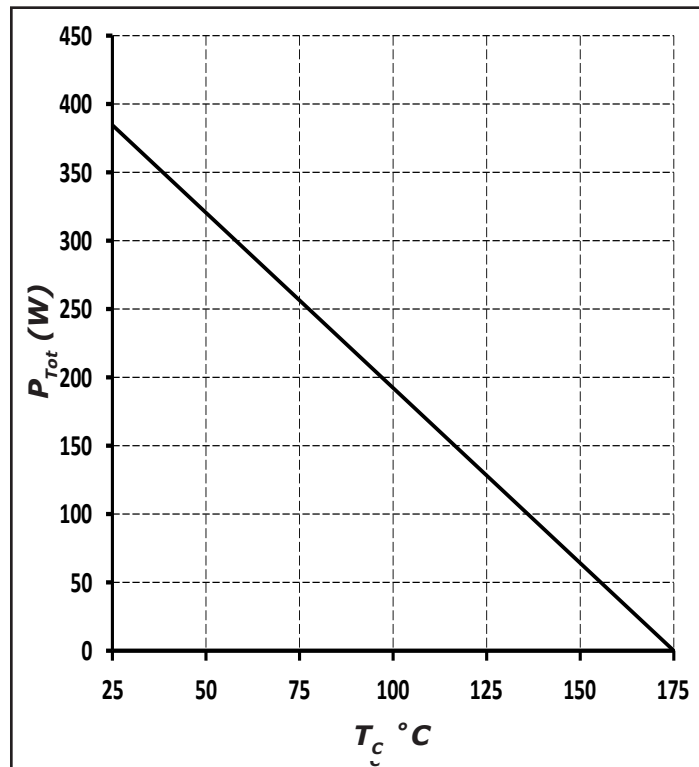


Figure 4. Power Derating

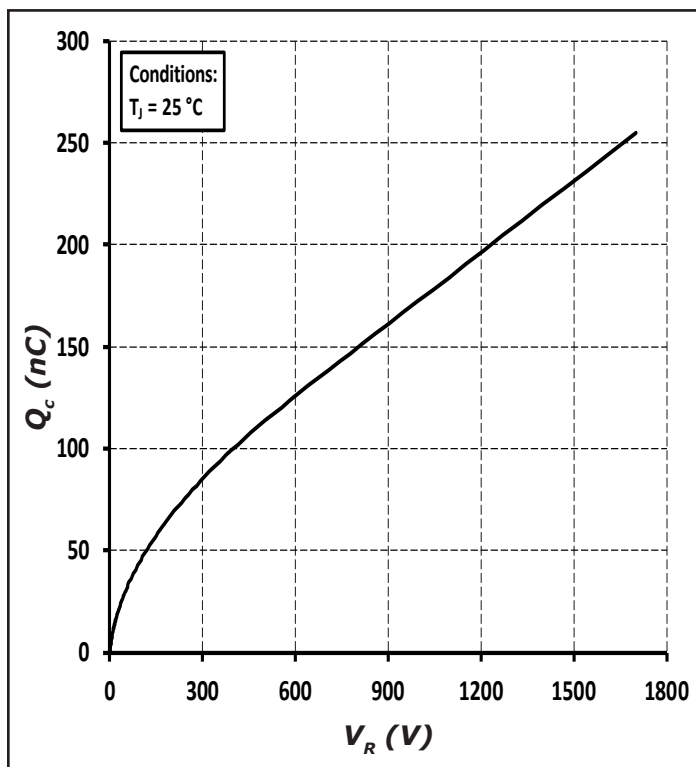


Figure 5. Recovery Charge vs. Reverse Voltage

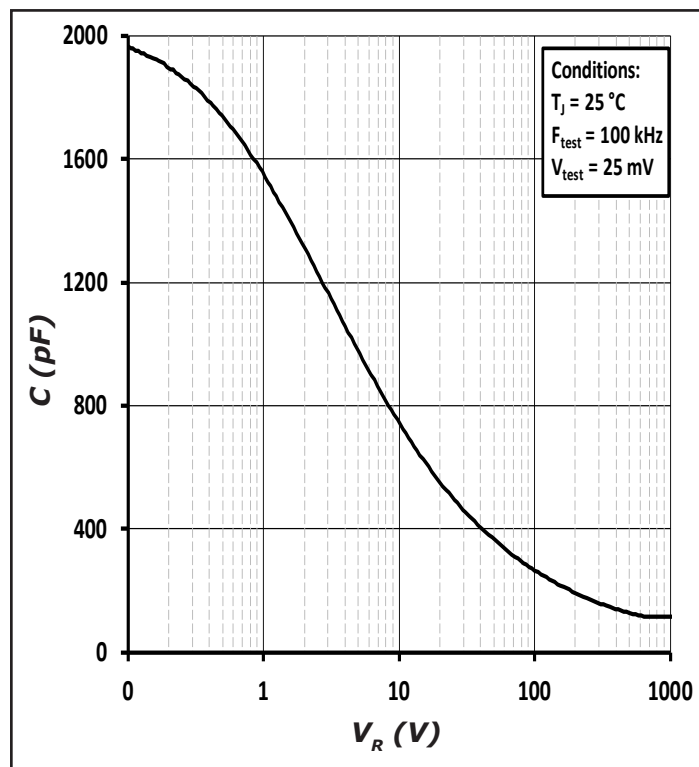


Figure 6. Capacitance vs. Reverse Voltage

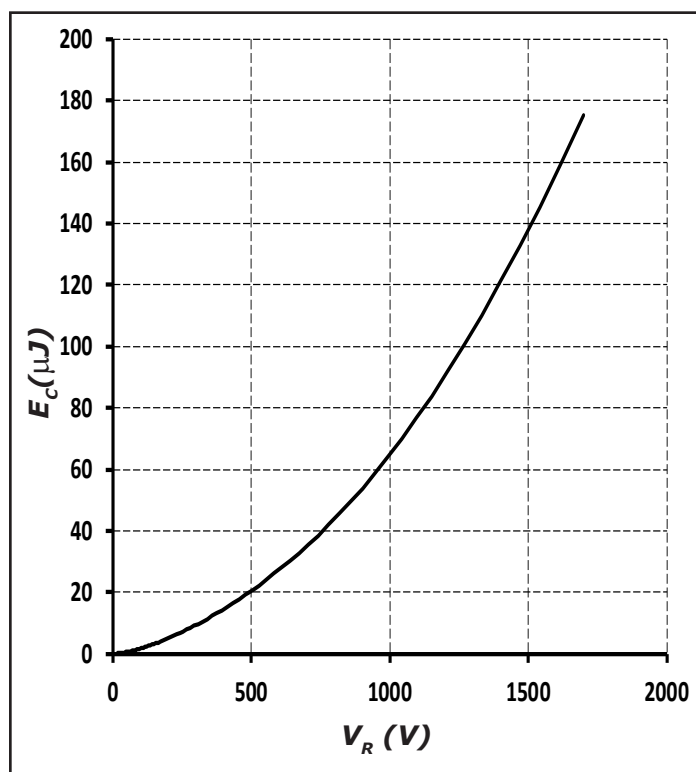


Figure 7. Typical Capacitance Stored Energy


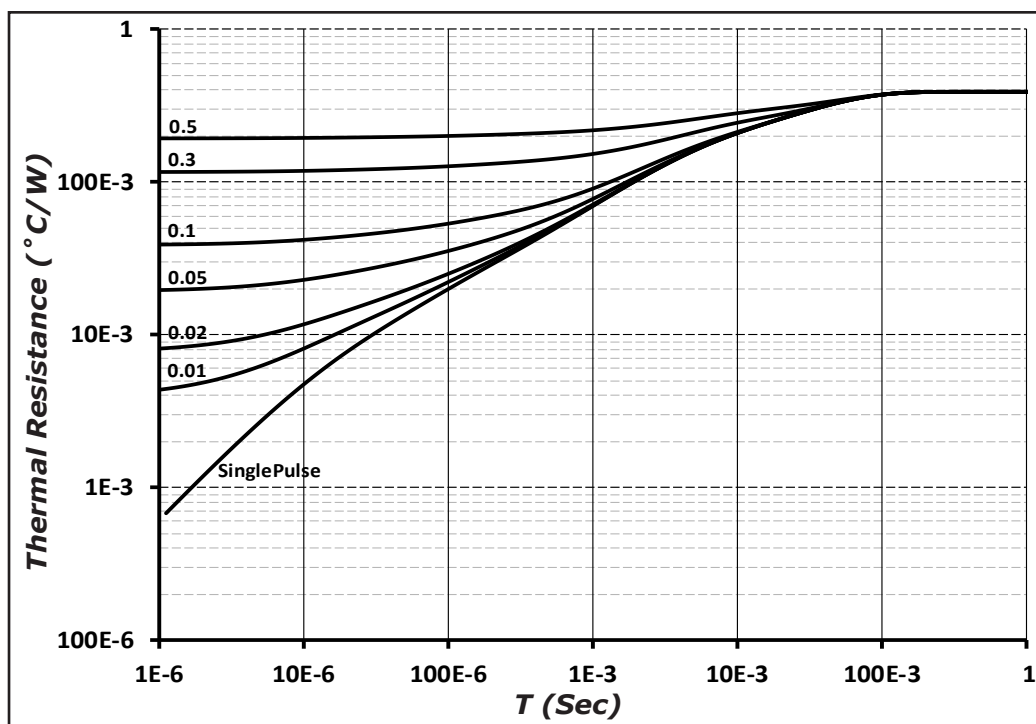


Figure 8. Transient Thermal Impedance


## **Package Dimensions**

### Package TO-247-2

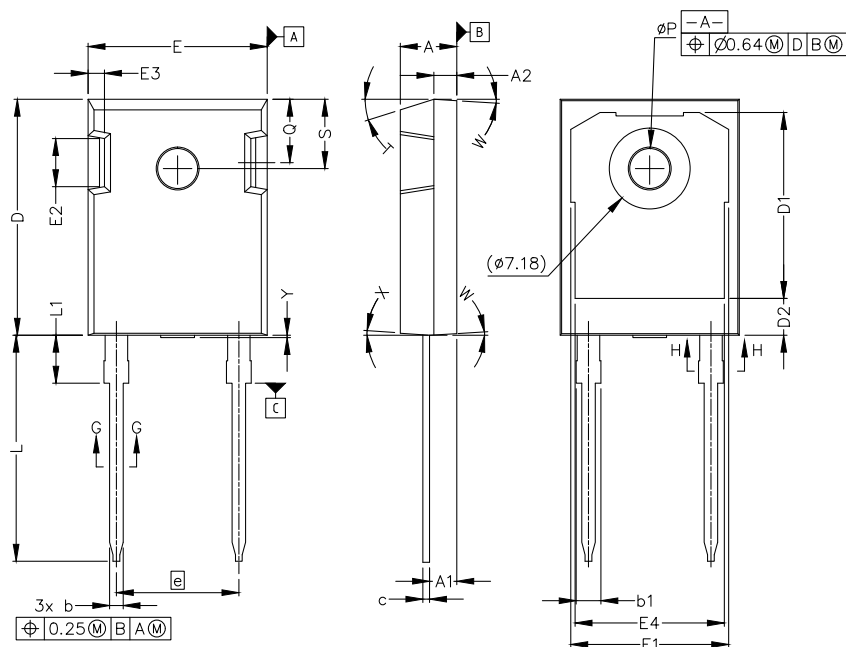

| POS | Inches     |       | Millimeters |       |
|-----|------------|-------|-------------|-------|
|     | Min        | Max   | Min         | Max   |
| A   | 0.190      | 0.205 | 4.70        | 5.31  |
| A1  | 0.087      | 0.102 | 2.21        | 2.59  |
| A2  | 0.059      | 0.098 | 1.50        | 2.49  |
| b   | 0.039      | 0.055 | 0.99        | 1.40  |
| b1  | 0.065      | 0.095 | 1.65        | 2.41  |
| c   | 0.015      | 0.035 | 0.38        | 0.89  |
| D   | 0.819      | 0.845 | 20.80       | 21.46 |
| D1  | 0.640      | 0.683 | 16.25       | 17.35 |
| D2  | 0.112      | 0.124 | 2.86        | 3.16  |
| E   | 0.620      | 0.640 | 15.49       | 16.26 |
| E1  | 0.516      | 0.557 | 13.10       | 14.15 |
| E2  | 0.135      | 0.201 | 3.43        | 5.10  |
| E3  | 0.039      | 0.075 | 1.00        | 1.90  |
| E4  | 0.487      | 0.529 | 12.38       | 13.43 |
| e   | 0.428 BSC  |       | 10.88 BSC   |       |
| L   | 0.78       | 0.80  | 19.81       | 20.32 |
| L1  | -          | 0.177 | -           | 4.50  |
| ØP  | 0.138      | 0.144 | 3.51        | 3.66  |
| Q   | 0.212      | 0.244 | 5.38        | 6.20  |
| S   | 0.238      | 0.248 | 6.04        | 6.3   |
| T   | 17.5° REF. |       |             |       |
| W   | 3.5° REF.  |       |             |       |
| X   | 4° REF.    |       |             |       |
| Y   | 0          | 0.5   | 0           | 0.02  |

## **Recommended Solder Pad Layout**

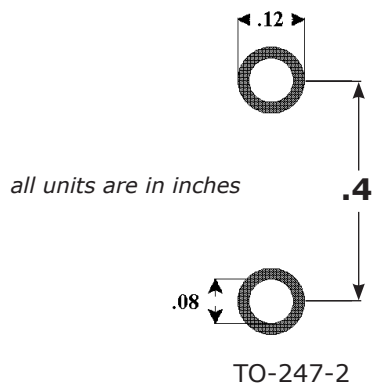


| Part Number | Package  | Marking  |
|-------------|----------|----------|
| C5D25170H   | TO-247-2 | C5D25170 |

**Note:** Recommended soldering profiles can be found in the applications note here:  
[http://www.wolfspeed.com/power\\_app\\_notes/soldering](http://www.wolfspeed.com/power_app_notes/soldering)



## Diode Model

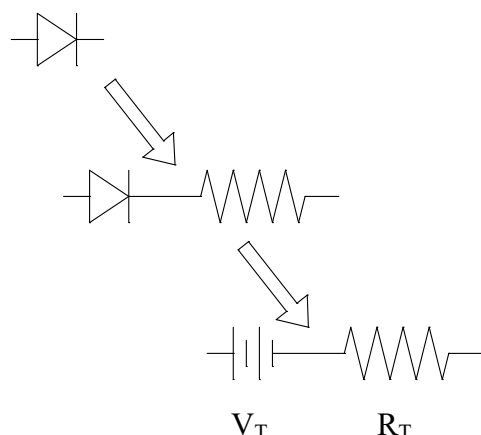

$$V_{fT} = V_T + I_f R_T$$

$$V_T = 0.94 + (T_J * -1.0 * 10^{-3})$$

$$R_T = 0.027 + (T_J * 2.8 * 10^{-4})$$

Note:  $T_J$  = Diode Junction Temperature In Degrees Celsius,  
valid from 25°C to 175°C

## Notes

- RoHS Compliance**

The levels of RoHS restricted materials in this product are below the maximum concentration values (also referred to as the threshold limits) permitted for such substances, or are used in an exempted application, in accordance with EU Directive 2011/65/EC (RoHS2), as implemented January 2, 2013. RoHS Declarations for this product can be obtained from your Wolfspeed representative or from the Product Ecology section of our website at <http://www.wolfspeed.com/power/tools-and-support/product-ecology>.

- REACH Compliance**

REACH substances of high concern (SVHCs) information is available for this product. Since the European Chemical Agency (ECHA) has published notice of their intent to frequently revise the SVHC listing for the foreseeable future, please contact a Cree representative to insure you get the most up-to-date REACH SVHC Declaration. REACH banned substance information (REACH Article 67) is also available upon request.

- This product has not been designed or tested for use in, and is not intended for use in, applications implanted into the human body nor in applications in which failure of the product could lead to death, personal injury or property damage, including but not limited to equipment used in the operation of nuclear facilities, life-support machines, cardiac defibrillators or similar emergency medical equipment, aircraft navigation or communication or control systems, or air traffic control systems.

## Related Links

- Cree SiC Schottky diode portfolio: <http://www.wolfspeed.com/Power/Products#SiCSchottkyDiodes>
- Schottky diode Spice models: <http://www.wolfspeed.com/power/tools-and-support/DIODE-model-request2>
- SiC MOSFET and diode reference designs: <http://go.pardot.com/l/101562/2015-07-31/349i>

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)