


STRAIGHT SQUARE FLANGE JACK

FULL CRIMP-TYPE - CABLE 2.6/50 S+D

R161.281.300

SERIES N

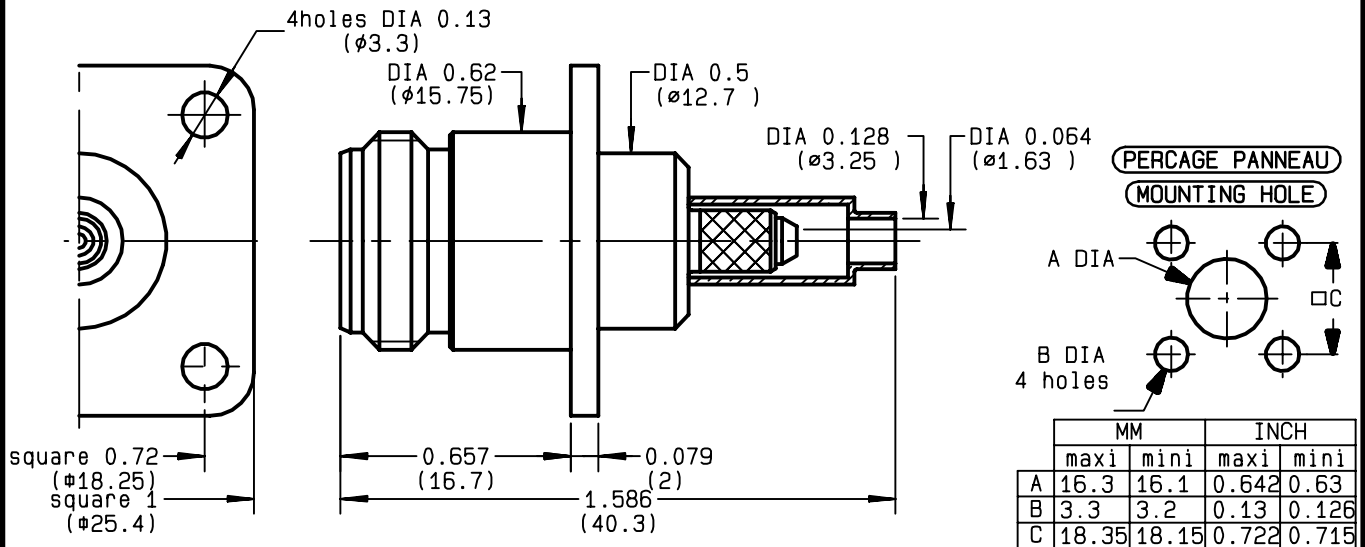

NOMINAL IMPEDANCE	50	Ω
FREQUENCY RANGE	0-11	GHz
TEMPERATURE RATING	-55/+155	$^{\circ}\text{C}$
V.S.W.R	1.20*	+ x F(GHz)Maxi
RF INSERTION LOSS	0.048	$\sqrt{F}(\text{GHz})$ dB Maxi
VOLTAGE RATING	250	Veff Maxi
DIELECTRIC WITHSTANDING VOLTAGE	750	Veff Mini
INSULATION RESISTANCE	5000	M Ω Mini
HERMETIC SEAL	NA	Atm.cm ³ /s
LEAKAGE (pressurized only)	NA	
MECHANICAL DURABILITY	500	Cycles
WEIGHT	36.5	gr
SPECIFICATION	* 0-3 GHz	

CABLES : **K02252D**
KX 22A
RD 316
RG 188
RG 316

OTHERS CHARACTERISTICS

CABLE RETENTION	40	N Mini
CENTER CONTACT RETENTION		
Axial force - mating end	68	N Mini
Axial force - opposite end	68	N Mini
Torque	NA	cm.N Mini
RECOMMENDED TORQUES		
Mating	NA	cm.N
Panel nut	NA	cm.N
Clamp nut	NA	cm.N

CONNECTOR PARTS	MATERIALS	FINISH	(all values are given in micrometers)
BODY	BRASS	BBR 2	
OUTER CONTACT	BRASS	BBR 2	
CENTER CONTACT	BERYLLIUM COPPER	GOLD 0.5 OVER NICKEL 2	
INSULATOR	PTFE	-	
GASKET	-	-	
OTHERS PIECES	BRASS	BBR 2	

ISSUE	CREATION DATE	FILE PART-NUMBER
9827B00	09/04/1997	EPC 96-07



RADIALL®

The information given here is subject to change without notice.
 Design changes may be in order to improve the product.


Connect to the future



R161.281.300

ISSUE **9827B00** SERIES


N

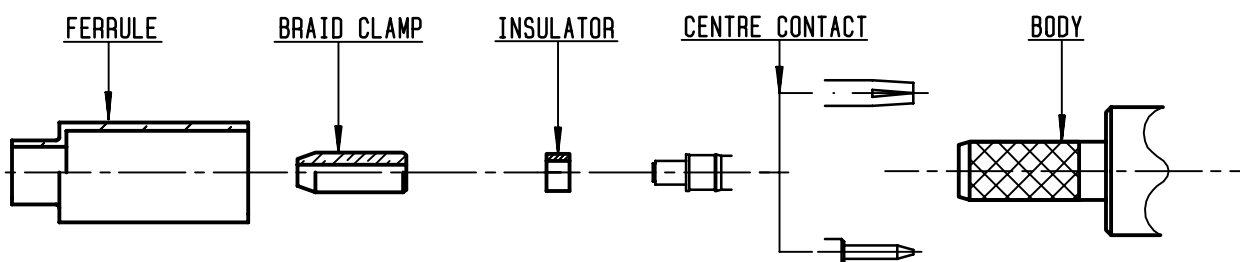

①

Slide onto the cable the ferrule
Strip the cable .

-
-

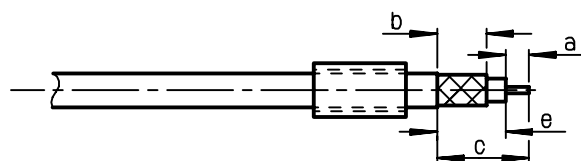

Stripping	a	b	c	d	e
inch	0.118	0.256	0.472	0	0.354
mm	3	6.5	12		9

②

Fan the braid .

Slide the braid clamp and insulator
between the dielectric and the braid .


Slide on centre contact until it
bottoms against cable dielectric .

Crimp centre contact .

Crimping tool : R282 223 000 (Hex. : 0.068)

or crimping tool R282 293 000 (M22520/5-01)

+ dies R282 235 011 (M22520/5-11)

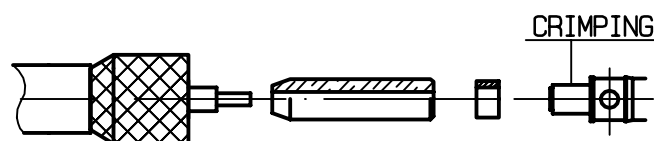


CRIMPING

③

Slide cable dielectric into the body
while gently ginding the braid over the knurl

Push until the dielectric clicks into
position .

Slide ferrule over braid in direction F .

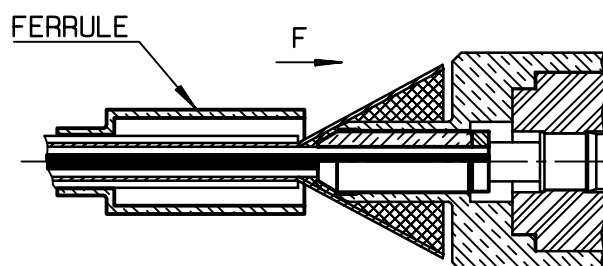

FERRULE

F

④

Crimp the ferrule with crimping tool


R 282 223 000 (Hex. : 0.213) or

crimping tool R282 293 000 (M22520/5-01)

+ dies R282 235 011 (M22520/5-11)

Cut the excess of braid .

-
-

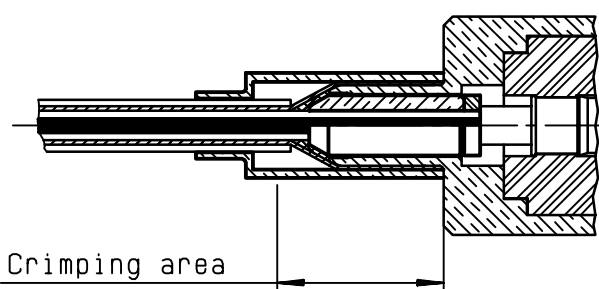

Crimping area

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru